electronics

AUGUST · 1956

A McGRAW-HILL PUBLICATION • PRICE 75 CENTS

Encapsulated Cockpit Saves Instruments

New TV Sound Detector. . page 138

Recognizing Lost Pulses. 164

Triple-Tuned Circuit Design . . 186

LARGEST PRODUCERS IN THIS FIELD FOR TWO DECADES...

HIGH Q INDUCTORS
FOR EVERY APPLICATION

FROM STOCK... ITEMS BELOW AND 650 OTHERS IN OUR CATALOGUE B.

UTC

MQ Series
Compact Hermetic Toroid Inductors

The MQ permalloy dust toroids combine the highest Q in their class with minimum size. Stability is excellent under varying voltage, temperature, frequency and vibration conditions. High permeability case plus uniform winding affords shielding of approximately 80 db.



MQE
15 stock values
from 7 Mhy.
to 2.8 Hy.



MQA
19 stock values
from 7 Mhy.
to 22 Hy.

MQB
12 stock values
from 10 Mhy.
to 25 Hy.





MQ drawn case structure.

	Length	Width	Height
MQE	1/2	1-1/16	1-7/32
MQA	11/16	1-9/32	1-23/32
MQB	1-5/16	2-9/16	2-13/16



VIC case structure

Length	Width	Height
1-1/4	1-11/32	1-7/16



Type	Mean Hys.	Type	Mean Hys.
VIC-1	.0085	VIC-12	1.3
VIC-2	.013	VIC-13	2.2
VIC-3	.021	VIC-14	3.4
VIC-4	.034	VIC-15	5.4
VIC-5	.053	VIC-16	8.5
VIC-6	.084	VIC-17	13.
VIC-7	.13	VIC-18	21.
VIC-8	.21	VIC-19	33.
VIC-9	.34	VIC-20	52.
VIC-10	.54	VIC-21	83.
VIC-11	.85	VIC-22	130.

VIC Variable Inductors

The VIC Inductors have represented an ideal solution to the problem of tuned audio circuits. A set screw in the side of the case permits adjustment of the inductance from +85% to −45% of the mean value. Setting is positive.

Curves shown indicate effective Q and L with varying frequency and applied AC voltage.

MQL Low Frequency High Q Coils

The MQL series of high Q coils employ special laminated Hipermalloy cores to provide very high Q at low frequencies with exceptional stability for changes of voltage, frequency, and temperature. Two identical windings permit series, parallel, or transformer type connections.

MQL-1	2.5/10 Hys.
MQL-2	5/20 Hys.
MQL-3	50/200 Hys.
MQL-4	100/400 Hys.

MQL case
1-13/16 dia. X 2-1/2" H.



DI Inductance Decades

These decades set new standards of Q, stability, frequency range and convenience. Inductance values laboratory adjusted to better than 1%. Units housed in a compact die cast case with sloping panel ideal for laboratory use.



DI-1	Ten 10 Mhy. steps.
DI-2	Ten 100 Mhy. steps.
DI-3	Ten 1 Hy. steps.
DI-4	Ten 10 Hy. steps.

DI DECADE

Length	4½"
Width	4⅜"
Height	2⅜"

HVC Hermetic Variable Inductors

A step forward from our long established VIC series. Hermetically sealed to MIL-T-27 . . . extremely compact . . . wider inductance range . . . higher Q . . . lower and higher frequencies. . . superior voltage and temperature stability.



Type No.	Min. Hys.	Mean Hys.	Max. Hys.
HVC-1	.002	.006	.02
HVC-2	.005	.015	.05
HVC-3	.011	.040	.11
HVC-4	.03	.1	.3
HVC-5	.07	.25	.7
HVC-6	.2	.6	2
HVC-7	.5	1.5	5
HVC-8	1.1	4.0	11
HVC-9	3.0	10	30
HVC-10	7.0	25	70
HVC-11	20	60	200
HVC-12	50	150	500

HVC case structure.

Width	Length	Height
25/32	1-1/8	1-7/32

SPECIAL UNITS TO YOUR NEEDS

Send your specifications for prices.

UNITED TRANSFORMER CO.

150 Varick Street, New York 13, N. Y. EXPORT DIVISION: 13 E. 40th St., New York 16, N. Y. CABLES: "ARLAB"

electronics

AUGUST • 1956

A McGRAW-HILL PUBLICATION

ENCAPSULATED COCKPIT SAVES INSTRUMENTS—Ejectable unit fabricated by Douglass Aircraft is designed to fit any aircraft and save men and expensive equipment in case of ditching (see page 192) ..... COVER

H. W. MATEER, *Publisher*

W. W. MacDONALD, *Editor*
VIN ZELUFF, *Managing Editor*
JOHN MARKUS, *Associate Editor*
ALEXANDER A. McKENZIE, *Associate Editor*
JOHN M. CARROLL, *Associate Editor*
JOHN M. KINN, JR., *Associate Editor*
WILLIAM P. O'BRIEN, *Assistant Editor*
WILLIAM G. ARNOLD, *Assistant Editor*
DAVID A. FINDLAY, *Assistant Editor*
HAIG A. MANOOGIAN, *Assistant Editor*
GLORIA J. FILIPPONE, *Editorial Assistant*
ARLENE SCHILP, *Editorial Assistant*
GLADYS T. MONTGOMERY, *Washington Editor*
HARRY PHILLIPS, *Art Director*

WALLACE B. BLOOD, *Manager*
R. S. QUINT, *Buyers' Guide Manager*
FRANK H. WARD, *Business Manager*
GEORGE E. POMEROY, *Classified Manager*
DONALD H. MILLER, *New York*
JAMES GIRDWOOD, *New York*
THOMAS B. VOUGHT, *New York*
WM. S. HODGKINSON, *New England*
JAMES T. HAUPTLI, *Philadelphia*
CHARLES WARDNER, *Chicago*
BRUCE WINNER, *Chicago*
WALTER M. LUCE, *Chicago*
HENRY M. SHAW, *Cleveland*
T. H. CARMODY, *San Francisco*
R. C. ALCORN, *San Francisco*
CARL W. DYSINGER, *Los Angeles*
WILLIAM KEARNS, *Atlanta*
GORDON L. JONES, *Dallas*
DOUGLAS BILLIAN, *Dallas*
HERBERT LAGLER, *London*

KEITH HENNEY, *Consultant*

SHOPTALK 2

FIGURES OF THE MONTH 8

INDUSTRY REPORT 9

WESCON Expects 30,000 9
U. S. Appraises Business 9
Color TV Gathers Speed 10
Electronics In Controls 10
Two-Way Radio For Highways 10
New FCC Commissioner 12
FCC Actions 12
Transistors Take To Radio 12
Magnetic Tape Market Expands 14
Measuring Instrument Sales 16
Hookups Feed Computers 16
Engineers Evaluate Jobs 18
Phonograph Record Sales 18
Educational TV Grows 18
FCC Proposes TV Shift 20
British Hi-Fi Exports Rise 20
Industry Helps Teachers 22
SAGE Device Aids Safety 22
Satellite Electronics Gain 22
Electronics Attacks Ills 24
Firm Plans For Expansion 24
Welding Uses More Gear 24
Financial Roundup 26
Meetings Ahead 26
Industry Shorts 26

CROSSTALK 137

FEATURES

Sampling Detector for Intercarrier TV Sound 138
By Kurt Schlesinger

Transistor Amplifier for Radar Video 142
By Richard Leslie

Bridge Tests Capacitors On Production Line 146
By Joseph Boer

Exciters Multiplex F-M Carriers 148
By H. G. Stratman

Servo Accelerometer Uses R-F Oscillator 151
By Victor B. Corey

Grid-Switched Gas Tube for Display Presentation 154
By F. B. Maynard, J. Carluccio and W. G. Poelstra

Controller Integrates Spot-Welding Current 157
By Herbert J. Fraser

Recorder Amplifier for Flight Testing 158
By Cecil C. Pine

Counters Control High-Speed Flash 160
By Samuel E. Dorsey

Magnetron Tester Detects Lost Pulses 164
By Peter Koustas and Daniel D. Mawhinney

CONTINUED ON NEXT PAGE

contents

continued

Ferrite Inductors Tune Panoramic Receiver 169
By Fred C. Gabriel

Magnetic Shift-Register Correlator 172
By R. C. Kelner and M. H. Glauberman

Transient Controlled Magnetic Amplifier 176
By George Schohan

Gate Selects Pulses for Spectrum Analysis 179
By Alan Ross and Leonard Simon

Triangular-Wave Analog Multiplier 182
By R. A. Meyers and H. B. Davis

Design Of Triple-Tuned Circuits (Reference Sheet) 186
By P. R. Geffe

ELECTRONS AT WORK 190

Forecast Of Solar Power 190
Air Traffic Control System 190
Transistor Meltback Process 190
The Front Cover 192
Mill Operates Using TV Eye 192
Drone Television Reconnaissance 194
Television In A Furnace 194
Frequency Compensated Dividers 194
By Lyman W. Orr
Tiny TV Checks Boiler Tubes 196
Manganese-Bismuth Magnets 196
Line Output Preamplifier 198
By Rufus P. Turner
Mobile Amplifier 198
Pulsed-Light Generator 200
Pulsed-Light Generator 200
By R. W. Treharne, C. R. Nosker
Measuring Electric Fields 206
By John D. Salisbury
Breeding Better Cattle 216
Transhorizon Circuit 218
Metal-Ceramic Miniatures 220
Teleprinter Performs Stunts 222
Pertinent Patents 222
By Norman L. Chalfin

PRODUCTION TECHNIQUES 230

Production Chart Uses Golf Tees 230
Knife-Edge Test Clips 230
Steel Pails Replace Wire Spools 232
Automatic Grinder for Ferrite 234
Installing Radio Pushbuttons 240
Induction Soldering on Conveyor 244
Stapling TV Back Cover Hinge 246
Centrifuge Tests Missile Parts 248
Tuning Capacitor Assembly Fixture 250
Transistor Can Welder 254
Molded Adapters for Test Bench 258
Wire-Stripper Cuts Teflon 264
Capacitor-Discharge Welder 266

NEW PRODUCTS 268

LITERATURE 347

PLANTS AND PEOPLE 364

NEW BOOKS 397

THUMBNAIL REVIEWS 404

BACKTALK 406

INDEX TO ADVERTISERS 455

SHOP

▶ **MISSILE MEMORIES** . . . Comment on radio communications barrier that may exist around objects moving faster than Mach 10 (*Crosstalk*, June '56) induced further speculation from readers.

Missiles reentering the earth's atmosphere from outer space could compact ionized gas around them sufficiently to blank out telemetering signals for perhaps 30 seconds. One way to avoid loss of information would be to record flight data within the missile on magnetic tape during this period, feeding this information into the transmitter immediately thereafter and before the missile lands.

▶ **WE GET SURVEYED** . . . One of the editorial functions of a magazine is to make surveys of the various facets of the industry it serves and to analyze and present the findings.

Many of the articles in the *Industry Report of* ELECTRONICS result from such surveys and from time to time feature articles are published that are based on larger surveys.

Usually we are the surveyor, but sometimes we become the surveyee. We received a questionnaire the other day that apparently is being sent out to all kinds and sizes of magazines. Under the question Editorial Background?, two lines of space were provided. It seemed that 20 or 30 sheets of paper would be needed.

A phone call to the surveyor saved us a lot of work. The two lines were

electronics

AUGUST, 1956 Vol. 29, No. 8

Member ABC and ABP

TALK

filled in by some simple arithmetic. Ten editors times years on staff, 77.5, gave an average time with ELECTRONICS alone of 7.75 years.

Our own company quietly surveyed us and other McGraw-Hill magazines recently and came up with the statistic that "no less than 19 basic texts and reference books in the field of electronics have been written by the members of the staff of the magazine ELECTRONICS."

▶ **DEMPA GIZITSU** . . . Words were added to our vocabulary when we received the material for the article on Japanese transistor techniques that appeared in the July issue. Some of the data was enclosed in an envelope on which were printed Japanese symbols, but the words "dempa gizitsu" appeared in Arabic letters.

Checking with the New York representative of a Japanese company, we find that these words can be translated as "literature" or "manuscript", in our editorial language.

Speaking of manuscripts, we are always pleased when an author tells us he will go ahead on preparation of a new one for the magazine. We were more than pleased when one engineer wrote in as follows:

"While the demand for technical articles on the new ..... would easily exhaust the ability of every engineer we have to write even if we were to put them to work at nothing else, for months to come, we consider ELECTRONICS of such importance to the entire electronic engineering profession that we feel an obligation to provide you with an article which is satisfactory to you and to your readership.

"I will, therefore, undertake to prepare the article for you."

▶ **THEORY, PLUS PRACTICE** — Extent to which ELECTRONICS editors dig into a subject is illustrated by these photographs of two members of the staff out in the field. At left, John Markus examines a jig while collecting material for Production Techniques department. At right, Haig Manoogian wears a borrowed mechanics jumper while he gets first-hand information on the operation of a dynamic engine analyzer as it diagnoses an automobile's neuroses

▶ **EDUCATIONAL** . . . During a recent visit to Eastman's model laboratory in Rochester, N. Y. to investigate electronic applications in photofinishing, one of our editors met an overseas reader, L. D. Rehfeldt. He is connected with Kodak Hawaii, Ltd., and has been reading ELECTRONICS for years.

He and his friends feel that our magazine helps make up for the lack of graduate-level engineering schools in that part of the world. He considers us "must" reading to keep up with the latest developments in the field, both in this country and abroad.

Which reminds us that New York City newspapers have carried help-wanted ads in recent months that specify a degree in electrical engineering or physics but say that this requirement will be waived if the applicant has taken some math and engineering courses and is a regular reader of ELECTRONICS and one of the society journals.

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42 St., New York 36, N. Y.** Longacre 4-3000. Publication Office, 99-129 North Broadway, Albany 1, N. Y. Donald C. McGraw, President; Paul Montgomery, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Nelson Bond, Executive Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Joseph H. Allen, Vice-President and Director of Advertising Sales; J. E. Blackburn, Jr., Vice-President and Circulation Director.

Subscriptions: Address correspondence to Electronics—Subscription Service, 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons engaged in theory, research, design, production, maintenance and use of electronic and industrial control components, parts and products. Position and company connection must be indicated on subscription orders.

Single copies 75¢ for United States and possessions, and Canada; $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $3.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years. Canada, $10.00 a year; $16.00 for two years. Other western hemisphere countries and the Philippines, $15.00 a year; $25 for two years. All other countries $20.00 a year; $30.00 for two years. Three-year rates, accepted on renewals only, are double the one-year rate. Entered as second-class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879. Printed in U.S.A. Copyright 1956 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; McGraw-Hill House, London, E. C. 4; Washington, D. C. 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; 1321 Rhodes-Haverty Bldg., Atlanta 3, Ga.; 1125 West Sixth St., Los Angeles 17; 919 Oliver Building, Pittsburgh 23. ELECTRONICS is indexed regularly in The Engineering Index.

MA6501



MA6501 — tubeless 0.01% regulated DC supply; 6 and 2 volt outputs.

•

ELECTROSTATIC GENERATOR for lab or industrial high-voltage applications.

•

MA1000S — tubeless, dependable 1000VA regulator, ideal for unattended installations.

MA1000S

NEW PRODUCTS . . . BROADER ENGINEERING HORIZONS FROM SORENSEN

MR3215 5-32VDC AT 0-15 AMPS
new, tubeless, magnetic amplifier

WIDE RANGE REGULATED DC POWER SUPPLY

for versatile, trouble-free performance in countless design & test applications

Different outside . . . and *inside!* The latest design in magnetic amplifier regulation. A silicon diode is used as reference element and a transistor amplifier provides the control current for the magnetic amplifier. Wide range, continuously adjustable voltage at high current. Regulation ±0.5% against line or load, ripple 1% RMS. Versatile, dependable, rugged, economical.

Write today for detailed specifications, performance data, and quotations.

Sorensen

SORENSEN & COMPANY, 375 FAIRFIELD AVENUE, STAMFORD, CONN.

TECHNIQUE

MUIRHEAD

A JOURNAL OF INSTRUMENT ENGINEERING

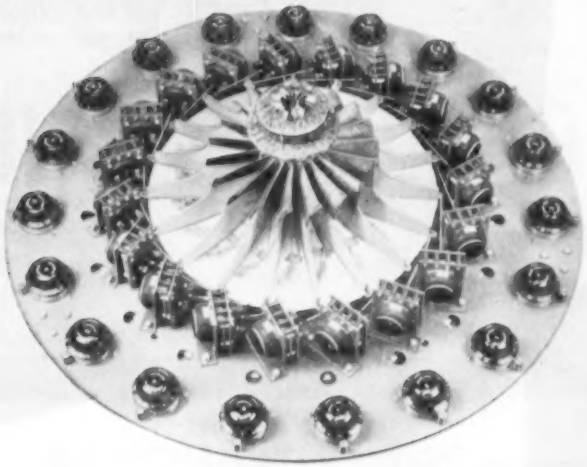

FOR THE

ENGINEER

SCIENTIST

RESEARCH WORKER

TECHNICIAN

The July issue of Technique, Volume 10. No. 3., includes the following articles:—

"Rig for Vibrating Centrifugal Impellers" by D. A. Drew, B.Sc., A.M.I.Mech.E., Head of Vibration Department, Rolls Royce Limited.

"Instructional Applications of the D-669-A Frequency Analyser" by A. W. Keen, M.I.R.E., A.M.I.E.E., Senior Lecturer in Electronics, Coventry Technical College, England.

Write and have your name placed on our mailing list to receive Technique quarterly, without charge.

211

MUIRHEAD PRECISION ELECTRICAL INSTRUMENTS

MUIRHEAD INSTRUMENTS INC. · 677 Fifth Ave. · New York 22 · N.Y. · U.S.A.
MUIRHEAD INSTRUMENTS LIMITED · STRATFORD · ONTARIO · CANADA
MUIRHEAD & CO. LIMITED · BECKENHAM · KENT · ENGLAND

Sylvania develops a **power**

NEW

new

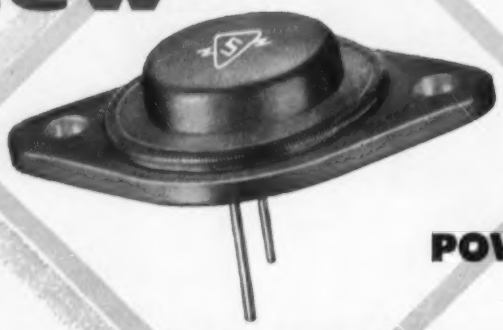

POWER TRANSISTOR—

provides 2½ watts
Class A output with
*5% total harmonic distortion

FEATURES—

- 10 watts maximum collector dissipation
- 2 amps max. collector current
- 40 volts max. collector voltage
- New heliarc-weld hermetic seal
- 30 db minimum power gain (typically 35 db)
- 85° C storage temperature
- 100° C operating temperature
- derating—3° C per watt (typically 2° C per watt)

new

DETECTOR-DRIVER

Type 12J8—delivers 20 mw signal
power output with
*5% total harmonic distortion

CHARACTERISTICS—

- zero signal plate current —14 ma
- zero signal screen current—3 ma
- plate resistance —2000 ohms
- transconductance —540 μmhos
- plate voltage —12.6 volts
- heater voltage —12.6 volts

Want more information? Use post card on last page.

low distortion* pack for HYBRID AUTO RADIO

combined engineering forces produce new power transistor and detector-driver tube—full line of 12-volt tube types completes auto radio complement.

SYLVANIA, in close co-operation with leading auto radio manufacturers, has just completed a full-time joint engineering project to develop a transistor-tube "power pack" for new hybrid auto radio designs.

Result of this combined engineering program is a new power transistor and the type 12J8 detector-driver tube especially designed to produce high current at low plate voltage for optimum power coupling to the output transistor.

Other important power transistor features include a heliarc-weld hermetic seal for ruggedness and a storage temperature of 85° C to eliminate heat problems under inoperative conditions.

Sylvania also offers a full line of 12-volt tubes to complete auto radio complements.

Designers of transistorized equipment will find Sylvania's new transistor highly useful in all power applications calling for a maximum collector dissipation of 10 watts.

Engineering Sample Offer

Sylvania will honor all bona-fide requests for engineering samples of the new hybrid "power pack" including the new power transistor and driver tube 12J8, plus samples or information on 12-volt types to complete your auto radio complement.

For samples of the power transistor for use in other applications, write on your company letterhead indicating your intended use.

SYLVANIA®

SYLVANIA ELECTRIC PRODUCTS INC.
1740 Broadway, New York 19, N. Y.
In Canada: Sylvania Electric (Canada) Ltd.
University Tower Bldg., Montreal

LIGHTING • RADIO • TELEVISION • ELECTRONICS • ATOMIC ENERGY

FIGURES OF THE MONTH

RECEIVER PRODUCTION

(Source: RETMA)	Latest Month	Previous Month	Year Ago
	May '56	Apr. '56	May '55
Television sets, total	467,913	549,632	467,394
With UHF	58,116	74,102	61,784
Color sets	nr	nr	nr
Radio sets, total	1,060,165	992,982	1,114,035
With F-M	nr	nr	8,726
Auto sets	282,611	299,253	563,369

RECEIVER SALES

(Source: RETMA)	May '56	Apr. '56	May '55
Television sets, units	393,080	347,630	416,908
Radio sets (except auto)	566,357	471,193	398,449

RECEIVING TUBE SALES

(Source: RETMA)	May '56	Apr. '56	May '55
Receiv. tubes, total units	33,015,000	35,184,000	32,920,310
Receiv. tubes, value	$27,145,000	$28,616,000	$25,914,821
Picture tubes, total units	906,732	830,902	779,324
Picture tubes, value	$16,123,625	$15,141,461	$14,572,518

INDUSTRIAL TUBE SALES

(Source: NEMA)	Quarterly Figures: Latest Quarter	Previous Quarter	Year Ago
	4th '55	3rd '55	4th '54
Vacuum (non-receiving)	$9,967,411	$9,027,845	$9,338,181
Gas or vapor	$3,251,621	$3,438,835	$3,498,123
Magnetrons and velocity modulation tubes	$13,726,323	$10,998,967	$15,249,651
Gaps and T/R boxes	$1,578,767	$1,421,138	$1,788,780

MILITARY PROCUREMENT

(Source: Defense Dept.)	1st '56	4th '55	1st '55
Army	$40,490,000	$48,477,000	$2,833,000
Navy	$28,700,000	$20,378,000	$43,147,000
Air Force	$124,828,000	$131,938,000	$133,503,000
Total—Electronics	$194,018,000	$200,793,000	$179,483,000

BROADCAST STATIONS

(Source: FCC)	Latest Month	Previous Month	Year Ago
	June '56	May '56	June '55
TV stations on air	496	495	458
TV stations CPs—not on air	113	112	124
TV stations—new requests	43	41	16
A-M stations on air	2,896	2,890	2,732
A-M stations CPs—not on air	124	118	108
A-M stations—new requests	274	273	222
F-M stations on air	530	532	540
F-M stations CPs—not on air	16	15	12
F-M stations—new requests	10	4	6

COMMUNICATION AUTHORIZATIONS

(Source: FCC)	May '56	Apr. '56	May '55
Aeronautical	47,660	46,739	42,396
Marine	56,038	55,580	50,187
Police, fire, etc.	20,422	20,339	18,149
Industrial	30,287	28,946	24,347
Land transportation	9,073	9,001	7,579
Amateur	150,222	148,648	137,199
Citizens radio	17,835	17,046	11,816
Disaster	327	327	315
Experimental	698	690	619
Common carrier	2,283	2,219	1,934

EMPLOYMENT AND PAYROLLS

(Source: Bur. Labor Statistics)	Apr. '56	Mar. '56	Apr. '55
Prod. workers, comm. equip.	384,500-p	383,500-r	350,500
Av. wkly. earnings, comm.	$75.70 -p	$74.96 -r	$70.98
Av. wkly. earnings, radio	$72.18 -p	$71.82 -r	$68.68
Av. wkly. hours, comm.	40.7 -p	40.3 -r	40.1
Av. wkly. hours, radio	40.1 -p	39.9 -r	39.7

SEMICONDUCTOR SALES ESTIMATES

	Apr. '56	Mar. '56	Feb. '56*
Transistors, Units	832,676	707,817	616,818

STOCK PRICE AVERAGES

(Source: Standard and Poor's)	June '56	May '56	June '55
Radio-tv & electronics	405.1	424.0	508.4
Radio broadcasters	476.3	492.1	586.2

p—provisional r—revised nr—not reported

*1955 not available

FIGURES OF THE YEAR

	FIGURES FOR FIRST FIVE MONTHS 1956	1955	Percent Change	1955 Total
Television set production	2,862,177	3,238,820	—11.6	7,756,521
Radio set production	5,585,390	5,853,954	— 4.5	14,894,695
Television set sales	2,428,888	2,772,648	—12.4	7,421,084
Radio set sales (except auto)	2,551,272	2,007,631	+27.0	6,921,384
Receiving tube sales	188,619,000	185,681,000	+ 1.6	479,802,000
Cathode-ray tube sales	4,376,137	4,207,069	+ 4.0	10,874,234

INDUSTRY REPORT

electronics—August • 1956

GROWING Los Angeles, host city for this year's WESCON, will get a new influx of visitors as . . .

1956 Western Electronic Show Expects 30,000

Exhibits and technical sessions are readied as the industry gets set for a mid-year look at itself

ENGINEERS and executives who attend WESCON, August 21-24, are expected to number 30,000. The event is jointly sponsored by WCEMA and IRE.

The Pan Pacific Auditorium in Los Angeles will house some 706 exhibitor units representing the products of more than 750 electronics manufacturers. Headquarters for the technical convention, held concurrently with the electronics exhibition, will be the Ambassador Hotel and the I.A.S. Bldg.

Technical papers scheduled for presentation during the convention are published in this issue of ELECTRONICS beginning on page 388. For each session, there will be accommodations for a minimum of 500 persons.

▶ **Registration**—Early arrivals can register at the Ambassador on Monday, August 20 from 7 to 9 pm. Otherwise, at the Pan Pacific Auditorium and Ambassador from August 21-24.

▶ **Local Industry**—Engineers and executives attending WESCON can also get a first-hand look at the growing electronics industry in Los Angeles. There are now 460 firms in the metropolitan area with an annual factory billing during 1955 of $916.6 million, according to the city's Chamber of Commerce.

These companies employ 72,167 people who earn an annual estimated payroll of $293.6 million. They manufacture a total of 172 products in 531 separate plant locations. Sales in 1956 are expected to hit $1 billion.

Government Appraises 1956 Business

Sees overall 1956 factory volume exceeding 1955 sales by $500 million

MID-YEAR survey by the Department Of Commerce of the electronics industry indicates the same

favorable outlook for the last half of this year that it reported in its December forecast for 1956. The report, prepared by the electronics division of the Business and Defense Services Administration, notes a continually high output, with some very slight variations in earlier estimated figures.

▶**Volume**—Total factory output is expected to reach $6.8 billion for the year, as compared with $6.3 billion for 1955. Included in this estimate are radio and television receivers, broadcasting and radio communication equipment, industrial electronics and television equipment, tubes and electronic components, and a wide variety of military electronics equipment such as radar, navigation, communication, and missile guidance systems.

▶**TV**—In the television receiver market, factory sales are expected to exceed $1 billion for the year. Color tv retail sales had been estimated at $250 million for this year, but dollar volume may be somewhat less because reduction in the prices of color sets is coming faster than anticipated, according to BDSA.

▶**Components**—Repair parts sales for television, radios and phonographs in 1955 reached an estimated $200 million and are expected to increase to $290 million in 1957 and $480 million in 1958.

Commercial repair parts sales are expected to increase about 10 percent a year through 1958, from a 1955 level of $36 million. Defense maintenance parts sales are seen rising at about the same rate from a 1955 level of $105 million.

Color TV Gathers Momentum

Manufacturers see increasing volume as new lower priced sets are introduced

TV SET industry is moving ahead faster on color. Recent estimates by Sylvania show that during the first six months of this year 70,000 color sets were sold compared to 35,000 during all of 1955. About 30,000 sets were sold in the first quarter of 1956 and 40,000 in the second.

The firm estimates that there are now 110,000 color sets in use and that 7.6 million monochrome tv sets and 275,000 color sets will be produced by the entire industry this year. In 1957 color production is expected to reach 900,000 with sales to the public totaling 750,000.

▶**Sets** — During the first six months of this year, 12 set manufacturers out of 29 surveyed had color sets available. At least three more firms introduced color models during July. Before the year is out, nearly every major set manufacturer is expected to have color sets available.

Admiral has a consolette model to sell for $499.95, Olympic has introduced a $495 color receiver. Packard-Bell has shown a color table model tentatively priced at $495 and RCA introduced a color tv table model at $495.

Electronics Advances In Industrial Control

USE of electronics in industrial control equipment has nearly doubled in the past eight years and may reach $20 million this year if the past trend holds its course. According to the Department of Commerce, $14.5 million in industrial electronic controls were shipped in 1954, a rise of nearly $7 million from the 1947 total of $7.6 mlilion.

▶**Share**—Shipments of industrial electrical control equipment have been on the downward trend since 1952, dropping by some $35 million through 1954. During the same period, the electronic controls portion of the total climbed steadily. Now the electronic portion of the total control business is about five percent.

Two-Way Radio Girds For Highway Expansion

Government roadbuilding plan may expand market for highway communications

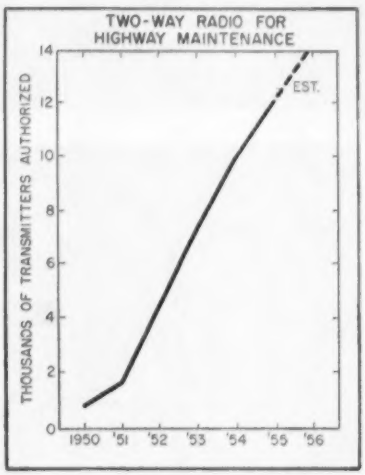

THE market for two-way radio in the highway building and maintenance field is already a substantial one. But it will be in for marked expansion in the near future as President Eisenhower's $25-billion road building program, passed by Congress, gets underway.

▶**Maintenance**—At the end of fiscal 1956, over 14,000 transmitters were authorized by FCC to operate in the highway maintenance service representing an increase of some 2,000 during the year. All are licensed to government agencies since station authorizations are only available to states, counties, cities, towns and other governmental subdivisions. The equipment is used for public safety, protection of life and property as well as maintenance supervision and operation of public highways.

▶**Why**—According to the FCC, the growth in authorizations reflects increased use of the highway maintenance service by city and county governments.

The equipment has enabled highway agencies to reduce costs through more efficient use of men

(Continued on page 12)

choose from this complete line of

MINIATURE PULSE TRANSFORMERS

Type 10Z
tubular pulse transformer

Type 15Z
miniature bathtub pulse transformer

Type 20Z
drawn-shell bathtub pulse transformer



Type 41Z
plug-in pulse transformer

NOW YOU CAN CHOOSE from eighteen standard pulse transformers in four major construction styles, all in quantity production at Sprague. The standard transformers covered in the table below offer a complete range of characteristics for computer circuits, blocking oscillator circuits, memory array driving circuits, etc.

These hermetically sealed units will meet such stringent military specifications as MIL-T-27, and operate at temperatures up to 85°C. Special designs are available for high acceleration and high ambient temperature operation. In addition, the electrical counterparts of each transformer can be obtained in lower cost housings designed for typical commercial environment requirements.

Complete information on this high-reliability pulse transformer line is provided in Engineering Bulletin 502A, available on letterhead request to the Technical Literature Section, Sprague Electric Company, 35 Marshall Street, North Adams, Massachusetts.

ELECTRICAL CHARACTERISTICS OF SPRAGUE PULSE TRANSFORMERS

Type No.	Turns Ratio	Pulse Width μ seconds	Rise Time μ seconds	Primary Inductance	Leakage Inductance	Repetition Rate	Load and Output	Typical Applications
10Z1	5:1	0.1	0.04	200 μH	5 μH	1 to 2 MC	15 volts 100 ohms	Used in digital computer circuitry for impedance matching and inter-stage coupling. Pulses are of sine wave type.
10Z2	4:1	0.07	0.03	200 μH	20 μH	1 to 2 MC	20 volts 100 ohms	
10Z3	1:1	0.07	0.03	125 μH	12 μH	1 to 2 MC	20 volts 200 ohms	
10Z4	3:1	0.07	0.03	160 μH	15 μH	1 to 2 MC	20 volts 100 ohms	
10Z6	4:1	0.1	0.04	200 μH	6 μH	1 to 2 MC	17 volts 100 ohms	
10Z12	1:1	0.25	0.02	200 μH	2 μH	12KC	100 volts	Blocking Oscillator
10Z13	1:1	0.33	0.07	240 μH	2 μH	2KC	50 volts	Blocking Oscillator
10Z14	7:1:1	0.50	0.05	1.2 mH	20 μH	1MC	25 volts	Impedance Matching
15Z1	3:1	5.0	0.04	7.5 mH	22 μH	10 KC	10 volts 100 ohms	Impedance Matching and Pulse Inversion
15Z2	2:1	0.5	0.07	6 mH	15 μH		40 volts	Blocking Oscillator
15Z3	5:1	10.0	0.04	12 mH	70 μH	10 KC	10 volts	Impedance Matching
15Z4	1:1.4	6.0	0.1	16 mH	15 μH	0.4 KC	15 volts	Blocking Oscillator
20Z1	5:5:1 Push-Pull	1.5	0.25	4.0 mH	0.3 MH		5 volts 10 ohms	Memory Core Current Driver
20Z3	6:1	1 to 4	0.22	18 mH	0.8 MH	250 KC (max.)	21 volts 200 ohms	Current Driver
20Z4	6:1:1	1 to 7	0.25	55 mH	0.3 MH	50 KC (max.)	22 volts 400 ohms	Current Driver and Pulse Inversion
20Z5	3.3:3.3:1 Push-Pull	2.4	0.2	2.8 mH	0.2 MH		2.5 volts 6 ohms	Memory Core Current Driver
20Z6	11:1	6.0	0.2	90 mH	0.2 MH	50 KC (max.)	10 volts 75 ohms	Current Transformer
41Z1	7:1:1	0.50	0.05	1.2 mH	20 μH	1 MC	25 volts	Impedance Matching

Sprague, on request, will provide you with complete application engineering service for optimum results in the use of pulse transformers.

SPRAGUE® WORLD'S LARGEST CAPACITOR MANUFACTURER

Export for the Americas: Sprague Electric International Ltd., North Adams, Mass. CABLE: SPREXINT

Want more information? Use post card on last page.

and heavy expensive roadbuilding equipment. Many highway maintenance agencies have been able to recover the cost of a radio installation in one or two years through resulting economies.

▶ **Truck**—Market for two-way radio in the highway truck service may also be in for a big boost as the federal plan is started. About 15,000 transmitters are authorized to operate in this service, an increase of 3,000 during 1955.

New FCC Commissioner Takes Office

George C. McConnaughey, left, chairman of the Federal Communications Commission, congratulates T. A. M. Craven as he hands him his commission as an FCC Commissioner. Craven has received two interval appointments. He previously served on the FCC from 1937 to 1944

FCC Actions

▶ **Adopted** plans to improve tv service by: (1) inviting comments on shifting all tv operation to uhf; (2) proposing immediate R&D programs to increase uhf range; (3) increasing maximum uhf power to 5,000 kw; (4) outlining considerations on vhf assignment and rules for channel changes.

▶ **Granted** channel 8 to WIRL, Peoria, and channel 2 to WMAY, Springfield, with proviso neither can build until final decision is made on channel assignment rules (see above).

▶ **Approved** Conelrad air-attack plan for all Hawaiian radio stations, making this first territory so covered.

▶ **Published** list of tv broadcast transmitters and monitors that are type accepted or type approved. This supplements other approved equipment lists available at Commission field offices.

▶ **Invited** telephone and telegraph companies to help effect a national priority system for resumption of intercity communications that might be interrupted by a national emergency.

▶ **Extended** licenses of industrial radiolocation service stations operating below 1.8 mc to make expiration date fall on July 1.

▶ **Waived** rules to permit operation of radiolocation station outside specified bands aboard *Horizon*, Scripps Institution of Oceanography.

▶ **Proposed** provision of longer distance public radiotelephone service for ships off Gulf ports using frequencies between 5 and 25 mc.

▶ **Granted** KGVO-TV, Missoula, Mont. permit for private intercity tv relay. This involves off-air pickup of KXLY-TV, Spokane, Wash. and 160-mile relay in 6,875-7,050 mc band.

Transistors Replace Tubes In More Radio Sets

Nearly every major radio manufacturer now has a transistorized set on the market

DURING the first half of 1956, 16 radio manufacturers in the U. S. and abroad out of some 42 manufacturers surveyed had transistorized radio sets on the market. With July introductions of new models, nearly every major radio manufacturer has a transistorized receiver available. The first transistorized home radio was marketed less than two years ago.

▶ **Kinds** — Most of the transistorized sets are portables although a few manufacturers have table models. Individual firms offer from one to four basic models. Prices range from $28 without batteries to $100. Number of transistors range from three in hybrid sets up to seven.

▶ **Car Radios**—The big three car manufacturers have had transistorized sets available since the beginning of 1956. Now transistors have moved into British car radios.

Pye recently introduced a transistorized car radio that contains three tubes, a germanium crystal diode as a detector and power transistors in the output stage. Output is 4 watts with one loud speaker or 6 watts with two. The set operates on 12-volt systems only.

▶ **Prices** — General Electric recently announced price reductions ranging up to 27 percent on ten new entertainment transistors. The firm believes reduced transistor prices may bring about price reductions of up to 20 percent on 1957

(Continued on page 14)

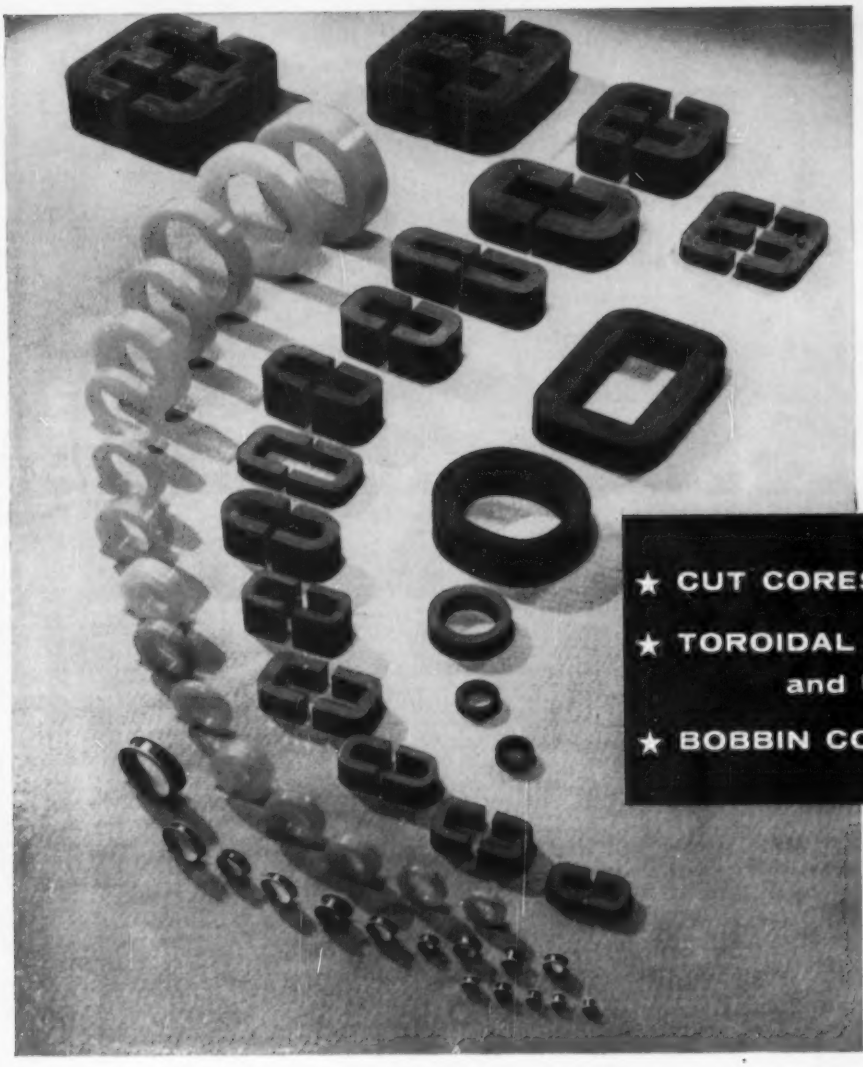

★ CUT CORES, Types C and E

★ TOROIDAL CORES, Cased and Uncased

★ BOBBIN CORES

WESCON 1956 August 21, 22, 23, 24, 1956 LOS ANGELES CALIFORNIA

See us at BOOTH 913-914

It's ARNOLD for EVERYTHING in TAPE-WOUND CORES

Applications

Let us help you with your core requirements for Pulse and Power Transformers, 3-Phase Transformers, Magnetic Amplifiers, Current Transformers, Wide-Band Transformers, Non-Linear Retard Coils, Reactors, Coincident Current Matrix Systems, Static Magnetic Memory Elements, Harmonic Generators, etc.

For Complete Details

Write for Bulletins:

★ SC-107—Cut Cores, Types C and E
★ TC-101A—Toroidal Cores, cased and uncased
★ TC-108—Bobbin Cores

ADDRESS DEPT. E-68

MATERIALS: Deltamax, 4-79 Mo-Permalloy, Supermalloy, Mumetal, 4750, Monimax, Silectron, Permendur: all are available for cores depending upon the specific properties required.

GAUGES: The following standard tape thicknesses are available for Arnold tape wound cores in most of the magnetic materials mentioned above: .012", .004", .002", .001", .0005", or .00025". Bobbin cores are made from tape .001" to .000125" thick.

SIZES: Cores weighing from a fraction of a gram to many hundreds of pounds can be supplied. Toroidal cores are made in 27 standard sizes with nylon cases. Types "C" and "E" cut cores are made in a total of 530 standard sizes. Many special sizes and shapes of both gapless and cut cores are manufactured for unusual requirements.

OTHER PRODUCTS: In addition to Tape-Wound Cores, we also produce a complete line of Mo-Permalloy Powder Cores, Iron Powder Cores, and permanent magnets. • *Let us work with you.*

WAW 5818 B

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

General Office & Plant: Marengo, Illinois

DISTRICT SALES OFFICES . . . New York: 350 Fifth Ave.

Los Angeles: 3450 Wilshire Blvd. Boston: 200 Berkeley St.

Want more information? Use post card on last page.

transistorized portable radios. The company forecasts further transistor price cuts later this year or early in 1957. GE sees practically all portable radios and a large percentage of table model radios transistorized.

▶**Silicon** — Recent reductions in the price of silicon may help reduce transistor prices although the silicon used in a single transistor is only worth from five to ten cents. Silicon transistors are used where high ambient temperatures are encountered such as in military equipment.

Du Pont, one of the main suppliers of the material, had dropped the price of semiconductor-grade silicon $30, to $350 a pound. The $380 price had been in effect since November 1954. Before that the material sold for $430 a pound.

Further price reductions and greater supply of silicon is foreseen in the recent purchase by Du Pont of a 10,500-acre tract near Brevard, N. C. as a possible site for future expansion of its silicon business. A plant initially employing about 200 persons is planned.

Four silicon solar cells on top of this portable radio, demonstrated by Hoffman Electronics, convert sun energy into electricity to operate the set.

▶**Solar**—Du Pont also announced a special grade of silicon suitable for solar converters such as those shown in the portable radio. The material will sell for $180 a pound since the extreme purity of transistor-grade silicon is not required.

Magnetic tape magazine assembly and recorder, made by North American Aviation, is readied for flight as . . .

Magnetic Tape Market Expands

Home, industrial and lab uses boost tape consumption to king-size business

MAGNETIC recording industry is looking ahead to a banner year. Sales of recorders are continuing to climb and will boost tape consumption. Last year's growth of 50 percent additional volume in recorders may be topped by the end of 1956, according to the Magnetic Recording Industry Association, which represents 36 companies in the field. One manufacturer sees retail sales of recorders surpassing $100 million this year and believes the market is less than five percent saturated. This additional recorder volume is expected to boost tape volume to a new high.

▶**Growth**—This year, if the past trend holds its course, about 7-billion feet of magnetic tape will be produced, nearly double the amount used just three years ago. This will mean a sales volume for tape makers of about $9 million, compared to approximately $8 million in 1955.

▶**Future**—According to one tape manufacturer, sales of magnetic recording tape will double again in three or four years. The rise is based on present uses of tape and does not include applications such as tape recording for tv programs. The tv application alone is expected to boost tape production to even greater volume. For an hour's program on the Ampex device, about 5,000 feet of 2-inch tape is used.

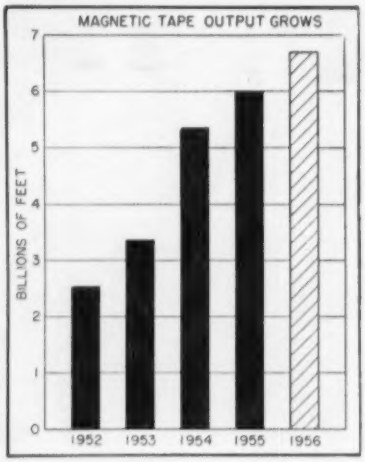

Ampex expects to manufacture 100 tv tape recorders during 1957 bringing total quantity scheduled for production to over $5 million worth of Videotape machines. The company is increasing its video engineering staff. Factory facilities will be expanded by 50,000 sq ft.

▶**Uses**—Growing use of magnetic recorders and tape in instrumentation is highlighted by a $1.2-million contract let by the Air Research and Development Command to Consolidated Electrodynamic Corp. to provide magnetic-tape instrumentation along the 5,000-mile missile test range at Patrick AFB, Florida for testing intercontinental ballistic missiles.

The magnetic tape equipment

(Continued on page 16)

KĀHLE

automatic machines

WILL PRODUCE YOUR

PRECISION GRIDS

TUBE COMPONENTS, GLASS DIODES, TRANSISTORS AND SUBMINIATURE TUBES *faster,* MORE ECONOMICALLY

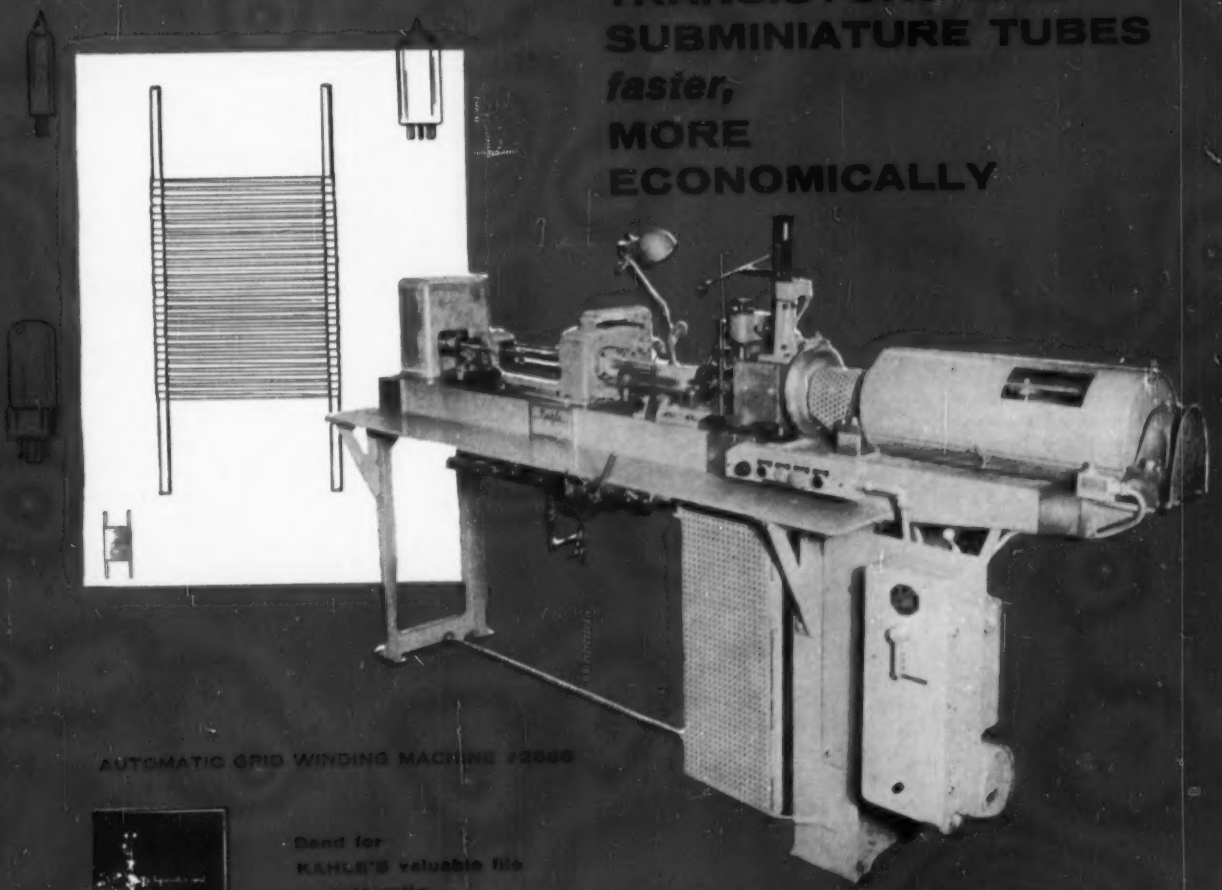

AUTOMATIC GRID WINDING MACHINE #2600

Send for KAHLE'S valuable file on automatic equipment Today!

Kähle ENGINEERING COMPANY
1910 SEVENTH STREET • NORTH BERGEN, N. J.

DESIGNERS AND BUILDERS OF AUTOMATIC AND SEMI-AUTOMATIC EQUIPMENT FOR ALL INDUSTRIAL OPERATIONS

placed at over 100 stategic points on the ground and aboard ships along the range will record telemetered data, such as temperature, pressure and thrust, from the missiles and play it back for analysis and interpretation.

Use of recorders in manned aircraft is also increasing. The airborne taperecorder shown, records the operation of a fire control system during attack. It is being installed in four Air Defense Command interceptors. The North American Aviation recorders, translate information from the airplane radar equipment into signals that can be played back on a reproducer for the benefit of aircrews. More than 850 of the devices have been installed in Sabre Jets and the Air Force has taken delivery of more than 3,000 recorders and 150 reproducing machines.

Measuring Instrument Sales Gain

Indicating and recording instruments have doubled in sales since the war

INSTRUMENT business has more than doubled in sales volume in the past nine years. Value of shipments has climbed from $24 million in 1947 to $60 million in 1954. This year total volume may exceed $70 million.

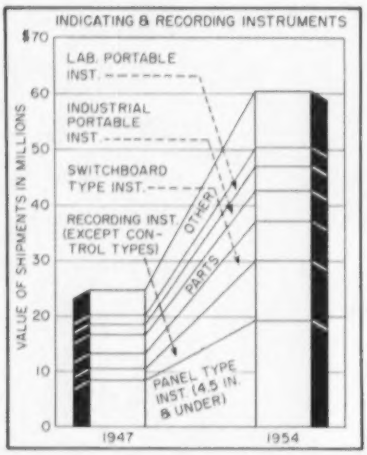

► **Leaders** — Accounting for the largest volume of shipments in 1954 were panel-type instruments under 4.5 inches in size. There were over 2 million of these shipped in 1954 with a total value of $19.0 million. In 1947, such instruments also led in volume with a total of slightly more than one-million units valued at $8.3 million.

Second largest in shipment dollar value were graphic recording instruments with a total volume of $10.1 million compared to $1.9 million in 1947 .

Some 130,000 switchboard type instruments were shipped in 1954 valued at $7.1 million. In 1947, 115,000 units were shipped at a total value of $3.1 million.

The parts volume for both recording and indicating instruments rose during the seven year period from $3.4 million in 1947 to $5.9 million in 1954.

► **Portables** — Portable industrial ammeter and voltmeter shipments totaled 108,000 units valued at $4.2 million in 1954. In 1947 only 68,000 of the items, valued at $1.6 million, were shipped.

Portable laboratory instruments also accounted for a sizable volume of business in 1954. Some 33,000 of the items were shipped that year for a value of $3.4 million. In 1947 44,000 were shipped for a dollar value of $2.3 million.

► **Airborne**—Although the volume of aircraft instruments is relatively low in quantity and value, the devices showed the greatest percentage growth of any of indicating and recording instruments surveyed. There were 55,000 panel-type instruments valued at $2.8 million shipped in 1954 for use on aircraft in measuring electrical quantities. They include ammeters, voltmeters, volt-ammeters, frequency meters and phase-sequence indicators. In 1947, 43,000 of the devices, valued at $408,000, were shipped.

Current growth of this market is indicated by recent military contracts for the equipment. One electronics manufacturer has received over $5.8 million in orders in the past year for aircraft instruments and spare parts.

Nationwide Hookups Feed Computers

Industry and defense benefit as computing centers handle data from diverse points

ELECTRONIC brains have solved the problem of being in more than one place at the same time.

► **Industry** — Several companies, whose overall operations are complex enough to make a large computer economically feasible, have held off buying one because their plants individually are small and widely separated.

Sylvania faced this problem since it has 71 plants, laboratories, offices and warehouses in 61 cities in 20 states. The solution was a nationwide 18,000-mile Western Union private teleprinter network channeling data to Sylvania's data processing center at Camillus, New York.

► **Computer** — A Univac computer is installed in the company's new 50,000-sq ft center. Three switching centers: Williamsport, Pa., Salem, Mass. and Camillus route data from the 71 stations to the computer facility.

First chore for the Univac will be preparing payroll for Sylvania's 27,000 employees. Other jobs may include maintaining personnel records, inventory accounting, production planning and market research. The computer is expected to realize savings of $125,000 within two years and provide better management information than is now available.

► **Military** — Special-purpose digital control computers designated AN/FSQ-7 will form the nerve centers of the air defense of the North American continent. The so-called SAGE system will link far-flung radar stations to the computers. The computers, in turn, will evaluate the radar information and other data and calculate the most effective defense measures to employ against attacking aircraft. The computer will issue orders to intercepting aircraft and guided missiles

(Continued on page 18)

how to measure a Sales "Rep"...
A 'Rep' is measured by the quality of the product lines he represents — by the weight of technical knowledge he can apply to an instrumentation problem — by his practical assistance in procurement problems — and by the efficiency of his organization's maintenance facilities.
On all these counts you can rely on your independent FIRST SIX* sales representative. Keeping pace with every new advance in electronic research and development, technically competent FIRST SIX field engineers have given industry a new concept of field representation that assures not only that you're buying the instrument that best meets your need, but that your investment is being supported by lasting service.
By any yardstick, your independent FIRST SIX sales 'Rep' measures up to the highest standards of technical know-how in engineering ability and service. Rely on him.
The FIRST 6
* THE FIRST SIX — Six leading, independent manufacturers' representatives functioning cooperatively for the advancement of improved electronic instrumentation in industry.
A. CROSSLEY ASSOC., INC.
Chicago, Ill.
Dayton, Ohio
St. Paul, Minn.
THE I. E. ROBINSON CO.
Philadelphia, Pa. — (Upper Darby)
Camp Hill, Pa.
Asbury Park, N. J.
S. STERLING CO.
Detroit, Mich.
Cleveland, Ohio
Dayton, Ohio
HORMAN ASSOC., INC.
Washington, D. C.
J. D. RYERSON ASSOC., INC.
Syracuse, N. Y.
YEWELL ASSOC., INC.
Waltham, Mass.
Bridgeport, Conn.

over special radio links.

The computers are being manufactured by IBM. They cost the government about $14 million a piece.

The first one is ready for installation at McGuire Air Force Base in New Jersey. Two more are abuilding at IBM's new Kingston, N. Y. plant.

How Engineers Evaluate Jobs

Survey shows opportunity for individual growth is rated most important by job seekers

RESULTS of a recent nation-wide survey conducted by Melpar, Inc. of Falls Church, Va., reveal the factors considered most important by an engineer in evaluating a present or prospective position.

► **Breakdown** — Sixty-four percent of the 1,200 electrical and electronic engineers returning the survey questionaire listed opportunity for individual growth as first in importance Compensation and colleagues were considered most important by 29 and 28 percent, while environment was cited by 18 percent.

Other factors, listed in the order of their importance, were recognition of professional accomplishments, facilities, security, assignments in diverse fields and specialization.

► **Analysis**—A comparison of the preferences of engineers by different age levels and geographical location did not show any significant variations. Little difference was found in the preferences of nonsupervisory and supervisory personnel except that the factor of colleagues was considered most important by 30 percent of the former and only 20 percent of the latter.

Comparing the interests of the engineers on the basis of the type of work they were engaged in revealed a stronger interest in facilities on the part of research engineers.

Record Business Keeps Changing

Census figures show that volume has dropped since 1947 and that 78-rpm disks are still big sellers

LATEST government survey of the phonograph record business shows that the industry is still changing as far as record speeds and volume of business is concerned. During 1954, manufacturers in the phonograph record field shipped products valued at $85 million, a decrease of 23 percent from the 1947 total of $110.2 million. The $85 million consisted of $83 million in manufactured products and almost $2 million in miscellaneous receipts for contract work, repair work, sales of scrap etc. The $83 million product shipments were accounted for by $79 million of phonograph records and record blanks, and $4 million of other products.

► **Speeds** — In 1954, the standard 78-rpm record still held top spot in the record field. Some 121 million 78-rpm platters worth $24 million were shipped compared to 76 million 45-rpm disks worth $21 million and 24 million 33.3-rpm disks valued at about $22 million.

► **Ratios Change**—In 1949 the percentage of total sales accounted for by each speed was: 78 rpm, 88 percent; 33.3 rpm, 8 percent; 45 rpm, 4 percent. In 1951 the percentages were 78 rpm, 66 percent; 33.3 rpm, 16 percent; 45 rpm, 18 percent. In 1954, the percentages based on value of shipments were: 78 rpm, 36 percent; 33.3 rpm, 33 percent and 45 rpm, 31 percent.

► **Companies** — According to the census there were 142 phonograph record manufacturers in the U. S. in 1954 employing 6,200 people. Of these, 4,700 were production workers. In 1947 there were 111 record companies with 10,000 employees, 8,200 of whom were production workers.

The Middle Atlantic states represent the main headquarters for the record industry. A total of 77 of the 142 firms in the business are located in the area, followed by 45 in the South and West, 14 in North

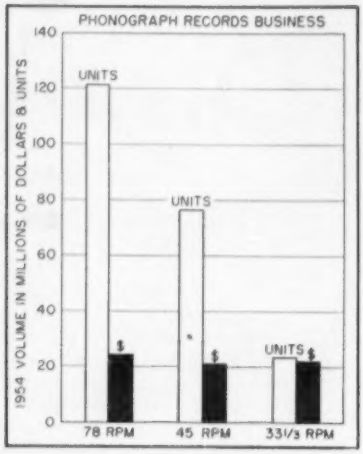

Central states and 6 firms in New England. Although the South and Western states have second largest number of companies in the business, they are small concerns. The 45 employ a total of 980 people compared to 2,225 in the Middle Atlantic, 1,648 in the North Central and 1,295 in the New England area.

Educational TV Takes On New Life

Closed-circuit tv combines with educational tv stations to boost video instruction

USE of television by educational intitutions has been slow in starting but now is gathering increasing speed. An estimated 100 institutions now have closed-circuit tv installations. In addition, there are 25 educational tv stations on the air and 7 more are expected during 1956.

► **Wire**—Most installations in educational institutions have been small experimental hook-ups of two or three rooms. Starting in September, more than 6,000 pupils in two high schools and six elementary schools in Washington County, Md. will receive a part of their daily instruction by closed-circuit tv.

Present plans call for expansion of the system to the entire Wash-

(Continued on page 20)

It's RAYTHEON for RELIABILITY

in BONDED

SILICON DIODES

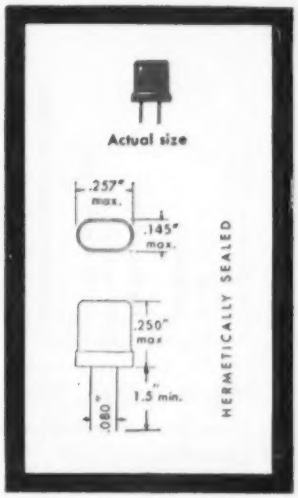

THESE FIVE TESTS TELL THE STORY

1. **Temperature**
   4 hours at −55°C, then instant transfer to 4 hours at +150°C — twenty-five times
2. **Vibration**
   25G., 40 to 2000 cps, along each of the three mutually perpendicular axes. Five 3-minute sweeps through the range
3. **Shock**
   500G shocks of one millisecond duration through each of the three mutually perpendicular axes
4. **Noise**
   145DB random acoustical noise application, 200 cps to 20 kc
5. **Life**
   2000 hour tests, run as rectifier with *both* maximum reverse voltage and maximum rectified current

Samples of RAYTHEON BONDED SILICON DIODES show no failures when subjected to all five of these tests

Type	Peak Inv. Voltage 25°C	Forward Current at +1.0 V (min.) Current 25°C	Reverse Current at −10 V (max.) Current 25°C	Reverse Current (max.) in μA at specified voltage			Rectified Current (max.)		
				Volts	25°C	100°C	25°C	100°C	150°C
1N300	15 V	15 mA	.001 μA	10	0.001	0.1	65 μA	40 μA	18 μA
1N300A	15	30	.001	10	0.001	0.1	80	50	25
1N432	40	10	.005	10	0.005	0.1	55	30	15
1N432A	40	20	.005	10	0.005	0.1	70	48	22
1N301	70	5	.01	50	0.05	1.0	45	25	12
1N301A	70	18	.01	50	0.05	1.0	65	45	20
1N460	90	5	.01	75	0.1	1.0	45	25	12
1N460A	90	15	.01	75	0.1	1.0	60	40	18
1N303	125	3	.01	100	0.1	2.0	40	20	10
1N303A	125	12	.01	100	0.1	2.0	55	35	16
1N433	145	3	.01	125	0.1	3.0	40	20	10
1N433A	145	10	.01	125	0.1	3.0	50	30	16
1N434	180	2	.01	150	0.1	4.0	35	18	10
1N434A	180	7	.01	150	0.1	4.0	45	25	15
1N302	225	1	.01	200	0.2	5.0	30	14	8
1N302A	225	5	.01	200	0.2	5.0	40	22	13
CK863	300	1	.01	275	0.3	8.0	20	12	6
CK863A	300	3	.01	275	0.3	8.0	30	20	8

RAYTHEON mfg. co.

SEMICONDUCTOR DIVISION

Silicon and Germanium Diodes and Transistors • Silicon Power Diodes

NEWTON, MASS.: 150 California St. • DEcatur 2-7177
NEW YORK: 589 Fifth Ave. • PLaza 9-3900
CHICAGO: 9501 Grand Ave., Franklin Park • TUxedo 9-5400
LOS ANGELES: 622 S. La Brea Ave. • WEbster 8-2851

Want more information? Use post card on last page.

ington County school system by September, 1958. A total of 47 schools will be supplied with equipment and approximately 20,000 pupils will receive tv instruction.

▶**Plan**—All necessary equipment for school installations during the life of the five-year project is to be contributed by electronics manufacturers through RETMA. The Ford Foundation through its Fund for the Advancement of Education is to provide funds for training personnel and supervising the program.

Total cost of the project is estimated at over $1 million. Educational tv proponents believe that successful results from this program will triple the use of closed-circuit tv as an educational medium.

▶**Stations**—Growth of educational tv stations has been relatively slow since channels were first allocated in 1952. One reason has been the uhf situation. According to the Joint Council on Educational Television, the five uhf educational tv stations now on the air have encountered many of the same problems that have confronted commercial uhf stations. Station coverage has been satisfactory but uhf receiver inconveniences and difficulties have caused considerable trouble. Two-thirds, 172, of the 258 channel assignments reserved for educational tv are in the uhf band.

FCC Proposes TV Shift To UHF

Invites industry comment on long-range plan while boosting uhf power ceiling

IN a far-reaching proposal, the FCC took the first step toward a possible complete changeover of tv broadcasting from vhf to uhf.

Final decision on deintermixture and channel assignments is still far in the future. However, the recent proposal maps out interim measures which may result in final adoption of the plan.

▶**Considerations**—The basic proposals outlined in the Commission's Report and Order are: an invitation to industry for comments by Oct. 1 on the possibility of shifting tv operation to the uhf band; proposal of an immediate R&D program concentrating on increasing uhf transmitter power and determining the feasibility of such techniques as uhf boosters and satellites, as well as increasing the sensitivity and reducing the noise factors of receivers along with improving their selectivity to permit channel reassignment with minimum restrictions on station separations; increasing the maximum power of uhf stations from 1,000 to 5,000 kw effective August 1.

▶**Other**—The Commission also: set forth interim measures for eliminating vhf assignments to create opportunities for uhf broadcasting as well as measures for assignment of additional vhf channels; set up rule making to consider 13 particular interim proposals for channel changes; relaxed present rules to permit new vhf assignments at shorter spacing from cities but still conforming to minimum spacing between transmitters of individual stations.

▶**Interim Action**—To establish a minimum criteria for decisions the following factors were suggested. In markets with one or more commercial vhf assignments consideration would be given to whether: significant numbers of people would lack service if the vhf channel were eliminated; one or more uhf stations are operating in the area; enough sets in use can receive uhf signals; terrain is reasonably favorable for uhf coverage; eliminating a vhf channel would create competition among more stations.

Assigning or adding a first vhf channel would depend on whether: the new transmitter can be located at minimum transmitter spacings; when shifting location there is a greater need at the new location; adding a new vhf channel would create competition among more stations.

Britain Moves Ahead In Hi-Fi Exports

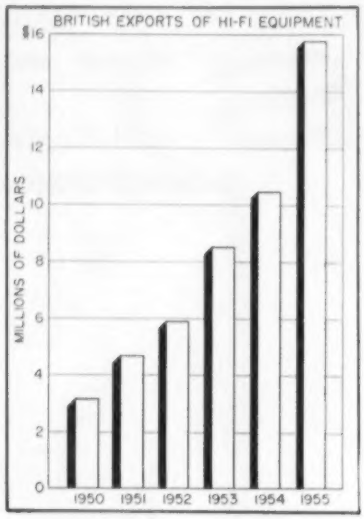

World markets, including U. S., take increasing volume of British sound equipment

BRITISH electronics firms are breaking records in the export of hi-fi gear. In 1955, the total hit a new high, reaching a volume of nearly $16 million. Last year hi-fi exports increased by $5.7 million over the 1954 total. The rise alone was larger than the total of such exports in 1951. So far this year, British hi-fi exports are higher than last year by an estimated 17 percent.

▶**Breakdown**—Nearly $8 million worth of British phonographs were exported to world markets last year and the U. S. constituted one main market for the devices. Some $1.7 million in tape recorders and tapes and over $6.6 million in phonograph records were exported.

▶**Show**—Britain's National Radio Show, to be held in London from August 22 to September 1, will show some of the newest hi-fi equipment.

According to the Radio Industry Council, British high-fidelity sound reproduction equipment, including phonograph parts, is penetrating the U. S. market to an in-

(Continued on page 22)

BARRY ADDS NEW WEST COAST FACILITY

Occupies Plant in Burbank

With its purchase of all physical assets of the United States Sheet Metal Products Company in Burbank, California, Barry Controls Incorporated establishes a Western Division for improved service to the aircraft and missile industry. Operations of the Western Division will include an engineering design section, a shock and vibration test laboratory, a model shop, and production of special designs.

The metal-working facilities of this plant will be used to produce prototypes of vibration-isolating mounting bases and for short-run production of special mounting bases. Stocks of standard isolators will also be maintained here. Barry's present West Coast engineering office will become part of the engineering section of the Western Division.

With the availability of on-the-spot engineering consultation and local model-shop facilities, design and development of complex mounting systems for missiles and jet aircraft will be speeded and valuable lead-time gained for production of prototypes.

CHIVERS TO HEAD WESTERN DIVISION

A. S. Chivers, Sales Manager of Barry Controls Incorporated, has been appointed General Manager of the new Barry Western Division. A graduate of Massachusetts Institute of Technology, Chivers joined Barry in 1952 as administrative assistant with the sales department. He was made Assistant Sales Manager in 1953 and Sales Manager in 1955. As General Manager of the Western Division, he will be responsible for the direction of all its activities.

Here's ALL-ANGL Reliability in Minimum Space for JETS and MISSILES

ALL-ANGL Mounts integral with base of relay interlock assembly built by Diaphlex Division of Cook Electric Company for F 86 and F 100.

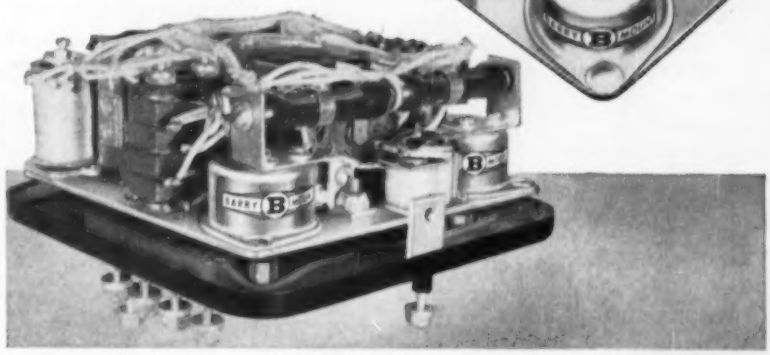

The attitude gyro of North American Aviation's F-100 Super Sabre must give reliable indication through every flight attitude — or the pilot won't know which way is up.

That's why ALL-ANGL Barry Mounts are chosen to protect the delicate sensing relays in the interlock assembly for this vital instrument. Close-tolerance operation in all attitudes demands the certain isolation of vibration — assured by ALL-ANGL Barry Mounts.

F-100 Super Sabre photo courtesy of North American Aviation, Inc.

Two added advantages result:

1. Size of the unit is cut 40% by integrating ALL-ANGL mounts, upside down, in the base plate.

2. Short leads replace long cables because the Barry Mounts float the assembly within its case.

Barry's Western Division, in Burbank, California, will offer engineering facilities, prototype service, and short-run production of "specials".

BARRY CONTROLS INCORPORATED

BARRY B MOUNT

SALES REPRESENTATIVES IN ALL PRINCIPAL CITIES

707 PLEASANT STREET, WATERTOWN 72, MASSACHUSETTS

creasing degree. There will be 100 exhibitors at the show, including 35 manufacturers of radio and tv receivers. About 400 tv receivers will be on display and there will be some 30 demonstration rooms for tv and radio sets.

Industry Subsidizes Science Teachers

GROWING concern over future scientific manpower requirements is causing renewed interest on the part of industry in providing free summer fellowships for high-school teachers of science and mathematics.

The main objective in this subsidization is to help teachers gain more knowledge of their subjects so they can increase student interest in science and mathematics courses.

▶ **Cost**—A pioneer in this field, GE estimates the cost of its near sixty programs this summer at about $175,000. This amount will allow more than 250 teachers in 38 states to study. Just entering the field, Shell Oil estimates its programs will cost about $100,000 this summer.

Satellite Electronics Shape Up

Engineers describe telemetering and Minitrack systems to be used in the earth-satellite program

MORE complete picture of Project Vanguard, code name for the earth-satellite phase of the U. S. scientific program for the International Geophysical year, was presented by George Washington University at an IRE, AIEE symposium called Vanguard of Outer Space.

▶ **Telemetering**—One of the important tools in the launching of the earth satellite will be radio telemetering. As described by Donald G. Mazur, telemetering will be used in the test phases of the Vanguard program, to obtain complete performance data on the three rocket stages individually and in combination.

Telemetering equipment will be used in the actual launching. Emphasis will be on obtaining essential operation information, using one or two light-weight transmitters in the rockets.

Equipment reliability will be extremely important in this application. Another important qualification of the system will be its ability to transmit and receive signals over long ranges.

During certain phases of the launching, vehicle trajectory, the slant range between the rocket-borne transmitters and the ground receiving stations, will be over 300 miles. All telemetering systems under consideration have been proved out in actual rocket work. Twenty or more ground stations spread out over a thousand miles must be operated simultaneously and must provide overlapping coverage.

▶ **Tracking** — Radio will also be used for tracking the earth satellite and obtaining scientific data from it, according to John T. Mengal. Radio tracking will handle three jobs: to prove that the satellite is actually orbiting, determine its precise orbit, and measure what is happening within the satellite from the vantage point of a ground station.

These problems are solved by the Minitrack system of radio angle tracking developed by the Naval Research Laboratory. In the ground station layouts, seven antennas will be used. Six items of data will be obtained, sent to a general computing facility within 20 minutes of receipt, and used there for determining the orbit of the satellite.

▶ **Technical**—The Minitrack transmitter will be a simple minimum weight (three pounds or less) oscillator with a power output of between 10 and 50 milliwatts at an operating frequency of 108 mc. Two developments are under consideration, one using subminiature low-filament-voltage electron tubes and the other using transistors. Reliability and general utility of the tube model is high, but it is considerably larger and heavier than the transistor unit. One of the common battery types will probably be used for a power supply. Solar batteries will be considered only if intensive tests ascertain their reliability.

Telemetering of data from the

(Continued on page 24)

SAGE Device To Aid Air Safety

Commercial version of the Charactron shaped-beam tube (ELECTRONICS, p 174, Aug. 1952) which has been used for some time in the SAGE system of military aircraft surveillance, has been introduced by Stromberg-Carlson-San Diego, as an electronic display device to help solve air traffic control problems. Production has started on the new model, which has a 19-inch screen. In addition to providing the relative positions of aircraft and showing movement across a map-diagram, the system displays letters and numbers to represent such information as flight number, speed and altitude

"BEST IRON WE'VE HAD in the plant," says William Fish, a production supervisor of General Radio, Cambridge, Mass. This company has switched to G-E Midget irons for soldering *both* delicate and heavy joints in their Type 1862-B Megohmmeters —jobs which formerly required *both* a heavy and a light iron. G-E Midget iron's light weight also helps reduce fatigue.

50 G-E Midget irons do work of 100 former irons at General Radio Co., boost production 25%

HANDLES LIKE A PENCIL—Weighing less than a package of cigarettes, the General Electric Midget soldering iron speeds production by reducing operator fatigue.

RAPID HEAT TRANSFER is achieved by locating the heater directly in the iron-clad-copper tip. Result—the G-E Midget iron's heat efficiency is 90%.

THREE-IN-ONE IRON with 1/8", 1/4", 3/16" tip sizes gives you greater versatility to meet your soldering requirements. Tips can be changed in only 5 seconds.

SEE THE MIDGET AT THE WESCON SHOW, AUGUST 21–24.

For more information write for GED-2263, G-E Midget Soldering Iron, Section 724-3, General Electric Co., Schenectady 5, N. Y.

GENERAL ELECTRIC

satellite will also be accomplished through the Minitrack system. A method of ground command turn-on has been worked out so that the telemetering will transmit only when the satellite is directly over a ground recording station, to minimize battery requirements.

Electronics Attacks Heart Ills

New applications promise to aid medicine's fight against one of the nation's top killers

THREE new instruments that aid heart disease diagnosis are being added to the growing volume of electronic equipment used by the medical profession.

▶ **Instrument**—A tiny transducer, about 60 thousandths of an inch in diameter, placed on the tip of a heart catheter and introduced into the heart to locate defects, has been developed at the Philadelphia General Hospital by Dr. David H. Lewis and engineer James R. Brown, Jr.

The device consists of a barium titanate element, built into a specially designed cardiac catheter. It converts sound into electrical energy which is then tape recorded. By listening to sounds inside the heart, the exact spot of a defect can be located.

So far, the instrument has been introduced only into the right side of the heart. Dr. Lewis is working on further miniaturization of the device so that it will fit into the eye of a needle which can be introduced into the left side of the heart.

A similar instrument, employing a condenser microphone, was developed in Japan in 1954 but its pickup was limited, according to Dr. Lewis.

▶ **Meter** — An electronic device which facilitates diagnosis of blue baby conditions and other cardiac diseases, is being introduced by The Colson Corp. of Elyria, Pa. The instrument is a cuvette densitometer that gives continuous information on variations in the oxygen saturation of blood taken from specific regions of the heart through a catheter. By ascertaining the position of the catheter in the heart by x-ray, the physician can determine the positions in the heart at which the patients blood departs from the normal oxygen saturation.

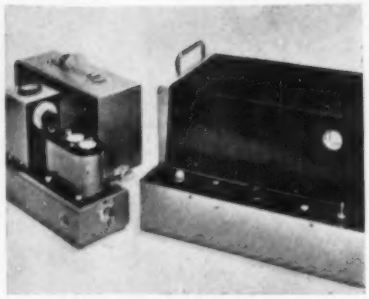

Colson cuvette densitometer for monitoring oxygen saturation of blood

▶ **Scope**—DuMont Laboratories is coming up with a new oscilloscope designed for use by doctors during operations for the monitoring of the patients heart action. It will reveal possible heart failure in advance and prove a decided additional safety factor, according to Dr. A. B. Dumont.

Manufacturer Girds for Expansion

Sixteen electronic product businesses of GE have been reorganized into three major divisions as a result of the rapid expansion and future growth prospects of these fields which now have a sales volume greater than that of the entire company in 1940. Dr. W. R. G. Baker, right, GE vice-president recently elected president of RETMA, discusses future developments with the new general managers of the new divisions. They are, left to right, L. B. Davis, electronic components division; Dr. G. L. Haller, defense electronics division; and H. A. Strickland, Jr., industrial electronics division

Welding Uses More Electronics

Electronic and magnetic resistance welding controls double in volume

THIS year electronic and magnetic resistance welding controls shipments may reach a total value of over $9 million. Volume doubled between 1947 and 1954, going from $4.3 million to $8.2 million in the period.

▶ **Welders** — Manufacturers of welders shipped over 15,000 units during 1954, valued at $38.6 million. Electronic controls accounted for an estimated 20 percent of this total value.

Largest portion of resistance welders sold were spot welders. Over 13,000 of the units were shipped in 1954 valued at nearly $19 million. Seam welders were the second largest sellers. Some 221 were shipped valued at $3.5 million.

▶ **Market** — There are about 120 manufacturers of welding equipment in the U. S. These represent

NOW AVAILABLE!

SUPER-RUGGED!

ADVAC

HIGH VOLTAGE TERMINALS

- **Pure silver brazed for higher temperature service**
- **Helium mass spectrometer tested for vacuum-tightness**
- **High mechanical strength and thermal shock resistance**
- **Adaptable for soft-soldering, brazing or welding**

New ADVAC High Voltage Terminals withstand operating temperatures of over 1000°F. They have been service-proven in a wide range of applications where severe environmental conditions, including both mechanical and thermal shock, are encountered. ADVAC super-rugged high voltage terminals are available in nine economical standard types that meet most requirements. For special applications, custom terminals can be produced to your exact specifications.

Specify ADVAC High Temperature Ceramic-to-Metal Seals for:

- JET ENGINE THERMOCOUPLE SEALS
- FIRE DETECTION AND TEMPERATURE CONTROLS
- EXPLOSION PROOF ASSEMBLIES
- REFRIGERATION COMPRESSOR SEALS
- KLYSTRON OUTPUT WINDOWS
- T-R TUBE WINDOWS
- IGNITION INSULATOR BUSHINGS
- VACUUM TUBE CLOSURES
- HEATING ELEMENT TERMINATIONS
- NUCLEAR ENERGY EQUIPMENT
- IMMERSION HEATER SEALS
- POWER CABLE END SEALS
- CHEMICAL RESISTANT INSULATORS
- HEAVY-DUTY TRANSFORMERS
- CAPACITORS
- PULSE NETWORKS
- RELAYS, DELAY LINES
- FILTERS, REACTORS
- MOTOR SWITCHES

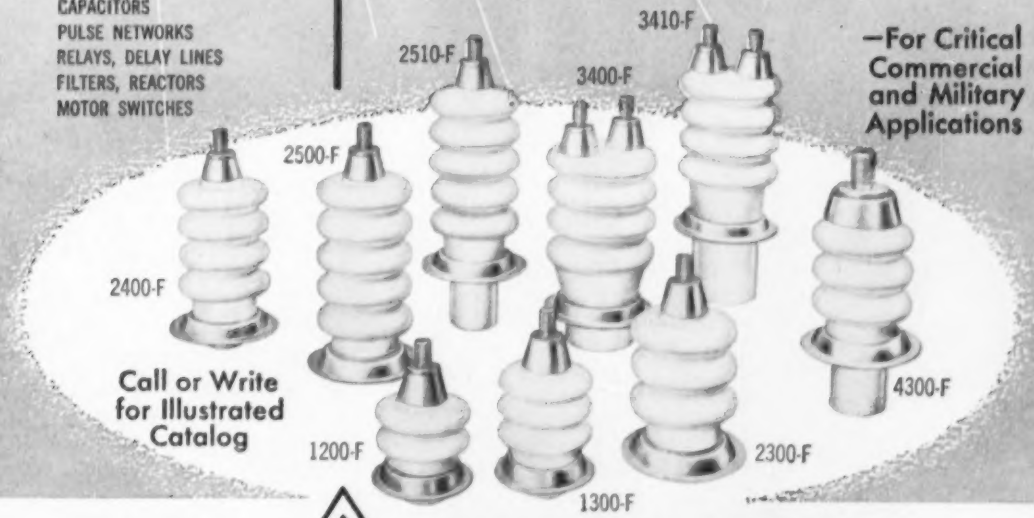

—For Critical Commercial and Military Applications

Call or Write for Illustrated Catalog

DIVISION OF GENERAL CERAMICS CORPORATION

ADVANCED VACUUM PRODUCTS • INC

430 Fairfield Avenue, Stamford, Connecticut—Telephone: Davis 4-2148

HIGH TEMPERATURE, VACUUM TIGHT CERAMIC-TO-METAL SEALS FOR THE ELECTRONIC INDUSTRY

the primary market for some 15 manufacturers of electronic welding controls.

Over half, 63, of welding equipment manufacturers are located in the east north central states. In Michigan alone there are 31 manufacturers. Ohio has 11. In the middle Atlantic states there are 21 manufacturers, 17 in the south and west, 14 in the west north central states and 4 in New England.

Financial Roundup

Final profit reports of many firms in the field show up last year's business

ROUNDUP of companies in the field reporting annual net profits shows how the industry is doing on the financial front.

Company	Annual Net Profits 1955	1954
Admiral Corp.	$2,426,866	$6,547,974
Am. Cable & Radio	1,248,954	1,890,072
American Electronics	265,013	273,057
Amphenol	952,687	679,491
AT&T	546,200,000	480,277,306
Avco	758,311	3,639,436
Bendix Aviation	25,883,599	25,537,771
Burroughs	12,149,753	9,146,514
Canadian Marconi	1,007,065	1,083,590
Century Engineers	102,305	.....
Clary Corp.	286,000	125,000
Clevite Corp.	4,854,753	2,668,648
CBS	13,397,000	11,415,000
Consolidated Electrodynamics	803,696	842,863
Cornell-Dubilier	1,809,002	1,729,640
Curtiss-Wright	35,031,045	19,377,279
Daystrom Inst.	1,784,000	1,716,000
Dynamics Corp.	2,012,071	2,010,447
Eastern Industries	715,436	532,009
Electronic Assoc.	491,523	244,557
Electronics Corp. Of Am.	446,840	162,106
Eitel-McCullough	645,844	622,761
Emerson	2,468,063	1,884,976
Fairchild Camera & Inst.	792,000	1,607,000
Fischer & Porter	365,973	263,588
General Electric	200,923,835	198,913,221
Gray Manufacturing	357,110	130,407
Indiana Steel	766,945	587,854
IBM	55,872,633	46,536,625
IT&T	23,070,327	20,068,525
Jerrold Electronics	169,422	189,733
Magnavox	1,774,960	1,532,469
Minn. Honeywell	19,278,648	15,345,203
Minnesota Mining	34,323,370	24,241,885
National Cash Register	15,388,000	12,729,000
Packard-Bell	638,933	164,295
Philco	8,423,000	769,000
RCA	47,525,465	40,525,459
Rome Cable	2,023,000	931,000
Servo Corp.	269,800	150,500
Servomechanisms	441,367	503,926
Siegler Corp.	613,855	.....
Sperry Rand	46,348,878	44,580,821
Stewart-Warner	6,163,217	2,757,436
Sylvania	13,812,970	9,480,941
Tempco Aircraft	3,103,070	2,937,249
Tung-Sol	3,239,393	2,077,062
Van Norman Industries	633,398	.....
Westinghouse Air Brake	12,357,959	7,763,546
Westinghouse	42,803,000	79,922,000
Zenith	8,034,491	5,676,264

MEETINGS AHEAD

Aug. 20-21: National Telemetering Conference, IRE, AIEE, IAS, ISA, Biltmore Hotel, Los Angeles, Calif.

Aug. 21-24: 1956 Western Electronic Show and Convention, Pan-Pacific Auditorium, Los Angeles, Calif.

Aug. 22-Sept. 1: The 23rd Annual British National Radio Show, Earls Court, London.

Aug. 24-26: Seventeenth Annual Summer Seminar, IRE, Emporium, Pa.

Sept. 10-12: Information Theory Symposium, IRE, MIT, Cambridge, Mass.

Sept. 11-12: Second RETMA Conference on Reliable Electrical Connections, University of Pennsylvania, Phildelphia.

Sept. 14-15: Sixth Symposium, IRE, PGBTS, Mellon Institute, Pittsburgh.

Sept. 14-15: Conference On Communications, IRE, Roosevelt Hotel, Cedar Rapids, Ia.

Sept. 17-21: Eleventh Annual International Instrument-Automation Conference and Exhibit, ISA, New York Coliseum, New York, N. Y.

Sept. 24-25: Industrial Electronics Conference IRE, AIEE, Hotel Manger, Cleveland, Ohio.

Sept. 24-28: Trade Fair of the Atomic Industry, Atomic Industrial Forum, Navy Pier, Chicago, Ill.

Sept. 26-29: 1956 Convention of the Audio Engineering Society, New York Trade Show Bldg., New York, N. Y.

Sept. 27-30: New York High Fidelity Show, New York Trade Show Building, New York.

Oct. 1-3: IRE Canadian Convention, Automotive Bldg. Exhibition Park, Toronto.

Oct. 1-3: Twelfth Annual National Electronics Conference, Hotel Sherman, Chicago.

Oct. 1-4: Semiconductor Symposium Electrochemical Society, Statler Hotel, Cleveland, Ohio.

Oct. 7-12: SMPTE 80th Convention, Ambassador Hotel, Los Angeles, Calif.

Oct. 8-9: Second National Symposium on Aeronautical Communications, IRE, Hotel Utica, Utica, N. Y.

Oct. 9-10: Third Annual Computer Applications Symposium, Armour Research Foundation, Chicago, Ill.

Oct. 10-11: Engineering Convention of the Central Canada Broadcasters Association, Seaway Hotel, Toronto.

Oct. 11-12: URSI Fall Meeting, University of California, Berkeley, Calif.

Oct. 15-17: Radio Fall Meeting, IRE, RETMA, Hotel Syracuse, Syracuse, N. Y.

Oct. 16-18: Conference On Magnetism & Magnetic Materials, IRE, AIEE, APS, AIMME, Hotel Statler, Boston, Mass.

Oct. 25-26: Second Annual Technical Meeting of the IRE Professional Group on Electronic Devices, Shoreham Hotel, Washington, D. C.

Industry Shorts

► **Two-way** radio units will be leased by General Electric for installation in trucks owned by Ryder Rental Systems. The rental firm will then offer radio-controlled pickup and delivery service to its customers.

► **WCEMA** has given 18 western universities major scholarship grants for deserving engineering students. The donations will permit as many as 30 students to attend engineering schools during the 1956-57 term.

► **Sales** of varnished tubing and saturated sleeving totaled $4.2 million in 1955 compared to $3.3 million in 1954. Total of 184.9 million feet was sold in 1955 compared to 148.7 million feet in 1954. (ELECTRONICS, p 14, May, 1956) This brought total insulation sales, as compiled by NEMA, to $188.5 million in 1955 compared to $141.4 million in 1954.

HIGH Output (1.0 v. RMS into 70 ohms)
WIDE Range (2-220 Megacycles. All At Fundamental)
and
CONSTANT OUTPUT
(Fast Acting AGC)

NEW KAY *Vari-Sweep*

ALL-ELECTRONIC HIGH LEVEL SWEEPING OSCILLATOR OR, (with sweep off) CONTINUOUSLY TUNED CW SIGNAL SOURCE

SPECIFICATIONS

Range: Fundamental frequency 2 to 220 mc., continuously variable in 10 switched overlapping bands. Direct reading frequency dial calibrated to ±2.0%.

RF Output: 1.0 v. RMS into 70 ohms, metered. Flat within ±0.5 db over widest sweep and frequency band.

Sweep Width: Continuously variable to ± 30% of center frequency to maximum of at least 30mc.

Sweep Rate: Continuously variable 10 to 40 cps.; also locks at line frequency.

Attenuator: Switched 20, 20, 10, 6, and 3 db plus continuously variable 6 db.

Power Supply: Electronically regulated 105 to 125 v. A. C. 50 - 60 cycles

- **Operates On Fundamental Frequency, Therefore Stable Narrow-Band Sweeps**
- **1.0 v. RMS (into 70 ohms) Output Flat to ±0.5 db Over Widest Sweep**
- **Output Automatically Held Constant (AGC) Over Complete Range**
- **Variable Sweep Width (to 30 mc. PLUS) — Variable Center Frequency**
- **Direct Reading Frequency Dial Accurate To ±2.0%**
- **Sweep Repetition Rates Down to 10 cps**

Price: **$695.** FOB Plant



- Variable Center Frequency, Variable Sweep Width • Includes Low End of Video Spectrum • Permits Observation of Complete Spectrum to 50 mc or Any 4 mc Part Over the Range • Markers at Set Frequencies or as Specified.

NEW KAY *Marka-Sweep* MODEL VIDEO 50

Combined Video and IF Sweeping Oscillator with Marks

SPECIFICATIONS

FREQUENCY RANGE: Continuously variable, 50 kc to 50 mc.

SWEEP WIDTH: Linear, continuously variable, 4.0 mc to 50 mc.

SWEEP RATE: Variable around 60 cps; locks to line frequency.

AMPLITUDE: 1.0 v, peak-to-peak, into nom. 70 ohms. Flat within ±0.5 db over widest sweep.

ATTENUATORS: Switched 20, 20, 10, 6 and 3 db, plus continuously variable 3 db.

MARKERS: Eight sharp, pulse-type, crystal-positioned, internal or external markers.

PRICE: $695.00 F.O.B. Factory. Substitute markers, $10.00. Additional markers, $20.00 each.

write for new 1956 Kay catalog

KAY ELECTRIC COMPANY Dept. 1-6

14 MAPLE AVENUE PINE BROOK, N. J. CAldwell 6-4000

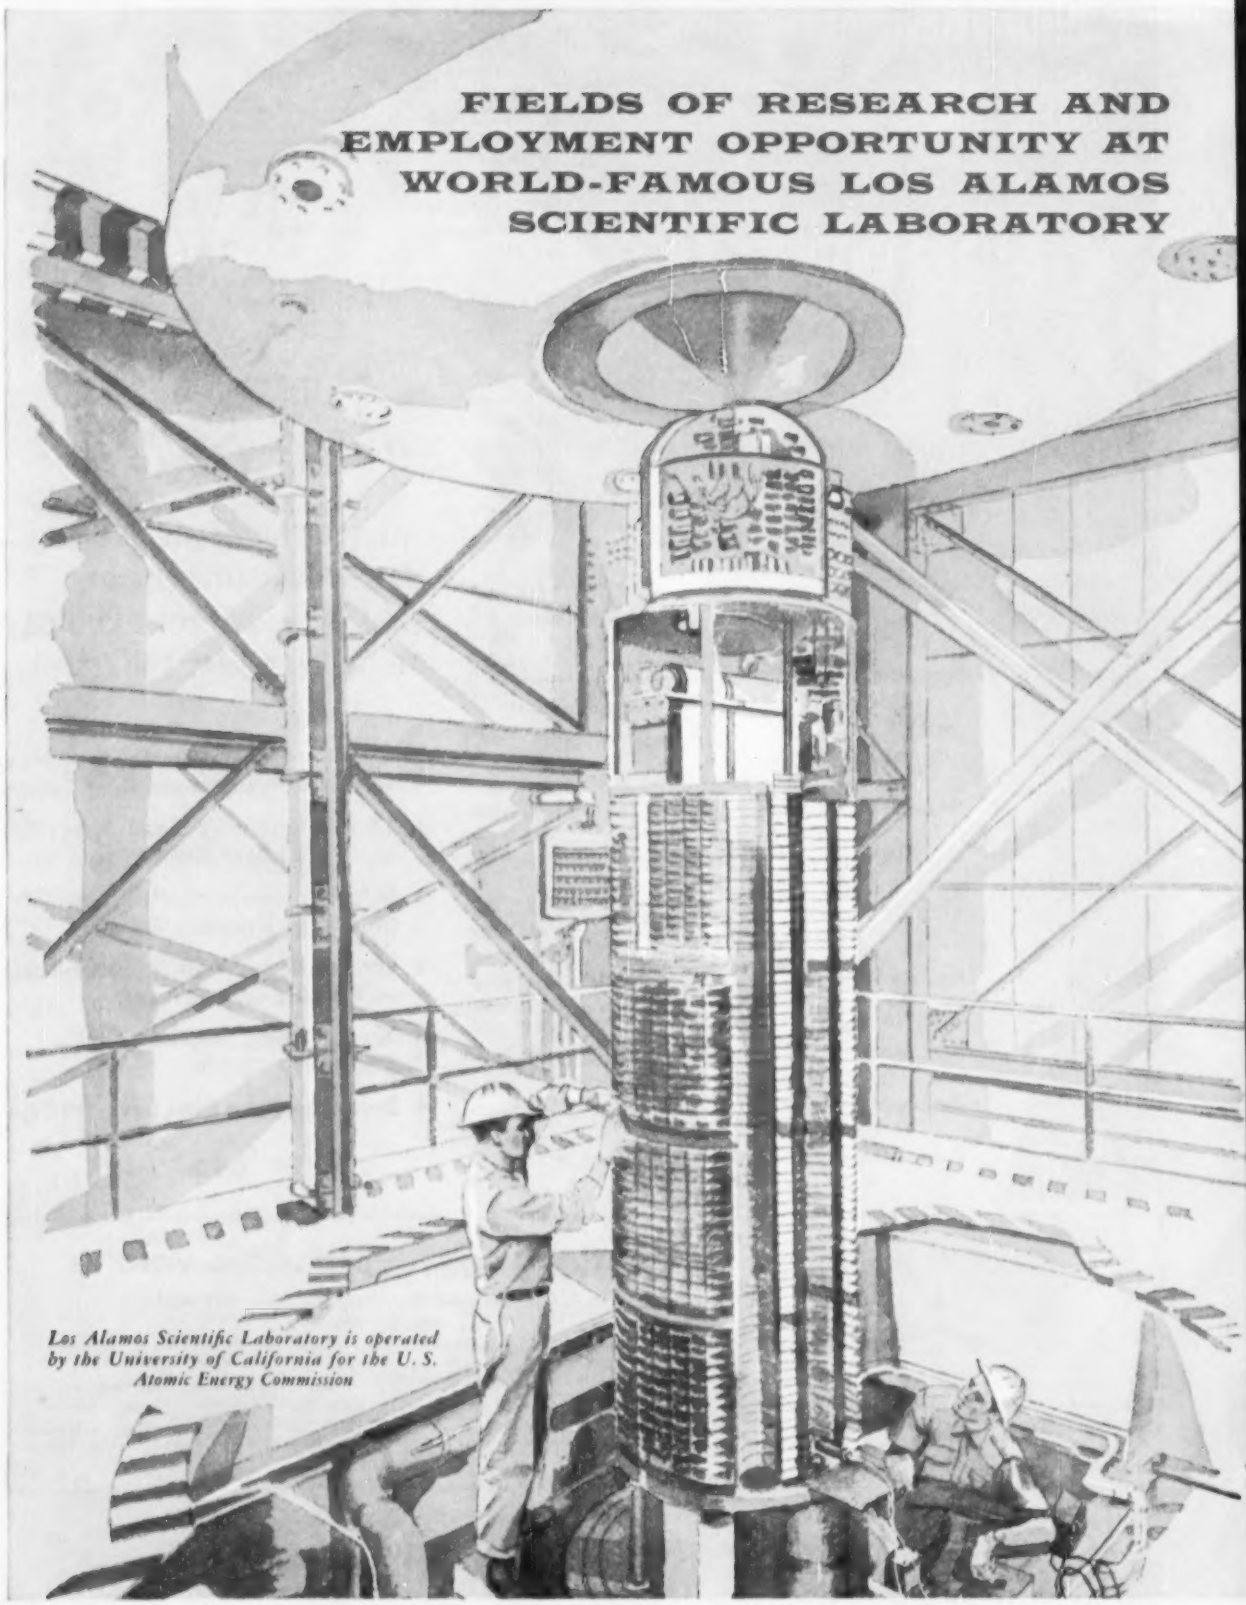
FIELDS OF RESEARCH AND EMPLOYMENT OPPORTUNITY AT WORLD-FAMOUS LOS ALAMOS SCIENTIFIC LABORATORY
Los Alamos Scientific Laboratory is operated by the University of California for the U. S. Atomic Energy Commission

Theoretical Physics and Mathematics

In the field of theoretical physics, the Laboratory carries on studies of nuclear theory, equations of state, mathematical analysis methods, hydrodynamics problems and various aspects of applied mathematics. The Theoretical Division is also concerned with the conceptual design of nuclear weapons, and supports many non-weapons activities such as the nuclear reactor and propulsion programs. The equipment used includes the Los Alamos-developed Maniac, the Maniac II, two IBM 704's and an IBM 701.

Experimental Nuclear Physics

Much of the work in experimental physics is concerned with nuclear properties of various materials. Fundamental studies are made of nuclear forces, neutron and charged-particle reactions and cross sections. Experimentation in controlled thermonuclear reactions is assuming increasing importance. Among the facilities available are three Van de Graaffs, two Cockcroft-Walton machines and a variable energy cyclotron.

Electronics and Instrumentation

The Laboratory is engaged in the design and development of nuclear physics research instruments, scintillation counters, fast pulse amplifiers, multi-channel analyzers, fast oscilloscopes, radiation detection instruments, electronic controls and control systems, and high-speed cameras which operate at 15 million frames per second. Electronics specialists also assist in the design of digital computers and of instruments for studying nuclear and thermonuclear detonations.

Nuclear Reactor Research

In connection with the peacetime applications of nuclear energy, the Laboratory is currently developing several advanced power reactors of unusual design. In addition, two research reactors are available for experimental studies. The remotely controlled critical assembly machines, known as Topsy , Godiva and Jezebel, constitute neutron research tools of a unique character.

Nuclear Propulsion

The Laboratory is actively engaged in the application of nuclear energy to the new and challenging field of self-propelled mobile reactors. There are studies in progress relative to engine design, heat transfer, controls and instrumentation.

Chemistry

Research in chemistry is devoted largely to inorganic and physical studies, especially of materials such as uranium, plutonium, deuterium and tritium used in nuclear energy systems. Radiochemical methods are applied in various investigations. Much work is being done on reaction kinetics, the effects of radiation on chemical reactions, complex ion formation and the determination of heats of combustion and solution. Extensive analytical studies include the use of a great variety of instruments, as well as the techniques of microanalysis.

Metallurgy and Metallurgical Engineering

Research activity and development in this field includes investigation of the metallurgical properties of materials used in nuclear energy systems; studies of extremely refractory substances, ceramics, cermets and plastics; the behavior of materials under extremely high temperatures and high pressures; studies of the properties of plutonium and its alloys, with increasing reference to their use in reactors, and of uranium and its alloys; development of fabrication techniques for various metals and alloys; and the high temperature properties of refractory metals tungsten, molybdenum, columbium, etc.

Weapons Physics, Design and Testing

Still the nation's principal institution for nuclear and thermonuclear weapons research, the Laboratory takes nuclear weapons from the concept stage to proved performance as determined by field tests. Activities in weapons research and development include the mechanics and dynamics of initiating a nuclear energy release; the behavior of supercritical systems; the testing of nuclear devices and weapons assemblies in Nevada and in the Pacific; engineering design of tests and prototypes of nuclear systems; and the design and development of nuclear weapons components and the techniques for their manufacture.

Explosives Research and Development

Work in this field includes study of fabrication, storage and stability problems of explosives; making and evaluating novel organic chemical compounds of possible use as explosives; mechanics and dynamics of explosive phenomena; and physical and chemical properties of explosive material using mass spectrometer, infra-red spectrometer, X-ray equipment and other analytical techniques. High explosives are employed in research on equations of state and shock wave phenomena.

Mechanical Engineering

Design and development work is carried on in connection with weapons design, field test facilities, the power reactor and propulsion programs, servo-mechanisms and remote control systems. High explosives systems are designed and manufactured. Other types of work are estimating, cost analysis and liaison between architectural engineers and contractors.

Chemical Engineering

Chemical engineering work includes studies of heat transfer, fluid flow, solvent extraction, evaporation, distillation and systems at extreme temperatures and pressures. Problems supporting inorganic and physical chemistry research projects are also undertaken. Other activities are the remote control handling of radioactive materials and corrosion and erosion studies.

Electrical Engineering

Much effort is devoted to the design of induction heating systems for study of alloys at extremely high temperatures; of DC power supplies at currents up to 100,000 amperes; of servomechanism controls for nuclear reactors; and of high magnetic field systems. Work is done in planning, building and installing power distribution systems and their controls.

The Laboratory now has staff openings for technically qualified people interested in these fields of research and development. For additional information address your inquiry to

Director of Personnel
Division 1103

los alamos
scientific laboratory
OF THE UNIVERSITY OF CALIFORNIA
LOS ALAMOS, NEW MEXICO

Want more information? Use post card on last page.

Taylor Fibre Co.

says...

"Using Revere Rolled Copper we are able to produce superior copper-clad laminates!"

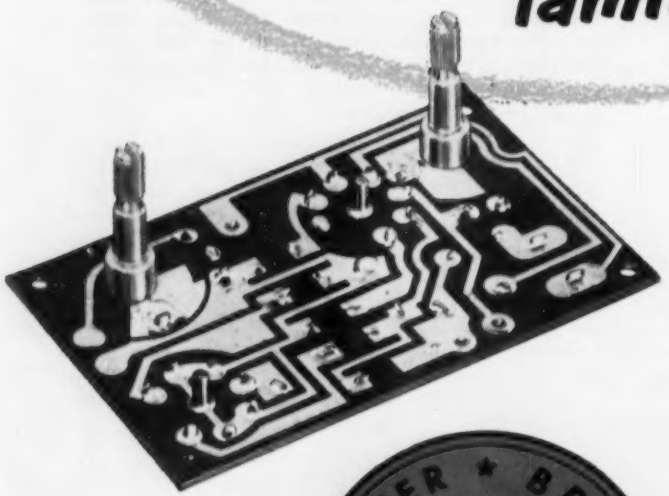

At the top of the page opposite is a section of an etched printed circuit enlarged 10 times. These particular lines are of .008 thickness, spaced .012 apart. They show the kind of printed circuits obtainable by combining Revere Rolled Printed Circuit Copper and Taylor laminates. Note the fine line etching, the close spacing and the sharp definition of the edges . . . the smoother surface (freer from pits, pinholes and imperfections) . . . the more uniform thickness with no sacrifice of conductivity. Results—consistently satisfactory etching at better production rates.

Laminators and users alike also have found that Revere Rolled Copper produces no peaks or valleys, that its smooth, hard surface of uniform density permits resist to clean off easily for there are no pores to hold resist and cause trouble when soldering.

They have noted, too, that Revere Rolled Copper is free from oxidation as it comes from the mill and is without lead inclusions. And because of its clean surface, fluxes wet readily, while in the automatic soldering operation it makes possible a uniform solder coat every time free of skips or bald spots.

Those are the very reasons why you should insist that Revere Rolled Copper be used when ordering blanks from your laminator. It is available in unlimited quantities in standard coils of 350 lbs. in widths up to 38" and in .0015 and .0027 gauges, weighing approximately 1 oz. and 2 oz. per square foot. Revere Rolled Copper exceeds requirements of standard specifications and meets ASTM B5 specification for purity with 99.9% minimum.

REVERE
COPPER AND BRASS INCORPORATED
Founded by Paul Revere in 1801
230 Park Avenue, New York 17, N.Y.

Mills: Baltimore, Md.; Brooklyn, N. Y.; Chicago, Clinton and Joliet, Ill., Detroit, Mich.; Los Angeles and Riverside, Calif.; New Bedford, Mass.; Newport, Ark.; Rome, N. Y. Sales Offices in Principal Cities, Distributors Everywhere.

PHOTO SHOWING SECTION OF CIRCUIT enlarged 10 times was made directly from panel and is UNRETOUCHED.
ABOVE PANEL IS ACTUAL PHOTO OF LAMINATE BY TAYLOR FIBRE CO., Norristown, Pa. and La Verne, Calif., using Revere Rolled Printed Circuit Copper.

Want more information? Use post card on last page.

TEFLON GLASS FIBER LACING

Ben-Har Braided TAPES

New Ben-Har Braided lacing and winding tapes combine two superior insulation materials . . . duPont Teflon and glass fibers. Teflon, with its high heat resistance of 500°F. has been coated directly on the glass fibers before braiding so as to preserve a rough texture for knottability while eliminating the abrasive action of the glass.

Developed particularly for harnessing, lacing and winding applications where heat is a determining factor, Ben-Har offers these additional features:

- non-shrinking — will not cut through insulated wires.
- pliable through −100°F. to 500°F.
- wax-free — fungus proof.
- inert to most known chemicals and oils.
- non-absorbent.
- knots hold tight, won't slip.

Ben-Har Braided Tapes are available in .048, .062, .090 and .22 inch widths; in natural color (offwhite); in 250 and 500 yard spools and a Universal wound ¼ pound tube. Brown, white, yellow, orange, red, green, blue, violet and black can be had on special order. Write for prices and samples.

BENTLEY, HARRIS MANUFACTURING COMPANY
1308 Barclay St.
CONSHOHOCKEN, PA. • TELEPHONE: TAYLOR 8-0634

BENTLEY, HARRIS *Fiberglas** **INSULATIONS**

*"Fiberglas" is Reg. TM of Owens-Corning Fiberglas Corp.

WESTINGHOUSE
2-AMP GERMANIUM
POWER TRANSISTORS

High Current Gain— Maintained at Large Collector Currents

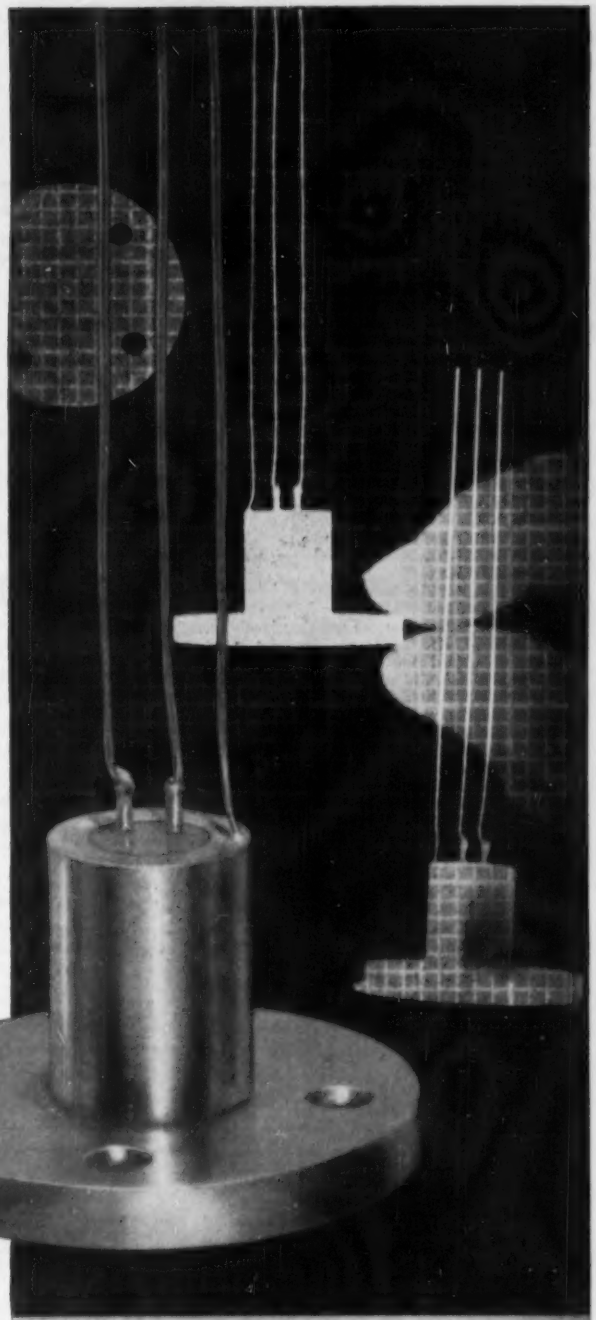

New Westinghouse XD-5081 transistor is characterized by high current gain throughout its operating range. Distortion is cut to a minimum.

THERMAL DISSIPATION. Large copper base provides an ample heat dissipating area.

LONG LIFE — RELIABLE OPERATION. Hermetically sealed in glass and metal to exclude moisture, prevent atmospheric contamination.

TYPICAL APPLICATION. Ideally suited for audio output stages and switching applications.

Performance data on the XD-5081:

Large signal current gain . . . 70 at Ic = 1 ampere; 55 at Ic = 2 amperes

Large signal frequency cutoff (common emitter) . . . > 10 kc

Maximum voltage (Vce) . . . 35 volts

Maximum current (Ic) . . . 2 amperes

Saturation characteristic (Vce) . . . < 1 volt at Ic = 1 ampere

Thermal drop . . . 3.5°C per watt from junction to case

Maximum junction temperature . . . 100°C

Sample quantities are available immediately. Contact your nearest Westinghouse district sales office or write, Westinghouse Electric Corporation, 3 Gateway Center, P. O. Box 868, Pittsburgh 30, Pennsylvania.

J-09002

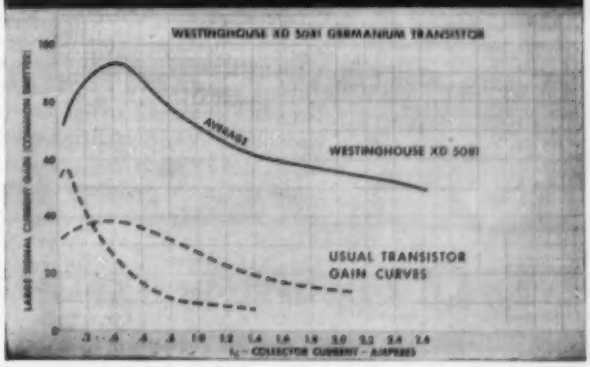

YOU CAN BE SURE...IF IT'S

Westinghouse

Want more information? Use post card on last page.

Superior

MARINE ELECTRONIC EQUIPMENT

by EDO

EDO DEEP DEPTH SOUNDER Sonar unit in wide Navy use, now available commercially. Gives clear indication of depth on CRT in two scales: 0-100 feet; 0-100 fathoms. Records continuously in three scales: 0-600 feet; 0-600 fathoms; 0-6,000 fathoms.

EDO FISHSCOPE Most advanced fish finding device on the market, available in three versions for deep and shallow fishing. Spots fish on CRT at depths to 400 fathoms, then magnifies any 10-fathom sector 20 to 40 times for clearer view. Compact design, single transsducer.



EDO LORAN Compact, direct-reading aid to long-range navigation. No special training required to operate. Fix obtained from single, 28-tube unit in matter of seconds, regardless of weather or sea conditions. Absolutely accurate though relatively low in cost.



EDO RADAR For long and short-range navigation in any weather. CRT display gives clear picture on 1, 2, 5, 10 and 20-mile range. Patented slotted waveguide antenna, mounted on transmitter, assures superior definition. Ideal where space and generator capacity are limited.



EDO SURVEY DEPTH RECORDER
Extremely accurate equipment for measuring depth of water for survey purposes. Legible, permanent record of depth, 0 to 250 fathoms, is made within eight overlapping range scales. For permanent or temporary installation.



EDO CORPORATION • COLLEGE POINT, L. I., N. Y. Since 1925

Raytheon — World's Largest Manufacturer of Magnetrons and Klystrons

1 MINIATURE — Actual size shown. Diameter, 1¼". Overall length, 2".
Ideal for pulsed beacon applications.

2 EXCELLENT VIBRATION PERFORMANCE
Reliable characteristics up to 10 g.'s from 20 to 1000 c.p.s.

3 MECHANICALLY TUNABLE
Tunes mechanically over X-band region, 9300-9500 Mc min.

4 RUGGED
Withstands 1,000 g. shock along cathode axis. 500 g. in two other perpendicular planes.

5 PULSE POWER
50 watts peak

6 LIGHTWEIGHT — 6 ounces

7 LOW THERMAL FACTOR
Exceptional frequency stability, .05Mc./°C

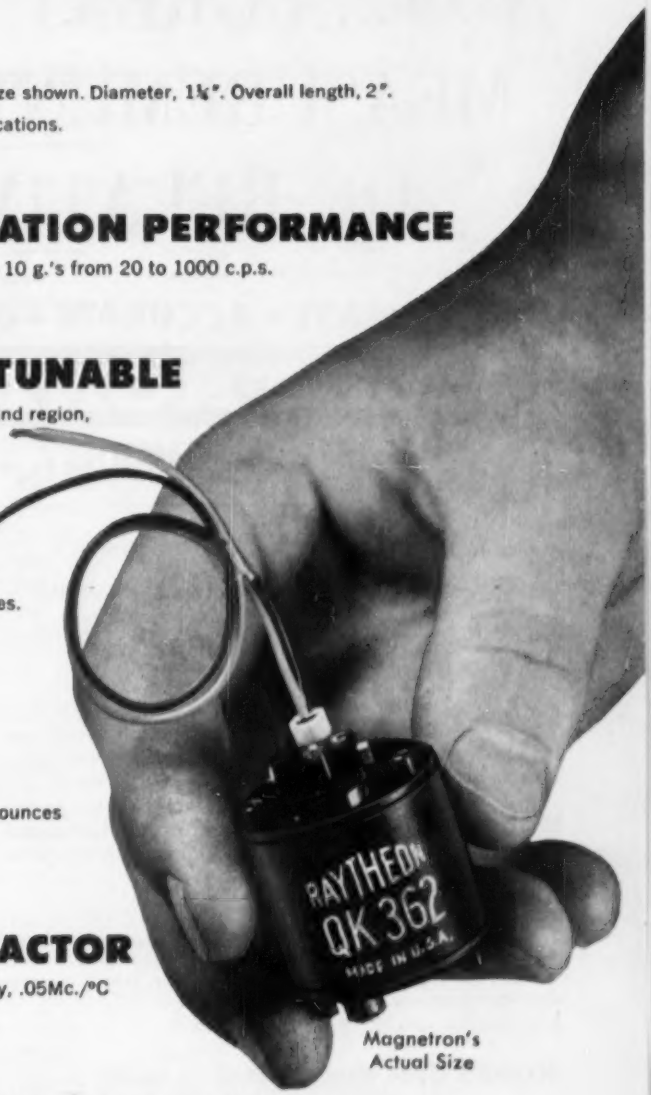

Magnetron's Actual Size

CHALLENGING CHARACTERISTICS

FOR YOUR NEW EQUIPMENT DESIGNS

For specifications on the extraordinary QK 362 magnetron write today. Similar tubes at other frequencies and power levels are available. Ask for copies of latest bulletins listing most of our unclassified Magnetrons and Klystrons and special tubes. Call on us for help in your microwave problems. There is no cost or obligation, of course.

Excellence in Electronics

RAYTHEON

RAYTHEON MANUFACTURING COMPANY

Microwave and Power Tube Operations, Section PT-50
Waltham 54, Massachusetts

Raytheon makes: Magnetrons and Klystrons, Backward Wave Oscillators, Traveling Wave Tubes, Storage Tubes, Power Tubes, Receiving Tubes, Picture Tubes, Transistors.

NOW...A GREAT, NEW ADVANCE IN MEASUREMENT AND CONTROL OF RELATIVE HUMIDITY

SIMPLE • FAST • ACCURATE • DEPENDABLE

EL-TRONICS

HUMIDITY SENSING ELEMENT

An entirely new principle . . . completely stable over long periods . . . mass produced at low cost.

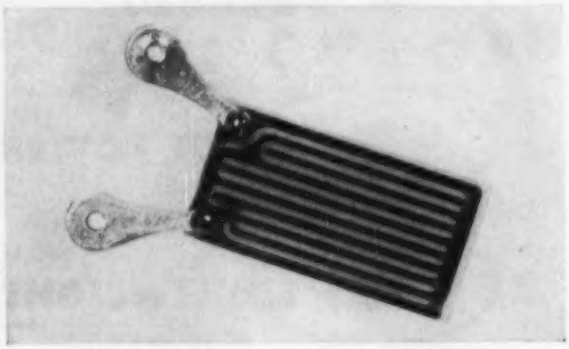

Composed of a specially treated plastic material, the El-Tronics Humidity Sensing Element (patented) is only $\frac{5}{8}$" wide, $1\frac{1}{2}$" long, and $\frac{1}{32}$" thick.

The resistance of the element varies as the logarithm of the relative humidity. The signal produced by the resistance change may be amplified and used to operate indicators, recorders, and controls.

RAPID RESPONSE

Reaction to humidity change is rapid, 67% of the change registers within 30 seconds on standard production elements. This reaction time can be reduced to 1 second for special applications.

ACCURATE OVER WIDE TEMPERATURE RANGE

For use over a wider range than heretofore possible, from -5° to 80° C (23° to 176° F), the standard element has a repeat accuracy within 3% R.H. Long-term stability and maintenance of calibration under adverse conditions are additional features of the El-Tronics Humidity Sensing Element.

MANY APPLICATIONS

The El-Tronics Humidity Sensing Element is applicable to the entire field where relative humidity is measured or controlled. This includes humidifiers, dehumidifiers, dehydrators, dryers, home and industrial air conditioning, packaging process control, industrial, educational, and government laboratories.

PROVED PERFORMANCE

The El-Tronics Humidity Sensing Element is the result of five years of research and intensive tests under a wide range of operating conditions.

SPECIFICATIONS

Standard Ranges, R.H.: 10-100%, 20-100%, 40-100%
10-50%, 20-50%, 10-25%
Ambient Temperature Range: +23° to 176° F
Repeat Accuracy: Within 3%
Reaction time, standard models: 67% of change registers within 30 seconds
special models: 67% of change registers within 1 second
Dimensions: $\frac{5}{8}$" wide, $1\frac{1}{2}$" long, $\frac{1}{32}$" deep

FOR COMPLETE INFORMATION ON QUOTATIONS . . . PHONE . . . WIRE . . . OR WRITE:

EL-TRONICS INSTRUMENTS FOR THE MEASUREMENT AND CONTROL OF RELATIVE HUMIDITY

EL-TRONICS *Laboratory* HYGROMETER

Complete range of 10 to 100% R.H. Measures to 1% R.H.

MODEL 101

This is a precision 3-scale measuring instrument and can be used as a secondary standard. It is accurate within ±1% R.H. This hygrometer is plugged into a 110 volt a-c outlet to operate and is compensated for line voltage variations.

SPECIFICATIONS

Ranges: 40-100% (2% Graduations)
20-50% (1% Graduations)
10-25% (1% Graduations)
Calibration Accuracy: 1% R.H.
Power: 105-125 volts, 50-60 cycles
Size: 8" x 10½" x 10½"
Finish: Hammertone Gray

EL-TRONICS *Portable* HYGROMETER

Lightweight . . . Accurate . . . Battery Operated

Designed especially for humidity measurement work where a-c voltage may not be available. Under intermittent use, batteries are good for over 200 operating hours.

Range of 10-100% R.H. permits measurements of 10-50% R.H. in 1% graduations and of 20-100% in 2% graduations.

SPECIFICATIONS

Range: 10-100% R.H. (2 scales)
20-100% (2% Graduations)
10-50% (1% Graduations)
Calibration Accuracy: 2% R.H.
Power: Batteries
Battery Life: 200 hours (Intermittent)
Size: 5" x 6" x 7"
Weight: 6 pounds
Finish: Hammertone Gray

EL-TRONICS *Panel* HYGROMETER

Inexpensive . . . Versatile



MODEL 102

For panel mounting in industrial applications. Through external switches, any number of sensing elements, remotely located, may be connected to the meter singly.

SPECIFICATIONS

Range: 20-100% (2% Graduations)
10-50% (1% Graduations)
Calibration Accuracy: 4% R.H.
Power: 117 volts, 60 cycles
Size: 3½" x 3½" (Cylindrical)

EL-TRONICS *Industrial Humidity Control*

Manual or automatic . . . controls over full range 10-100% R.H.

MODEL 201 and MODEL 202

This is an electronic relay which is available in two types depending upon differential. Model 201 has a differential of ± 5% R.H. and Model 202 has a differential of ± 1% R.H. A standard thyratron tube "triggers" the relay. Contact rating is ample for electrical equipment rated up to ⅓ h.p.

SPECIFICATIONS

Range: 10-100% R.H.
Differential: Model 201—±5% R.H.
Model 202—±1% R.H.
Contacts: Double Pole, Double Throw
Current: 10 amperes
Power: 117 volts, 50-60 cycles
Size: 4" x 4" x 5½"
Finish: Hammertone Gray

EL-TRONICS, INC.
Mayfield, Pennsylvania

Please send me complete information on

Laboratory Hygrometer . . . . . _____
Portable Hygrometer . . . . . _____
Panel Hygrometer . . . . . _____
Industrial Humidity Control . . . . . _____
Please have representative call . . . . . _____

NAME_____

COMPANY_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

EL-TRONICS, INC.
Plant: MAYFIELD, PA. JERMYN 1450
1420 Walnut St., Philadelphia 2, Pa.

CTC Slug Tuned Coils are made in single layer or pie type windings to your specifications. Forms are of grade L-5 silicone impregnated ceramic. Mounting studs are cadmium plated brass; silicone fibreglas collars facilitate termination of simple or multiple windings.

Death-defying performance

You can depend upon CTC Coils to give a steady, star performance whether you use ten or ten thousand! They won't go dead even under severe temperature, climate or vibration conditions. Here's why:

All CTC coils are precision-made to meet individual specifications — and to meet, or better, government specifications. Continuous quality control is maintained. As a result, you get a *guaranteed* electronic component — custom or standard.

Precision-made CTC components that benefit from CTC high quality standards include terminals, terminal boards, capacitors, swagers, hardware, insulated terminals and coil forms. For all specifications and prices, write Cambridge Thermionic Corporation, 437 Concord Avenue, Cambridge 38, Mass. A West Coast stock is maintained by E. V. Roberts, 5068 West Washington Blvd., Los Angeles 16 and 988 Market St., San Francisco, Calif.

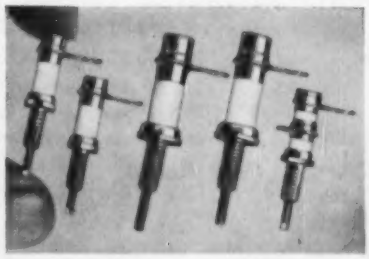

CTC Capacitor family: Metallized ceramic forms. From left to right — CST-50, in range 1.5 to 12.5 MMFD's. CST-6, in range 0.5 to 4.5 MMFD's. CS6-6, in range 1 to 8 MMFD's. CS6-50, in range 3 to 25 MMFD's. CST-50-D, a differential capacitor with the top half in range 1.5 to 10 MMFD's and lower half in range 5 to 10 MMFD's.

CTC

CAMBRIDGE THERMIONIC CORPORATION

makers of guaranteed electronic components custom or standard

MILLIONS OF VARIABLE RESISTORS
for every commercial and military need

- A world-wide reputation . . . for economical uniform high quality assembly . . . on a precision mass production basis . . . by 1500 skilled, trained-on-the-job specialists . . . to your exact individual specification.
- 315,000 sq. ft. of plant area devoted to variable resistors.
- Exceptionally good delivery cycle . . . on both commercial and military orders.
- Write for complete 62 page catalog today.

Typical Bushing Mounted Controls	Typical Ear-Mounted Controls	Typical Printed Circuit Controls	Typical Military Controls
Miniaturized 3/4" diameter composition	Molded shaft twist ear mounted 15/16" diameter composition	Solder or clinch ear mounted 15/16" diameter composition with flush shaft	Miniaturized 3/4" diameter 1/2 watt composition
15/16" diameter composition	Hollow shaft twist ear mounted 15/16" diameter composition for screwdriver adjustment	Bushing mounted 15/16" diameter concentric tandem composition with SPST switch	15/16" diameter 1 watt composition
15/16" diameter composition with SPST switch	Twist ear mounted 15/16" diameter composition with flatted shaft for push-on knobs	Self-supporting snap-in mounted 15/16" diameter composition	15/16" diameter composition with waterseal between shaft and bushing and bushing and panel
1-1/8" diameter concentric tandem tone switch and composition variable resistor with SPST on-off switch	Twist ear mounted 15/16" diameter composition with SPST switch	Self-supporting snap-in bracket mounted 15/16" diameter composition with SPST switch	1-1/8" diameter composition
1-1/8" diameter composition with SPST switch	Twist ear mounted 15/16" diameter preset tandem	Self-supporting snap-in mounted compact 8-section multiple composition	1-1/8" diameter 2 watt composition
1-17/64" diameter 2 watt wirewound	Miniaturized clinch ear mounted composition	Miniaturized bushing mounted 3/4" diameter composition	1-17/64" diameter 2 watt wirewound with locking type bushing
 1-17/32" diameter 4 watt wirewound	Miniaturized clinch ear mounted composition with SPST switch	Bushing mounted 15/16" diameter composition with SPST switch	1-17/32" diameter 4 watt wirewound

A CTS control can be tailored to your specific requirement. Let CTS SPECIALISTS help solve your current control problems. Write or phone today.

Variable resistors shown 1/3 actual size

WEST COAST SUBSIDIARY
Chicago Telephone of California, Inc.
105 Pasadena Avenue
South Pasadena, Calif.
L.A. Phone: Clinton 5-7186
TWX LA 1105

CANADIAN SUBSIDIARY
C. C. Meredith & Co., Ltd.
Streetsville, Ontario
Phone: 310

EAST COAST OFFICE
130 N. Broadway
Camden 2, New Jersey
Phone: Woodlawn 6-1668
TWX No. Camden NJ 380
Phila. Phone: Market 7-3129

SOUTHWESTERN U.S.A.
John A. Green Company
137 Parkhouse
Dallas 7, Texas
Phone: Riverside 3266

SOUTH AMERICA
Jose Luis Pontet
Buenos Aires, Argentina
Montevideo, Uruguay
Rio de Janeiro, Brazil
Sao Paulo, Brazil

OTHER EXPORT
Sylvan Ginsbury
8 West 40th Street
New York 18, New York
Phone: Pennsylvania 6-8239

CHICAGO TELEPHONE SUPPLY *Corporation*
ELKHART • INDIANA

The Exclusive Specialists in Precision Mass Production of Variable Resistors • Founded 1896

ONLY AMERICAN AIRFREIGHT OFFERS

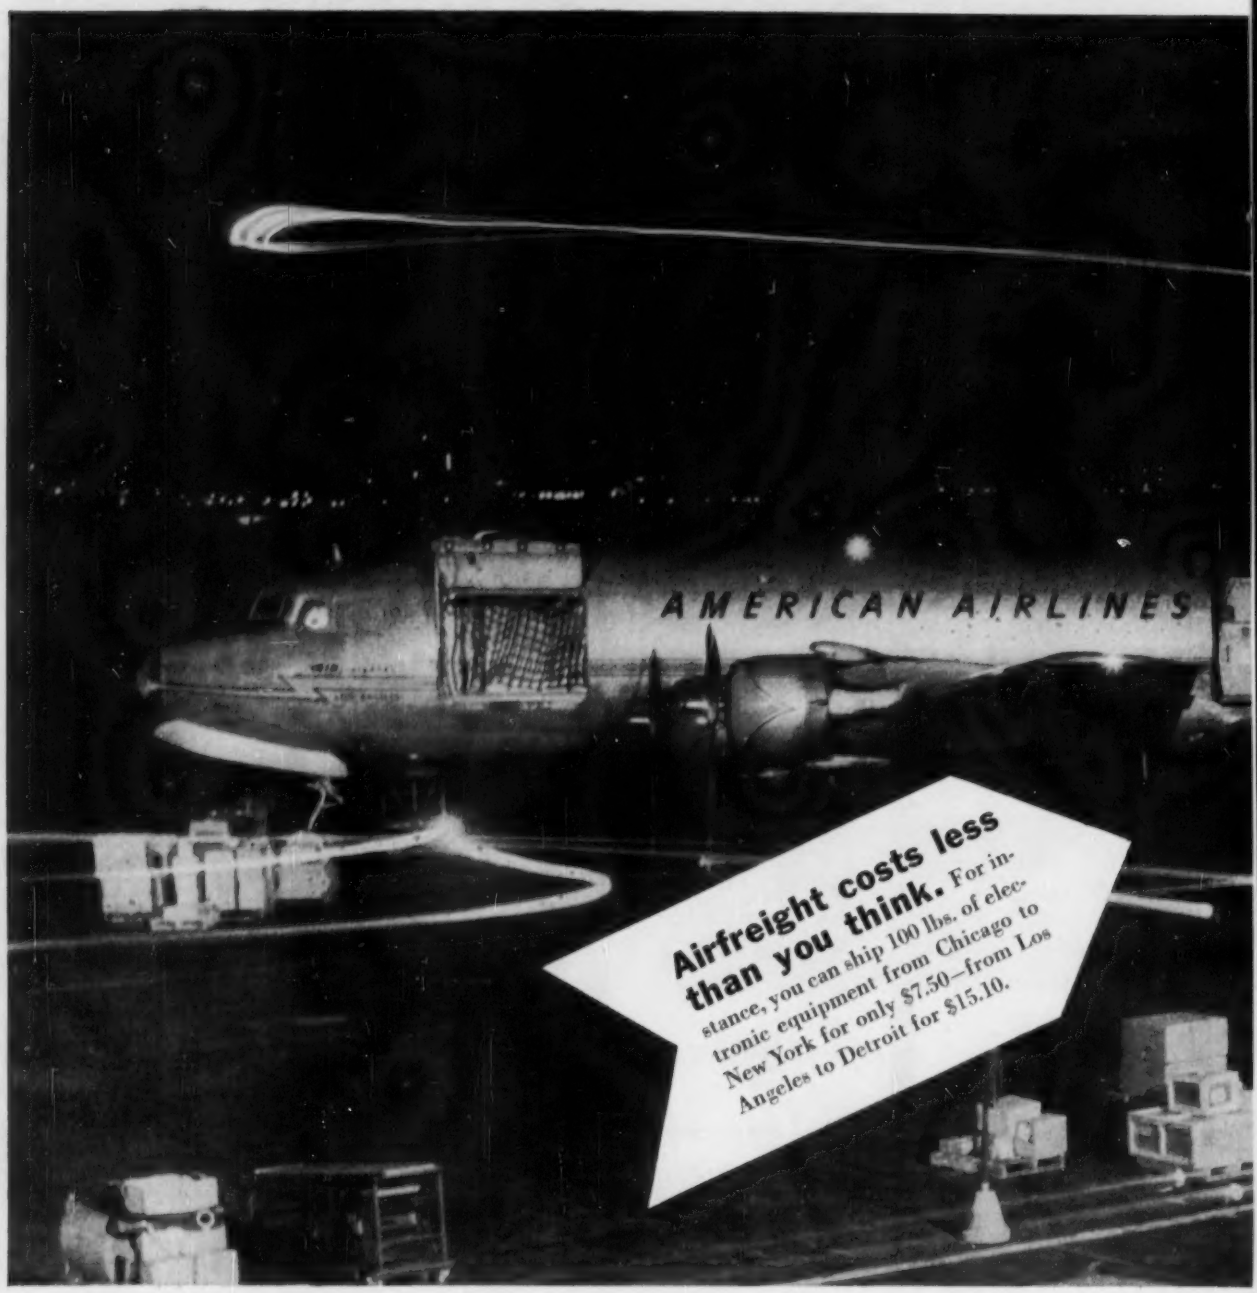
AMERICAN AIRLINES
Airfreight costs less than you think. For instance, you can ship 100 lbs. of electronic equipment from Chicago to New York for only $7.50—from Los Angeles to Detroit for $15.10.

Electronic manufacturers who use airfreight for fast reliable deliveries specify American Airfreight for these reasons:

COVERAGE

Only American offers you the extra speed of direct one-carrier service to all ten leading retail markets...more than two-thirds of the top thirty... all twenty-three leading industrial areas, in the United States.

CAPACITY

American has space for your shipment where and when it's needed most. A combined daily lift potential of over a half million pounds gives American the greatest cargo capacity of any airline.

Want more information? Use post card on last page.

ELECTRONIC EXECUTIVES ALL THESE BENEFITS

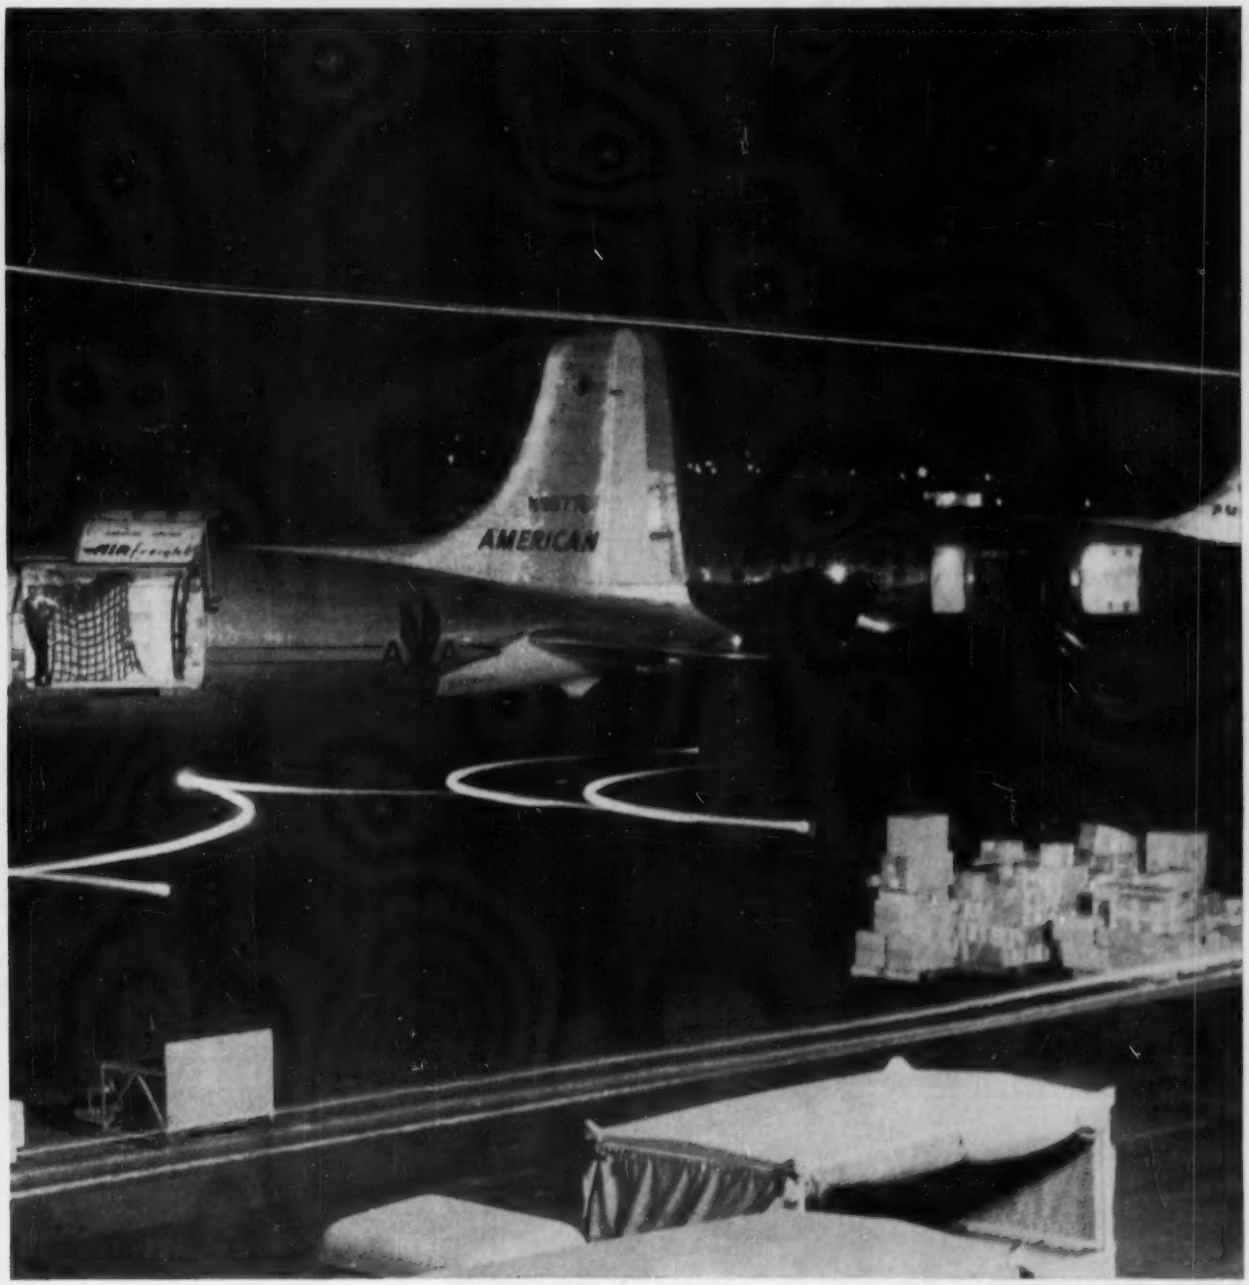

FREQUENCY

Shipments get faster forwarding...spend less time in terminals with American's greater frequency of schedules. Over 1000 departures daily offer more service to more cities than any other air carrier.

DEPENDABILITY

First with scheduled airfreight, American today has the largest, most experienced personnel force... most modern handling facilities. Is better able to solve shipping problems . . . provide dependable on-time deliveries.

AMERICAN AIRLINES AIRFREIGHT

—carries more cargo than any other airline in the world

Want more information? Use post card on last page.

ACCURATE FREQUENCIES

LOW WEIGHT
SMALL SIZE
ECONOMICAL

HIGH RELIABILITY
HIGH PRECISION
HIGH QUALITY

FREQUENCY STANDARD
240 to 800 Cycles

Type 50 C
± .02% at — 65° to 85°C

Type R 50 C
± .002% at 15° to 35°C

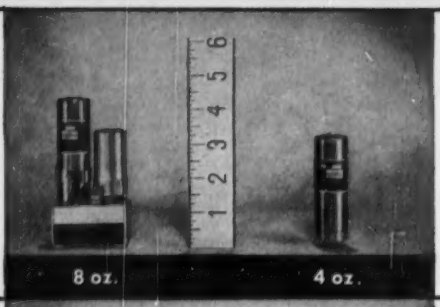

PRECISION FORK UNIT
240 to 800 Cycles

Type 50
± .02% at — 65° to 85°C

Type R 50
± .002% at 15° to 35°C

FREQUENCY STANDARD
200 to 4000 Cycles

Type 2003 C
± .02% at — 65° to 85°C

Type R 2003 C
± .002% at 15° to 35°C

Type W 2003 C
± .005% at — 65° to 85°C

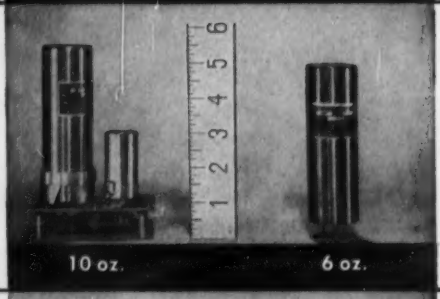

PRECISION FORK UNIT
200 to 4000 Cycles

Type 2003
± .02% at — 65° to 85°C

Type R 2003
± .002% at 15° to 35°C

Type W 2003
± .005% at — 65° to 85°C

FREQUENCY STANDARD
200 to 2000 Cycles
Sub-miniature Tube

Type 2007
± .02% at — 65° to 85°C

Type R 2007
± .002% at 15° to 35°C

Type W 2007
± .005% at — 65° to 85°C

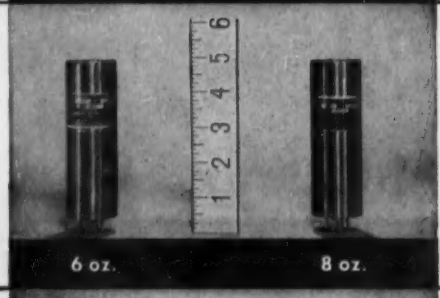

FREQUENCY STANDARD
240 to 1000 Cycles
Transistorized

Type 2007 T
± .02% at — 65° to 85°C

Type R 2007 T
± .002% at 15° to 35°C

Type W 2007 T
± .005% at — 65° to 85°C

FREQUENCY STANDARD
200 to 3000 Cycles

Type 2001-2
± .001% at 20° to 30°C

WHEN REQUESTING
INFORMATION
PLEASE SPECIFY
TYPE NUMBER

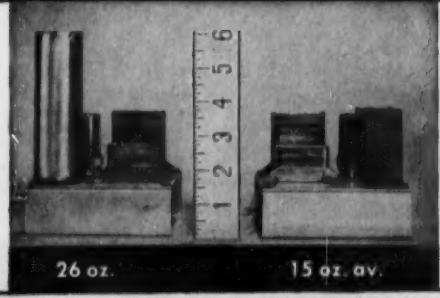

ACCESSORY UNITS
for Type 2001-2

L—for low frequencies, multi-vibrator type, 40-200 cy.
D—for low frequencies, counter type, 40-200 cy.
H—for high freqs., up to 20 KC
M—Power Amplifier, 2W output
P—Power Supply.

American Time Products, Inc.

580 Fifth Avenue *New York 36, N. Y.*

OPERATING UNDER PATENTS OF WESTERN ELECTRIC COMPANY

Want more information? Use post card on last page.

Need drafting help?

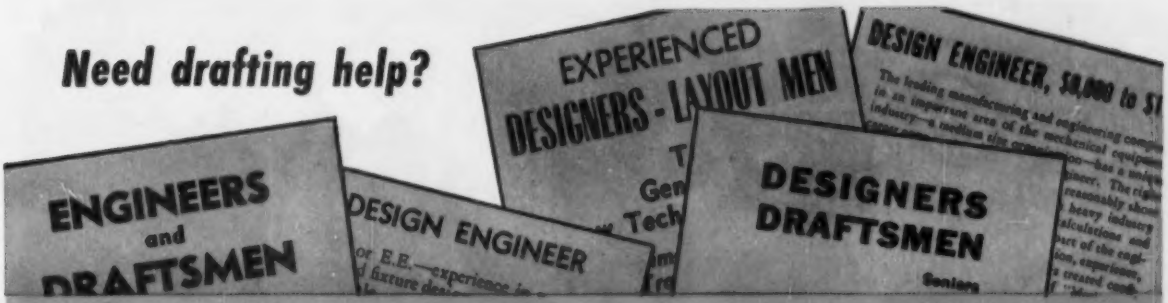

CLEARPRINT "FADE-OUT" PAPER

saves up to 15% of your drafting time

You can save as much as an hour or more per day per draftsman with Clearprint Fade-Out Paper. Using the printed grid as a guide, accurate drawings are easily made without mechanical scaling aids. Free-hand lettering is quickly applied without penciled guide lines. Pencil and ink lines can be erased repeatedly without a trace of a ghost. On direct and blue prints, grid lines fade out completely in the printing, making sharp, easy-to-read copies.

"Fade-Out" Paper is ideal for applications such as wiring, heating, and plumbing diagrams; structural, architectural and schematic drawings; plant layouts, tool and parts designs, surveyors' plottings, mapping, sketching, etc. See how Clearprint can reduce *your* drafting time and costs. Order a trial roll now and apply it to your drawing needs.

Available with grids ruled 4x4, 5x5, 8x8 and 10x10 lines to the inch.

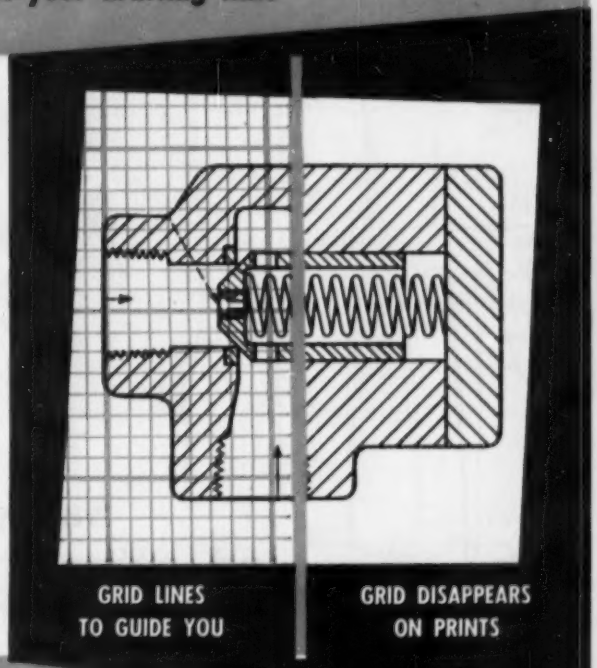

Printed on CLEARPRINT — America's Finest Technical Paper



...for drawings of any desired size (in 24", 30", 36", 42" widths)

...the sizes you need for ready use (42" wide by any length)

. . . for fast sketches and calculations

CLEARPRINT®

"FADE-OUT" PAPER

THERE IS NO SUBSTITUTE
Demand Watermarked Clearprint

SEEING is BELIEVING!

Ask your dealer for samples, or send coupon

CLEARPRINT PAPER CO. EL
1482 - 67th Street, Emeryville, Calif.

☐ Please send me sample Clearprint "Fade-Out" sheets, with prices.
☐ Send me Clearprint samples, with prices, for the following uses:

_____

_____

☐ Have your representative call at my office.

Name _____
Firm _____
Address _____
City _____ Zone ____ State _____

Want more information? Use post card on last page.

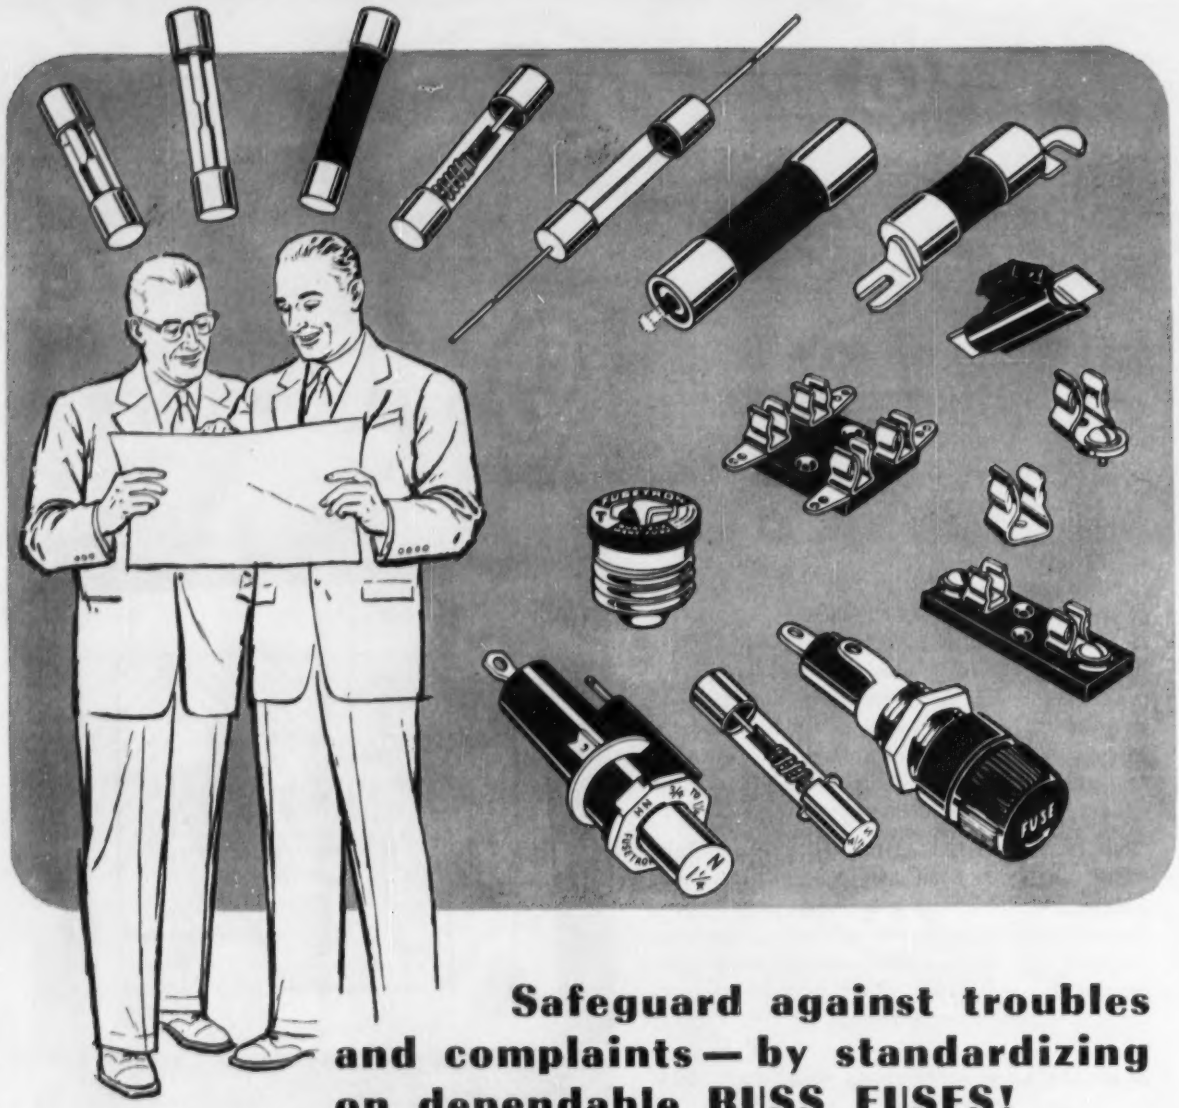

Safeguard against troubles and complaints — by standardizing on dependable BUSS FUSES!

BUSS fuses give you double protection against loss of customer goodwill because . . . BUSS fuses blow only to protect — never needlessly. To make sure of proper operation, BUSS fuses are tested in a sensitive electronic device that automatically rejects any fuse not correctly calibrated, properly constructed and right in all physical dimensions.

By specifying BUSS fuses, you are safeguarding users of your equipment against irritating useless shutdowns due to faulty fuses blowing needlessly. And you are providing them with maximum protection against damage caused by electrical faults.

Most important, the reputation of your product for service and quality is not harmed by the faulty operation of poor quality fuses.

To meet your needs, a complete line of BUSS fuses is available, plus a companion line of fuse clips, blocks and holders.

If your protection problem is unusual, BUSS places at your service the world's largest fuse research laboratory and its staff of engineers to help you select the fuse or fuseholder best suited to your application.

For more information available on BUSS and Fusetron small dimension fuses and fuseholders . . . Write for bulletin SFB.

Makers of a complete line of fuses for home, farm, commercial, electronic, automotive and industrial use.

BUSSMANN MFG. CO. *(Div. of McGraw Electric Co.)*
University at Jefferson, St. Louis 7, Mo.

FUSETRON
BUSS

ELEC
856

WHITE ALICE

The largest forward propagation tropospheric scatter system yet conceived is nearing completion by REL. Telephone service for the major portion of Alaska, in much of which no such service now exists, will be provided by the huge "White Alice" system.

Its 132 channels will furnish ample facilities both for civilian telephones and for military communications in an area larger than Texas, California, New York, Illinois, Delaware, and Tennessee combined. REL is manufacturing all the tropospheric radio equipment for White Alice, including 10 and 1 kw klystron amplifiers, driver exciters, dual diversity receivers, and radio test equipment.

Your specialized radio problems deserve the experience of REL.

Eleventh in a series describing REL versatility

REL Radio Engineering Laboratories·Inc.

36-40 37th St · Long Island City 1, N Y

STillwell 6-2100·Teletype: NY 4-2816

Canadian representative: AHEARN & SOPER CO · BOX 715 · OTTAWA

Creative careers at REL await a few exceptional engineers. Address resumes to James W. Kelly, Personnel Director.

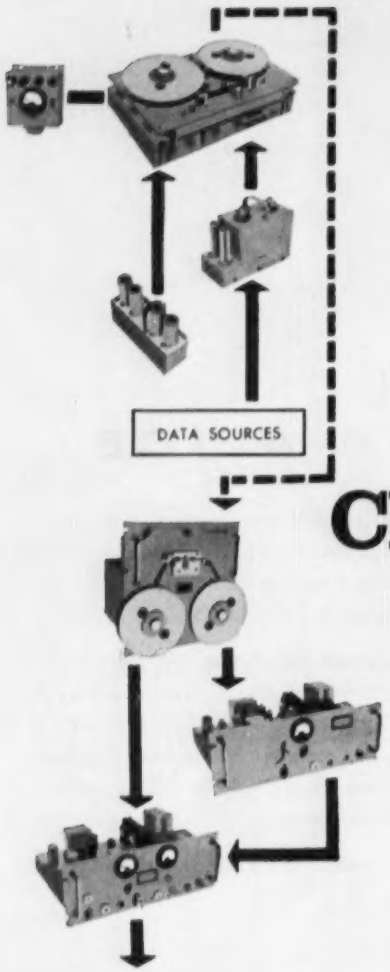

In choosing data recording equipment, it is now feasible to tailor the equipment to present and future data handling needs. It is no longer necessary to tailor your entire program to equipment limitations.

Choosing A System

for magnetic tape DATA recording

When magnetic recording was in the audio phase of its development, there was just one recording method —direct recording. But today, several methods are available. And while direct recording is still common in audio work, it has taken a back seat to modulated carrier techniques in the more critical field of *data* recording.

To take advantage of the broad range of equipment and techniques now available, start with a thoroughgoing analysis of your own present *and future* data handling . . . data processing needs. Then, match the techniques and individual components *to those needs.*

Choose the recording method first: Direct recording is limited in data work by its poor amplitude reproduction and poor low frequency response on playback. Pulse width modulation (PWM) recording is excellent for recording a large number of channels with limited frequency response. Digital recording offers extremely high data accuracy, but relatively low information capacity.

FM recording, electronically compensated for wow and flutter, offers a combination of high overall system performance, frequency response, and information capacity, suiting it for most analog recording applications. Any or all of these methods can be supplied in the same recording system by inserting the proper plug-in circuitry.

Consider physical requirements next: Where you plan to use a system is an extremely important factor. To record data in a missile or jet, you will obviously need different equipment than would be used in a laboratory. But reel size, tape width, tape speeds, must also be selected. And heads, available for recording from 2 to 24 data tracks or even more, should be specified early. Keep in mind also the planned final disposition of the data, whether to a computer, direct writing recorder, or other equipment.

Finally, select system components and accessories: In FM carrier recording alone, you can choose from at least three recording oscillators, two reference generators, and several signal and compensation discriminators. Speed control servos, power supplies, and remote controls also require attention.

Needless to say, much of this process of selection requires special experience, and should be placed in the hands of the competent data recording systems manufacturer. But the important thing to remember is that data recording on tape is a field in itself, with special techniques and special equipment that can be matched to virtually any recording need. The day when the problem had to be tailored to the equipment is long past.

More detailed information on recording systems and equipment, and how to select them, is provided in "The Role of Magnetic Tape In Data Recording," available on request to Davies Laboratories, Inc.

Davies

LABORATORIES, INCORPORATED

4705 QUEENSBURY ROAD • RIVERDALE, MARYLAND

VOICE under the SEA

Relies on ALSIMAG®

For dependable service on the ocean floor AlSiMag precision insulators are used in the new Transatlantic Voice Cable

For 25 years communications engineers have studied the problems of laying a voice cable under the Atlantic Ocean to link the Americas with Europe. Today, the "voice" is nearing reality. The new link, a twin cable system, will be completed this year.

The almost incredibly exacting standards involved in making parts of the transatlantic cable have produced some truly remarkable engineering—engineering that accepts results no less than perfect. A select group of suppliers share in the achievement and AlSiMag is proud to be among them.

Men who perform "impossible" tasks stake their success on their creative ability plus the quality of their products. When technical ceramics are required on such critical applications, almost without exception the choice is AlSiMag. There are many reasons for this: One is the wider choice of materials available in AlSiMag. The exact composition for the required performance may be chosen from the many available . . . **right in physical characteristics, right in electrical characteristics, right in every way!**

AlSiMag performs at higher temperatures . . . withstands greater thermal shock . . . is stronger, more durable . . . permanently rigid . . . chemically inert . . . thoroughly dependable! AlSiMag can be fabricated in intricate designs to tolerances that compare favorably with precision metal work. AlSiMag will not rust, corrode or deteriorate with time. AlSiMag is the product of fifty-five years of specialized experience plus the finest production equipment . . . high speed presses, high temperature, continuous-fire kilns . . . every possible facility for the finest possible ceramics. In a wide range of shapes and sizes. Volume production or small quantity lots.

Highly technical applications, however, are not the end of the service story. AlSiMag is entirely practical . . . and vastly superior . . . for everyday industrial use. Economical, too! For any ceramic requirement, your best buy is AlSiMag. Send blueprint or sketch for full details.

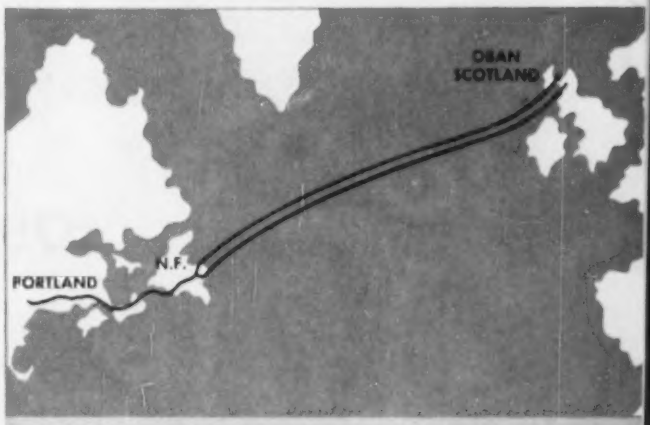

Route of transatlantic telephone cable system between Portland and Oban.

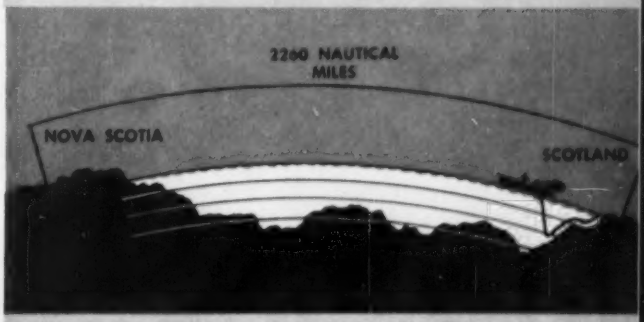

Profile of the ocean bottom on which the cable will rest.

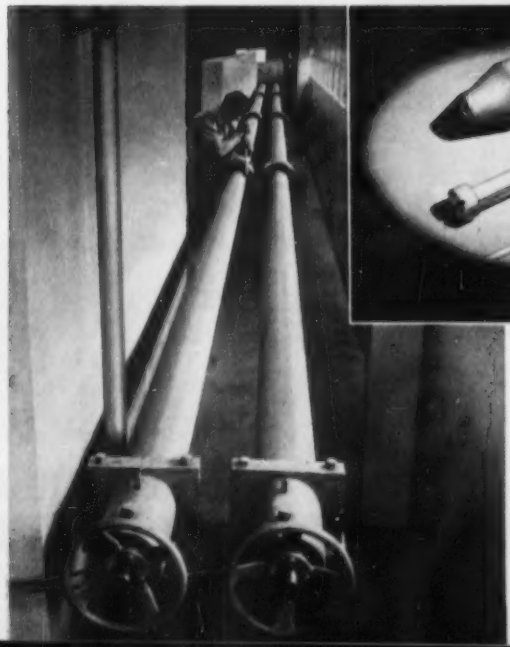

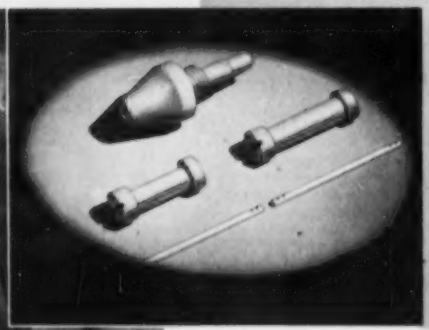

Dependable service on the ocean floor . . . not for years but for decades . . . calls for the most careful selection of components. To be economically feasible, the repeater units must have an exceptionally long life, since to raise the cable for replacing just one repeater would be a very costly operation. In the new transatlantic cable, impulses will be relayed by a series of repeaters, built by Western Electric Co., spaced some 40 miles apart. These rugged, low-cost AlSiMag parts are components of these repeaters.

AMERICAN LAVA

CORPORATION
CHATTANOOGA 5, TENN.
55TH YEAR OF CERAMIC LEADERSHIP

A subsidiary of Minnesota Mining and Manufacturing Company

AMERICAN LAVA SALES OFFICES IN PRINCIPAL CITIES

Finished repeaters, with cable leads at each end, are tested at up to 7,500 pounds a square inch in these long cylinders.

Complete, Accurate Time-Domain Measurements with One Instrument!

NEW GR

Pulse, Sweep and Time-Delay Generator

a High-Performance Instrument of Extreme Flexibility.

The Type 1391-A is both a measuring apparatus and generator, an instrument which is useful in many kinds of work of varying complexity. This new equipment generates pulses with a wider range of pulse durations over a greater range of repetition rates than has been previously available in a general-purpose tool of this kind. Rise and fall times average 25 milli-microseconds for all pulses, and gates and pulses available at the output are highly stable and exhibit small time jitter.

The Type 1391-A Pulse, Sweep and Time-Delay Generator takes sine wave, square wave, pulse, or other cyclic voltage — uses this signal to synchronize its delay, sweep, and pulse circuits — and makes available at the various binding posts, for your use:

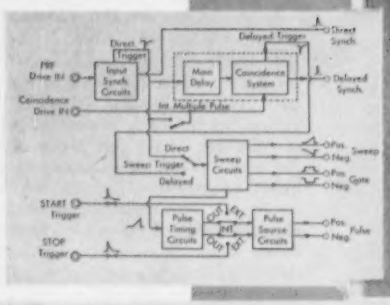

Pulse Timing

A switch and binding posts are included . . .

to make available to the user the accurately timed pulses (not shown on diagram) which start and stop the main pulse.

for starting and stopping the main pulse with externally generated timing pulses; under such operation the maximum pulse repetition rate can be extended to several Mc.

A direct-trigger pulse (or synchronizing pulse) timed by the input signal.

A delayed synchronizing pulse accurately adjustable in time by delay generator — to perform time selection, built-in coincidence circuitry permits timing of the delayed synchronizing pulse to be controlled by externally generated pulses fed into the instrument.

A push-pull sawtooth voltage of sufficient amplitude to be applied to the deflection plates of any oscilloscope for examining the generator's output pulses, or for use in driving auxiliary equipment.

A push-pull gating pulse having the same duration as the sweep.

Positive or negative pulses with excellent shape characteristics, continuously adjustable in duration, amplitude, and delay with respect to (a) the input trigger and (b) the sweep, at a variety of output impedances.

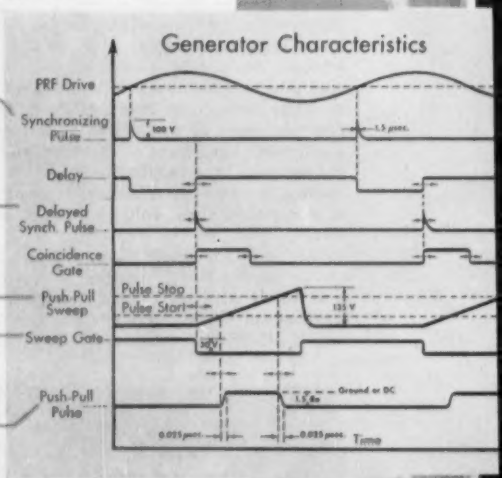

CONDENSED SPECIFICATIONS

Input System:
Accepts sine or square wave of 0.5v, p-to-p, or pulses of 10v, p-to-p, from external source to form a direct-trigger pulse.

Direct Synchronizing Pulse:
From cathode follower; positive, over 80 volts in amplitude, 1 μsec duration.

Main Delay Circuit:
Range — 1 μsec to 1.1 sec in six ranges.
Absolute Accuracy — 2%; Incremental Accuracy ± (1% + .05 μsec).
Resolution — 1 in 8800
Stable — against hum and line transients to better than one part in 10,000 at all time delays.
Duty Ratio Effects — Less than 2% error at 90% duty-ratio.
Delay Repetition Rate — 0 to 400 kc.

Coincidence Circuit
Coincidence Gate Duration — 3 to 1000 μsec.
Coincidence Amplifier — may be triggered by either pos. or neg. pulses in 5-100v range.

Delayed Synchronizing Pulse:
From cathode follower; positive, over 60 volts, 1 μsec duration.

Sweep Circuit:
Range — 3, 6, or 12 μsec to 30,000, 60,000, or 120,000 μsec in five decade ranges.
Accuracy — ±2%.
Linearity — Better than 1%.
Sweep Repetition Rate — 0 to 250 kc.
Sweep Duty-Ratio Effects — Sweep duty ratios up to 50% cause no more than 5% error in slope on shortest ranges, less effect on longer ranges.
Push-Pull Sweep Output — Cathode follower, 135v each phase.
Push-Pull Sweep Gate — Cathode follower, 40v each phase.

Push-Pull Pulse:
Pulse Duration Range — 0.05 to 2.5, 0.05 to 5.0, and 0.05 to 10 μsec, with the 3, 6, and 12 μsec sweeps respectively — five-decade sweep multiplier extends pulse duration to 100,000 μsec; interconnection with delay circuit extends max. pulse duration to 1.1 sec.
Pulse Duration Accuracy ± (1% + .05 μsec) when sweep is calibrated with "vernier" knob.
Pulse Repetition Rate — 0 to 250 kc; can be pulsed at 2 to 3 Mc with aid of suitable supplementary trigger generating equipment.
Pulse Shape — Rise and decay (0.025 ± 0.01 μsec) — overshoot and ringing less than 5%.

Output Impedances:
50, 72, 94, 150, 600 ohms ±5% — intermediate values obtainable using external resistors.
Output Voltage:
150 ma current source into any output impedance from 0 to 600 ohms; voltage equals (0.150 x output impedance)
Power Supply Input:
105-125 (or 210-250) volts, 50 to 60 cycles, 385 watts.
Dimensions:
Generator, 19 x 14 x 12½ inches; Power Supply, 19 x 10½ x 12½ inches.
Net Weight:
Generator, 30 pounds; Power Supply, 40 pounds.

GR **GENERAL RADIO Company**

275 Massachusetts Avenue, Cambridge 39, Massachusetts, U. S. A.

90 West Street **NEW YORK 6** • 8055 13th St., Silver Spring, Md. **WASHINGTON, D. C.**
1150 York Road, Abington, Pa. **PHILADELPHIA**
920 S. Michigan Ave. **CHICAGO 5** • 1000 N. Seward St. **LOS ANGELES 38**

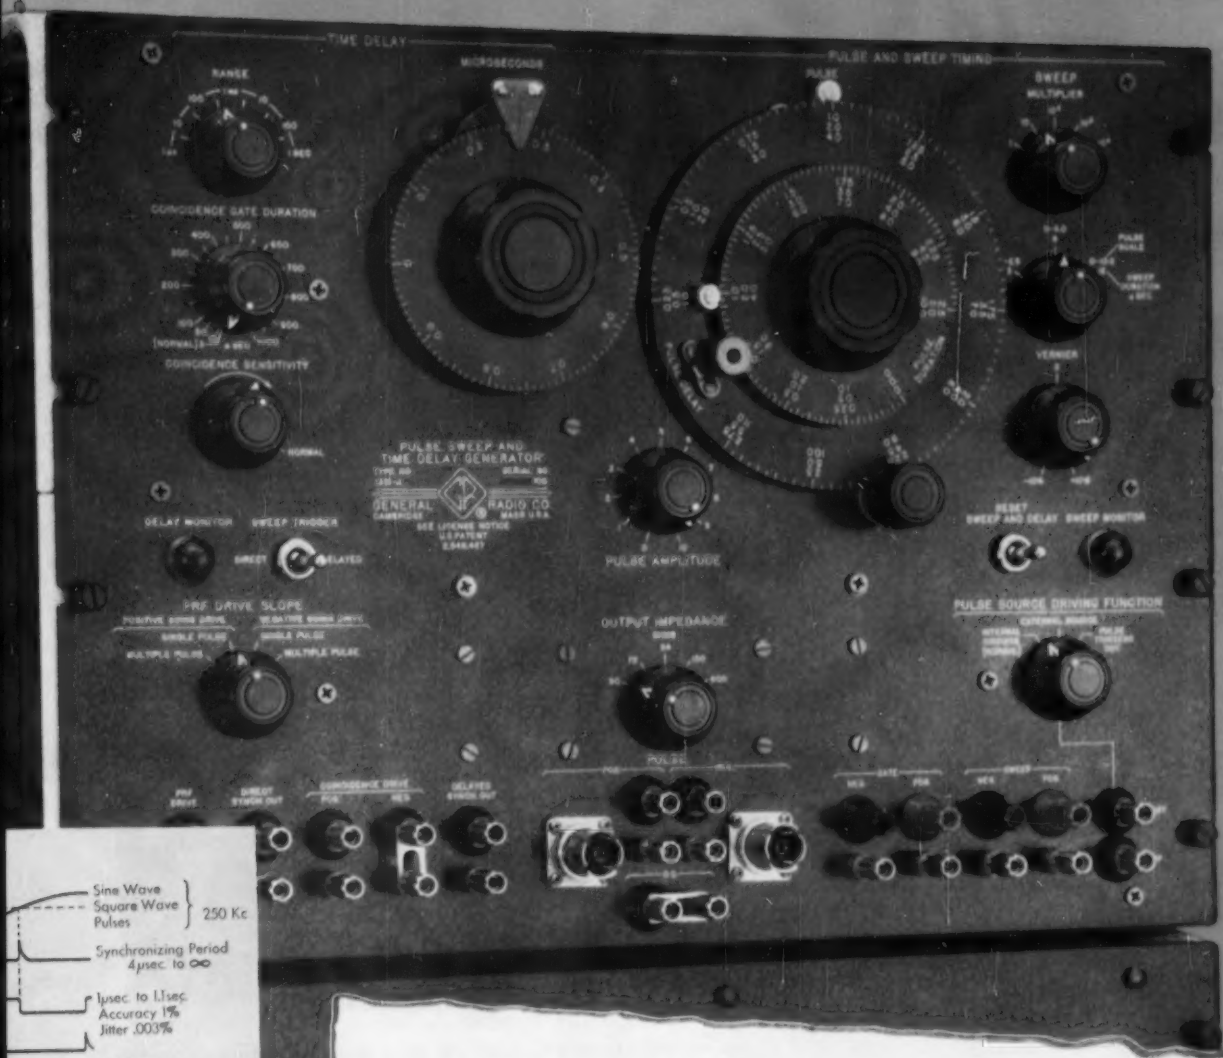

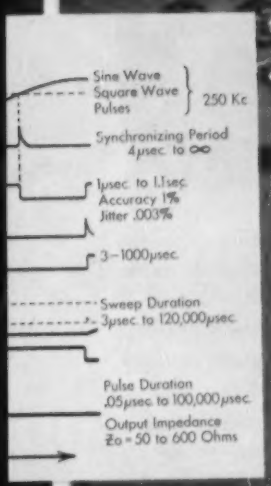

3 instruments in 1

Pulse Generator Time-Delay Generator Sweep Generator

The Most Complete Time-Domain Measuring Instrument Ever Offered.

Wide Ranges of

- **Pulse Duration:** 0.05 μsec—1.1 sec
- **Pulse Repetition Rate:** 0-250 kc
- **Time Delay:** 1 μsec — 1.1 sec
- **Delay Repetition Rate:** 0-400 kc
- **Output Impedance:** 0-600 ohms

Superior Pulse Characteristics
Excellent Rise and Decay Times: 0.025 ±0.01 μsec. No Duty-Ratio or Frequency Restrictions on the Pulse

High Basic Timing Accuracy
Timing Scales are Linearly Calibrated and Accurate to 1%

Extreme Versatility
Panel controls for all important instrument characteristics. Binding posts provide ready access to triggers, gates, delayed signals, pulses and internal sweeps.

The New G-R Type 1391A Pulse, Sweep and Time-Delay Generator offers best performance obtainable with modern-day techniques and materials. A carefully thought-out design, developed over several years, provides the pulse specialist with the apparatus he has been seeking ever since the close of World War II.

Price, complete with Power Supply $1745

150A High Frequency Oscilloscope

130A Low Frequency Oscilloscope

***-hp-* 130A Low Frequency Oscilloscope** is a versatile, accurate tool for laboratory and design work, yet its high gain, balanced input, simple operation and rugged construction make it a practical production instrument. The instrument also serves as a millivoltmeter or voltmeter.

Horizontal and vertical amplifiers are similar. Sensitivity is 1 mv/cm or 10 mv full scale deflection. Amplifiers have wide pass bands from dc to 300 KC. Input circuits are balanced on the five most sensitive ranges. Single ended input is also available, either ac or dc coupled. Both amplifiers are highly stable, and their gain may be standardized by an internal 1,000 cycle square wave source. These features, together with the instrument's precision input attenuator, permit use of the oscilloscope as a millivoltmeter or voltmeter accurate within 5%.

21 sweep times may be set and read directly. Horizontal sweeps are calibrated from 1 μsec/cm to 5 sec/cm. Accuracy is within 5%, and sweeps are highly linear.

In most cases, *-hp-* 130A will accept signals direct from a standard transducer without preamplification, presenting findings as a brilliant, high resolution trace visible under

BRIEF SPECIFICATIONS

-hp- 130A Low Frequency Oscilloscope

Sweep Range: 1 μsec/cm to 15 sec/cm.
Calibration: 21 sweeps: 1-2-5-10 sequence, 1 μsec/cm to 5 sec/cm. 5% accuracy.
Triggering: Internal, line voltage or external 2 v or more. Pos. or neg. slope, +30 to —30 v trigger range.
Preset Trigger: Optimum setting for automatic stable triggering.
Input Amplifiers: (Similar Vert. or Horiz. Amps). Sensitivity 1 mv/cm to 50 v/cm; 14 ranges plus continuous vernier. Pass band dc to 300 KC.
Amplitude Calibration: 1 KC square wave. 5% accuracy.
Price: $450.00.

-hp- 150A High Frequency Oscilloscope

Sweep Range: 0.02 μsec/cm to 15 sec/cm.
Calibration: 24 sweeps: 1-2-5-10 sequence, 0.1 μsec/cm to 5 sec/cm. 3% accuracy.
Triggering: Internal, line voltage or external 0.5 v or more. Pos. or neg. slope, +30 to —30 v trigger range.
Preset Trigger: Optimum setting for automatic stable triggering.
Horizontal Amplifier: Magnification 5, 10, 50, 100 times. Vernier

Now, more than ever, hp means "Complete

last!

Real Dependability day after day!

hp OSCILLOSCOPES

Revolutionary Convenience
Broadest Possible Usefulness

any light. A special feature of the instrument is the "universal" automatic triggering system — one preset condition which provides optimum triggering with almost any input signal.

-hp- 150A High Frequency Oscilloscope employs plug-in vertical preamplifiers. These include *-hp- 151A*, a high gain unit with 5 mv/cm sensitivity and frequency response from dc to 10 MC; and *-hp- 152A*, a dual amplifier permitting two phenomena to be presented on the CRT simultaneously.

Model 150A's vertical amplifier has good transient response and less than 0.035 μsec rise time, pass band dc to 10 MC. A 0.25 μsec delay line permits viewing the leading edge of the signal triggering the sweep.

A direct reading panel control selects any of 24 calibrated sweeps. The instrument includes the "universal" triggering adjustment providing optimum triggering for almost all conditions. Model 150A also features a single-shot sweep circuit which, after "firing", remains locked out until rearmed.

The instrument's horizontal amplifier provides sweep magnification of 5, 10, 50 and 100 times. "Reminder" lamps indicate when the circuit is in use, or the combination of sweep time and magnification exceeds the maximum calibrated sweep time. The amplifier's sensitivity is 50 mv/cm to 25 v/cm, pass band dc to 500 KC.



Unitized construction. Basic circuit elements assembled as separate units. Translucent mounting boards, hinged sub-chassis for maximum accessibility.



15° turn removes bezel for filter replacement, or quick CRT interchange. Bezel provides solid camera base. Top access door permits direct CRT connections.



Voltage divider probe. New 10 μμf capacitance probe has exclusive clip-on nose; 10 megohm input impedance.

See this new -hp- equipment at WESCON Booths 1050-1051

Vertical Amplifier: Pass band dc to 10 MC. Optimum transient response and rise time less than 0.035 μsec. Signal delay of 0.25 μsec permits leading edge of triggering signal to be viewed.

Amplitude Calibration: 18 calib. voltages, 2-5-10 sequence, 0.2 mv to 100 v peak-to-peak. Accuracy 3%. Approx. 1 KC square wave, rise and decay approx. 1.0 μsec.

Prices: *-hp-* 150A High Frequency Oscilloscope, $1,000.00.
-hp- 151A High Gain Amplifier, $100.00.
-hp- 152A Dual Channel Amplifier, $200.00.

Data subject to change without notice. Prices f.o.b. factory.

hp hp hp

HEWLETT-PACKARD COMPANY
3636A PAGE MILL ROAD • PALO ALTO, CALIFORNIA, U. S. A.
Field engineers in all principal areas
Cable "HEWPACK" • DAVENPORT 5-4451

Coverage" in electronic test instruments!

Want more information? Use post card on last page.

These successful uses of

PHELPS DODGE BONDEZE*

magnet wire . . .

Suggest

UNLIMITED NEW

COILS

Random-wound, Layer or Paper-section for potentiometers, telephones, brakes and clutches, clocks and timers, hearing aids, instruments, speakers, relays, television, radio and other applications.

TRANSFORMERS

Paper-section, Random-wound, Oil-filled, Air-cooled and High Voltage for distribution, current, X-ray, television, radio and other applications.

MOTORS

Windings for shaded pole, series fields, instruments, induction and others.

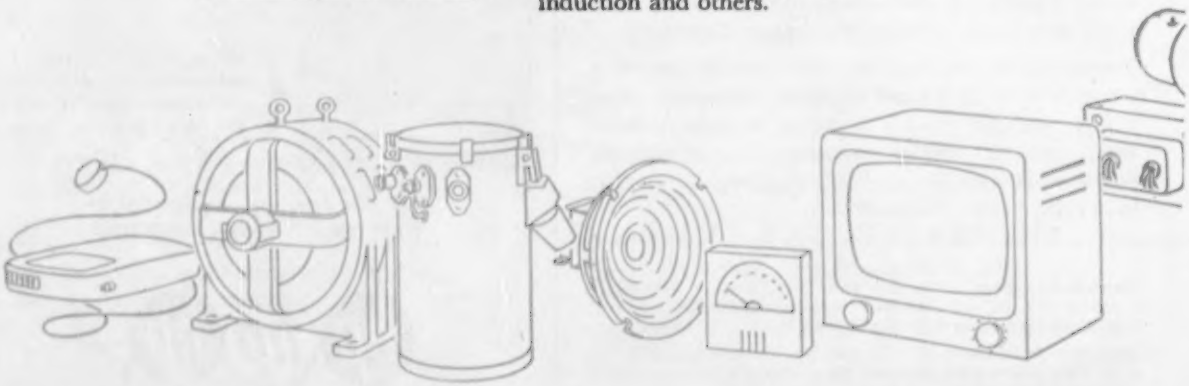

First for Lasting Quality—from Mine to Market!

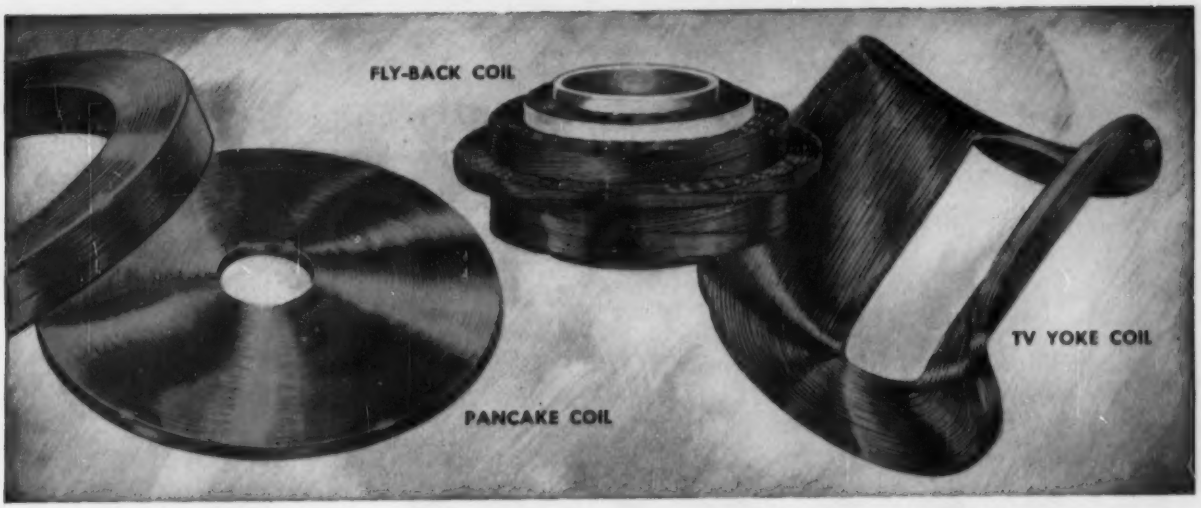

APPLICATIONS !

Redesigning? BONDEZE may provide one answer to your overall cost reduction program!

BONDEZE is Phelps Dodge magnet wire with a special thermo-plastic film applied over the insulation. It offers a quick, economical means of bonding wires together, turn to turn, through single application of heat or solvents.

BONDEZE offers unusual opportunities for redesign of windings and in many cases influences finished product design with overall savings to the user.

Any time magnet wire is your problem, consult Phelps Dodge for the quickest, easiest answer.

*BONDEZE is a Phelps Dodge Trademark

PHELPS DODGE COPPER PRODUCTS CORPORATION

INCA MANUFACTURING DIVISION

FORT WAYNE, INDIANA

Want more information? Use post card on last page.

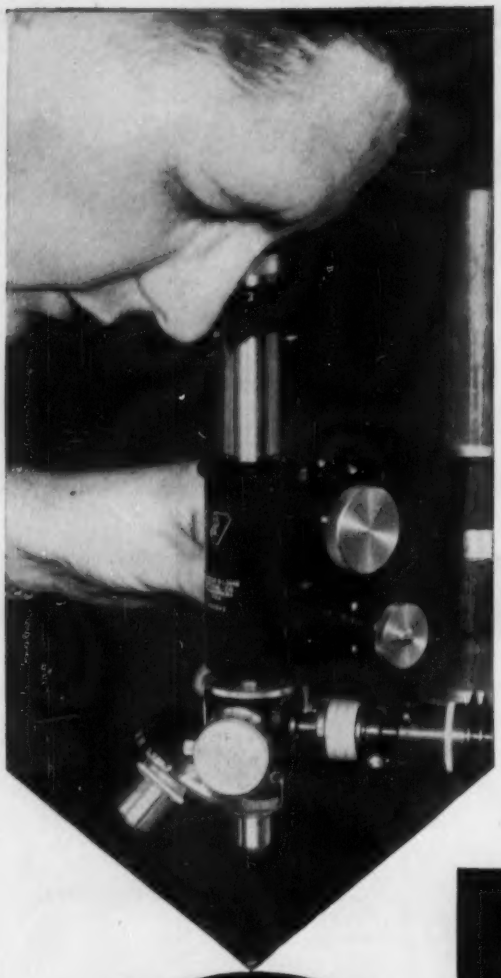

BRUSH *announces...*

NEW PRECISION MAGNETIC HEADS FOR CRITICAL RECORDING APPLICATIONS

Brush now offers a new design concept in multi-channel magnetic heads which provides extremely close tolerances to assure accuracy in recording and reproduction. These heads have already been proven in exacting airborne and missile applications.

ADVANTAGES

- **Uniform output assured by close mechanical tolerances on track width and channel spacing ... ± .002 in. maximum.**
- **Channel-to-channel timing accuracy provided by precise gap alignment... ± .0001 in. maximum.**
- **Crosstalk minimized by full shielding.**
- **Sustained accuracy under severe operating conditions assured by our new construction techniques.**

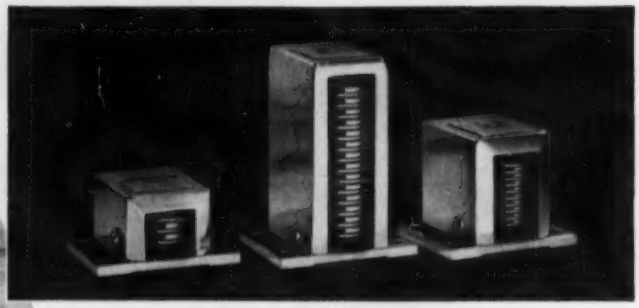

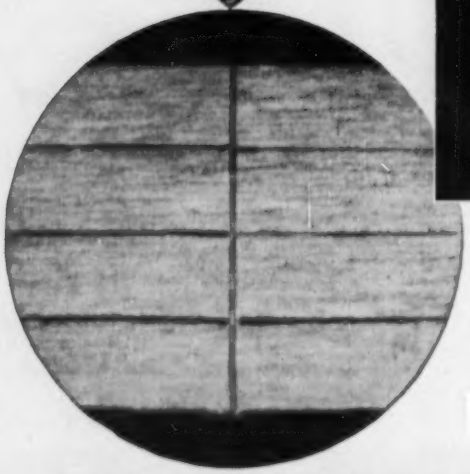

400X enlargement shows high precision gap and track construction.

AVAILABILITY

Brush offers these heads in three designs: providing 7, 8, or 13 tracks per inch. Heads may be interlaced to provide up to 25 tracks per inch. Modifications or new designs using this construction technique may be made to your requirements. Consult Brush on your magnetic head needs—write Brush Electronics Company, Department K-8, 3405 Perkins Avenue, Cleveland 14, Ohio.

BRUSH ELECTRONICS COMPANY

3405 Perkins Avenue, Cleveland 14, Ohio

BRUSH ELECTRONICS

DIVISION OF CLEVITE CORPORATION

WHERE RELIABILITY COUNTS

Automation takes many forms. In industry, electronic circuits control processes and machines to turn out products with a uniformity that results in low cost and high quality.

High speed operations that the human eye cannot follow are supervised by electronics. These applications of automatic control must be reliable to be useful.

In our national defense, high reliability of electronic equipment and control devices is a necessity. The airborne fire control system computer shown here, is manufactured to standards of peak reliability for the Navy, by the Air Arm Division of Westinghouse Electric Corporation. In it Airpax choppers convert DC input signals into AC voltages for use with the computer's AC servo amplifiers. Airpax choppers are highly developed electromechanical switches that can be relied on for billions of operations.

Where you need a dependable means for changing low level signals from DC to AC, investigate Airpax choppers. For complete technical details just write to

AIRPAX

DESIGNERS ENGINEERS

MIDDLE RIVER BALTIMORE 20, MD.

Dr. R. G. Hutter, manager of Sylvania's Physics Research Laboratories, under whose direction basic research in traveling wave tubes is carried on, discussing problems with engineer R. I. Harrison. Dr. Hutter is holding a Sylvania low level 2000-4000 mc amplifier tube in his hands.

When Sylvania started out on a traveling wave tube program, their research engineers specified PRD test equipment. High quality was an important factor in their choice. In addition, they wanted a line of test equipment covering a wide frequency range to take care of future developments in higher frequencies.

If you, like Sylvania, are pushing to higher frequencies, you will be interested in PRD's full coverage and especally in the –

PRD MILLIMETER WAVEGUIDE TEST EQUIPMENT

Why? Because: 1. Precision really counts with millimeter equipment
2. PRD has pioneering experience in this field
3. The equipment is available *now*.

Write for Complete Catalog A

Polytechnic RESEARCH & DEVELOPMENT CO., INC.

202 TILLARY STREET
BROOKLYN 1, N. Y.
Telephone: ULster 2-6800

Midwest Sales Office:
1 SOUTH NORTHWEST HIGHWAY, PARK RIDGE, ILLINOIS – TAlcott 3-3174.
Western Sales Office:
737-41, SUITE 7, NO. SEWARD STREET, HOLLYWOOD 38, CAL. – HO 5-5287

ELECTRONIC DIVISION

from the 102-year world leader in elevatoring . . .

THE BRAINS

the brawn

THE VISION

the skills

THE EXPERIENCE

the tools

INTEGRATED for defense electronics



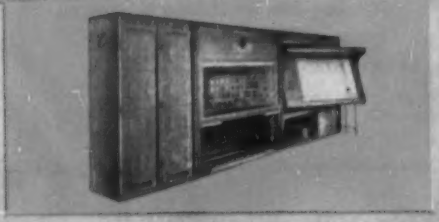

OTIS . . . a proven source for research, development, manufacture and maintenance of large-scale equipment and systems in the fields of:

- missile guidance and control
- gunfire control
- radar and counter measures
- simulators and training aids
- communication
- special electronic devices
- computers
- ultrasonics
- servomechanisms
- magnetic amplifiers
- testing instrumentation
- electro-mechanical components

For engineering achievements, rely on engineering-minded management—rely on Otis.
Write on your letterhead for 32-page history and facilities report.

OTIS ELEVATOR COMPANY
35 RYERSON STREET BROOKLYN 5, N. Y.
ELECTRONIC DIVISION

SIDELIGHTS ON THE SCIENTISTS *number* **5** *of a series*

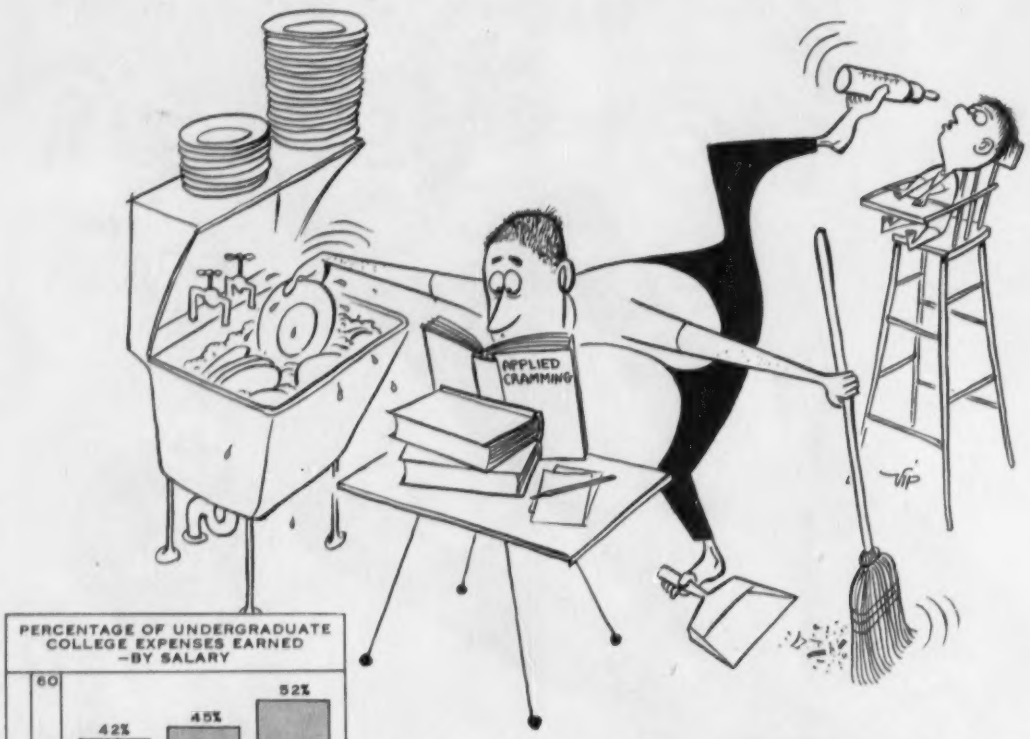

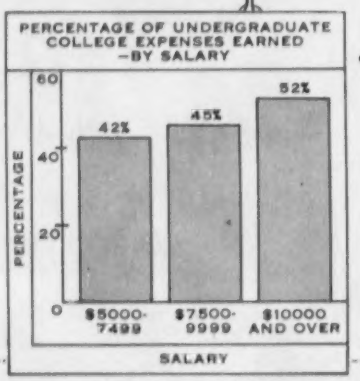

Data obtained from a 20% random sample of the 2400 professional engineers and scientists on the staff of Hughes Research and Development Laboratories.

How to make $10,000 *(and up)*

Here at Hughes we have been analyzing the files of personal data regarding our scientists and engineers. Together with some additional facts cheerfully contributed by individuals, the findings reveal some interesting—and sometimes surprising—group characteristics and relationships. In this series we shall chart and attempt to interpret the results for you.

College Expenses Earned . . . and Present Salaries

The chart shown here represents the percentage of undergraduate college expenses earned—by present salaries at Hughes. The net result of this comparison is, that the higher the present salary of the individual—the more he earned while an undergraduate. College jobs included baby-sitting, "hashing", collecting laundry, lawn-mowing, car-washing, etc., etc. One scientist included in his list of college jobs—"Walking the Dean's rheumatic bulldog."

In the Hughes laboratories more than half of the engineers and scientists have had one or more years of graduate work; one in four has his Master's; one in 15 his Doctorate. Our research program is of wide variety and scope, affording exceptional freedom as well as superior facilities for these people. From every standpoint, it would be difficult to find a more exciting and rewarding climate for a career in science. Too, we are continually stepping up projects which will insure success in commercial as well as military work.

Hughes is pre-eminent as developer and manufacturer of the electronic armament control system now standard equipment on all Air Force all-weather interceptors. Our program also embraces ground systems radar, the Hughes Falcon and other guided missiles, automatic control, synthetic intelligence. Projects of broader commercial and scientific interest include research in and manufacture of semiconductors; electron tubes; digital and analog computation; data handling; navigation; production automation.

Scientific Staff Relations

HUGHES

The Laboratories now have positions open for all phases of work on ground and airborne digital computers—from logical design to production engineering. Why not write us?

RESEARCH AND DEVELOPMENT LABORATORIES
HUGHES AIRCRAFT COMPANY
Culver City, Los Angeles County, California

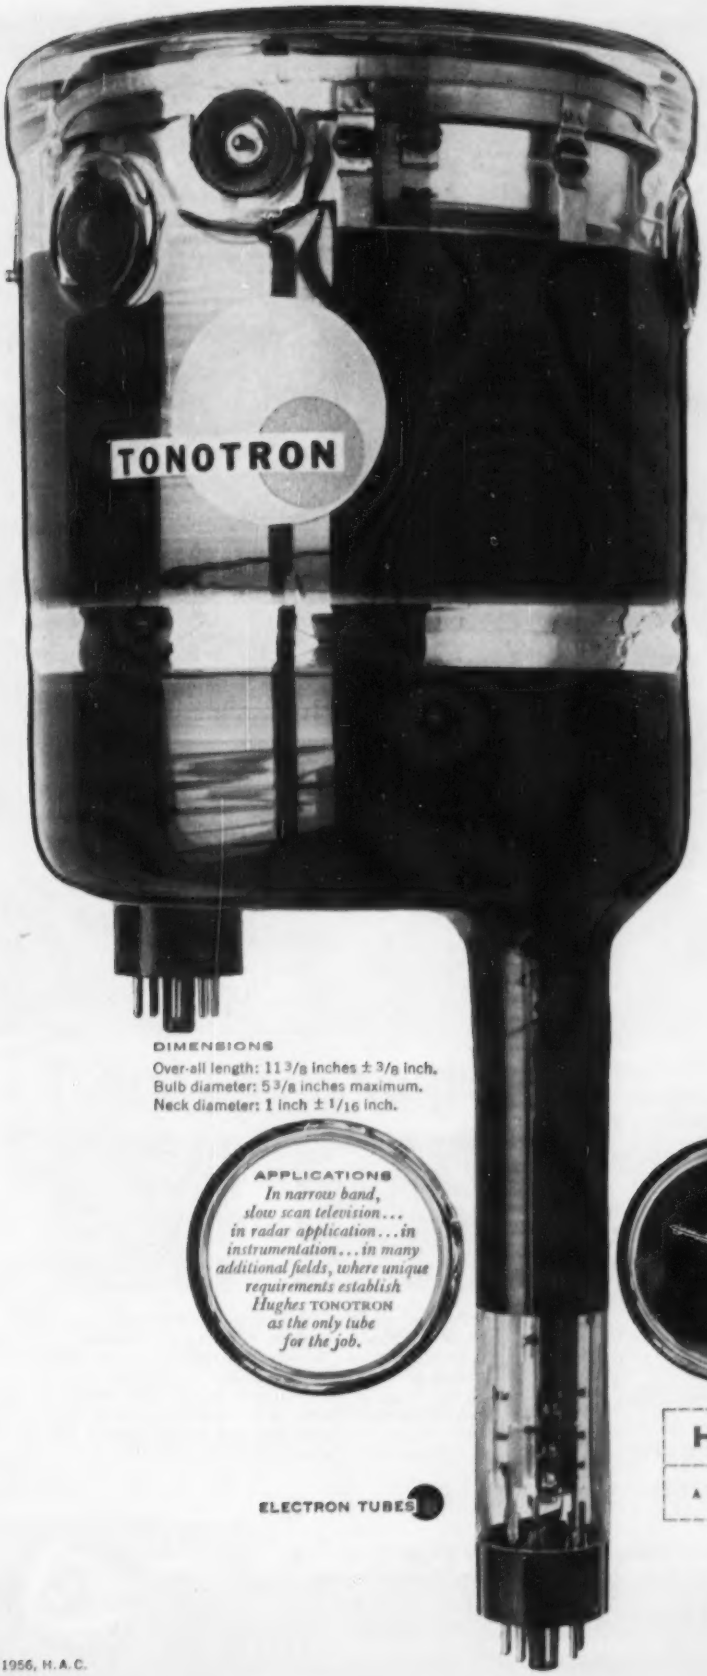

Hughes Products proudly announces

TONOTRON

Full circle persistence • New brilliance
Defies sunlight

Hughes Products introduces the TONOTRON, *another in its series of new, direct-display cathode ray tubes designed for commercial, industrial, and military applications.*

FEATURES

With TONOTRON, high-fidelity picture reproduction is possible for the first time. This new tube displays black, white, and *all* intermediate shades—with persistence which can be adjusted to maintain nearly maximum brilliance throughout the major portion of a 360-degree sweep. Both persistence and rate of decay can be controlled to suit a variety of specific applications. And TONOTRON'S extreme brilliance makes observation possible in the brightest sunlight without a hood.

DIMENSIONS

Over-all length: 11 3/8 inches ± 3/8 inch.
Bulb diameter: 5 3/8 inches maximum.
Neck diameter: 1 inch ± 1/16 inch.

APPLICATIONS

In narrow band, slow scan television... in radar application... in instrumentation... in many additional fields, where unique requirements establish Hughes TONOTRON *as the only tube for the job.*

ELECTRON TUBES

HUGHES PRODUCTS

A DIVISION OF THE HUGHES AIRCRAFT COMPANY

For additional information, please write:
HUGHES PRODUCTS
ELECTRON TUBES
International Airport Station, Los Angeles 45, California

© 1956, H. A. C.

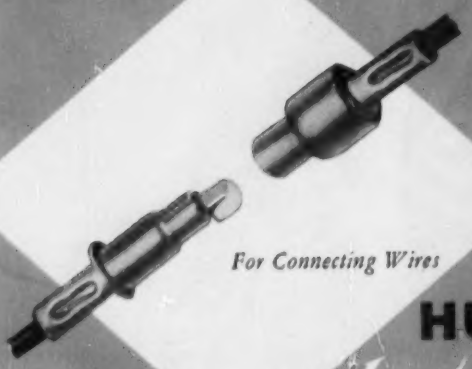

For Connecting Wires

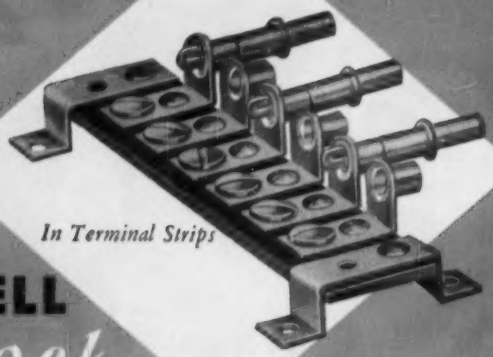

In Terminal Strips

HUBBELL *Interlock*

AUTOMATIC LOCKING — QUICK DISCONNECT

PLUGS and CONNECTORS

For Printed Circuits (Type "C")

In Panel Eyelets

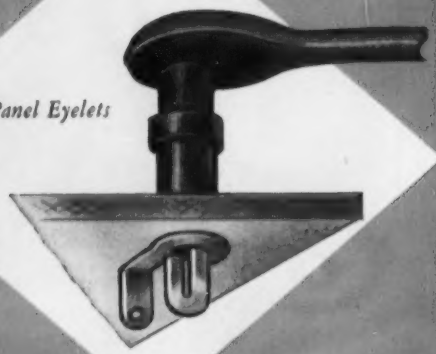

Insulated

Non-Insulated

Insulated

Non-Insulated

TYPE "B" MINIATURE PLUGS AND CONNECTORS

Current Capacity: 5 Amperes
Wire Sizes: #18 to #22

TYPE "C" SUB-MINIATURE JACKS AND CONNECTORS

Current Capacity: 1 Ampere
Wire Sizes: #20 to #22

TYPE "A" PLUGS AND CONNECTORS

Current Capacity: 10 Amperes
Wire Sizes: #14 to #18

VIBRATION PROOF!



Left: With an Interlock Plug and Jack securely mounted, test begins with platen vibrating at 10 cycles per second. Right: at 50 cycles per second, camera stops motion to show plug still locked in its jack! Tested for 18 hours at an amplitude of .06 inch and at a varying frequency from 10 to 50 to 10 cycles per second, conductive quality remained steady with no current interruption during vibration.

For Further Information, Write Dept. C:

HARVEY HUBBELL, INC.

Interlock Electronic Connector Dept., Bridgeport 2, Conn.

SELF-LOCKING HUBBELL CONNECTORS

Want more information? Use post card on last page.

RUGGED, LONG LIFE EIMAC 4X5000A CERAMIC TETRODE DELIVERS 10kw FOR SINGLE SIDEBAND

4X5000A RADIAL-BEAM POWER TETRODE
TYPICAL OPERATION
FREQUENCIES BELOW 30 mc.

	Class C CW	Class AB1 R-F Linear Amplifier*
D-C Plate Voltage	7500 v.	7500 v
D-C Screen Voltage	500 v	1250 v
D-C Grid Voltage	−350 v	−300 v
D-C Plate Current	2.8 amps	1.9 amps
Driving Power	150 w	0 w
Plate Dissipation	5 kw	4.2 kw
Plate Power Output	16 kw	10 kw

*Class AB figures shown are under Peak Envelope or Modulation Crest Conditions.

Top Single Sideband performance plus the advantages of great immunity to damage by thermal or physical shock are combined in the metal and ceramic Eimac 4X5000A radial-beam power tetrode.

Developed especially for Single Sideband communication systems the 4X5000A delivers 10kw power output and has a maximum plate dissipation rating of 6000 watts. High output is easily developed without going into the positive grid region.

A unique integral-finned anode permits the 4X5000A to be cooled with low air pressures. Simple coaxial construction provides low inductance multiple terminals.

Now available for optimum socketing and cooling of the 4X5000A is the Eimac SK300 air-system socket.

For further information about the 4X5000A and its companion socket write our Application Engineering Department.

Eimac

EITEL-McCULLOUGH, INC.
SAN BRUNO CALIFORNIA
The World's Largest Manufacturer of Transmitting Tubes

Want more information? Use post card on last page.

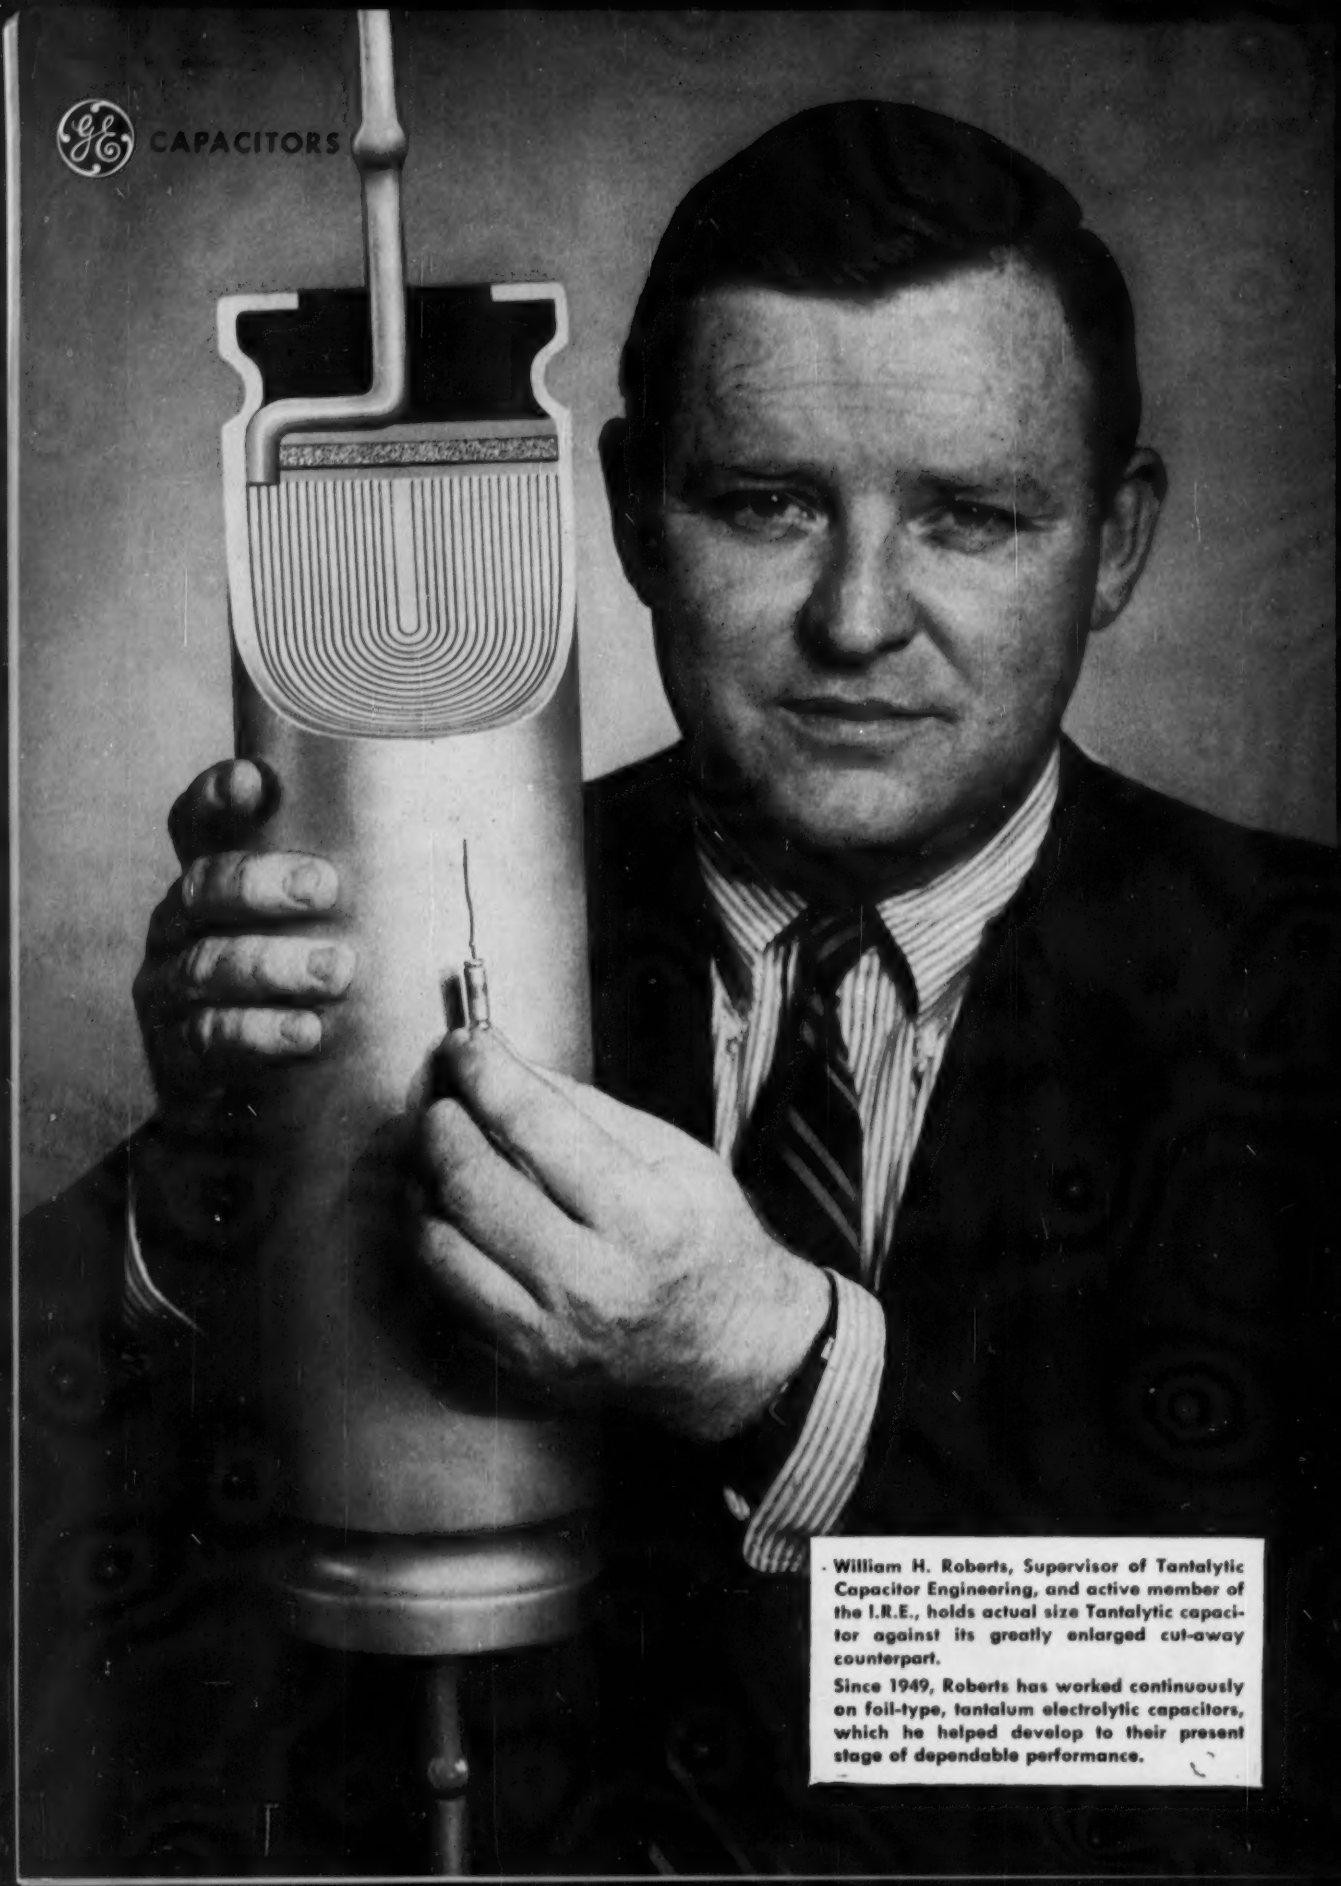

William H. Roberts, Supervisor of Tantalytic Capacitor Engineering, and active member of the I.R.E., holds actual size Tantalytic capacitor against its greatly enlarged cut-away counterpart.

Since 1949, Roberts has worked continuously on foil-type, tantalum electrolytic capacitors, which he helped develop to their present stage of dependable performance.

BILL ROBERTS TELLS YOU WHY...

Tantalytic* capacitors outperform ordinary tantalum capacitors

***General Electric's registered trade mark for its tantalum electrolytic capacitors**

"We're not going to tell people *how* we build Tantalytic capacitors," says Engineer W. H. "Bill" Roberts. "We've spent ten years in getting the answers. But we can tell them that those ten years have taught us a lot about tantalum, enough to enable us to build the best tantalum capacitor on the market.

"When Lee Foster and I along with chemists Al Jenny and Ralph Ruscetta attacked the tantalum problem, we knew that tantalum was rare (54th in occurrence in the earth's crust), that it was a valve-forming metal (its oxide forms a good dielectric), and that it was hard to isolate (its melting point is 2950C, just below tungsten).

"Basic research and hard work—we built hundreds of capacitors by hand in our pilot shop—led us to the development of 1. Fine gauge tantalum foil; 2. A hard, porous oxide; 3. The roll-crimp case; 4. The first successful etching process for tantalum. These four developments alone have made the Tantalytic capacitor the smallest, highest rated, most rugged, and most versatile in performance of its type."

In other types of capacitors, the same kind of engineering teamwork has been applied and has now resulted in General Electric's new subminiature metal-clad tubular capacitor (pictured below) with mineral oil impregnant. This latest addition to General Electric's subminiature line is designed to meet MIL-C-25A specifications.

The new mineral oil unit is designed for "workhorse" applications in military electronic circuits. The superior Kovar glass-to-metal sealing process is highly resistant to oil leakage and moisture penetration.

Your General Electric Apparatus Sales Engineer has complete up-to-date buying information on mineral oil tubular capacitors. For assistance with your specific capacitor applications, just contact him or write to the General Electric Company, Section 442-37, Schenectady 5, New York.

Progress Is Our Most Important Product

GENERAL ELECTRIC

METAL-CLAD TUBULAR CAPACITORS——85C, mineral oil impregnated. Built to MIL-C-25A. Ratings: .001 to 1.0 uf, 100–600 v. d-c. Tol: ±5%, ±10%, or ±20%. Write for GEC-1390.

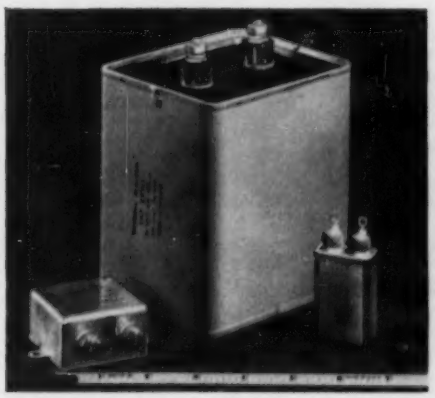

MIL-C-25A CAPACITORS—for filter, by-pass, and blocking in military equipment. Ratings: .05 to 15 uf at 100 to 12,500 v. d-c in case styles CP50, CP60, CP70 series. Temp. range: −55C to +85C, and −55C to +125C. Write for GEC-810.

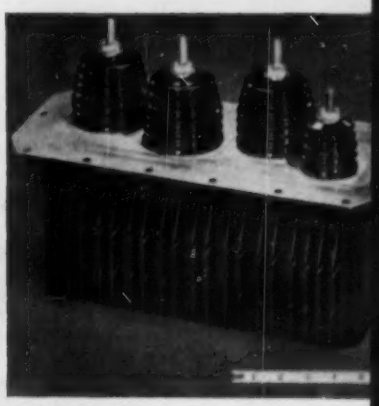

CAPACITOR PULSE FORMING NETWORKS—for missiles and radar equipment. Capacitance tolerance: ±7% (at +25C). Temperature range: −55C to +125C. Write for GEA-4996.

If it's worth Engineers' time . . .

. . . It's worth Engineered Cable

Belden

INTERCOMMUNICATING AND SOUND SYSTEM CABLES

Indoor-outdoor, phones or speakers—there is a Belden engineered cable to meet your needs for a permanent, trouble-free installation.

"Items from the Complete Belden Line"

The TV station, the systems for music, paging, and intercommunication in the new Prudential Insurance Company of America's Building in Chicago have been—wired by Belden.

Belden
WIREMAKER FOR INDUSTRY
SINCE 1902
CHICAGO

8-8

Magnet Wire • Lead and Fixture Wire • Power Supply Cords, Cord Sets and Portable Cord • Aircraft Wires
Welding Cable • Electrical Household Cords • Electronic Wires • Automotive Wire and Cable

New TEKTRONIX OSCILLOSCOPE PLUG-IN UNITS

Plug-In Preamplifiers for Tektronix Types 541, 545, 531, 532, 535

Four Plug-In Units with excellent performance records in the Type 530-Series Oscilloscopes have been redesigned for maximum performance with the fast-rise Oscilloscopes, Types 541 and 545. These new Type 53/54 Units are interchangeable among all five oscilloscopes in both series. When used with the Type 531, 535 or 532, however, overall performance is limited by the risetime and passband characteristics of the oscilloscope's main vertical amplifier.



NEW PLUG-IN UNITS

High Sensitivity



Type 53/54B Wide-Band High-Gain Unit—same as the Type 53/54A with the addition of an ac-coupled input stage providing sensitivity of 5 mv/cm to 0.05 v/cm continuously variable, with 3 calibrated steps . . . at 2 cycles to 12 mc, 0.03-μsec risetime with Types 541 and 545 . . . 2 cycles to 9 mc, 0.04-μsec risetime with Types 531 and 535 . . . 2 cycles to 5 mc, 0.07-μsec risetime with Type 532. Price $125.

Wide Passband

Type 53/54A Wide-Band DC-Coupled Unit—dc to 20 mc, 0.018-μsec risetime with Types 541 and 545 . . . dc to 10 mc, 0.035-μsec risetime with Types 531 and 535 . . . dc to 5 mc, 0.07-μsec risetime with Type 532. Sensitivity 0.05 to 50 v/cm; ac or dc, continuously variable, with 9 calibrated steps from 0.05 to 20 v/cm. 60-db isolation between two input connectors. Price $85.

OTHER PLUG-IN UNITS

Three other Plug-In Preamplifiers are also interchangeable among all five oscilloscopes.

Fast Rise

Type 53/54K—risetime 12 millimicroseconds, passband dc to approximately 30 mc with Types 541 and 545 . . . 0.031-μsec, dc to 11 mc with Types 531 and 535. Calibrated sensitivity from 0.05 v/cm to 20 v/cm. Input capacitance 20 μμf direct, 8 μμf with 10x (P410) probe. Price $125

Millivolt Sensitivity

Type 53/54D—passband dc to 350 kc at 1 mv/cm sensitivity, increasing to dc to 2 mc at 50 mv/cm sensitivity. Calibrated range, 1 mv/cm to 50 v/cm. Differential input, high rejection ratio. Price . . $145

Microvolt Sensitivity

Type 53/54E—sensitivity 50 microvolts/cm to 10 millivolts/cm in 8 calibrated steps. Frequency response 0.06 cycles to 30 kc at full gain, increasing to 0.06 cycles to 60 kc at 0.5 mv/cm. Differential input, high rejection ratio. Price $165

Two Channels



Type 53/54C Dual-Trace DC Unit—two identical amplifier channels, each with passband and risetime of . . . dc to 24 mc, 0.015-μsec with Types 541 and 545 . . . dc to 10 mc, 0.035-μsec with Types 531 and 535 . . . dc to 5 mc, 0.07-μsec with Type 532. Sensitivity 0.05 to 50 v/cm continuously variable, with 9 calibrated steps from 0.05 to 20 v/cm. Electronic switching triggered by sweep, or free-running at about 100 kc. Input capacitance 20 μμf direct, 8 μμf with 10x (P410) probe. Price $275.



Differential Input

Type 53/54G Wide-Band Differential DC Unit—dc to 20 mc, 0.018-μsec risetime with Types 541 and 545 . . . dc to 10 mc, 0.035-μsec risetime with Types 531 and 535 . . . dc to 5 mc, 0.07-μsec risetime with Type 532. Sensitivity 0.05 to 50 v/cm continuously variable, with 9 calibrated steps from 0.05 v to 20 v/cm. Rejection better than 100 to 1 at full gain for entire passband, 300 to 1 at 60 cycles. Price $175.

See these new **Plug-In Units** with Type 530-Series and Type 540-Series Oscilloscopes at **WESCON** August 21-24.

Tektronix, Inc.

P. O. BOX 831 • PORTLAND 7, OREGON

Phone CYpress 2-2611 • TWX-PD 265 • Cable: TEKTRONIX

ENGINEERS—interested in furthering the advancement of the oscilloscope? We have openings for men with creative design ability. Please write to Richard Ropiequet, Vice President, Engineering.

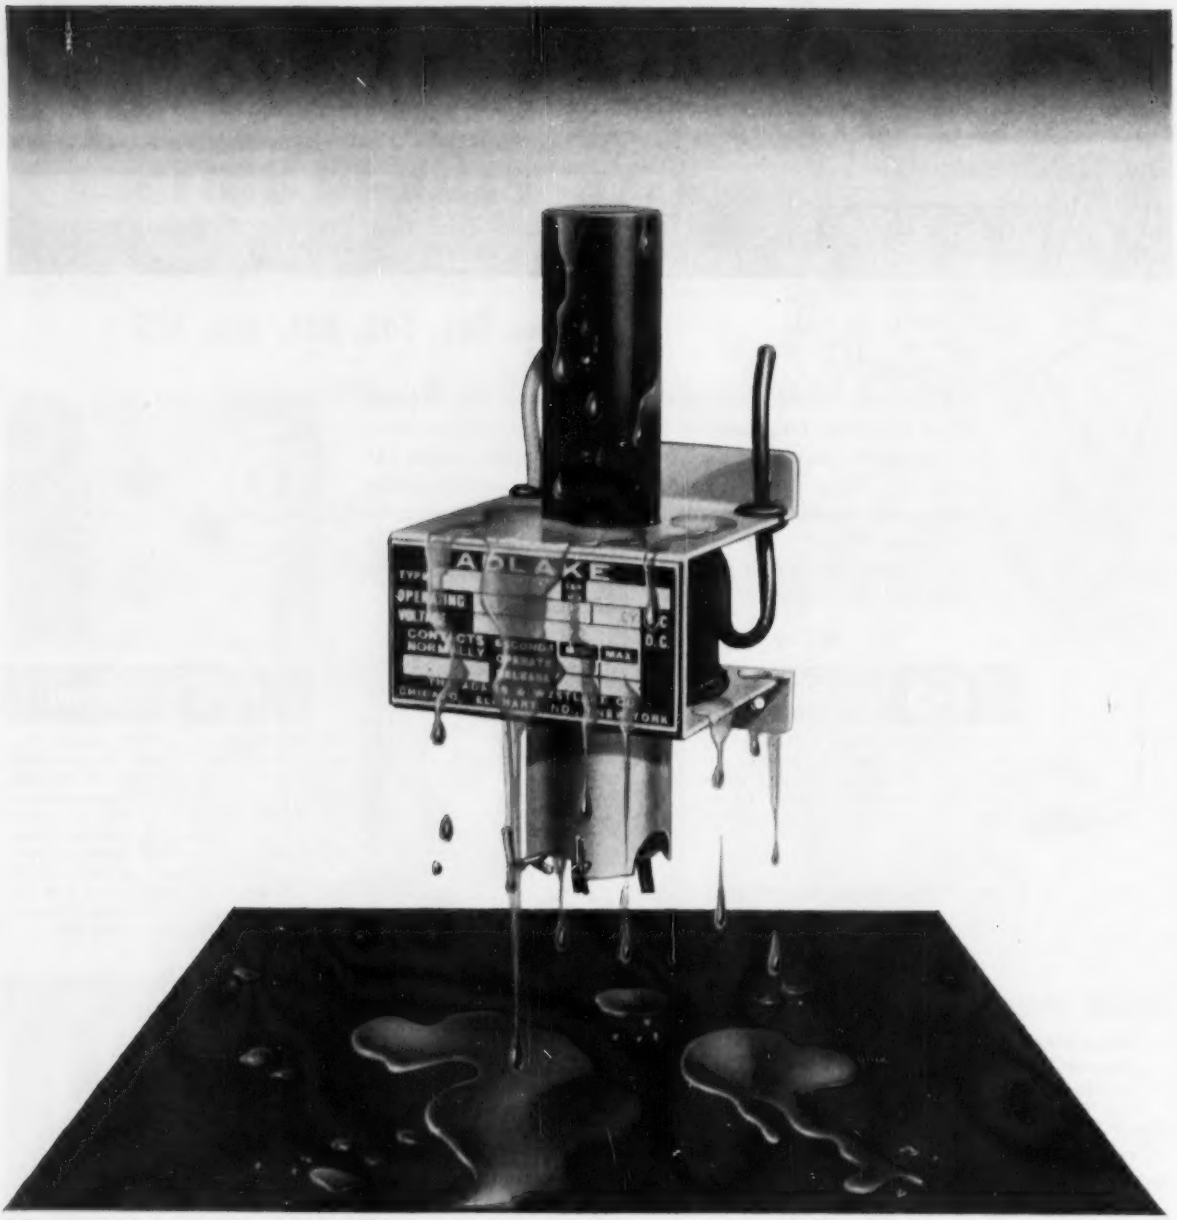

If moisture troubles your controls... it'll pay you to use

SEE
ADLAKE
AT BOOTH 305
Eleventh Annual Instrument
Automation Conference & Exhibit
Coliseum, New York City
Sept. 17 to 21, 1956

Adlake mercury relays

Adlake relays require no maintenance whatever...are quiet and chatterless...free from explosion hazard. Dust, dirt, moisture and temperature changes can't affect their operation. Mercury-to-mercury contact gives ideal snap action, with no burning, pitting or sticking. Time delay characteristics are fixed and non-adjustable.

For more information about Adlake Relays, write The Adams & Westlake Company, 1171 N. Michigan, Elkhart, Indiana

Adlake

99th year

The Adams & Westlake Company

Established 1857 • ELKHART, INDIANA • New York • Chicago
the *original* and largest manufacturers of mercury plunger-type relays

Want more information? Use post card on last page.

Modern industrial research instruments

THESE seven-ton bulldozers are truly research tools, for they are taking part in an exhaustive program for the study and revision of accepted methods of oscillographic recording system design and manufacture.

Yes, Sanborn Company is on the move! The instruments above are levelling off small mountains of earth and rock in preparation for a new and modern Sanborn plant near Boston, Mass.

Completion of the structure late this year will mean vastly improved facilities for research, manufacturing and other operations. This will directly and immediately benefit not only the work Sanborn does, but also the people who use Sanborn systems, amplifiers, recorders and other components. It will make possible more rapid development and production of new instruments, and increased opportunity for a larger number of people to apply their skills to the problems of modern instrument design and manufacture.

This represents not "just a new plant", but a reflection of Sanborn's growing role in providing better answers to industry's oscillographic recording needs.

Sanborn Company, Industrial Division, Cambridge 39, Massachusetts

Scale model of new Sanborn plant just off Route 128 in Waltham, Mass.

Greater **STABILITY**
Smaller **SIZE**
Greater **STRENGTH**

Temperature Compensating

RMC DISCAPS

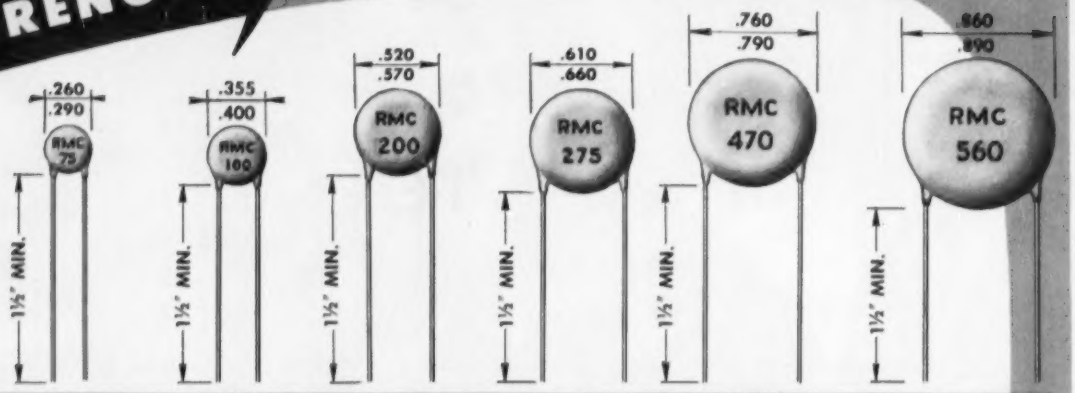

TC	1/4 Dia.	5/16 Dia.	1/2 Dia.	5/8 Dia.	3/4 Dia.	7/8 Dia.
P-100	1- 3 MMF	4- 9 MMF	10- 20 MMF	—	—	—
NPO	2- 13	14- 29	30- 69	70- 85 MMF	86-115 MMF	116-150 MMF
N- 33	2- 13	14- 29	30- 56	57- 62	63-100	101-150
N- 75	2- 14	15- 27	28- 56	57- 68	69-110	111-150
N- 150	2- 15	16- 30	31- 68	69- 75	76-140	141-150
N- 220	3- 15	16- 30	31- 75	76- 90	91-130	131-190
N- 330	3- 15	16- 30	31- 75	76-100	101-150	151-190
N- 470	3- 20	21- 40	41- 80	81-120	121-200	201-240
N- 750	5- 29	30- 68	69-150	151-180	181-300	301-350
N-1500	15- 50	51-120	121-200	201-250	251-330	331-560
N-2200	47- 75	76-150	151-200	201-275	276-470	471-560

Temperature coefficients up to N-5200 available on special order.

SPECIFICATIONS

POWER FACTOR: Over 10 MMF less than .1% at 1 megacycle. Under 10 MMF less than 2% at 1 megacycle.

WORKING VOLTAGE: 1000 V.D.C.

TEST VOLTAGE (FLASH): 1750 V.D.C.

CODING: Capacity, tolerance and TC stamped on disc

INSULATION: Durez phenolic-vacuum waxed

INITIAL LEAKAGE RESISTANCE: Guaranteed higher than 7500 megohms

AFTER HUMIDITY LEAKAGE RESISTANCE: Guaranteed higher than 1000 megohms

LEADS: No. 22 tinned copper (.026 dia.)

TOLERANCES: ±5% ±10% ±20%

These capacitors conform to the RTMA specification for Class 1 ceramic condensers.

The capacity of these condensers will not change under voltage.

RMC Type C temperature compensating DISCAPS are universally recognized as the ideal money-saving replacement for tubular ceramic and mica capacitors. Rated capacities will not change under voltage. Smaller size permits compact circuit designs. Greater mechanical strength assures rugged assemblies and lower costs in production line operations. Rated at 1000 working volts, Type C DISCAPS are available for a wide range of applications and cost no more than ordinary 600 volt capacitors.

Whatever your ceramic capacitor problem, standard or specialized, RMC engineers are prepared to solve it for you. Take advantage of a wealth of experience by writing today

DISCAP CERAMIC CAPACITORS

RMC

RADIO MATERIALS CORPORATION
GENERAL OFFICE: 3325 N. California Ave., Chicago 18, Ill.
Two RMC Plants Devoted Exclusively to Ceramic Capacitors
FACTORIES AT CHICAGO, ILL. AND ATTICA, IND.

THE SHORTAGE OF SCIENTISTS AND ENGINEERS:

A Threat to Economic Progress

THERE are two paramount reasons for concern over the serious shortage of scientists and engineers that now confronts the United States:

- The first reason, with which this editorial deals, is that continued expansion of our economy and further increases in our living standards are threatened unless we train more scientists and engineers and use them more effectively.
- The second reason for concern is that we run the risk of falling behind the Soviet Union in the technology so essential to national security. The consequences of losing this race to the Russians are not comforting. (The possibility that this might happen over the next few years was discussed in an earlier editorial in this series.)

The crucial contribution of scientists and engineers to the well-being of the American people has been to find ways of making better use of limited resources, to make equipment more productive, to develop new and better products that enrich our lives, to enable us to live longer and be healthier. They have made this contribution with greater success in the last 15 years than ever before, but it has required progressively more resources and more trained people.

During this 15-year period our annual production of goods and services, in dollars of constant purchasing power, has almost doubled. Since our total population has increased only 25 percent, this has meant a tremendous rise in the economic well-being of the American people as a whole. But in accomplishing this, the number of scientists and engineers has been more than doubled.

Tasks for Research

If the American economy is to continue to grow and if our living standards are to show further improvement, the work of scientists and engineers must be stepped up even more in the years ahead. Unless answers to several pressing problems are found through intensified research efforts, economic progress will become increasingly more difficult.

Productivity per hour of labor must be increased at a faster rate. Improved medical care has greatly increased the number of people who attain retirement age, and sharply higher birth rates since the war will mean larger numbers of children in school and college. Meantime, because of low birth rates during the depression, the number of people reaching working age is not rising nearly so fast. The result is that over the next 20 years our population will increase by about one-third, while the total manhours worked are not expected to increase more than 15 percent. So, simply to maintain the same living standards for a rising population — with no provision for additional improvements — ways must be found to enable each worker to produce for more dependents.

It is primarily to the scientists and engineers that we must look for help in making human labor more productive. This will require enormous increases in our power

resources. We will need to make more effective use of our existing fuel supplies — coal, oil and natural gas. And we will have to devise economically practical means of tapping other energy sources, particularly nuclear power and new rocket fuels.

Also, better ways must be found to use scarce and low-grade raw materials. Thanks to great strides in metallurgy and mining techniques, we are now utilizing sources of copper and iron ore that, for all practical purposes, were not available to us only ten years ago. Similar strides are needed in the mining and processing of bauxite if low-grade domestic ores are to help satisfy a fast-growing market for aluminum. And stubborn technical obstacles in the area of "high temperature" metals—such as nickel, cobalt, columbium, tantalum and titanium — are impeding progress in jet and turbine engines.

These are only a few of the challenging tasks that demand intensified research and engineering activity in the years immediately ahead if the United States is to continue to raise living standards. We need more houses, schools and highways for a rising population, more medical research to reduce further the ravages of illness, more research in chemistry and other sciences to sustain the flow of new and improved products that are so essential an ingredient of our economic progress.

Ceiling on Growth

American industry has indicated that it is ready to meet the challenge and undertake vastly expanded research programs. A recent survey conducted by the McGraw-Hill Department of Economics revealed that total research and development expenditures of American industry were almost $5 billion last year, 29% higher than in 1953. By 1959 business plans to be spending well over $6 billion on research and development. And the total could well prove to be much higher, based on the trend of recent years.

But industry's programs for research and development cannot be carried out unless enough qualified research workers and engineers are available. Ernest R. Breech, chairman of the Ford Motor Company, recently described the supply of engineers as the "ceiling on our future growth." He gave force to his point by announcing: "If 900 qualified engineers were to approach us next week looking for jobs, we would hire every one." The U. S. Bureau of Labor Statistics found in interviews with some 200 large companies at the end of 1954 — a recession year — that at least half were unable to hire enough research scientists and engineers to meet their needs. A third of the companies reported substantial shortages of technical personnel.

The shortage of technically trained people, furthermore, is becoming more acute. The number of engineers and scientists now being graduated is only about enough to cover replacement requirements, while the needs of industry, government and education are mounting every year. According to the best information available — as indicated in the first editorial in this series — these needs are now about twice as great as our current engineering graduating classes and annual production of scientists with Ph. D. degrees.

To perform the research needed to remove roadblocks to our economic progress — and at the same time hold our own in the technology essential to our security as a free nation — we must have an adequate supply of men and women with engineering and scientific training. Instead, we are faced with an acute shortage, now and for several years to come. Reasons for the shortage and proposals for working our way out of the shortage will be discussed in the remaining two editorials in this series.

This is one of a series of editorials prepared by the McGraw-Hill Department of Economics to help increase public knowledge and understanding of important nationwide developments of particular concern to the business and professional community served by our industrial and technical publications.

Permission is freely extended to newspapers, groups or individuals to quote or reprint all or parts of the text.

Donald C. McGraw

PRESIDENT

McGRAW-HILL PUBLISHING COMPANY, INC.

Transitron

SILICON DIODES

HIGH CONDUCTANCE

RATINGS AT 150° C

Type	Maximum Average Forward Current ma	Continuous Inverse Operating Voltage Volts D.C.	Minimum Saturation Voltage Volts
IN484B	50	130	150
IN486A	50	225	250
IN488A	50	380	420
IN457	25	60	70
IN458	25	120	135
IN459	25	180	180

HIGH FREQUENCY

SPECIFICATIONS AT 125° C

Type	Forward Current At + 1 V ma	Inverse Current At Specified Voltage ua at Volts	Maximum Operating Voltage Volts D.C.
IN252	10	10 @ - 5	20
IN251	5	10 @ - 10	30
S9G	2	10 @ - 20	40

Typical Shunt Capacitance: 0.8 uufd
Typical Pulse Recovery time: 0.15 usec
Operating Frequency Range: 0-1000 mc

Write for Bulletin TE-1350

SILICON RECTIFIERS

THE PROVEN PERFORMANCE of Transitron's silicon rectifiers and diodes has led to their widespread use in critical high temperature applications. The large number of types available allows optimum design for any given circuit.

For low level power supply or magnetic amplifier service, the subminiature diodes or miniature rectifiers are recommended. For higher power requirements, the stud-mounted rectifiers provide up to 30 KW.

UP TO 35 AMPS AT 150°C

RATINGS AT 150° C

	Maximum Average Forward Current Amps	Peak Recurrent Inverse Voltage Volts	RMS Inverse Voltage Volts
Miniature (Pig Tail Leads)			
TJ10A	0.2	100	70
TJ20A	0.2	200	140
TJ40A	0.2	400	280
Military Types			
IN253*	1.0	100	70
IN254*	0.4	200	140
IN255*	0.4	400	280
IN256*	0.2	600	420
Medium Power Types			
IN249A	20	100	70
IN250A	20	200	140
TR352	20	350	250
High Power Types			
IN412A	35	100	70
IN413A	35	200	140
TT352	35	350	250

* JAN types Rated at 135° C

WESCON SHOW
BOOTH 903

Write for Bulletin TE-1351

Transitron

electronic corporation · **melrose 76, massachusetts**



Germanium Diodes · Transistors · Silicon Diodes · Silicon Rectifiers

T

For the most dependable printed circuits, you need the high bond strength, workability, heat-resistance of C-D-F DILECTO® METAL-CLAD LAMINATES

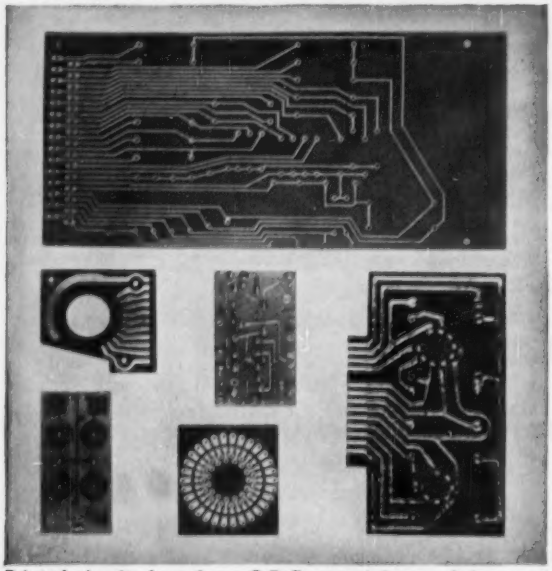

Printed circuits based on C-D-F materials are being used with great success in military electronic equipment, commercial television and radio sets, telephone switchboards—even sub-miniature radiosonde equipment and hearing aids.
Photos courtesy of Photocircuits, Inc., Glen Cove, N. Y.

HIGH BOND STRENGTH—C-D-F's special adhesive for metal-clad Dilecto bonds the copper foil to the plastic without affecting the laminate's superior electrical properties. Heat-resistance, dissipation factor, dielectric constant, dielectric strength, and insulation resistance of the Dilecto base remain unaffected. The closely-bonded foil can be etched cleanly and dipped in hot solder to 450°F. for ten seconds with a guarantee of no blistering or separating. Metal-Clad Dilecto can be punched or machined either before or after etching.

EXCELLENT WORKABILITY—On all four Dilecto metal-clad grades, you can solder, punch, saw, and assemble components either by hand or automatically. Thanks to the inherently superior workability of the plastics laminate over that of ceramic-type materials, Dilecto can be dropped, jammed into tight chassis, and otherwise treated roughly on the assembly line and in service.

HIGH HEAT-RESISTANCE—Metal-Clad Dilecto Laminates are made of phenolic, epoxy, or Teflon* resin for various conditions of service and assembly, and have either cellulosic paper or woven glass-fabric base. All are ideally suited to printed-circuit applications in which heat-dissipation is a major problem. Continuous exposure to high ambient operating temperatures in enclosed electronic equipment has no significant effects on Dilecto's electrical and physical properties.

UNLOAD YOUR HEADACHE HERE! C-D-F, a big, reliable source of supply, can help you get the most for your printed-circuit money by reducing rejects, lowering fabrication costs, assuring dependable quality every time. Send us your print or problem, and we'll gladly supply appropriate test samples free. See our catalog in the Product Design File (Sweet's) or send for the new 20-page Dilecto catalog. Let your nearby C-D-F sales engineer (listed in Sweet's) help you right from the design stage!

TYPICAL PROPERTY VALUES

	Copper-Clad PHENOLIC (Grade XXXP-26)	Copper-Clad PHENOLIC (Grade XXXP-28)	Copper-Clad EPOXY (Grade GB-181E)	Copper-Clad TEFLON* (Grade GB-112T)
BOND STRENGTH—0.0014" foil (Lbs. reqd. to separate 1" width of foil from laminate)	7 to 11	5 to 9	8 to 12	4 to 8
MAXIMUM CONTINUOUS OPERATING TEMP. (Deg. C.)	120	120	150	200
DIELECTRIC STRENGTH (Maximum voltage per mil.)	800	800	650	700
INSULATION RESISTANCE (Megohms) 96 hrs. at 35° C. & 90% RH	50,000	25,000	20,000	Over 10^6 megohms
DIELECTRIC CONSTANT 10^6 Cycles	4.20	4.20	4.54	2.85
DISSIPATION FACTOR 10^6 Cycles	0.026	0.052	0.018	0.0006
ARC-RESISTANCE (Seconds)	10	5	120	180
TENSILE STRENGTH (psi.)	16,000 x 13,000	12,000 x 10,000	48,000 x 44,000	23,000 x 21,000
FLEXURAL STRENGTH (psi.)	21,000 x 18,000	18,000 x 16,000	65,000 x 55,000	13,000 x 11,000
IZOD IMPACT STRENGTH edgewise (ft. lbs. per inch of notch)	0.40 x 0.35	0.40 x 0.35	13.5 x 11.5	6.0 x 5.0
COMPRESSIVE STRENGTH flatwise (psi.)	28,000	22,000	62,000	20,000
BASE MATERIAL OF LAMINATE	Cotton rag paper	Cotton rag paper	Medium-weave, medium-weight glass cloth	Fine-weave, medium-weight glass cloth
COLOR OF UNCLAD LAMINATE	Natural greenish	Natural Brown	Natural	Natural

All these standard grades are available with 0.0014", 0.0028", 0.0042", or thicker electrolytic or rolled copper foil on one or both surfaces. Other metal foils and other resin-and-base combinations can be supplied on special order.

*duPont Trademark

CDF **CONTINENTAL DIAMOND FIBRE**

CONTINENTAL-DIAMOND FIBRE DIVISION OF THE BUDD COMPANY, INC.

NEWARK 16, DELAWARE

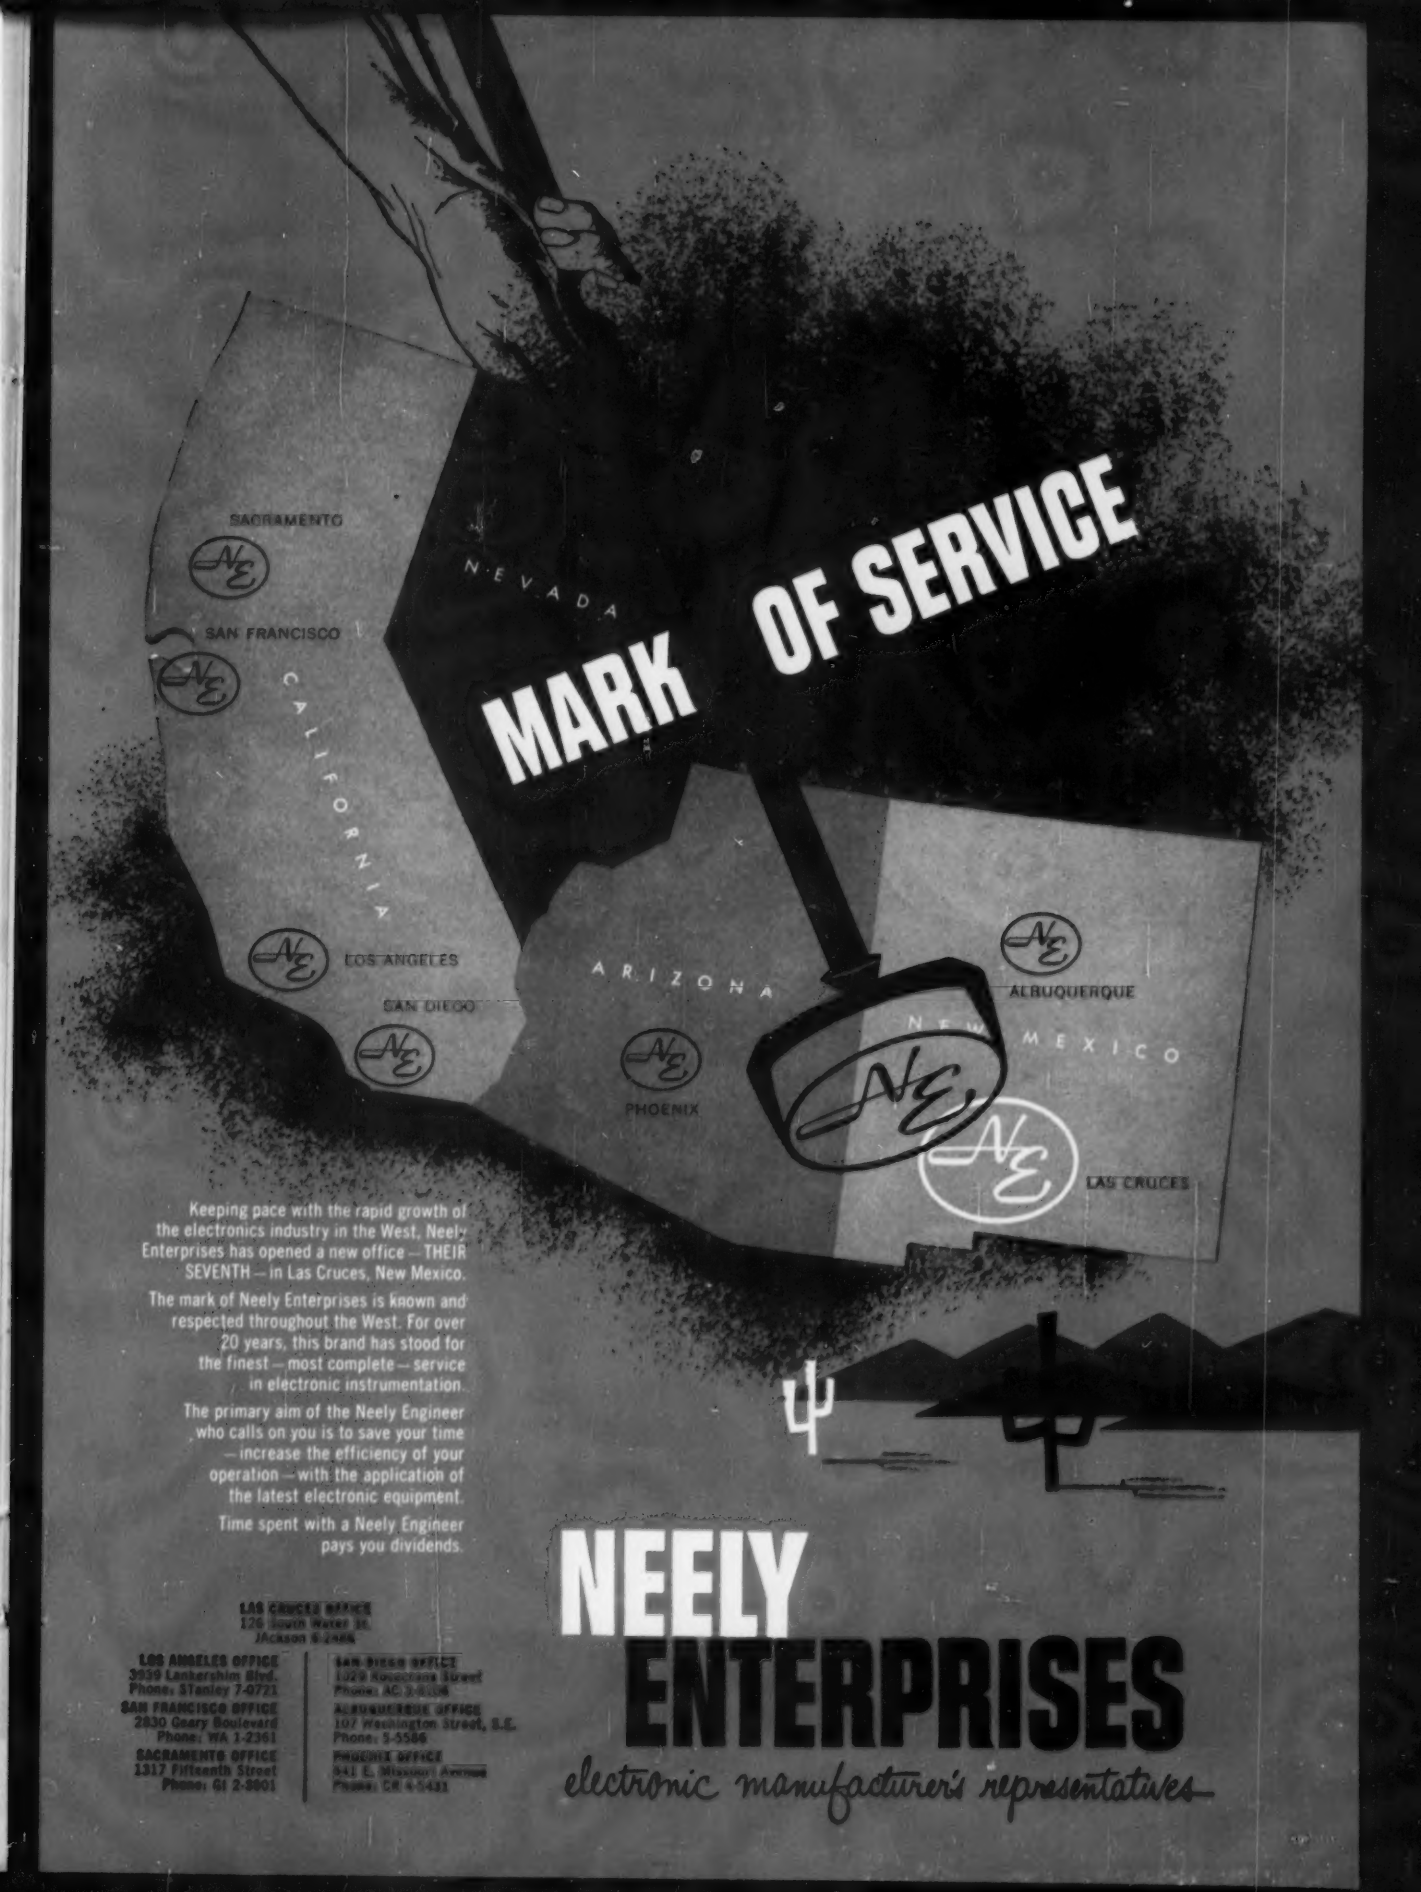

Keeping pace with the rapid growth of the electronics industry in the West, Neely Enterprises has opened a new office—THEIR SEVENTH—in Las Cruces, New Mexico.

The mark of Neely Enterprises is known and respected throughout the West. For over 20 years, this brand has stood for the finest—most complete—service in electronic instrumentation.

The primary aim of the Neely Engineer who calls on you is to save your time—increase the efficiency of your operation—with the application of the latest electronic equipment.

Time spent with a Neely Engineer pays you dividends.

LAS CRUCES OFFICE
126 South Water St.
JAckson 6-2484

LOS ANGELES OFFICE
3939 Lankershim Blvd.
Phone: STanley 7-0721

SAN FRANCISCO OFFICE
2830 Geary Boulevard
Phone: WA 1-2361

SACRAMENTO OFFICE
1317 Fifteenth Street
Phone: GI 2-8001

SAN DIEGO OFFICE
1029 Rosecrans Street
Phone: AC 3-6106

ALBUQUERQUE OFFICE
107 Washington Street, S.E.
Phone: 5-5586

PHOENIX OFFICE
941 E. Missouri Avenue
Phone: CR 4-5431

NEELY ENTERPRISES

electronic manufacturer's representatives

YOUR "SPECIAL" TIMER
may be one of our
721 STANDARD UNITS!

We have 20 years of experience in developing new timers to meet our customers' widely varying requirements. Our Engineering Department not only originates new designs, but also develops modifications for that purpose. That's why most requests for special timers can be filled without delay—by one of the 721 combinations we've developed so far from our 17 basic types of timers. But if we don't have what you want on hand, we'll welcome the chance to design and make it for you! And quickly too!

We manufacture a complete line of timers in these 4 broad classifications:

INTERVAL TIMERS • TIME DELAY TIMERS
RE-CYCLING TIMERS • RUNNING TIME METERS

Our large stock assures you of rapid deliveries—even when we have to create a brand new timer for your special needs. Ask us first—you may save yourself much lost motion... and your inquiry will receive prompt attention.

Timers that Control the Pulse Beat of Industry

INDUSTRIAL TIMER CORPORATION

1409 McCARTER HIGHWAY, NEWARK 4, N. J.

A new and better variable-phase, single-turn precision potentiometer

CLAROSTAT

VARI-PHASE®

Pat. Pend.



EQUAL TORQUE AND TRACKING IN BOTH DIRECTIONS

Unique contact design permits micrometer tension adjustment at factory and assures equal torque and tracking in either direction at all times.

NO CLAMPING RINGS

Simplified phasing—External independent phasing of each cup without affecting the relationship of the others.—To phase, loosen clamping nut, move terminal board in desired direction, tighten clamping nut and it's done. Speedy phasing saves time and money. Reduced overall diameter by elimination of clamping rings.





STANDARD A.I.A. MOUNTING

Mounting per A.I.A.* standards—others available. Meets or exceeds electrical and mechanical A.I.A. requirements.

Materials selected for lightest weight possible. Design assures highest performance. Five sizes available—7/8", 1-1/16", 1-5/8", 2" and 3" diameters.

Another **CLAROSTAT** first. A product of advanced imagineering.

WRITE FOR COMPLETE ELECTRICAL AND MECHANICAL SPECIFICATIONS.

CLAROSTAT®

CLAROSTAT MFG. CO., INC.
DOVER, NEW HAMPSHIRE

In Canada: Candian Marconi Co., Ltd., Toronto 17, Ont.
Manufactured under license in Great Britain by A. B. Metal Products Ltd., 17 Stratton St., London W.1, Concessionaires for British Commonwealth except Canada.

*Aircraft Industries Associated.

Want more information? Use post card on last page.

MICRO precision switches

...THEIR USE IS A PRINCIPLE OF GOOD DESIGN

HONEYWELL

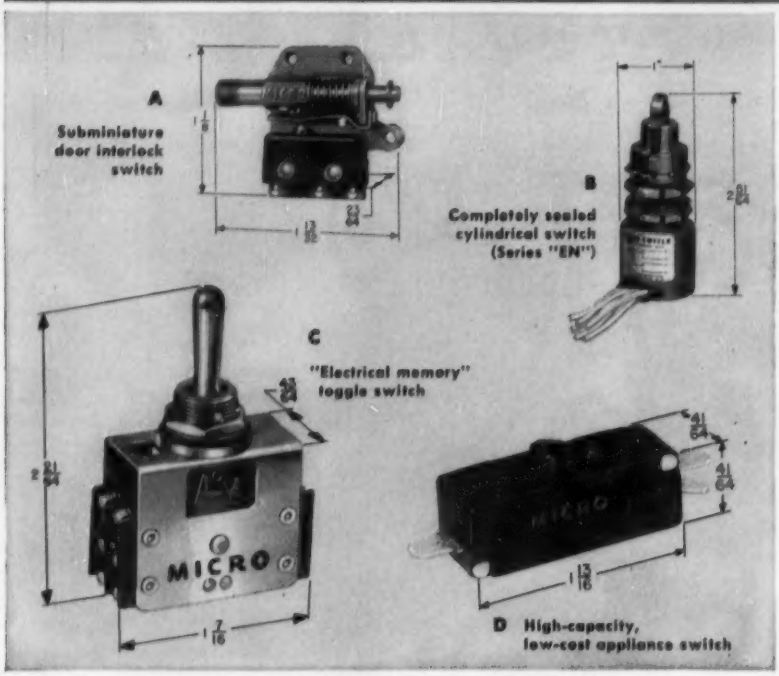

A continuous flow of Precision Switch Developments anticipates Your design needs

MICRO precision switches are developed and built to meet specific requirements. Some designs call for the utmost precision, plus reliability. Other designs put long life and extreme reliability at the top of the list. Some must have all of these and more. Whatever YOUR requirement may be, MICRO SWITCH has a switch readily available or can work with you in its development.

Here are a few recent MICRO SWITCH *developments to meet specific needs:*

A The subminiature door interlock switch is for use where an extremely small assembly is desired to provide automatic cut-off of the power circuit when a cabinet door is opened. This switch assembly has been found extremely valuable on radio, radar, x-ray and other hazardous equipment where it is desirable to provide automatic protection to operating personnel. (*Ask for Data Sheet P108*).

B The MICRO SWITCH "EN" Series switches are capable of reliable, long-life performance under extreme environmental and mechanical conditions. They are completely sealed, cylindrical in shape and can be mounted wherever a through hole can be provided. Variations of the "EN" are capable of actuation by almost any means (see right hand column). (*Send for Data Sheet 105*).

C This is the first of a new series of "electrical memory" toggle switches being introduced by MICRO SWITCH. They offer a completely new concept in switching remotely controlled circuits. They promise to simplify basic circuit designs of radar units, computers, aircraft control panels and similar devices. The switch indicates through a pilot light or buzzer which circuit was last actuated. (*Send for Data Sheet 109*).

D MICRO SWITCH now offers a new series of low cost plastic encased switches especially designed for use on domestic appliances. In addition to their small size and high electrical capacity, these switches are ruggedly constructed for hard service. They are readily adaptable for use with auxiliary actuators. (*Send for Data Sheet 106*).

See the unusual design flexibility of the new MICRO Series "EN" switches

Spring return adjustable actuator for cam or slide actuation
Roller plunger actuator for actuation by cams and slides

MICRO SWITCH *Engineering service is available at nearby branch offices. A call can save you time and money.*

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

In Canada, Leaside, Toronto 17, Ontario • FREEPORT, ILLINOIS

Want more information? Use post card on last page.

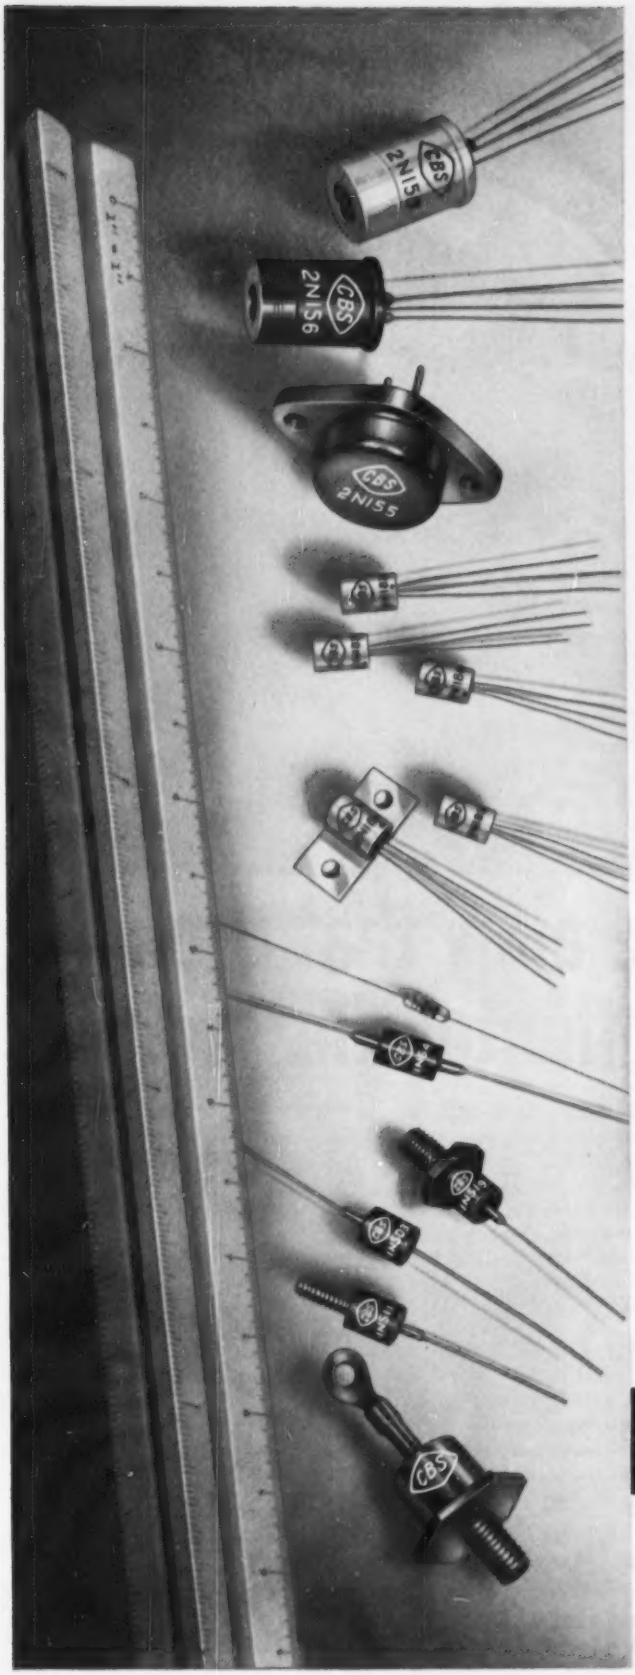

growing line of

CBS

semiconductors features uniformity and reliability

Users rate the rapidly expanding line of CBS semiconductors as "exceptionally uniform and reliable." They have also discovered that CBS' mass production insures dependable delivery and competitive prices. You, too, will prefer advance-engineered CBS semiconductors. Write for data and quotation on the types you need.

Power Transistors Popular auto-radio type 2N155. General-purpose 2N156 (12-volt) and 2N158 (28-volt). And *new higher-power and higher-voltage versions* for larger audio output systems and power supplies.

High-Frequency Transistors Uniform and reliable performance up to 20 mc. CBS 2N182, 2N183, 2N184 are NPN symmetrical, permitting unusual applications.

General-Purpose Transistors CBS 2N180 and 2N181 are noted for outstanding dependability. Integral C-clamp mounting of 2N181 permits dissipation up to 250 mw.

Diodes A complete line from one source: Glass . . . plastic . . . point-contact . . . bonded-junction . . . entertainment . . . general-purpose . . . and computer.

Silicon Power Rectifiers Series 1N503-1N508 rated at ½ amp . . . 1N511-1N516 at 1 amp . . . 1N519-1N524 at 1¼ amp. Also *a new much higher-current series* for heavy-duty power supplies.

Reliable products
through Advanced-Engineering

CBS semiconductors

CBS-HYTRON
Semiconductor Products, Lowell, Mass.
A DIVISION OF COLUMBIA BROADCASTING SYSTEM, INC.

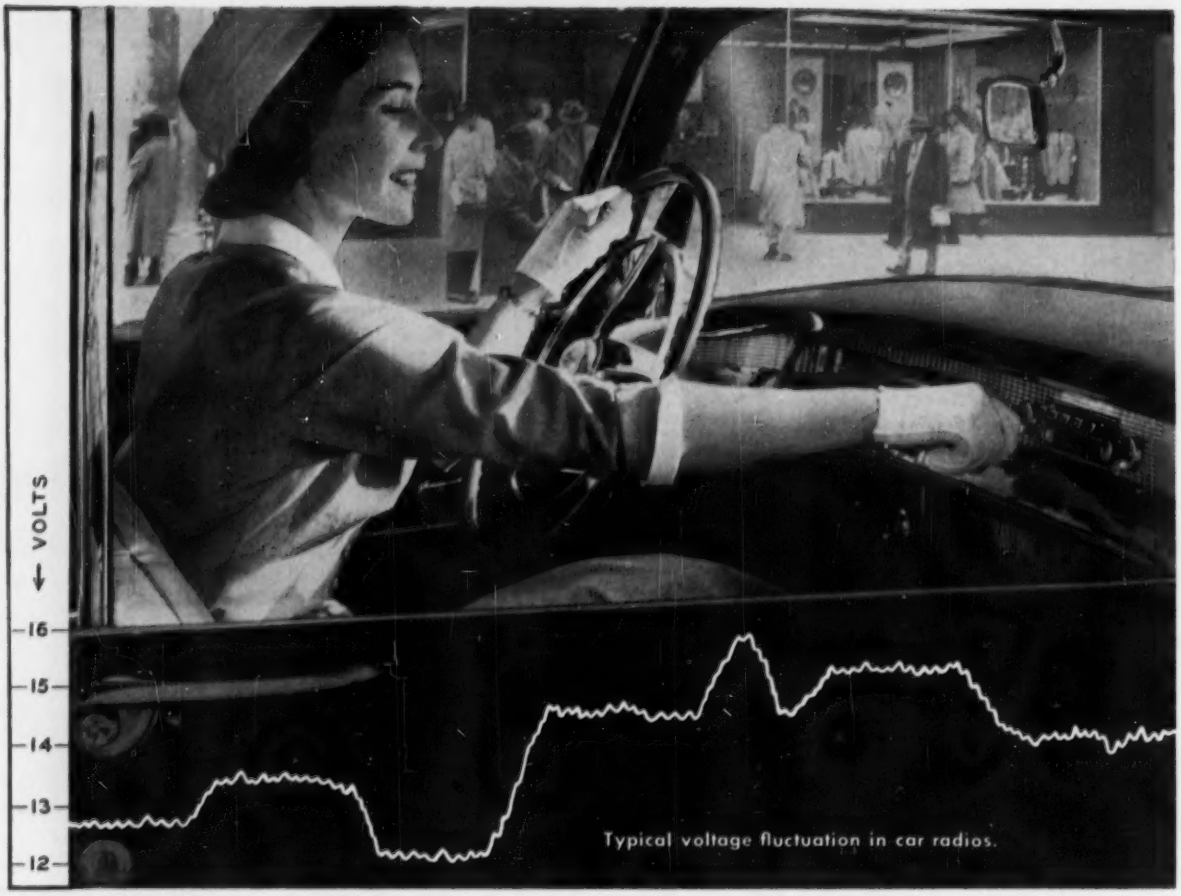

FOUND: a Cathode alloy that prolongs tube life under fluctuating voltage

CATHALOY*A-31 IDEAL FOR CAR RADIO TUBES. This discovery was made in actual car radio installations. Heater supply voltages were found to vary up to 25% above specification. And the tubes using Superior's new Cathaloy A-31† consistently outlasted others.

These findings prompted car radio manufacturers to insist on longer-life tubes in car radio service. Specifications stipulate several hundred hours at approximately 25% overvoltage. No cathode alloy can match Superior's Cathaloy A-31 in meeting these requirements.

OTHER ADVANTAGES. Cathaloy A-31, with its 4% tungsten, is probably the strongest cathode material at high temperatures that is commercially available today. Hence it qualifies especially for use in ruggedized tubes. In addition, its special composition reduces the twin problems of sublimation and interface impedance.

SEND FOR FREE CATALOG. Contains complete technical information on Cathaloy A-31 and other cathode alloys and on electronic tubular parts. Write Superior Tube Co., 2500 Germantown Ave., Norristown, Pa.



Cathodes made from A-31 are available in Weldrawn, Lockseam † and disc cathodes.*

• • •

*T.M. Reg. U.S. Pat. Off., Superior Tube Co.
†Manufactured under U.S. patents.

Superior Tube

The big name in small tubing

NORRISTOWN, PA.

It can cost you much more to settle for less than this Clare relay

This ad was all but written by a Clare customer. Here is the story as he told it:

"I shopped around for relays for continuous-duty, high-speed switching service. Clare engineers recommended Type HG Mercury-Wetted Contact Relays. They said they were ideal for this application. I thought so, too; but they do cost a little more than some other relays, and I thought I couldn't afford to use them. I thought the extra cost, multiplied by the large number of relays in my machine, would run my price too high. So I built a model with cheaper relays. In just a few weeks the relays wore out. I knew that Clare Type HG relays would last for years under the same conditions, and it didn't take me long then to decide that *I couldn't afford not to use them.*"

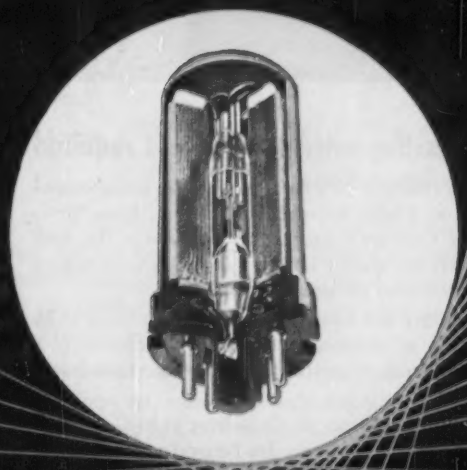

Ask yourself whether you, too, don't have jobs for which no other relay is good enough. Consider that the life of a Clare Mercury-Wetted Contact Relay is measured in billions of maintenance-free operations. Compare the cost per flawless operation with that of other relays: this is the crux of the matter—a vital, basic point.

The price is very reasonable, and delivery is quick—one to seven weeks, depending on the particular assembly desired and the size of the order.

FOR COMPLETE INFORMATION on CLARE Mercury-Wetted Contact Relays for single or multiple circuits contact your nearest CLARE representative or address: C. P. Clare & Co., 3101 Pratt Blvd., Chicago 45, Illinois. In Canada: C. P. Clare & Co., 659 Bayview Avenue, Toronto 17. Cable address: CLARELAY.

Send for CLARE Sales Engineering Bulletins Nos. 120 and 122

CLARE RELAYS

FIRST in the industrial field

Radio Receptor's diodes are assembled under glass in a DRY atmosphere

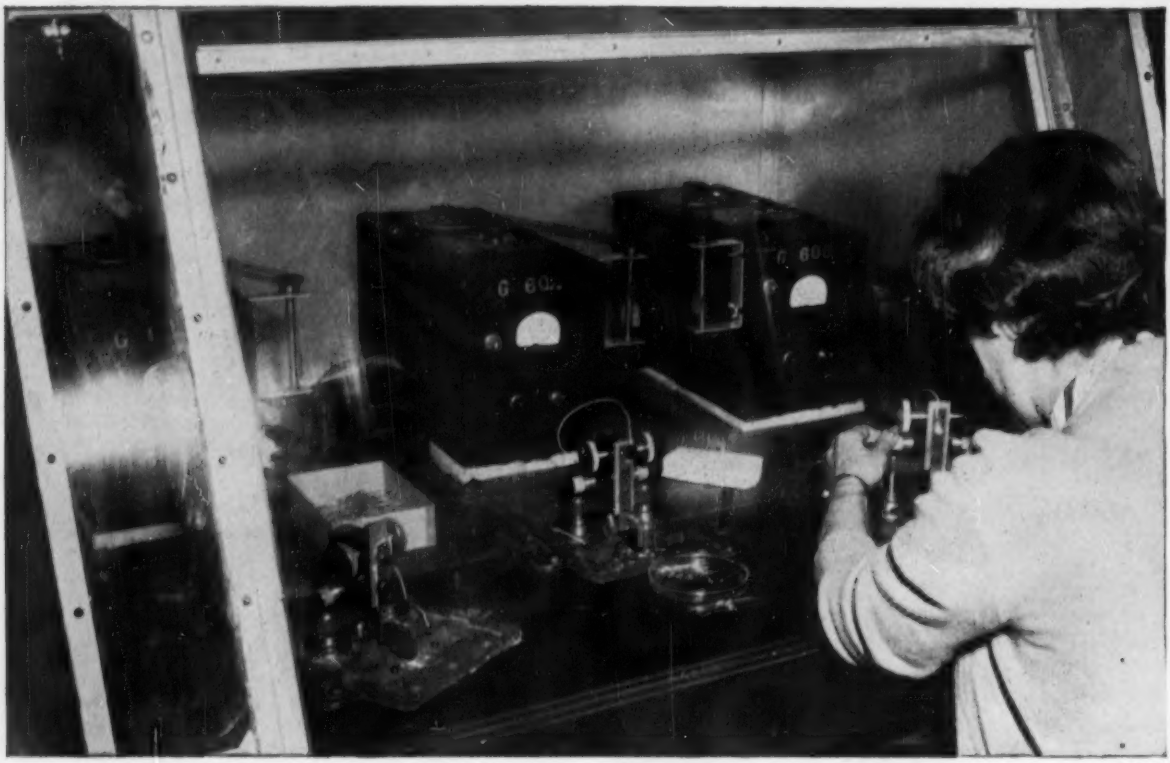

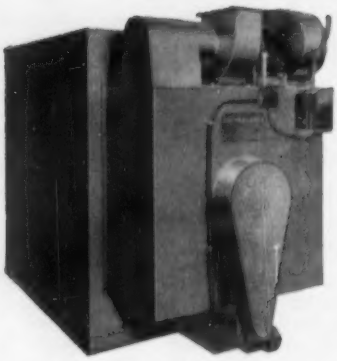

Type CH Air-Drying Lectrodryer

A Lectrodryer maintains the extreme DRYness required

Moisture is locked out of this chamber in which germanium gold-bonded diodes are being assembled at Radio Receptor's Brooklyn, New York, plant. A constant supply of DRY air from Lectrodryer keeps the flow of air outward. This makes certain there's no moisture present to impair the high quality of these precision products.

More and more manufacturers are learning how vital DRYness is in the production and operation of electronic equipment. Moisture is a hazard which cannot be tolerated, if quality is to be maintained and procedures standardized.

You may be dealing with small volumes of air, as here at Radio Receptor Company, or with entire workrooms. There are Lectrodryers to handle any volume and any degree of DRYness. Tell your DRYing problem to Pittsburgh Lectrodryer Company, 359 32nd Street, Pittsburgh 30, Pa. (a McGraw Electric Company Division).

In England: Birlec, Limited, Tyburn Road, Erdington, Birmingham.
In France: Stein et Roubaix, 24 Rue Erlanger, Paris XVI.
In Belgium: S. A. Belge Stein et Roubaix, 320 Rue du Moulin, Bressoux-Liege.

LECTRODRYERS DRY WITH ACTIVATED ALUMINAS

LECTRODRYER

* REGISTERED TRADEMARK U. S. PAT. OFF.

ANOTHER
VARIAN
first

A MINIATURE *backward wave oscillator*

This Varian Model VA-161 is the *only* rugged, system-tailored, voltage-tuned Backward Wave Oscillator now available for radars, signal generators, search receivers and related microwave equipment. Here are some of its important advantages:

- ✔ Instantaneously tuned by changing voltage.
- ✔ Low voltage requirements... operates over a frequency range of 8.2 to 12.4 kMc on less than 600 volts.
- ✔ *Existing* radar system power supplies can be used... operates over the normal 8.5 to 9.6 kMc radar band on 300 volts or less.
- ✔ Designed for modern miniaturized equipment... small, compact... body measures approximately 4" x ¾".
- ✔ Withstands shock and vibration... rugged metal and ceramic construction.
- ✔ Permanent magnet weighs less than 5 pounds... eliminates need for electromagnet *and* its power supply.
- ✔ Power output is smooth across entire tuning range... fluctuations are small.
- ✔ Low thermal drift.

Additional tubes covering other frequencies are being developed to help solve your microwave system problems.

SYSTEM DESIGNERS . . . Why not get the full story on this important new Backward Wave Oscillator? For complete technical data, write Applications Engineering Dept. H-1

THE MARK OF LEADERSHIP

VARIAN associates

PALO ALTO, CALIFORNIA

Representatives in all principal cities

KLYSTRONS, TRAVELING WAVE TUBES, BACKWARD WAVE OSCILLATORS, LINEAR ACCELERATORS, MICROWAVE SYSTEM COMPONENTS, R. F. SPECTROMETERS, MAGNETS, MAGNETOMETERS, STALOS, POWER AMPLIFIERS, GRAPHIC RECORDERS, RESEARCH AND DEVELOPMENT SERVICES

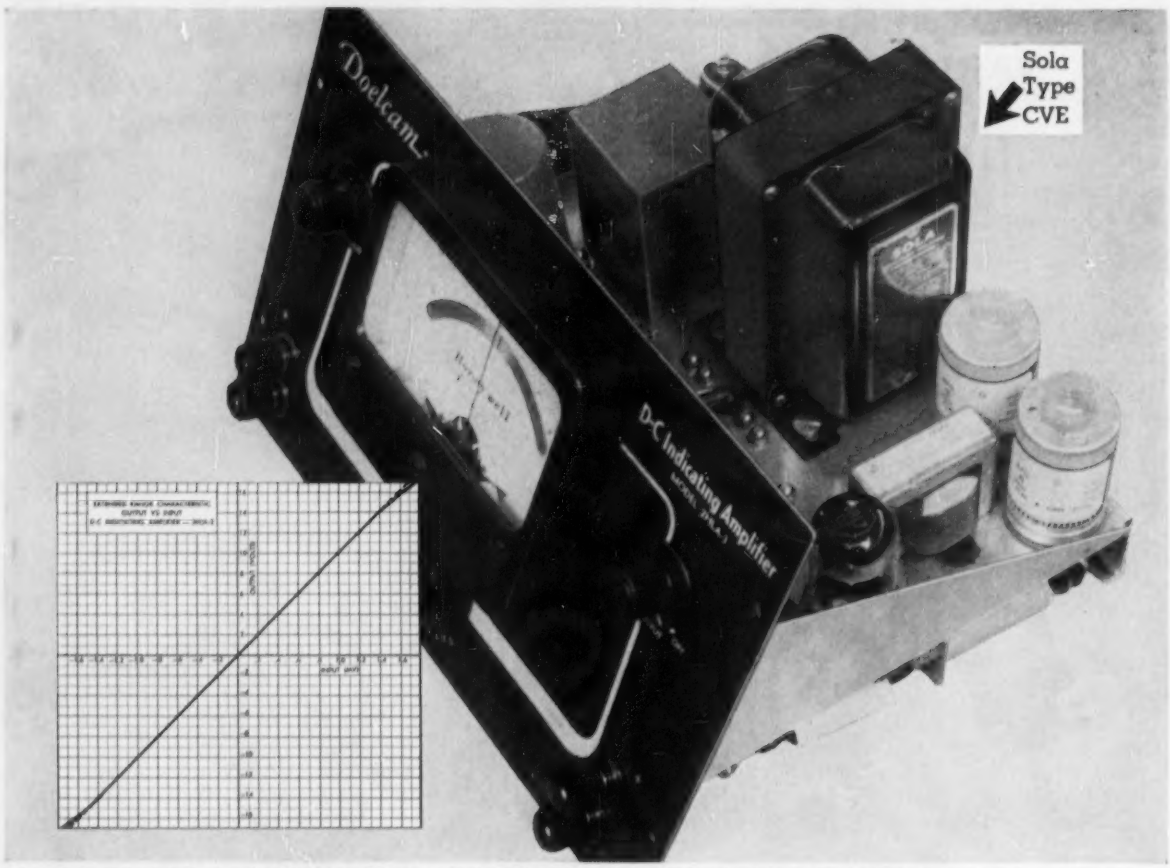

Above is the 2HLA-3 Indicating Amplifier, a product of the Doelcam Division of Minneapolis-Honeywell. Housing is removed to show chassis-mounted Sola Type CVE Regulated Power Supply Transformer. Inset is an extended-range characteristic showing linear amplifier output.

Sola-Regulated DC Amplifier Provides Reliable Measurement of 2×10^{-15} W Signals

The Doelcam 2HLA-3 DC Indicating Amplifier has introduced a standard of performance heretofore unattainable in the field of amplification and measurement of low level dc signals. This precision instrument measures signals as small as 2×10^{-15} watt. High gain, excellent linearity, and negligible drift of the 2HLA-3 are *unaffected by variations in line voltage* or tube characteristics.

Contributing to this reliable and stable performance of the Doelcam amplifier is its chassis-mounted Sola Type CVE Regulated Power Supply Transformer. The Sola CVE static-magnetic stabilizer provides a single, compact source of plate and filament supply voltages regulated within ±3%, with input voltage variations of 100-130 volts. All windings are on the same core, providing a moderately-priced unit to replace both voltage-regulating circuit, or component, as well as conventional power transformer.

These Sola transformers are available in three standard models (±3% regulation); or in special designs with regulation of one winding as close as ±1%. They have no moving parts or tubes, and are completely automatic, instantaneous, and continuous in operation. In addition, they provide self-protection against short circuit, and require no maintenance.

Your area representative will be happy to provide you with information on the specific benefits of a Sola Type CVE Regulated Power Supply Transformer as a component in your product.

SOLA *Constant Voltage* **TRANSFORMERS**

Write for Bulletin 7H-CV-170D
SOLA ELECTRIC CO.
4633 W. 16th St.
Chicago 50, Ill.

CONSTANT VOLTAGE TRANSFORMERS for Regulation of Electronic and Electrical Equipment • **LIGHTING TRANSFORMERS** for All Types of Fluorescent and Mercury Vapor Lamps. • **SOLA ELECTRIC CO., 4633 West 16th Street, Chicago 50, Illinois, Bishop 2-1414** • *NEW YORK 35: 103 E. 125th St., TRafalgar 6-6464* • *PHILADELPHIA: Commercial Trust Bldg., Rittenhouse 6-4988* • *BOSTON: 272 Centre Street, Newton 58, Mass., Bigelow 4-3354* • *CLEVELAND 15: 1836 Euclid Ave., PRospect 1-6400* • *KANSAS CITY 2, MO.: 406 W. 34th St., Jefferson 4382* • *LOS ANGELES 23: 3138 E. Olympic Blvd., ANgelus 9-9431* • *TORONTO 17, ONTARIO: 102 Laird Drive, Mayfair 4554* • *Representatives in Other Principal Cities*

"heart" of the most accurate tank gauge ever made!

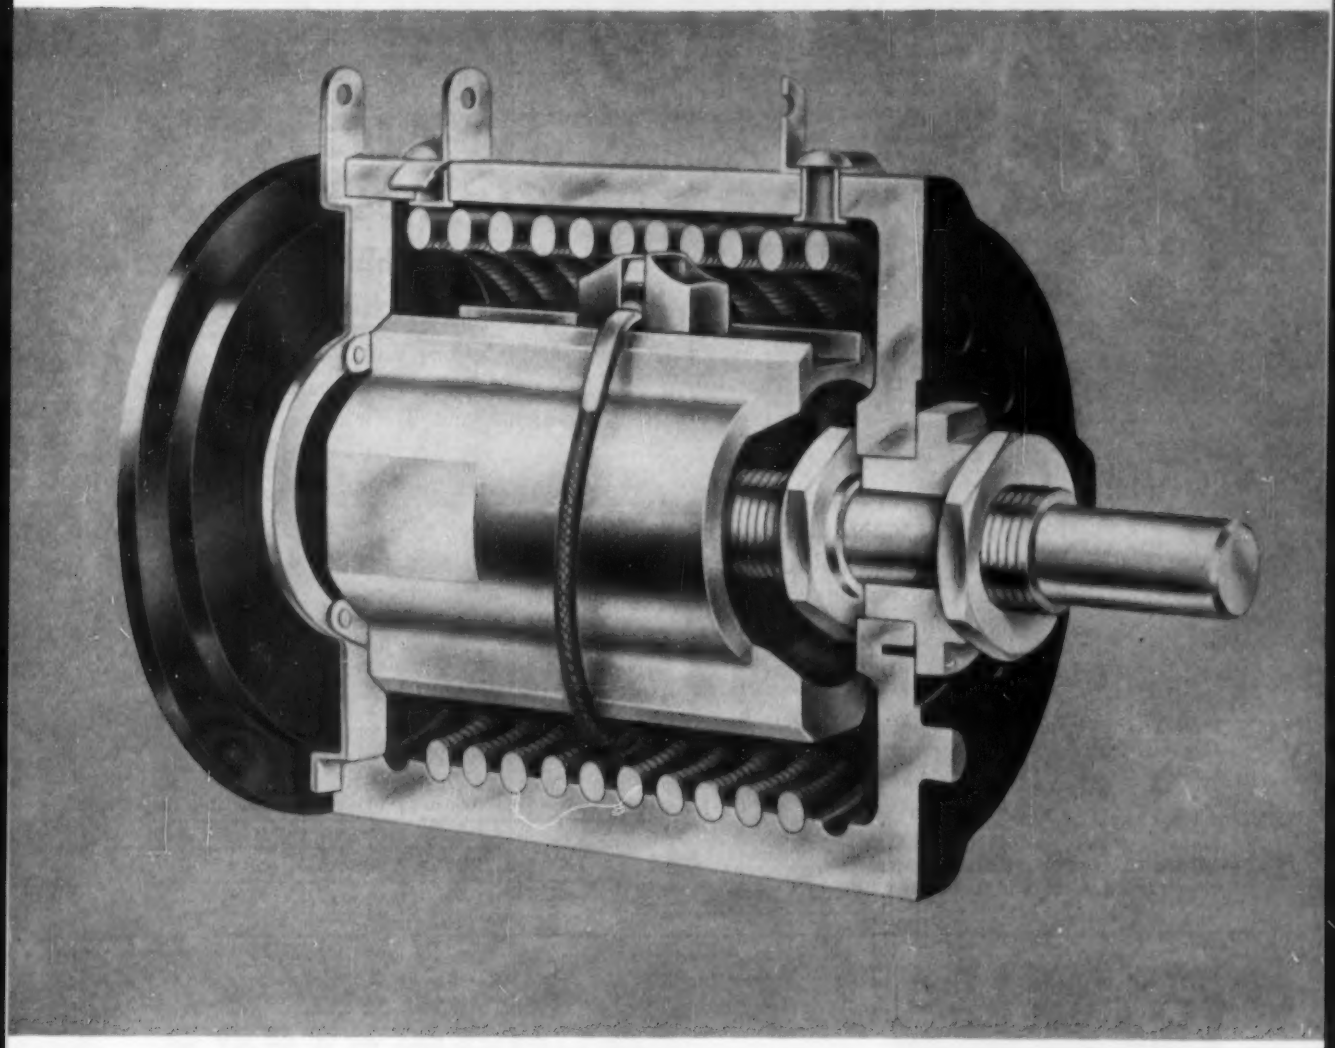

It's housed in Monsanto RESINOX* 3700

...only material tested that met every exacting requirement



HEART OF THE remote transmission in the new Gilbarco Electronic Gauge—which accurately measures the liquid levels of storage tanks—is the Helipot® precision potentiometer. To house this all-important component, engineers needed a material with:

- **low moisture absorption**
- **superior dimensional stability**
- **high electrical resistance**

Of all materials tested, only Resinox 3700 measured up to all these exacting requirements. And, since specifying Resinox 3700, Gilbarco electronic tank gauges have been able to transmit remotely storage tank liquid levels accurate to 1/16th of an inch!

Resinox 3700 can solve your critical electric parts problem just as it did for Gilbarco. In addition to the characteristics outlined above, Resinox 3700 also has:

- **outstanding arc resistance**
- **dielectric strength**
- **good impact resistance**
- **excellent moldability**

For complete information, write: Monsanto Chemical Company, Plastics Division, Room 408, Springfield 2, Mass.

The Electronic Tank Gauge is manufactured by Gilbarco (Gilbert & Barker Mfg. Co.), West Springfield, Mass. Precision potentiometers are made by Helipot Corporation, South Pasadena, Calif.

MONSANTO

*Resinox: Reg. U. S. Pat. Off.

PANELS · TIMERS · TACHOMETERS
by Standard Electric

flexlab PANELS
Distribution Switchboards
Control Panels, Test Benches and Units

Custom Designed and Custom Built for a long and impressive list of users in Industry, Research, Government, and in Vocational and Technical Schools and Universities. **Send for Bulletin 187.**

flexlab RECEPTACLES AND PLUGS and binding posts, for quick, frequent, flexible, plug-in connections for power distribution and circuitry on test or production equipment. **Send for Bulletin 238.**

Precision TIMERS

For extreme accuracy and continuous performance. Rugged, for heavy duty service; flexible in application; to measure and indicate elapsed time intervals. Synchronous motor drive. Electric clutch controlled by manual switch, automatic switch or output of electronic tubes. Manual or electric zero reset. **Send for Bulletin 198.**



Model	Scale Divisions	Totalizes	Accuracy
S-100	1/5 sec.	6000 sec.	±.1 sec.
S-60	1/5 sec.	60 min.	±.1 sec.
SM-60	1/100 min.	60 min.	±.002 min.
S-10	1/10 sec.	1000 sec.	±.02 sec.
S-6	1/1000 min.	10 min.	±.0002 min.
S-1	1/100 sec.	60 sec.	±.01 sec.
MST	1/1000 sec.	.360 sec.	±.001 sec.
MST-500	1/1000 sec.	30 sec.	±.002 sec.

Chrono and Electronic TACHOMETERS

These NEW and IMPROVED TACHOMETERS are designed to give you these outstanding benefits: Extreme Precision — Reliability — Readability — Self-Checking — Package-type, plug-in construction to simplify servicing. **Write for Bulletins 218 and 240.**

Write for Bulletins listed above. For information on specific problems, address inquiries to our Engineering Department.

THE **Standard** ELECTRIC TIME COMPANY

97 Logan Street • Springfield 2, Massachusetts

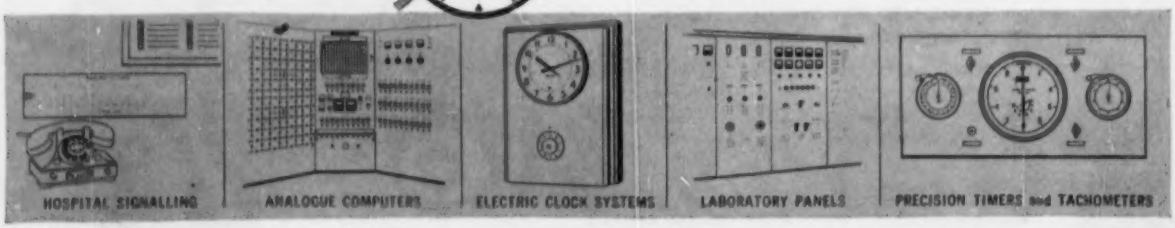

PHILCO

SBT*2N240

HIGH SPEED SWITCHING TRANSISTOR

with response time in millimicrosecond range

GUARANTEED CHARACTERISTICS

CHARACTERISTIC	CONDITION	VALUE
"ON"	$I_b = -.3$ ma, $I_c = -2$ ma. $I_b = -2.5$ ma, $I_c = -8$ ma.	$V_{ce} = -0.07$ V MAX. $V_{ce} = -0.10$ V MAX.
"OFF"	$V_{be} = -0.10$V., $V_{cb} = -4.5$V.	$I_c = -150\,\mu a$ MAX.
h_{fe} (COMMON EMITTER CURRENT GAIN)	$V_c = -3$V., $I_c = -.5$ ma.	16 MIN.
C_{ob} (COMMON BASE OUTPUT CAPACITY)	$V_c = -3$V., $I_c = -.5$ ma.	6 $\mu\mu f$ MAX.
I_{cb} (COLLECTOR CUTOFF CURRENT)	$V_{cb} = -5$ V	3 μa MAX.
I_{eb} (EMITTER CUTOFF CURRENT)	$V_{eb} = -5$ V	3 μa MAX.

MAXIMUM RATINGS

$V_{ce} = -6$ V. $I_c = -15$ ma. $P_c = 10$ mw @ 40°C.

PULSE RESPONSE





Test Conditions. V_{cc} is set to −6V and pulse input is adjusted until transistor is just in saturation. V_{cc} is then lowered to −1.5V for saturated pulse curve. t_s = hole storage time.

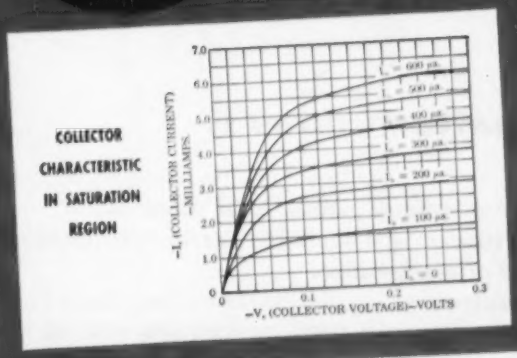

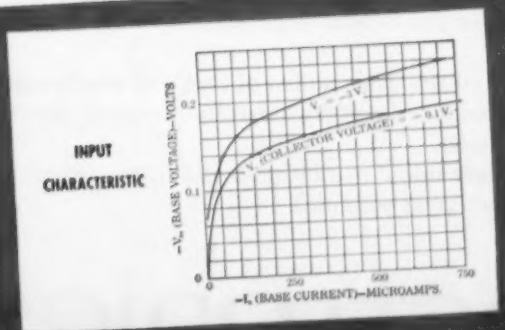

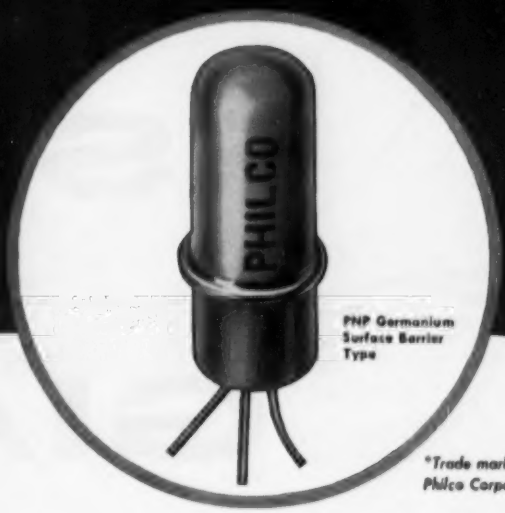

*Trade mark of Philco Corporation

FEATURES

- Low saturation resistance
- Low saturation voltage
- Ideal electrical characteristics for direct coupled circuitry
- Extremely fast rise and fall time
- Absolute hermetic seal
- Available *now* in production quantities

Proven performance of the Philco Surface Barrier Transistor has made it the basis for design of both military and commercial computers where speed and reliability are the major considerations. And now this transistor goes even farther . . by giving reliable performance in 20 megacycle switching circuits!

Make Philco your prime source of information for high speed computer transistor applications.

Write to Dept. E, Lansdale Tube Company Division, Lansdale, Pa.

PHILCO CORPORATION

LANSDALE TUBE COMPANY DIVISION

LANSDALE, PENNSYLVANIA

HOW TO SELL A GIANT

electronics' market-pattern does it

Now you can build your business *parallel to its potential!*

Your yardstick for measuring potential . . . territory by territory . . . is the penetration of **electronics.**

The pattern of **electronics** circulation shows you where business exists . . . tells you how each territory compares with all the others . . . enables you to spot your salesmen and set their quotas.

Also . . .

We have proved that the number of copies of **electronics** going into any one company is proportional to the use of electronics by the company itself.

Send for **electronics'** market-pattern maps . . . check your distribution against your potential.

electronics

. . . of course!

A McGRAW-HILL PUBLICATION • 330 West 42nd Street • New York 36, N.Y.

for
HEARING AIDS

302 STAINLESS CASE
TRANSFORMER 4750
MAGNETIC MICROPHONE COMPONENTS - 4750
MAGNETIC AIR RECEIVER COMPONENTS - 4750
MAGNETIC BONE RECEIVER COMPONENTS - 4750

or
RECORDING HEADS

or *ANY* MAGNETIC MATERIALS JOB . . .

Write for your Copy
"MAGNETIC MATERIALS"

This 32-page book contains valuable data on all Allegheny Ludlum magnetic materials, silicon steels and special electrical alloys. Illustrated in full color, includes essential information on properties, characteristics, applications, etc. Your copy gladly sent free.
ADDRESS DEPT. E-80

You can *rely* on core materials like the Allegheny 4750 components illustrated above, in your receivers, recording heads or microphone assemblies.

In fact, whether your equipment is small or large, the extra-broad line of A-L magnetic materials will solve your magnetic core problems. It includes all grades of silicon steel sheets or coil strip, as well as Allegheny Silectron (grain-oriented silicon steel), and a wide selection of high-permeability alloys such as 4750, Mumetal, Permendur, etc.

Our service on these materials also includes complete facilities for the fabrication and heat treatment of laminations. (For users of electrical sheets and strip, our lamination know-how is a real bonus value!) Either way, we'll welcome the chance to serve you. *Allegheny Ludlum Steel Corporation, Oliver Building, Pittsburgh 22, Pa.*

STEELMAKERS to the Electrical Industry

Allegheny Ludlum

AL STEELS FOR THE ELECTRONIC AGE

Missile and aircraft speeds approaching the thermal barrier have triggered a whole new field of precision potentiometer research and development at Fairchild. High temperature lubricants, insulations, solders, rhodium-plated parts, special all-welded construction techniques —all these have been designed, tested and incorporated into a complete line of high temperature units to give you precision potentiometers that will function accurately and reliably under "hot-speed" conditions.

HIGH-TEMPERATURE POTENTIOMETERS

for barrier-breaking speeds

Fairchild announces the first *complete* line of high temperature precision potentiometers — tested and proven for reliability of performance under rigid requirements laid down for all Fairchild products. Two general categories of potentiometers are available:
FilmPots (Nobl-Ohm metallic film element) and Wirewound units.

FILMPOTS — Operate at 150°C, 175°C and 225°C.

WIREWOUND — To 150°C, single turn and multi-turn types.

A new line of Pressure Transducers which meets all military requirements for humidity, shock, and other environmental conditions, is also available.

Fairchild components research, implemented by critical production techniques and severe testing programs, is continuing to develop units for even higher temperatures and can offer constructive cooperation in guided missile and aircraft control programs. For data sheets, or for assistance on specific problems, write to Fairchild Controls Corporation, Components Division, Dept. 140-72A.

EAST COAST
225 Park Avenue
Hicksville, L. I., N. Y.

WEST COAST
6111 E. Washington Blvd.
Los Angeles, Cal.

Visit us at Booths 1206-1207 at the Wescon Show.

FAIRCHILD
PRECISION POTENTIOMETERS and COMPONENTS

Want more information? Use post card on last page.

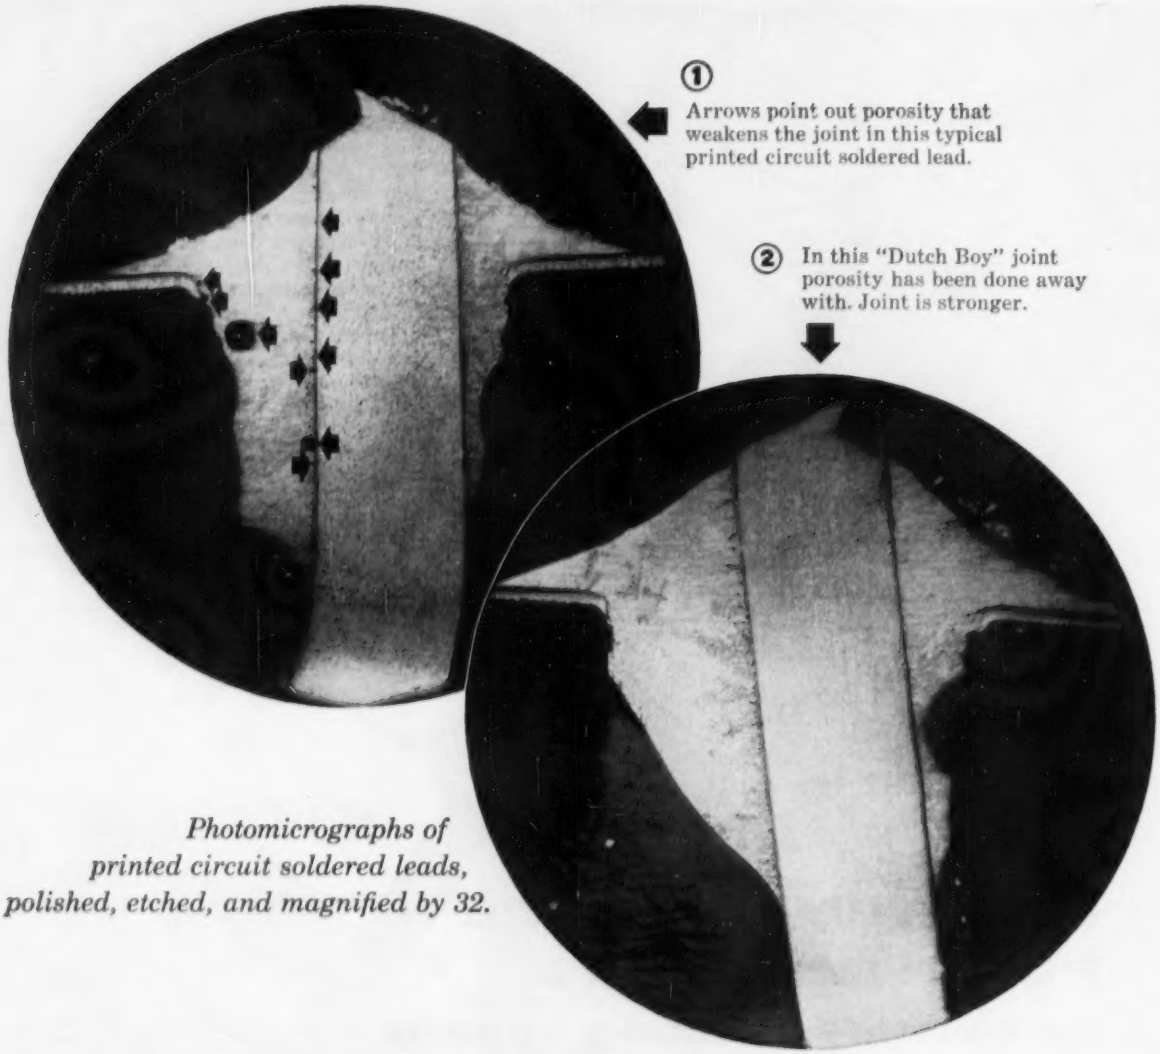

① Arrows point out porosity that weakens the joint in this typical printed circuit soldered lead.

② In this "Dutch Boy" joint porosity has been done away with. Joint is stronger.

Photomicrographs of printed circuit soldered leads, polished, etched, and magnified by 32.

"Dutch Boy" gets inside story on printed circuit soldering

...develops solders and fluxes that give stronger joints, coat more uniformly, show higher conductivity

"Dutch Boy" researchers keep a close eye on printed circuit soldering.

For example, they cross-section soldered leads, polish, and examine the polished sections under the microscope.

Most such joints prove too weak

The photomicrograph above left shows why. Notice this typical joint is honeycombed with porosity. Arrows point to holes.

Now look at the photomicrograph on the right. This joint is strong. Non-porous.

How was joint on the right made stronger?

No great trick. A "Dutch Boy" Solder Specialist simply worked out slight improvements in flux and solder formulae and operating conditions.

Maybe this would help improve *your* printed circuits.

"Dutch Boy" solders develop maximum surface tension. They don't form "tear drops" when coated boards are lifted from the bath...they improve coating uniformity. The residual flux is both non-corrosive and non-conductive, and can be left on the soldered board.

So, if you feel there is room for improvement in your printed circuit soldering, look first to "Dutch Boy". Write, giving details if possible, to National Lead Company, 111 Broadway, New York 6, N. Y.

Dutch Boy®
SOLDER AND FLUXES

too modern?

Built by Count Gianni Caproni, in 1922, this 100 passenger flying boat, with three banks of triplanes and eight engines, was thought by some to be too modern for its time. Today's newest, fastest jet leaps the sonic barrier on abbreviated wings . . . only 7-1/2 feet from fuselage to tip.

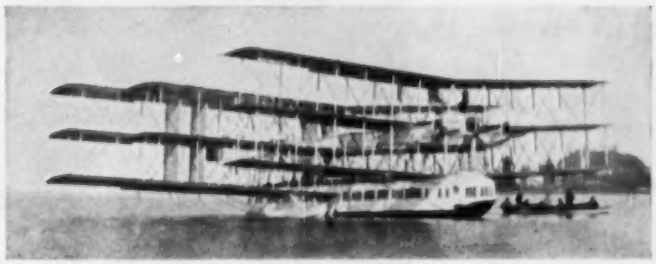

Courtesy "Pegasus"—Fairchild Engine & Airplane Corp.

Simplicity Spells Progress . . .

in the FXR BROADBAND SPECTRUM ANALYZER

. . . with broadband r-f heads and superior specifications

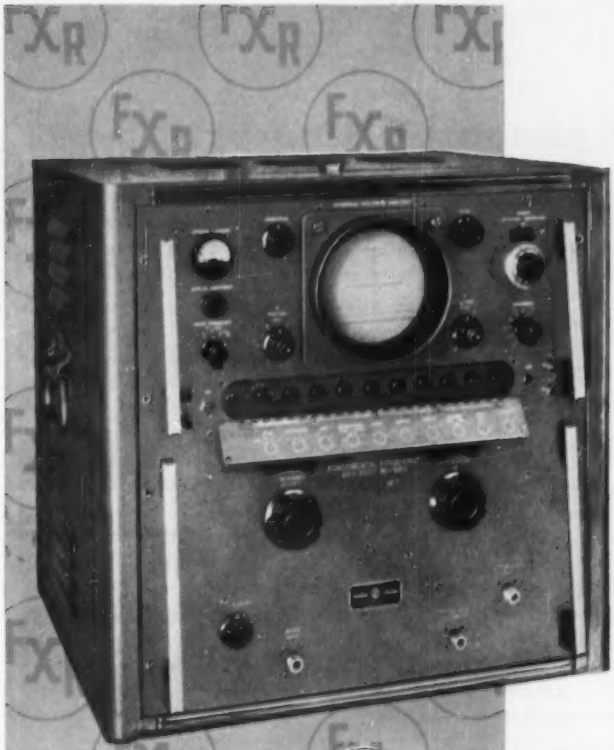

Once complexity was a constant companion to progress. Today, new trends in technology achieve tremendous advances through simplicity of design.

FXR's Spectrum Analyzer too has achieved tremendous advances in every major specification. The r-f heads are broadbrand in design permitting operation with one head in the range from 950 to 16000 Mc. Then too, there is more sweep width and the sweep range is greater, the display is better and all of the controls are more convenient. A versatile microwave receiver, this unit reflects the careful craftsmanship and quality components for which FXR is famous.

SPECIFICATIONS

Frequency Range:	L701A: 950 to 2000 Mc Fund. Freq. S701A: 1900 to 4000 Mc Fund. Freq. Harmonic operation to 16,000 Mc
Accuracy of Frequency:	Direct Reading Dial: ±1%*
Sensitivity:	– 90 dbm at 7 Kc Bandwidth – 80 dbm at 50 Kc Bandwidth Low Dispersion Fund. Freq.
Note: Sensitivity decreases approx. 7 db per harmonic.	
Sweep Width:	50 Mc maximum
Resolution:	7 Kc and 50 Kc (Front Panel Switch)
Input Attenuator:	Direct Reading to 100 db Accuracy: ±1 db over entire range
Sweep Rate:	1 to 35 sweeps per second (2 ranges)
Display Tube:	5ADP7

N410A

*When greater accuracy is required, the FXR Type No. N410A Direct Reading Coaxial Frequency Meter will provide ±0.1% accuracy from 1000 to 4000 Mc.

FXR ELECTRONICS & X-RAY DIVISION F-R MACHINE WORKS, INC. FIRST BY FAR

Electronics & X-Ray Division

F-R MACHINE WORKS, Inc.

26-12 BOROUGH PLACE WOODSIDE 77 N. Y. • ASTORIA 8-2800

Now Available: New 1956-57 Catalogue of the complete line of FXR PRECISION MICROWAVE TEST EQUIPMENT.

At the WESCON, see Van Groos—Booth No. 1138

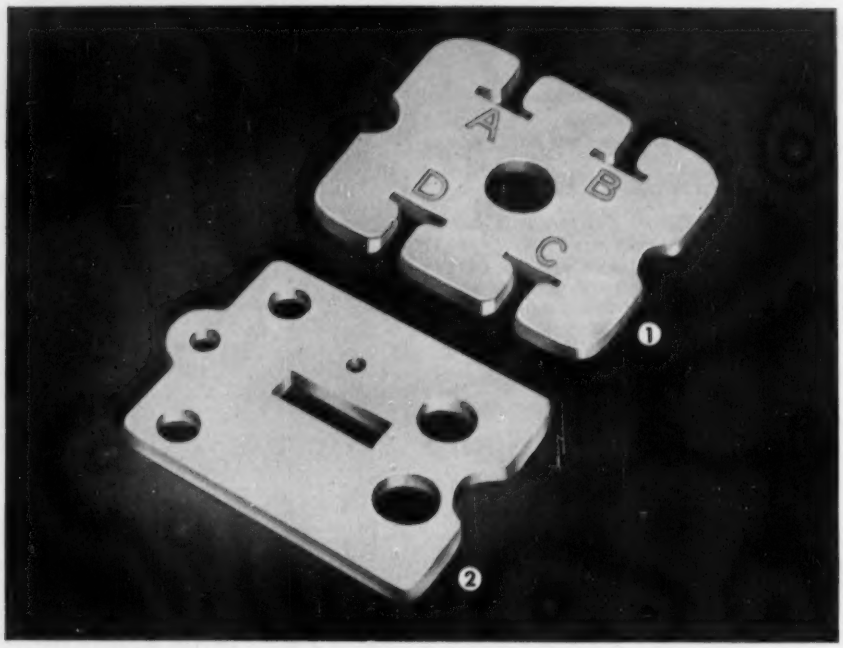

1. Grade XP-240 for warm punching. *2. Grade XXP-241 for hot punching.*

Put these two new Taylor phenol laminates to work

HERE are two major additions to the extensive Taylor line of laminated plastics. There's a good chance that a product you're now designing can be improved through the use of these new materials . . . or that products now in your production line can be more economically made with them. Check the features of these outstanding paper base, phenolic laminates. They may be exactly what you're looking for.

Grade XP-240 is a warm punching grade that requires some heat when punching more complicated shapes, though much less heat than comparable NEMA grades . . . and can be cold punched in thicknesses to 1/16". With this material, there's no lifting around punched holes, and check-in is negligible. It has excellent staking characteristics, and good dielectric strength. XP-240 has much to recommend it for such applications as insulating washers, terminal boards, plug and socket bases, switch bases, panels for sub-assemblies, and terminal strips.

Grade XXP-241 is a hot punching grade with excellent physical and electrical characteristics, plus good moisture-resisting properties. It's dimensionally stable, punches without lifting around holes, and machines with clean-cut edges. XXP-241 can be used to advantage in such applications as condenser stator brackets, wave switch rotors and stators, plug and socket bases, terminal boards and sub panels, insulating washers. Both laminates are available in sheets approximately 49" x 49".

If you're interested in fitting these tough, versatile materials into your plans, Taylor engineers will help you work out design and production details. Call or write for the facts.

TAYLOR FIBRE CO. • Plants in Norristown, Pa. and La Verne, Calif.

Taylor Fabricating Facilities

Your production can be simplified . . . schedules safeguarded . . . inventory headaches cured . . . and over-all costs reduced by having Taylor fabricate finished parts to your specifications. Efficient, modern facilities are ready to serve you. Get in touch with Taylor about your specific requirements.

TAYLOR
Laminated Plastics
Vulcanized Fibre

remote control circuits packaged to your specifications with

OAK rotary solenoids*

application-engineered and produced to meet your requirements

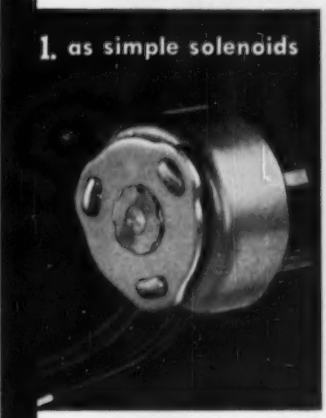

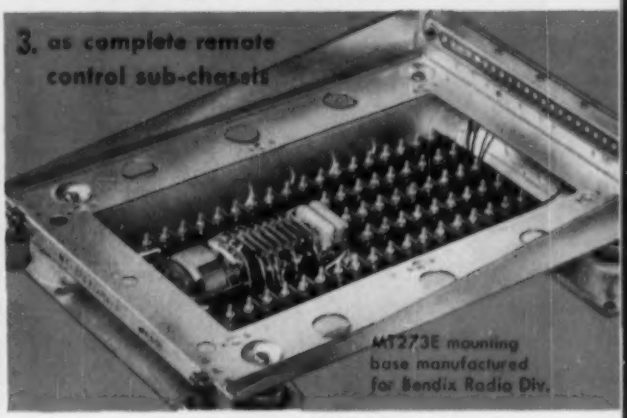

rugged, compact units that meet the most stringent MIL specs

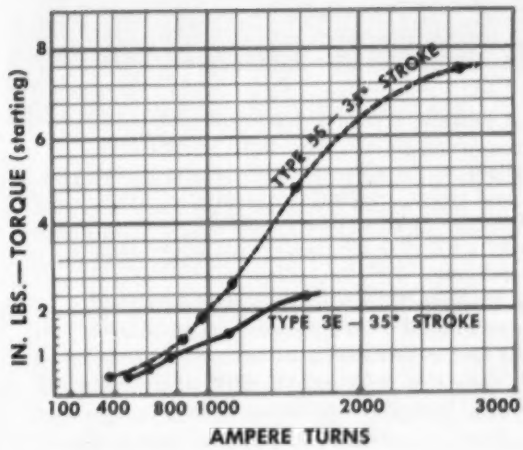

send for descriptive brochure with layout sheets

* Solenoids manufactured under license of G. H. Leland, Inc.

instant, positive HIGH TORQUE OUTPUT from LOW POWER INPUT

Oak rotary solenoids give you exceptionally high torque . . . instantly on application of power. Whether your installation requires a simple solenoid, rotary selectors with switch sections, or a complete remote control sub-chassis unit, OAK will completely engineer and manufacture to meet your individual requirements.

address dept. "O"

OAK MFG. CO.

1260 clybourn ave. • chicago 10, ill.

Four modern plants manufacturing switches, vibrators, tuners, choppers and rotary solenoids.

"SCOTCH" 28 prevents solvent action in Fairbanks-Morse coils

White acetate-cloth tape has true thermosetting adhesive

Insulating tape *must* hold on top-quality resin-encapsulated coils such as those turned out by Fairbanks-Morse. *True thermosetting* adhesive tapes are unaffected by solvent action of synthetic casting resins, especially those containing monomeric components. Result: A completely cured coil with no soft or wet spots. That's why "SCOTCH" Brand Thermosetting Tape No. 28 anchors primary leads and holds terminal posts on the secondary in Fairbanks-Morse coils.

"SCOTCH" Brand Thermosetting Tapes have a pressure-sensitive adhesive that sticks at a touch. After the curing process, these tapes become highly resistant to the solvent action of waxes, varnishes and resins, preventing softening or throw-out. Adhesive holding power actually *increases*, positively anchoring all components under high-heat conditions.

Next time you have a heat or solvent-resistant job for tape, think of the pressure-sensitive tapes with the *true thermosetting* adhesive — "SCOTCH" Brand! For more information, write 3M, Dept. CA-86, St. Paul 6, Minnesota.

Reg. U. S. Pat. Off.

SCOTCH BRAND Thermosetting Tapes

PRODUCT OF 3M RESEARCH

The term "SCOTCH" and the plaid design is a registered trademark of Minnesota Mining and Manufacturing Company, St. Paul 6, Minn. Export Sales Office: 99 Park Ave., New York 16, N. Y. In Canada: P.O. Box 757, London, Ontario.

3M COMPANY

TRANSFORMERS BY AIRPAX

Airpax manufacturers transformers with laboratory precision in production quantities. Engineers who need expertly designed transformers regularly send their specifications to Airpax.

The eight transformers shown here are typical of the hundreds of designs that Airpax regularly produces to customer requirements. These particular units meet MIL-T-27A. We will gladly send you copies of the drawings for them, which give complete mechanical and electrical ratings. Other Airpax transformers are going into industrial controls and test equipment.

Airpax superiority is the result of two ingredients: thorough design with attention to every detail, and careful production under close supervision. Transformers containing these ingredients cost little more and take only a trifle longer to design and build but give greatly improved performance, which after all, is what interests you most. Companies that value their reputation for quality equipment buy transformers from Airpax.

When your equipment depends on an especially reliable transformer designed and manufactured to the highest standards, turn to

AIRPAX
DESIGNERS ENGINEERS

MIDDLE RIVER BALTIMORE 20, MD.

Want more information? Use post card on last page.

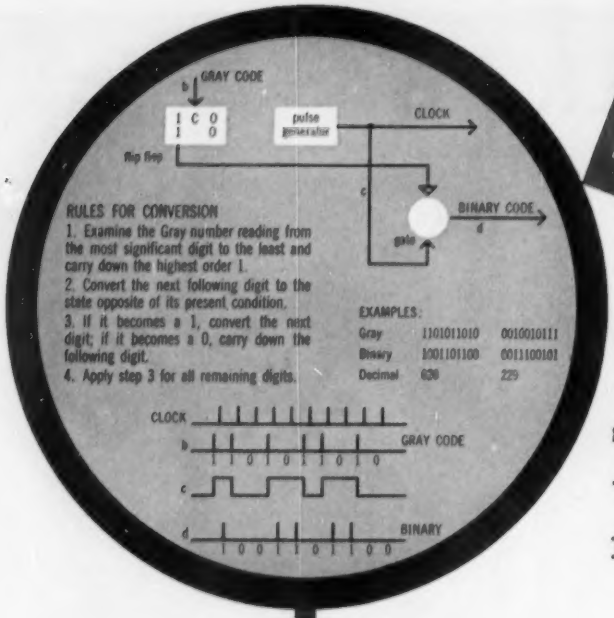
GRAY CODE
b
1 C 0
1 0
pulse generator
CLOCK
flip flop
c
BINARY CODE
d
gate
RULES FOR CONVERSION
1. Examine the Gray number reading from the most significant digit to the least and carry down the highest order 1.
2. Convert the next following digit to the state opposite of its present condition.
3. If it becomes a 1, convert the next digit; if it becomes a 0, carry down the following digit.
4. Apply step 3 for all remaining digits.
EXAMPLES:
Gray 1101011010 0010010111
Binary 1001101100 0011100101
Decimal 620 229
CLOCK
b
GRAY CODE
1 1 0 1 0 1 1 0 1 0
c
d
BINARY
1 0 0 1 1 0 1 1 0 0

solving logical problems with Burroughs pulse control systems

TOOLS FOR ENGINEERS

converting Gray code to binary equivalents

Here is a simple method for converting Gray code to true binary equivalents. It was put into operation in minutes just by interconnecting Burroughs Pulse Control Units in accordance with the engineer's block diagram, without detailed specifications or complicated circuit designs. With pulse control equipment at his disposal, the engineer was able to turn immediately to other important problems awaiting his attention.

The majority of engineers solving logical problems are badly in need of such tools. Most are bogged down by equipment of limited use that must be redesigned and rebuilt for every new project . . . that clutters the path to a working solution instead of clearing and shortening it.

The smallest discrete units with which such a man can work are logical concepts . . . the basic logical operations. The ideal tools for him are these same operations, packaged for convenient and immediate use by simple interconnections—like the blocks in his block diagram. Such tools are Burroughs Pulse Control Units, which bring block diagrams to life in a matter of hours rather than weeks. Wherever logical problems are being solved with pulses they have earned the title "Tools For Engineers" by eliminating intermediate steps to a proof, obsoleting the frustrations and complexities of breadboarding.

Why not lift the burden of proof from your shoulders by passing pulse problems on to us? We'll gladly show you how Burroughs Pulse Control Units can bring your logical problems closer to a neat working solution . . . at no cost. Or, write for Bulletin 236.

Burroughs

BURROUGHS CORP. • ELECTRONIC INSTRUMENTS DIV.
Department C • 1209 Vine Street • Philadelphia 7, Penna.

TUNING FORK RESONATORS • THE ULTIMATE IN PRECISION AUDIO FREQUENCY CONTROL

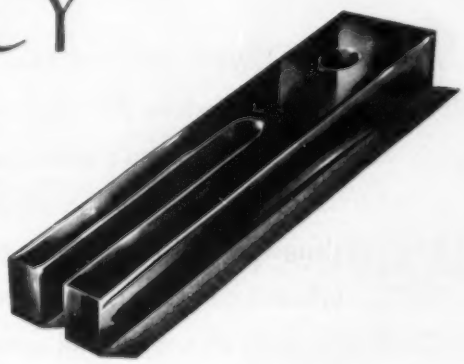

PHONE OR WRITE *for complete information regarding component type Tuning Fork Resonators, or variously packaged Tuning Fork Frequency Standards.*

PHILAMON LABORATORIES INC.
90 Hopper Street, Westbury, Long Island, N. Y. **ED***gewood* **3-1700**

ONLY *Glass* CAN DO THIS JOB SO WELL...



Type ML-2G
New all-glass miniature
Shown Actual Size

Type ML-300
Developed by Midland
for color television
Shown Actual Size

Type ML-1G
New all-glass
sub-miniature
Shown Actual Size

Only glass makes it possible to get and keep such high vacuum in a crystal holder.

Only glass gives complete and permanent protection against atmospheric enemies of crystal efficiency and service life.

only *Midland* provides you

ALL-GLASS CRYSTALS FOR ALL APPLICATIONS

Now you can have a new high level of crystal performance that just wasn't possible before. All-glass holders for crystals are another "first" resulting from Midland's advanced research. It is another step in our continuous effort to overcome whatever problems stand in the way of longer crystal life or more precise, constant and unfailing performance . . . in short, **better** frequency control units!

Check with us on all your crystal needs — and any special requirements.

Midland

Manufacturing Company, Inc.

3155 Fiberglas Road Kansas City 15, Kansas

WORLD'S LARGEST MANUFACTURER OF QUARTZ CRYSTALS

. . . every one produced to the industry's highest standards.

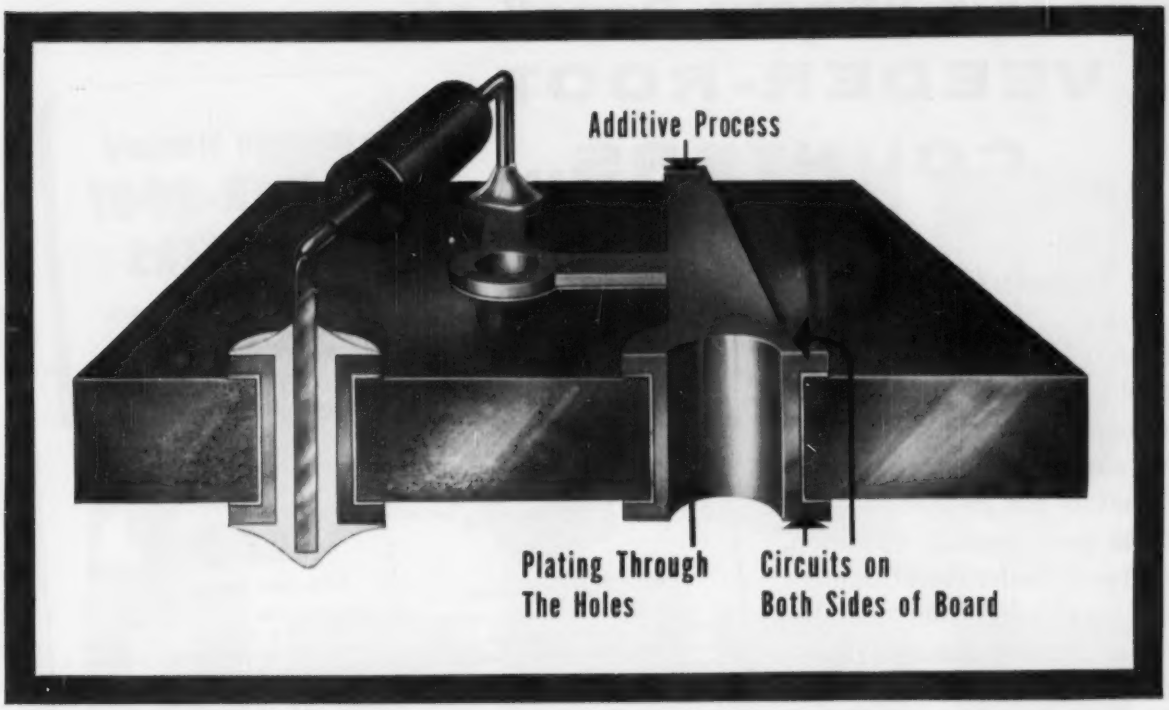

Order General Electric "Thru-Con" Boards for positive connections through the holes—see them at Booth 1213 at the Wescon Show, August 21-24

"Thru-Con" insures accurate solder filleting top and bottom for extreme strength and easier assembly.

Original Design Features. Original General Electric additive-method production techniques provide continuous copper plating through the holes. Positive connections do away with separate staking pins, assure perfect circuits. Costly rejects due to difficult soldering problems are eliminated. If desired, G-E "Thru-Con" boards may provide patterns on both sides, further reducing size and weight.

"Thru-Con" Boards Serving Many Industries. Important economies afforded by dependable G-E "Thru-Con" boards are helping manufacturers cut costs and improve profit pictures. Producers of lamps, radios, fans, street lighting and traffic control units, television receivers, appliances, and control equipment are using "Thru-Con" now.

Full Production Facilities. The G-E "Thru-Con" plant is devoted to full-time production of printed circuit boards. New, specially-designed equipment is capable of producing thousands of boards each day. The combination of custom wiring patterns, sizes, and shapes is virtually limitless.

Investigate G-E "Thru-Con" Boards, Today. It will pay you to look into the savings "Thru-Con" boards make possible in manufacturing techniques. For a full discussion of your printed circuit program, and a sample "Thru-Con" board, call or write: *General Electric Co., Specialty Electronic Components Dept., Section 486, Auburn, New York.*



G-E "Thru-Con" Printed Circuit Boards offer *positive connection through the holes*, without staking pins, patterns on both sides if needed. Printed circuitry cuts assembly time; eliminates product bulk, weight; reduces inspection time, parts inventory.



Positive Proof. This new transistorized portable radio features a full printed circuit using a G-E "Thru-Con" Board. Combining other advances in electronics with a "Thru-Con" circuit makes possible sweeping changes in size, weight, and styling.

ADVANCED COMPONENTS FOR THE ELECTRONICS INDUSTRY

★ **Printed Circuit Boards** ★ **Ferrites** ★ **Distributed Constant Delay Line** ★ **Ceramics**

Progress Is Our Most Important Product

GENERAL ELECTRIC

Want more information? Use post card on last page.

See this "Show-Case" of VEEDER-ROOT COUNTERS...

at your Industrial Supply Distributor

Useful "facts-in-figures" on practically every machine, operation, system or process in industry can be supplied by Veeder-Root Counters for mechanical, electrical and manual operation. And now Veeder-Root Counters can be supplied from stock by certain leading Industrial Supply Distributors. Find out from your own distributor how they can add to the efficiency and *Count*rol of your plant operation. And if you are selling or designing equipment, contact Veeder-Root for engineering recommendations.

Insist on Standard VEEDER-ROOT COUNTERS

from your Industrial Supply Distributor or write us on special problems



SMALL RESET COUNTER

A compact, rugged reset counter for moderate duty in parts inspection, quality control, conveyors, machine tools, light presses, etc.

Dimensions: 1¾" long, 1 15/64" high, 1 7/16" wide

Speed: Up to 1000 counts per minute.



BOX-TYPE RESET COUNTER

For punch press installations, conveyors, metal-working equipment, die casting, plastic-molding, rivet, spring and wire machining, or any installation requiring a heavy duty counter.

Dimensions: 4¼" long, 2 1/32" high, 3⅜" wide.

Speed: 500 counts per minute.

RESET MAGNETIC COUNTER

For remote indication of machine operation from plant to office.

Dimensions: 3 1/16" long, 2½" high, 1⅜" wide.

Speed: Up to 1000 counts per minute.

Coils: 110V-AC are standard. Other voltages are available. Panel mounting feature also available.

HAND TALLY

For quick spot-checks of production or performance.

Dimensions: 1 7/64" long (to end of reset knob), 1¾" deep, 2" high.

Counts one for each depression of the thumb lever, and resets to zero by a turn of the knob.



CLUTCH SPEED COUNTER

For checking to make sure that the machine is operating at the required R.P.M.

Dimensions: 3¼" long, ⅞" max. diameter. Non-Reset.

Internal clutch operates counter only when rubber tip is pressed against the shaft.

Everyone Can Count on

VEEDER-ROOT

"The Name that Counts"

HARTFORD 2, CONN.

Stocked at Hartford 2, Conn. • New York 19, N. Y.
Greenville, S. C. • Chicago 6, Ill. • Montreal 2, Canada
Offices and Agents in Principal Cities

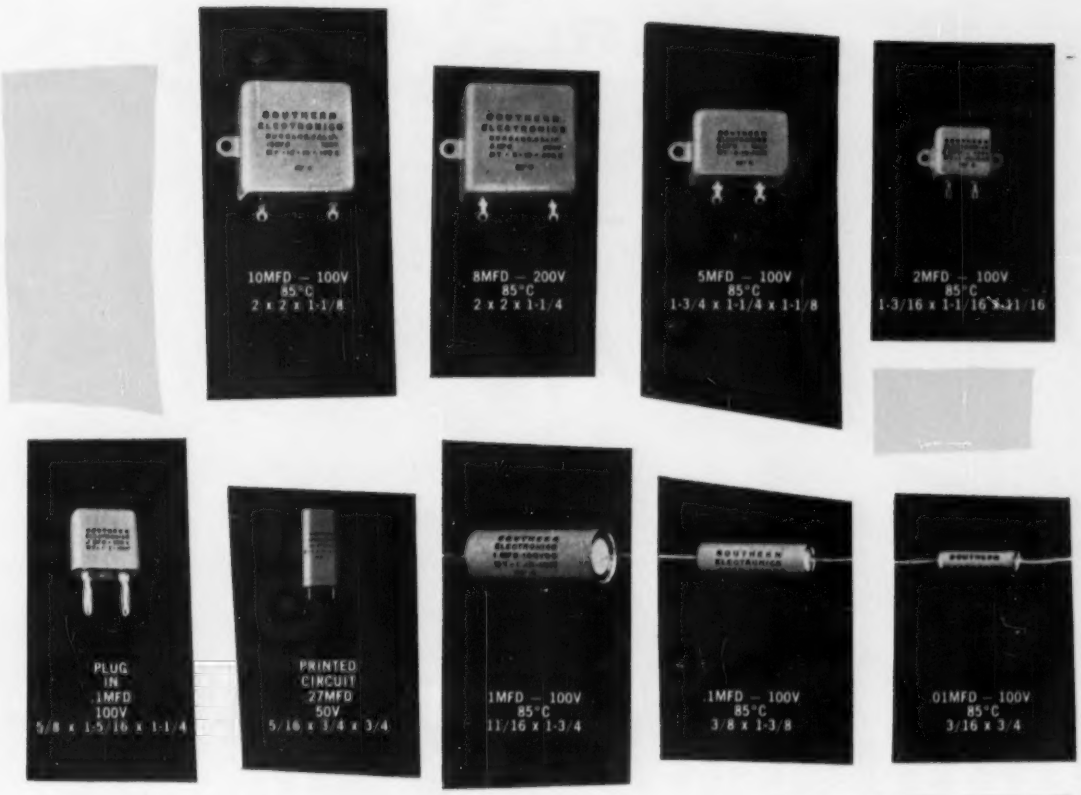

At last! Mycon Plastic Capacitors up to 150° C!

- *Reliability proved*
- *Rated for infinite long life*
- *Insulation resistance 1 x 10^{11} OHMS*

Derated at 125°C as follows:
100 volts — 50%
200 volts — 50%
300 volts — 33⅓%
400 volts — 33⅓%
500 volts — 20%
600 volts — 16%

Tested and proved! Only Southern Electronics Corporation has developed a test procedure which insures built-in reliability! For your most exacting requirements—be sure—always specify S.E.C.

SUPER MYCON CAPACITORS

Tolerance to 1%—lowest temperature coefficient. Superior insulation resistance at high ambient temp. Good stability compatible with material.

POLYCON SEC MYCON

Wire, write or phone for complete catalog today!

SOUTHERN ELECTRONICS *Corporation*

239 West Orange Grove Ave., Burbank, California

PIONEERS IN CUSTOM CAPACITOR ENGINEERING

See us at Booth 1208 at the Wescon Show, Aug. 21-24

Want more information? Use post card on last page.

if your professional interest is in **missile development,**
you belong at Martin-Denver

For when you combine the challenging problems in our project of conquering outer space with the advantages of living in the colorful Rocky Mountain area... you will have the ultimate in realizing your professional aspirations.

The Martin Company invites you to TAKE ANOTHER LOOK at the real engineering opportunities in Denver, Colorado and *write to Emmett E. Hearn, Empl. Director, P. O. Box 179, Dept. H-6, Denver 1, Colorado*

MARTIN
DENVER DIVISION

Precision Instruments...

backed by the

RCA reputation

for engineering

excellence

VHF Signal Generator Type LG-22
(5 mc to 230 mc)

$395.00*

VHF Signal Generator

Now . . . For The First Time . . . Precision Features in a Low Priced VHF Signal Generator . . . Ideal For Production Use!

This attractively priced RCA Signal Generator has laboratory precision features that make it highly desirable for production use. Excellent frequency accuracy and stability. Individually calibrated. Negligible RF leakage. Wave-guide below cut-off type attenuator normally found in more expensive instruments.

Valuable in designing and evaluating receivers, amplifiers, and other apparatus that operate at frequencies between 5 and 230 mc. Particularly useful in measuring sensitivity and gain and for driving impedance bridges. Other signal generators available to meet your equipment and price requirements.

RCA Instruments of Laboratory Precision

PULSE GENERATOR ★ RF POWER METERS ★ NULL VOLTMETERS ★ IMPEDANCE BRIDGES ★ SIGNAL GENERATORS ★ VACUUM TUBE VOLTMETER ★ MULTIMETER ★ CRYSTAL MODULATOR AND OTHERS.

**Price in U.S.A., subject to change without notice.*

USE COUPON BELOW FOR COMPLETE INFORMATION

RADIO CORPORATION of AMERICA

CAMDEN, N.J.

***In Canada:* RCA VICTOR Company Limited, Montreal**

Visit RCA at WESCON, Booth No. 745

Radio Corporation of America
Precision Electronic Instruments
Dept. H-46, Building 15-1, Camden, N. J.

☐ Please send me complete information on the following instruments:

_____

_____

_____

☐ Send name of nearest representative

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

LEACH MAGNIVOLT

regulated D-C power supplies

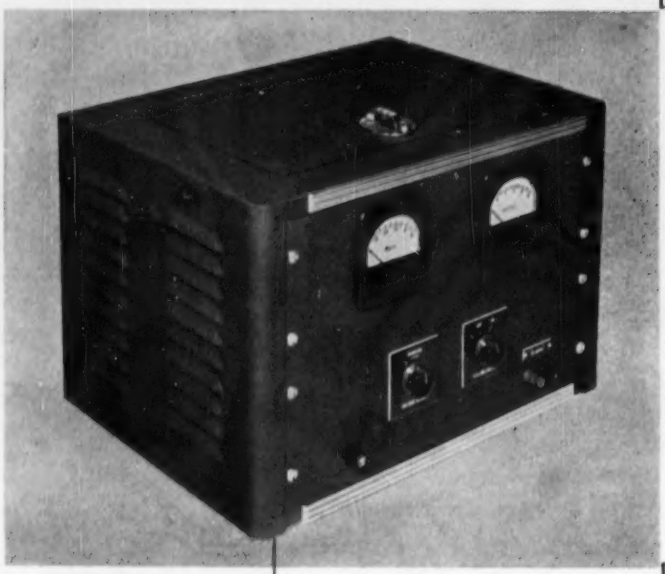

Here's a closely regulated D-C Power Supply accurate enough for the most exacting laboratory use, yet sufficiently rugged to use out in the plant for production testing and quality-control work. Back of this unusual combination is the Leach MAGNIVOLT's construction . . . it uses only static components, contains no vacuum tubes or other fragile parts. Heart of the unit is a design based on magnetic amplifiers and selenium rectifiers, assurance of stability today and long, maintenance-free dependability for years to come.

Use the MAGNIVOLT, either portable or easily rack mounted, as a dependable D-C voltage source in such demanding applications as these...

strain-gage excitation
d-c amplifier filament supply
computer filament supply
incoming parts inspection
production-line testing
calibration reference
standard light-source power
radio and radar research

PERFORMANCE SPECIFICATIONS

A-C Input.....120 volts, 60-cycle, single phase

D-C Output.....3-32 volts (continuously adjustable) at 0 to full-rated amperage

Ratings Available.....5 to 30 amperes (max.)

Voltage Regulation...±½% from 24 to 32 volts for load change of no-load to full-load and for suppy-voltage change from 105 to 125 volts

Ripple.....less than 1% r.m.s.

Recovery Time...less than 0.2 seconds to reach 1% of regulated voltage (no-load to full-load or full-load to no-load)

MAGNIVOLT models are available for immediate delivery

LEACH CORPORATION / INET-PALMER DIVISION

4441 SOUTH SANTA FE AVENUE • LOS ANGELES 58, CALIFORNIA

DISTRICT OFFICES AND REPRESENTATIVES IN PRINCIPAL CITIES OF U. S. AND CANADA

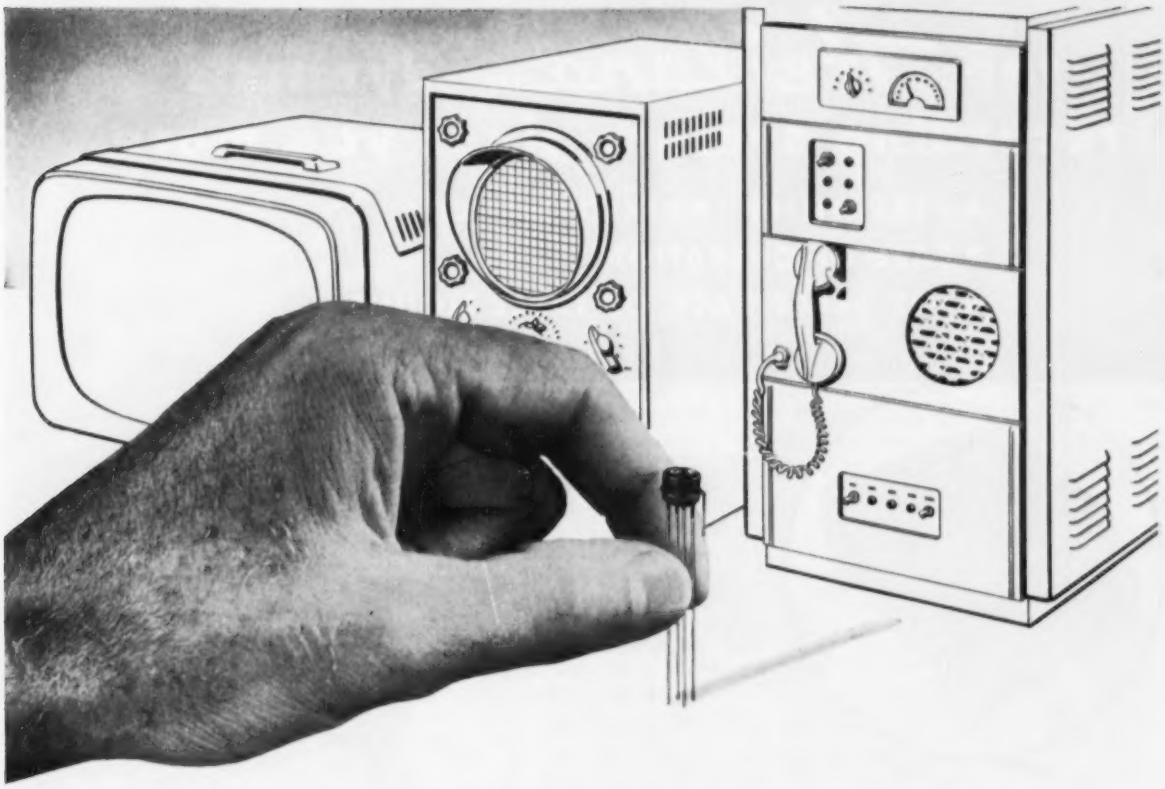

New General Electric Tetrode Transistor Amplifies at 120 mc

The new General Electric Germanium NPN Tetrode has been designed for amplification, switching, controlled oscillation, AGC, and other higher frequency operations

Meltback process, new package design. Higher frequency operation is made possible by recent G-E developments of the meltback process. Exceptional results obtained from devices produced through this process have led to the design of this new transistor. A new standard package design provides easy adaptation to printed circuit applications, an extra lead for grounding when used at higher frequencies, good heat dissipation, and a more convenient smaller size.

In Television Circuits: This transistor used in a six-stage TV IF amplifier operates at a center frequency of 45 mc. Maximum bandwidth in each tank circuit can be obtained with a variable inductance which resonates with the transistor and circuit capacitance. This tetrode amplifier delivers up to 57 db gain with a 4 mc bandwidth. A video amplifier of two stages, each containing a tetrode—produces a power gain of 33 db ±.4 db from 30 cps to 10 mc which is equivalent to vacuum tube performance.

In Radar Circuits: The new tetrode has been used in a standard radar IF amplifier. Operation showed a 70 db power gain at 30 mc with a 3 mc bandwidth.

In Oscillator Circuits: An oscillator operating at 110 mc produced a 10 mw output power.

In Pulse Circuits: A typical circuit with a pulse repetition rate of 1 mc has a peak pulse power gain of 10 db. The output pulse has a rise and fall time of 0.025 microseconds and a pulse width of 0.07 microseconds.

Four Typical Tetrode Specifications Are:

Collector Voltage	—	7 volts
Power Gain	—	10 dh min. at 120 megacycles
Bandwidth	—	2 megacycles
Power Dissipation	—	50 milliwatts at room temperature

Ask your General Electric Semiconductor Specialist for the full details and technical specifications. Or, write today to: *General Electric Company, Section* ***X486,*** *Semiconductor Products Department, Electronics Park, Syracuse, N. Y.*

Progress Is Our Most Important Product

GENERAL ELECTRIC

the Heiland dynamic recording system gives you more...

- VERSATILITY
- PERFORMANCE
- EASE OF OPERATION
- FOR RELAY RACK OR TABLE MOUNT

The Series 700 oscillographs feature 8" paper width with 1-36 channels, or 12" paper width with 1-60 channels. Available for 28 v.d.c. or 115 v.a.c. operation, the 700 Series has paper speeds adjustable from .030 to 144"/sec., and writing speeds in excess of 20,000"/sec. Separate supply and take-up drums are light-weight—and light tight for easy daylight loading.

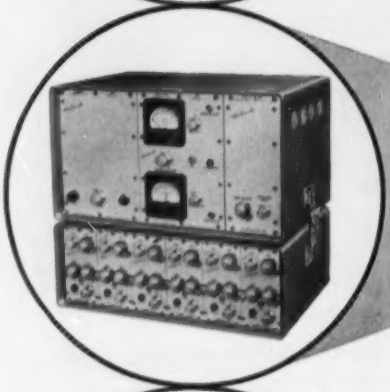

The Heiland 119 Amplifier System offers up to 6 channels, in any combination, of either linear-integrate amplifiers or carrier amplifiers. Carrier amplifier channels provide linear frequency response from 0 to 1000 CPS, for resistive, linear differential transformer, or variable reluctance type transducer inputs. Linear-integrate amplifier channels provide linear frequency response from 5 to 3000 CPS for self-generating transducers. Provides high-amplitude recording up to 8" peak to peak deflection.

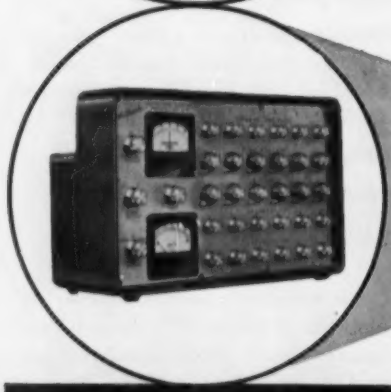

The Heiland 82-6 Bridge Balance and Strain Indicator Unit provides a simple and accurate means of balancing, calibrating and measuring static and dynamic phenomena from resistive-type transducers where you don't need amplification. When used as a strain-indicating device without an oscillograph, an input of 25 microamperes produces full scale on the indicating meter.

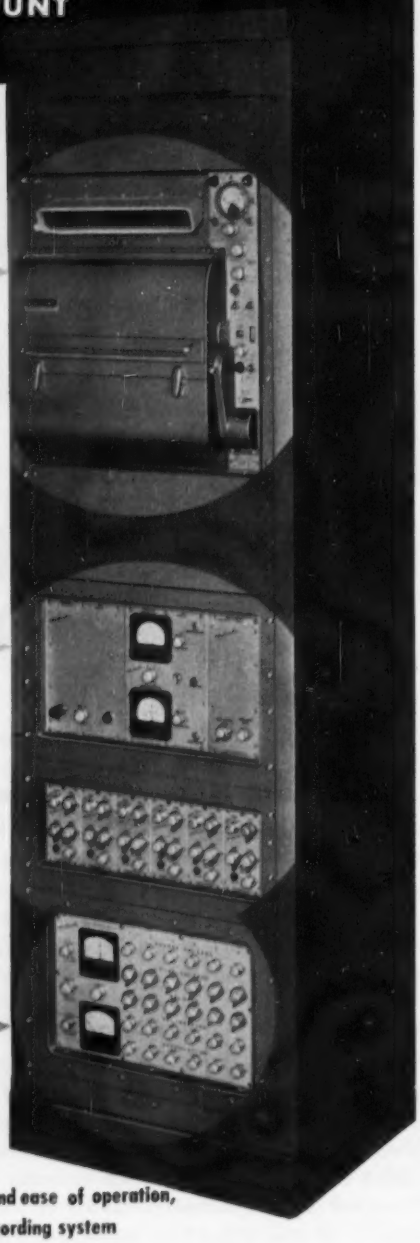

For versatility, performance, and ease of operation, choose the Heiland dynamic recording system

For details and specifications, write for Bulletin 701-RK

MINNEAPOLIS **Honeywell**

Heiland INSTRUMENTS

HEILAND DIVISION OF MINNEAPOLIS HONEYWELL
5200 E. EVANS AVE., DENVER 22, COLO.



MAGNETIC AMPLIFIERS

Custom computer amplifiers with high stability and linearity can be designed having single or multiple inputs to your specific needs. Servo drives and relay actuators are also available. Frequency selective networks can be integrally designed to provide additional useful control functions. Proven packaging techniques insure minimum size—proven toroidal construction assures highest performance.

Typical Temperatures	−60°C. to +150°C.
Typical Line Frequencies	60cps to 6000cps



MISSILE POWER TRANSFORMERS

Recommended for supply frequencies above 400 cps and where size performance and reliability are factors. Thin nickel alloy toroidal cores reduce core losses. Toroid structure cures stray field problems.

SEALED MISSILE POWER SUPPLIES combining toroidal power transformers, toroidal filter chokes, hi temp capacitors and silicon rectifiers. These units offer multiple outputs and low ripple. Low stray field of toroidal elements obviate usual internal shielding. Mag regulation where required.

MAGNETIC AMPLIFIERS & TRANSFORMERS

C-A-C®

Our modern production and research facilities assure you of the most advanced solutions to your problems.

COMMUNICATION ACCESSORIES CO.

World's Largest Exclusive Producer of Toroidal Windings

HICKMAN MILLS, MISSOURI • PHONE KANSAS CITY, SOUTH 1-5521

A Subsidiary of Collins Radio Company



LAMINATED TRANSFORMERS AND INDUCTORS

A complete line of laminated constructed units are now available through CAC. Our highly qualified engineering staff, a well complimented laboratory, humidity controlled production facility with modern manufacturing equipment guarantees conformance with any specifications. Both power and audio transformers employing advanced techniques can be supplied either hermetically sealed or encapsulated to 150° C. ambients. Catalogues, supplied upon request, cover a wide range of standardized designs including omnirange and ILS Filters.



PRECISION RATIO COMPUTER TRANSFORMERS

Toroidal form of construction is ideal for designing precision ratio transformers since the turns of wire are applied to and adjusted *on* the core. Normal production procedure of zero turn accuracy, high permeability cores, low phase shift, and near unity coupling will yield laboratory quality on any production run. Advanced design and newest packaging methods provide optimum performance with minimum size and rugged construction.

Catalogs on Individual Components are Available on Request.

New Grant 3400 *thinslide*

mounts standard 17" chassis in standard 18" rack or cabinets

REQUIRES ONLY 19/64" SPACE PER SIDE—

YET HAS

FULL ROLLER ACTION

(fits RETMA *rack hole spacing)*

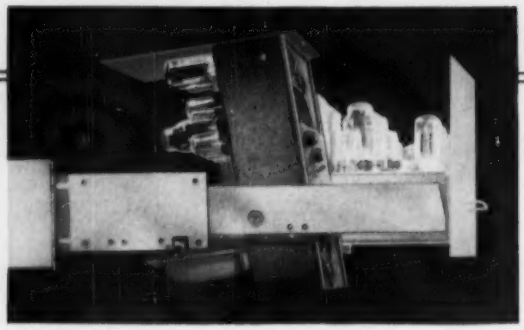

The Grant 3400 Thinslide requires only 19/64" space per side—installs readily in standard racks and cabinets. Allows instant access to chassis measuring from 10" to 16" deep. Tilts through 100° for under-chassis servicing. Positive lock in "out" position. Lock has finger-tip release for instant return or removal of chassis. Eight hardened steel rollers carry the rated load of 100 lbs. smoothly and easily—durability insures frictionless rolling for thousands of cycles of use.

Slide mounting not only provides for quick access—it usually eliminates need for rear access doors and rear aisles—a very important saving of space.

The Grant 3400 is a versatile slide, suited for use in your *product*, in *plant equipment, prototype* and *breadboard* work, and in *production line or field test equipment.* Very moderate cost allows a wide range of applications in original equipment.

Write today for Grant 3400 Thinslide Technical Bulletin—contains full data and specifications.

Grant INDUSTRIAL SLIDES

Grant Pulley and Hardware Corporation

factories: **31-73 Whitestone Parkway, Flushing 54, N. Y.**
944 Long Beach Avenue, Los Angeles 21, Calif.

ONLY available source in all welded construction

STUD MOUNT
PIGTAIL

NOW! IN PRODUCTION QUANTITIES



ACTUAL SIZE

AUTOMATIC SILICON POWER RECTIFIERS

At 150° C quality Automatic Silicon Power Rectifiers really perform, featuring negligible reverse leakage current and sharp zener breakdown, plus the exclusive ALL WELDED CONSTRUCTION on *both* stud-mount and pigtail lead types. These field-proven units *are available in quantity.*

Automatic Silicon Power Rectifiers are *your best buy* for switching circuits, blocking circuits, magnetic amplifiers, power supplies, and dozens of other applications.

Write or wire today for complete technical data. Automatic can supply types 1N253, 1N254, 1N255, 1N256 in conformance with JAN specifications.

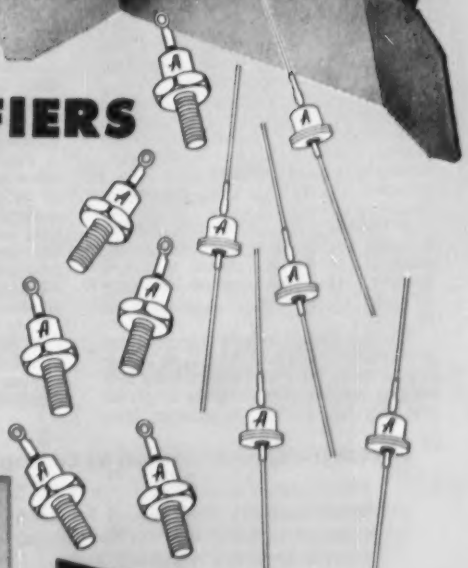

TYPICAL DATA FOR 25°C AMBIENTS

Type No.	P. I. V. (volts)	Average DC Output Current (MA)	Reverse Leakage At Rated P. I. V. (μA)	Mounting
1N440	100	300	0.03	Pigtail Leads
1N441	200	300	0.075	"
1N442	300	300	0.10	"
1N443	400	300	0.15	"
1N444	500	300	0.18	"
1N445	600	300	0.20	"
1N530	100	300	0.30	"
1N531	200	300	0.75	"
1N532	300	300	1.00	"
1N533	400	300	1.50	"
1N534	500	300	1.80	"
1N535	600	300	2.00	Pigtail Leads
1N560	800	300	1.50	"
1N561	1,000	300	2.00	"
1N550	100	500	.05	Stud-Mount
1N551	200	500	.10	"
1N552	300	500	.15	"
1N553	400	500	.20	"
1N554	500	500	.25	"
1N555	600	500	.30	"
1N562	800	500	1.50	"
1N563	1,000	500	2.00	"

AUTOMATIC MANUFACTURING

DIVISION OF GENERAL INSTRUMENT CORPORATION
65 GOUVERNEUR STREET NEWARK 4, NEW JERSEY

MASS PRODUCERS OF ELECTRONIC COMPONENTS

GI

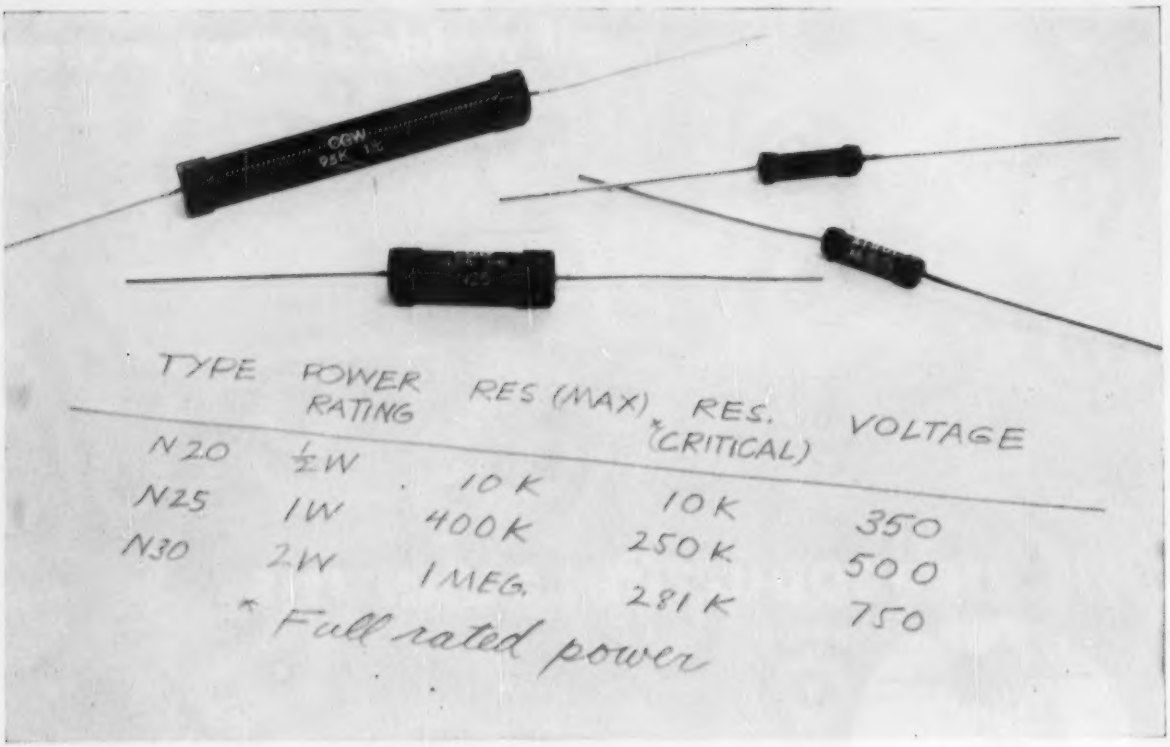

New film multiplies Corning Type N resistance range 10 times on N 25 - N 30 types . . . closer tolerance TC now available

Now you can use rugged, stable Corning Accurate Grade Resistors of high resistivity in your critical circuits.

Corning scientists have developed a new 600 ohms per square resistive film. This new film, which is integrally bonded to the glass core, increases the resistance values for each Type N size as noted above. This table shows you the new ratings.

With this development, you also get a much improved temperature coefficient. It can be guaranteed to ±300 ppm/° C. over the temperature range of −55° C. to ±105° C. referenced to 25° C.

You get these noninductive resistors in standard tolerances of 1%, or closer if you wish. They are stable, have low voltage coefficients and noise levels so low they are difficult to measure. The film and the core are impervious to moisture. Even rough production handling and thermal shock of soldering will not alter values. Corning Type N Resistors meet or exceed MIL-R-10509A specifications.

You can use them in circuits where other precision resistors are unsuitable or in the place of costly wire-wound resistors. With their stable, noninductive, low-noise characteristics, you can use them in test equipment, high-frequency circuits—wherever you're working with low-signal, high-gain amplifier stages.

Our catalog sheet details complete information. We'll send it to you with samples and very interesting price lists at your request. Write us or circle this publication's reader service number.

Ask for information on these other Corning Resistors:

Low-Power 3-, 4-, 5-, and 7-watt sizes. Highest resistance range of any low-power resistor.

Type S—Stable performance to 200° C. Meet MIL-R-11804A specs. Values to 100,000 ohms.

Type R—High-power 2% or 5% resistors, 7 to 115 watts. Range from 10 to 1,000,000 ohms. Noninductive.

Type H—High frequency—Standard ranges from 10 to 1,000,000 ohms and ratings from 7-140 watts.

Type HP—High-power resistors. 17, 30, 70, and 150 watts DC. Tolerances of 2% or 5%. Range from 30 to ½ Megohm.

Type WC-5—5 KW water-cooled. Range —35 to 300 ohms. Versatile, adaptable.

Other electronic products by Corning Components Department:

Fixed Glass Capacitors*, Transmitting Capacitors, Canned High-Capacitance Capacitors, Subminiature Tab-Lead Capacitors, Special Combination Capacitors, Direct-Traverse and Midget-Rotary Capacitors*, Metallized Glass Inductances, Attenuator Plates.

**Distributed by Erie Resistor Corporation*

CORNING GLASS WORKS, 94-8 Crystal Street, **CORNING, N. Y.**

Components Department, Electrical Products Division

Corning means research in Glass

MICROWAVE
SIGNAL GENERATORS AND SIGNAL SOURCES

EHF

for extremely high frequencies 12,400 to 50,000 mc

Rugged, compact, completely integrated units. Designed to save engineering manhours in the laboratory and on the production line. Operate simply with direct-reading continuously variable dials. No calibration charts.

Frequency is measured by direct-reading reaction-type wavemeters that assure extreme accuracy. VSWR is exceptional—Signal Generators 1.7 to 1; Signal Sources 1.7 to 1 when attenuated. Calibration accuracy is given special attention.

Consult Polarad on all your EHF problems.

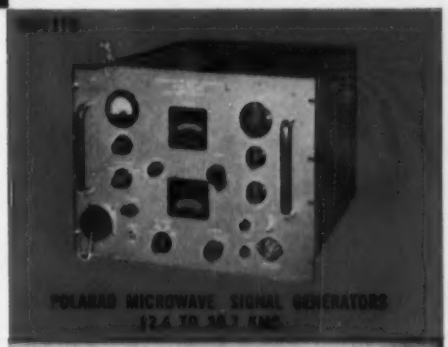

POLARAD MICROWAVE SIGNAL GENERATORS 12.4 TO 50.0 KMC

SS-1218

POLARAD MICROWAVE SIGNAL SOURCES 12.4 TO 50.0 KMC

Frequency Range	SIGNAL GENERATORS		SIGNAL SOURCES	
	Model Number	Output Power	Model Number	Power Output (Average)
12.4 to 17.5 KMC	SG 1218*	−10 DBM	SS 1218	15 mw
18.0 to 22.0 KMC	SG 1822	−10 DBM	SS 1822	10 mw
22.0 to 25.0 KMC	SG 2225	−10 DBM	SS 2225	10 mw
24.7 to 27.5 KMC	SG 2427	−10 DBM	SS 2427	10 mw
27.27 to 30.0 KMC	SG 2730	−10 DBM	SS 2730	10 mw
29.7 to 33.52 KMC	SG 3033	−10 DBM	SS 3033	10 mw
33.52 to 36.25 KMC	SG 3336	−10 DBM	SS 3336	9 mw
35.1 to 39.7 KMC	SG 3540	−10 DBM	SS 3540	5 mw
37.1 to 42.6 KMC	*External Source Power Measurement Range +10 to +30 DBM Accuracy with Correction: ±2 DB		SS 3742	Approx. 3 mw
41.7 to 50.0 KMC			SS 4150	Approx. 3 mw

Modulation:
1. Internal
   1000 CPS Square Wave
2. External
   a. Pulse
      Pulse Width: 0.5 to 10 Microseconds
      PRF: 50 to 10,000 PPS
      Pulse Amplitude: 10 volts Pk to Pk Min.
      Polarity: Positive
   b. Sawtooth or Sinusoidal
      Frequency: 50 to 10,000 CPS
      Amplitude: 15 Volts RMS Min.

SPECIAL FEATURES OF EHF SIGNAL GENERATORS

- **Unique power measurement system employs waveguide components of unusual design — allows continuous and front panel monitoring.**
- **Attenuation is independent of power set and frequency.**
- **1000 cycles cps square wave modulation and external fm or pulse modulation provided over entire frequency range.**

AVAILABLE ON EQUIPMENT LEASE PLAN

FIELD MAINTENANCE SERVICE AVAILABLE THROUGHOUT THE COUNTRY

For complete information write to your nearest Polarad representative or directly to the factory.

POLARAD PROVEN RELIABILITY

ELECTRONICS CORPORATION
43-20 34th STREET, LONG ISLAND CITY 1, N. Y.

A complete line of Microwave Signal Generators available in a range of 950 to 11,500 MC and Signal Sources available in a range of 650 to 10,750 MC.

REPRESENTATIVES: Albuquerque, Atlanta, Baltimore, Boston, Buffalo, Chicago, Cleveland, Dayton, Denver, Fort Worth, Kansas City, Los Angeles, New York, Philadelphia, Portland, St. Louis, San Francisco, Schenectady, Syracuse, Washington, D. C., Winston-Salem, Canada; Arnprior, Ontario. Resident Representatives in Principal Foreign Cities

Want more information? Use post card on last page.

THE OFFNER

DYNOGRAPH

DIRECT WRITING OSCILLOGRAPH RECORDER

unequalled for versatility and performance!

ALTERNATE MOUNTINGS

Offner Dynographs are available in rack and console mountings and portable cases for single or two channel use.

High sensitivity—up to 15 microvolts d-c per mm. • Stable—absolute zero base line drift • Recording media—ink, electric, or heat sensitive • Recording coordinates—curvilinear or rectilinear • No "warm-up"—immediately stable and ready for use • One per cent linearity—for four centimeters deflection • One amplifier—for all recording applications • Large records—easy to read, easy to measure • Rapid pen response—1/120th second deflection time • Alternate mountings—console, rack, or portable.

Compare the Offner DYNOGRAPH with any other recorder—This high-speed, direct writing oscillograph gives you, in a single recorder, three record media—ink, heat sensitive, and electric sensitive records; with either curvilinear or heat and electric sensitive rectilinear coordinates. You can select the method of recording best suited to each of your applications.

. . . rectilinear recording
. . . curvilinear recording
. . . heat sensitive recording
. . . electric recording
. . . ink recording
IN A SINGLE RECORDER!

The Offner Dynograph . . . unequalled for versatility. Now . . . for the first time, in a single recorder you can have both rectilinear and curvilinear recording; ink, electric, or heat sensitive. You can shift from one recording media to another, and from rectilinear to curvilinear coordinates in a matter of minutes.

Versatility plus performance. The Offner Dynograph combines high speed, high sensitivity and complete stability as a result of Offner's exclusive patented chopper amplifier. The unique circuit employed results in a dc amplifier of unusual sensitivity and stability that has set new performance standards for direct writing oscillographs.

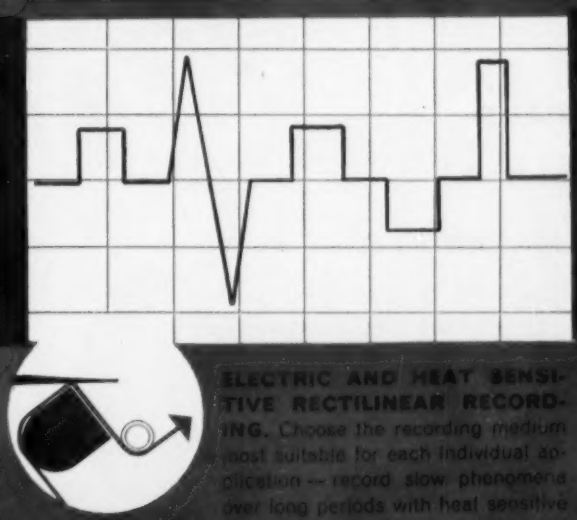

ELECTRIC AND HEAT SENSITIVE RECTILINEAR RECORDING. Choose the recording medium most suitable for each individual application — record slow phenomena over long periods with heat sensitive recording; use electric sensitive recording for high speed, rectilinear coordinates.

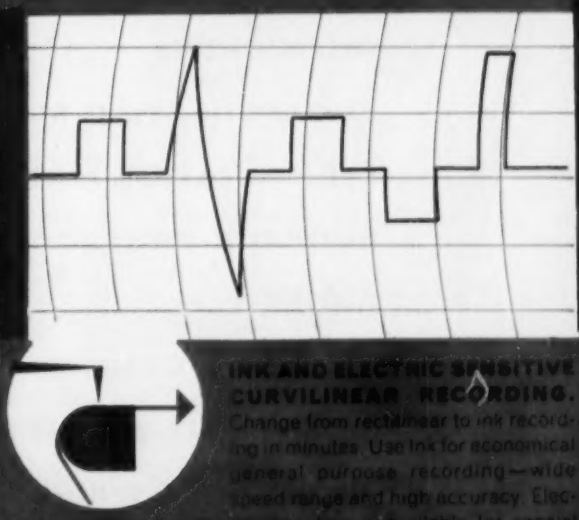

INK AND ELECTRIC SENSITIVE CURVILINEAR RECORDING. Change from rectilinear to ink recording in minutes. Use ink for economical general purpose recording — wide speed range and high accuracy. Electric sensitive curvilinear recording is available for special applications such as mobile use.

Write for your copy of the Offner Dynograph Catalog.

Check and compare the Offner Dynograph with any other recorder. It is unequalled for versatility, unmatched in performance. Point for point — you'll select the Offner Dynograph. Write for complete details.

OFFNER ELECTRONICS INC.

5924 N. KEDZIE AVE. • CHICAGO 25, U.S.A.

FOAMED PLASTICS

MOLDING PLASTICS

LAMINATES

INSULATING AND DIELECTRIC FILMS

INSULATING TAPES

WIRE INSULATIONS

CERAMIC MATERIALS

MICA MATERIALS

GLASS MATERIALS

SYNTHETIC RUBBER MATERIALS

CHEMICALS

ENCAPSULATING MATERIALS

IMPREGNATING MATERIALS

SURFACE-PROTECTING MATERIALS

ADHESIVES

MAGNETIC CORE MATERIALS

PERMANENT MAGNETIC MATERIALS

RESISTANCE WIRES

METALS AND ALLOYS

SOLDERS AND FLUXES

electronics

A McGRAW-HILL PUBLICATION

MATERIALS FOR ELECTRONICS

a Special Report in the October issue of electronics

NOW . . . added value to help you sell . . . in the October issue of ELECTRONICS. For now . . . with new types of components, wider temperature tolerances and other environmental factors; and new military developments making unusual demands on electronic materials . . . ELECTRONICS presents this important *Special Report* on *MATERIALS FOR ELECTRONICS.*

In this report . . . a *first* in the electronic field . . . ELECTRONICS has compiled a library of reference data to:

- bring readers up to date on new materials now available
- indicate trends in utilization of materials for various purposes
- give preliminary data on forthcoming new materials still in laboratories
- help design engineers to choose from the multitude of old and new materials

This is your chance to get special advertising tie-in value from an issue that will be used as a text book and be an important reference tool for the entire industry.

CLOSING DATES: Copy to set—August 25th; Complete plates—September 1st.

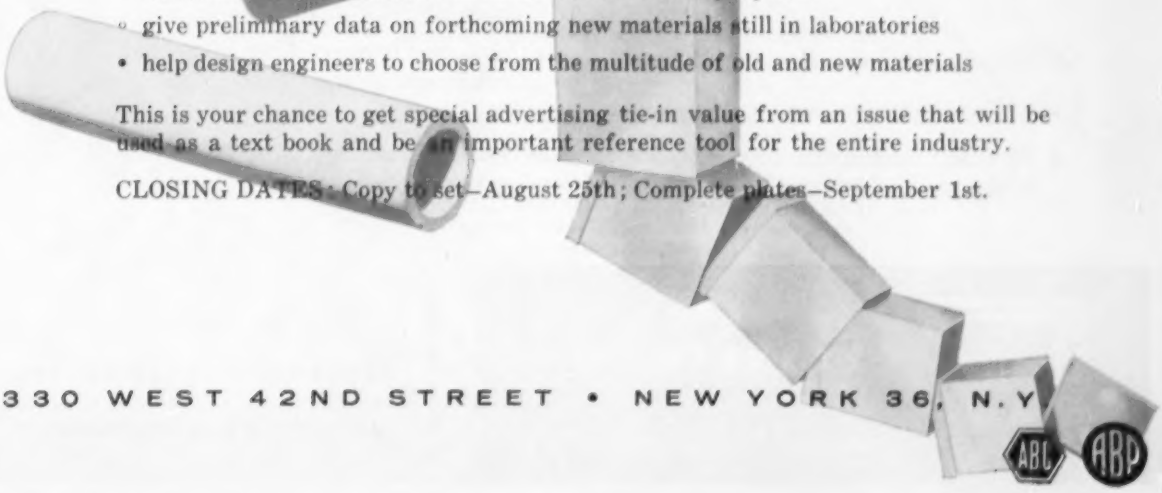

330 WEST 42ND STREET • NEW YORK 36, N.Y.

ABC ABP

DIAGONAL SPRING EQUIFLEX

125500 Series

The new Equiflex vibration isolator pictured above is designed particularly for applications where strict adherence to Government specifications is important.

Barrel-shaped springs of heavier wire are assembled diagonally instead of radially and the result is a rugged, highly damped mount with excellent resistance to prolonged vibration at resonant frequencies. In addition to this improved performance, all the advantages of an all-metal mount with omnidirectional isolation have been retained.

SPECIAL FEATURES

- Low amplification at resonance. Approximately 2 times depending upon input amplitude.
- Resonant frequency between 15 and 20 c. p. s. depending upon mounting angle, input amplitude and location of center of gravity.
- Efficient isolation at high frequencies.
- Efficient isolation at low input amplitudes.
- All metal construction with exception of lubricant.
- Temperature range without change 375 F to −70 F.
- Vibration and shock protection characteristics unchanged by repeated shocks of 22 g's for 11 millisecond duration on all axes.
- Unharmed by hours of resonance with input of .036" double amplitude as outlined in Procedure I of MIL-E-5272A with equipment mounted both horizontally and vertically.
- Available in 1/4#, 1/2#, 1#, 2#, and 3# ratings in Number 1 plate size.

ELECTRICAL ASSEMBLIES Ucinite RADIO AND AUTOMOTIVE

The UCINITE CO.

Newtonville 60, Mass.

Division of United-Carr Fastener Corp.

Specialists in

ELECTRICAL ASSEMBLIES, RADIO AND AUTOMOTIVE

DOT's new angle washer holds cast trim against curves

Fastening die-cast trim to curved sheet metal surfaces can be a troublesome problem. Ordinary nuts jam before they get close enough to hold tight. One solution has been a costly mould construction permitting off-angle stud casting.

The modern cost saving way is to use United-Carr's new angle washer and washer-nut combination. This compensates for practically any curve or can be used to secure studs that protrude at an angle through a flat surface.

Tight fastening is assured and rattles never get a chance to start.

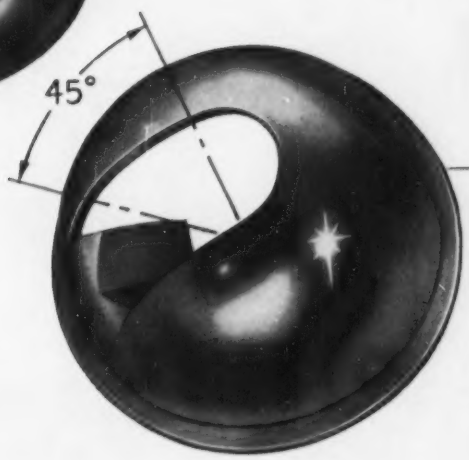

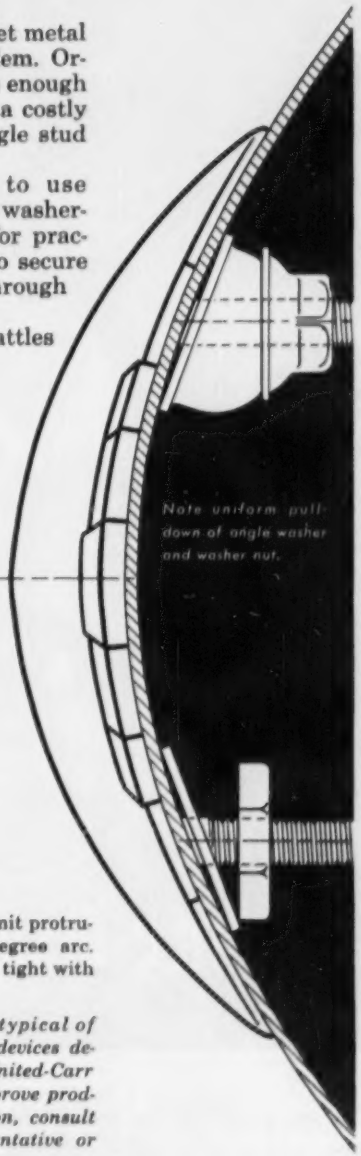

Light, strong metal shell is slotted to permit protrusion of stud at any angle within 45 degree arc. Washer nut matches shape of shell, locks tight with normal wrench torque.

The angle washer and washer nut are typical of thousands of special-purpose fastening devices designed and manufactured in volume *by United-Carr to help speed assembly, cut costs and improve product performance. For further information, consult your nearest United-Carr field representative or write us for his name and address.*

UNITED-CARR Fastener Corp.

31 Ames Street, Cambridge 42, Mass.

MAKERS OF DOT FASTENERS

Want more information? Use post card on last page.

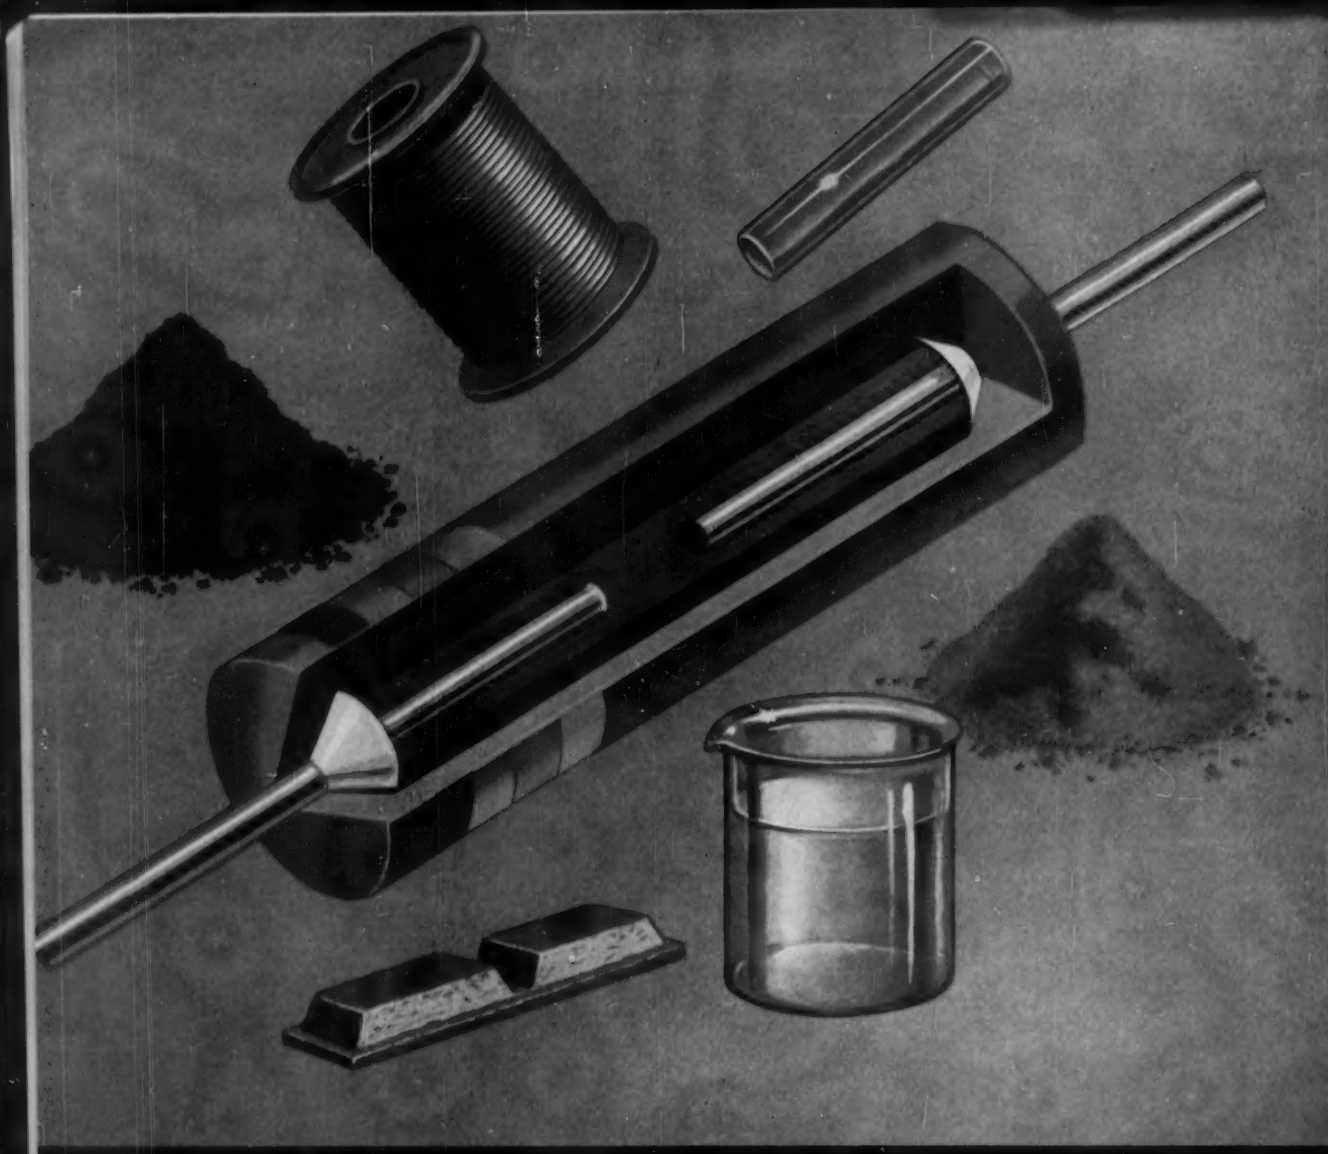

They're made from standard materials—

WHY DO IRC RESISTORS OFFER HIGHEST REPRODUCIBILITY?

Carbon, glass, coating resins, molding powder, copper wire, and a metal alloy—they're the only materials you'd need to make a resistor such as IRC's famous Type BT fixed composition resistor. But the real problem, you'd soon discover, is to make every resistor just like the ones before it and just like those following it. That's where IRC's exclusive processes pay off. They give you resistors that "test out" more alike in mechanical and electrical characteristics than any other resistors of their type. That's why only IRC resistors make possible unvarying performance of your own equipment.

The outstanding thing about IRC production processes is that they provide this uniformity at economical mass-production rates. For example, over 5 miles of carbon filament are drawn every day for film type resistors. And for maximum efficiency and uniformity, this filament is measured and cut while it's being produced. It's this kind of know-how that makes every type of IRC resistor your best buy. Send the coupon today for more facts.

How IRC provides unique reproducibility

FILM RESISTORS

Type BT Fixed Composition Resistors

Type DC Deposited and Type BO Boron Carbon Resistors

Molded Type MD Deposited and Type MB Boron Carbon Resistors



Type MF High Frequency Resistors

Type MV High Voltage Resistors

Resistance Strips and Discs

IRC film resistors exceed military specifications but the really outstanding thing is that they do it with unusual lot-to-lot uniformity in characteristics. What's the reason for this reproducibility? IRC's secret production processes!

You'll find this kind of production know-how in the making of Type DC Deposited Carbon Resistors, for example. The carbon used and the way the carbon film is formed both assure complete dispersion for better resistor performance. In IRC Boron Carbon Resistors, too, the unique method used to combine gases results in greater uniformity at low cost.

WIRE WOUND RESISTORS



Types BW and PW Low Power Wire Wound Resistors

Types PWW and FRW Power Wire Wound Resistors

Type WWJ Precision Wire Wound Resistors

"PH" Series Encapsulated Precision Resistors

Type CL Insulated Wire Wound Chokes

Type MW Bracket Mounted Resistors

IRC wire wound resistors are exceptionally uniform in their accuracy of adjustment and in characteristics making for long-term stability. The main reason is that they are all automatically machine wound under uniform tension and constant temperature and humidity conditions.

You can see the result of this superior winding skill in the element of the Type CL Insulated Choke, for example. Extremely fine wire is wound so expertly that the element appears to be one smooth, uninterrupted surface! This same winding skill also makes the element of all other IRC wire wound resistors a study in perfection—free from shorted turns or winding strains.

SEE NEW IRC COMPONENTS AT WESCON BOOTH 1023

Insulated Composition Resistors • Deposited and Boron Carbon Precistors • Power Resistors • Voltmeter Multipliers • Ultra HF and Hi-Voltage Resistors.

Wherever the Circuit Says

Low Wattage Wire Wounds • Resistance Strips and Discs • Selenium Rectifiers and Diodes • Hermetic Sealing Terminals • Insulated Chokes • Precision Wire Wounds.

IRC

HYCOR, Division of International Resistance Co., Sylmar, Los Angeles County, California

Subsidiaries:
Circuit Instruments Inc., St. Petersburg, Florida
Hycor Company, Inc., Vega Baja, Puerto Rico

INTERNATIONAL RESISTANCE COMPANY

Dept. 234, 401 N. Broad St., Philadelphia 8, Pa.
In Canada: *International Resistance Co., Ltd., Toronto, Licensee*

Please send technical bulletins describing ☐ Fixed Compositions ☐ Deposited and Boron Carbons ☐ High Frequency Types ☐ High Voltage Types ☐ Low Power Wire Wounds ☐ Power Wire Wounds ☐ Precision Wire Wounds ☐ Insulated Chokes ☐ Resistance Strips and Discs.

NAME_____

COMPANY_____

ADDRESS_____

CITY_____ STATE_____

...and Radio Receptor Selenium Rectifiers help make that accuracy possible!

Power supply and amplifier cabinet made by Belock Instrument Corp., New York, for U. S. Navy gun fire control systems. Five Radio Receptor rectifiers are utilized in this unit.

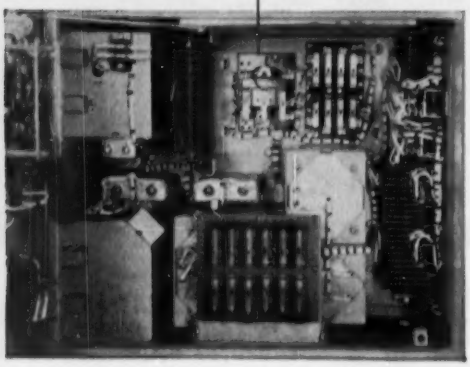

The timing and precision of U. S. Naval gunfire depends on complex fire control systems for which Radio Receptor's customer, **Belock Instrument Corp.** manufactures power supply and amplifier cabinets. Five Radio Receptor power rectifiers are included in each unit because the manufacturer knows that ruggedness, long life and reliability are always prime features of every RRco. stack.

On target with the fleet — and in hundreds of other applications for government and industry, RRco. rectifiers constantly prove they can pass the stiffest requirements with flying colors. If *you* have a problem involving rectification, submit your specs to our engineering department. We'll be glad to make recommendations, without obligation of course.

Really RR Reliable

Semiconductor Division

RADIO RECEPTOR COMPANY, INC.

Radio and Electronic Products Since 1922

240 Wythe Avenue, Brooklyn 11, N. Y. • EVergreen 8-6000

Radio Receptor Products for Industry and Government: Selenium Rectifiers • Germanium Diodes
Thermatron Dielectric Heating Generators & Presses • Communications, Radar & Navigation Equipment

ask about amp's Creative Approach
TO BETTER WIRING

More Confidence... Less Expense

with

AMP

Taper Technique

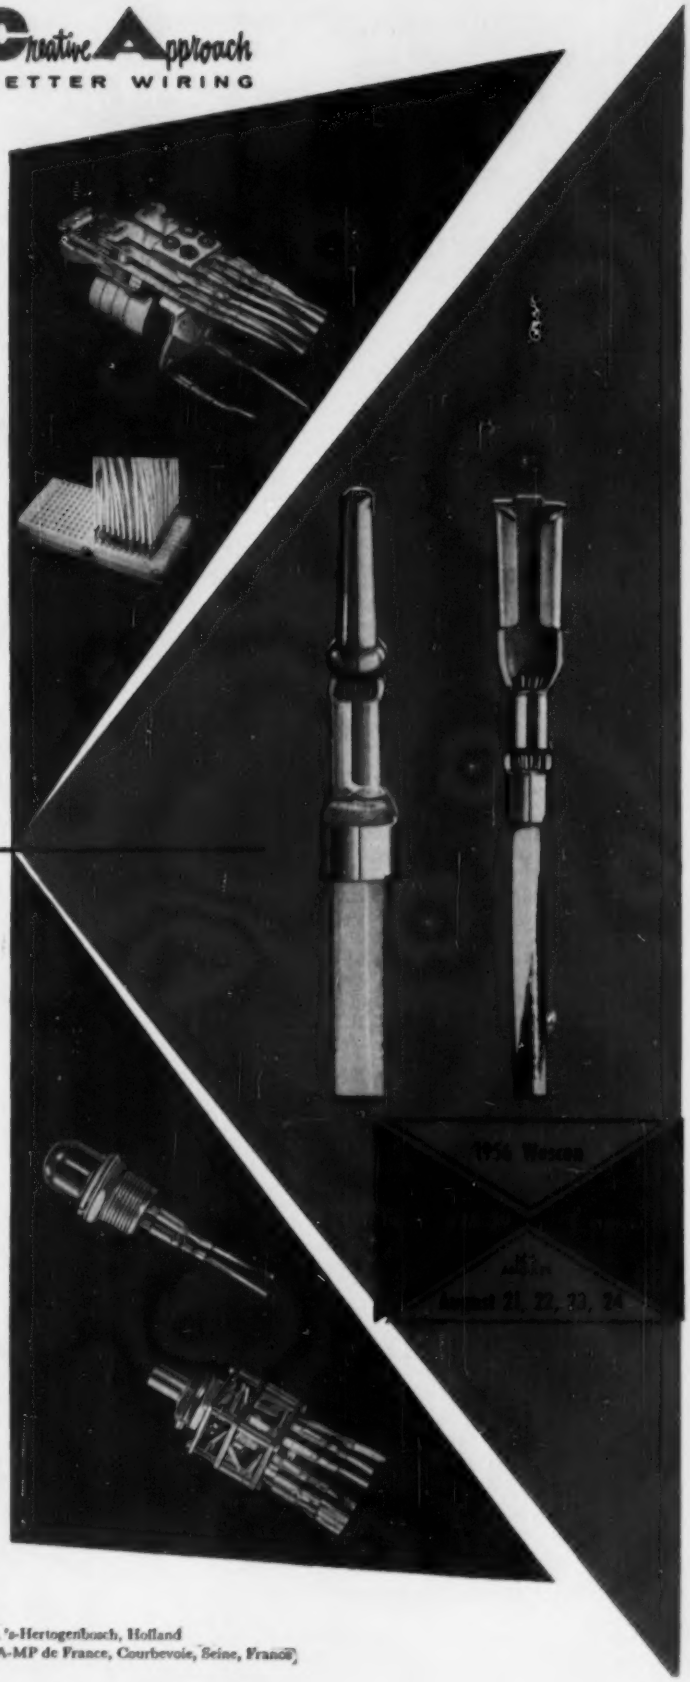

A-MP Taper Pins, Taper Bloks, Taper Tips, Taper Tabs and Taper Tab Receptacles offer great freedom of circuit design and insure maximum electrical stability.

They cut material cost . . . cut labor cost . . . and reduce assembly time. Taper Technique is benefiting manufacturers of business machines, aircraft, guided missiles and electronic equipment.

You, too, can benefit by the A-MP Taper Technique. Consult your local A-MP salesman or write to Harrisburg.

©A-MP 1956

AMP

Aircraft-Marine Products, Inc.
General Office: Harrisburg, Pa.

A-MP of Canada, Ltd., Toronto, Canada • A-MP—Holland N.V., 's-Hertogenbosch, Holland
Aircraft-Marine Products (G.B.) Ltd., London, England • Societe A-MP de France, Courbevoie, Seine, France

The British Electronics Industry is making giant strides with new developments in a variety of fields. Mullard tubes are an important contribution to this progress.

Britain's foremost pentode for 25W high fidelity equipment

The Mullard EL34 can be rightly acclaimed as the most efficient high fidelity output pentode tube yet produced in Britain. It is being fitted in many of the British sound reproducing equipments which are becoming increasingly popular in the United States and Canada.

Used in push-pull ultra-linear operation (distributed load), two EL34 tubes will give 32 watts output at a total distortion of less than 1%. The application of negative feedback reduces distortion even further.

The EL34 is equally capable of supplying higher power outputs where an increased distortion level is acceptable. Under class B conditions, 100 watts are obtainable from a pair of EL34 tubes in push-pull for a total distortion of 5%.

Another significant feature of this tube is its high transconductance value of 11,000 μmhos, resulting in high power sensitivity and low drive requirements.

Supplies of the EL34 are now available for replacement purposes from the companies mentioned below.

Principal Ratings

Heater
6.3V, 1.5A

Max. plate voltage
800V

Max. plate dissipation
25W

Max. screen voltage
425V

Max. screen dissipation
8W

Max. cathode current
150mA

Base
Octal 8-pin

Available in the U.S.A. from:—
International Electronics Corporation,
Dept. E8, 81 Spring Street, N.Y.12,
New York, U.S.A.

Available in Canada from:—
Rogers Majestic Electronics Limited,
Dept. 1J, 11-19 Brentcliffe Road,
Toronto 17, Ontario, Canada.

Mullard ELECTRONIC TUBES

used throughout the world

MULLARD OVERSEAS LTD., CENTURY HOUSE, SHAFTESBURY AVE., LONDON, ENGLAND

Mullard is the Trade Mark of Mullard Ltd., and is registered in most of the principal countries of the world.

MEV3.

DU PONT
Better Things for Better Living
. . . through Chemistry

ELECTRONIC DESIGN NEWS

PROPERTY AND APPLICATION DATA
ON THESE VERSATILE ENGINEERING MATERIALS:
"ZYTEL," "ALATHON," "TEFLON," "LUCITE."

Unique properties of Du Pont TEFLON® help solve electronic design problems

Terminals of Du Pont TEFLON® feature high dielectric strength

The toughness, high dielectric strength and heat resistance of TEFLON make it particularly suited for applications such as these terminals manufactured by Cambridge Thermionic Corporation, Cambridge, Massachusetts. Utilizing in a unique manner the toughness of



TEFLON, the terminals exhibit excellent resistance to shock and vibration over a wide temperature range.

TEFLON has many electronic design possibilities. Its power factor remains extremely low over the entire spectrum. Volume resistivity is very great even after prolonged immersion. Surface resistivity remains high even under exposure to saturated water vapor. TEFLON does not "track" on exposure to arc. Dielectric strength is high over a considerable temperature range.

To obtain complete property and application data, mail coupon.

An engineer at Eitel-McCullough, Inc., holds sleeve of TEFLON molded by Chase Sales Company, Hayward, California, for use in klystron pictured above.



Capacitors encased in TEFLON are designed especially for sustained high-temperature operation in aircraft, airborne computers and other high-ambient-temperature applications where high insulation resistance must be maintained. *(Manufactured by Film Capacitors, Inc., New York, N. Y.)*

The physical, chemical and electrical properties of Du Pont TEFLON tetrafluoroethylene resin make it applicable to a wide variety of uses in the electronic field. It is especially useful in applications involving miniaturization, high-frequency, high-voltage, high-temperature requirements; and exposure to corrosive action.

TEFLON readily provides continuous service at 260°C., exceeding requirements of Class H materials. Of exceptional thermal stability, TEFLON can be used at extreme service temperatures, ranging from a high of 500°F. to a low of −450°F. The power factor of TEFLON is less than 0.0003 over the measured spectrum (60 cycles to 10^8 cycles). Water absorption (ASTM D570-42) is only 0.005%.

A sleeve of Du Pont TEFLON is used by Eitel-McCullough, Inc., of San Bruno, California, in apparatus to measure the radio frequency power output of high-power UHF microwave amplifier klystrons. The sleeve of TEFLON is mounted in a metal pipe through which the electromagnetic energy output from the klystron travels. The TEFLON acts as a window through which the energy passes into water circulating within the cone-shaped sleeve. Here the energy is dissipated. By measuring rate of flow, and temperature change of the water, tube output can be determined.

If you wish complete property and application data on TEFLON to evaluate for your own use, clip and mail the coupon below.

NEED MORE INFORMATION?

CLIP THE COUPON for additional data on the properties and applications of this Du Pont engineering material.

E. I. du Pont de Nemours & Co. (Inc.), Polychemicals Department
Room 228 Du Pont Building, Wilmington 98, Delaware.
In Canada: Du Pont Company of Canada Limited, P.O. Box 660, Montreal, Quebec

Please send me complete property and application data on Du Pont TEFLON. ☐

I am interested in evaluating this material for

_____

_____

Name _____

Firm Name _____

Position _____

Type of Business _____

Street Address _____

City _____ *State* _____

ANNOU

greatly expanded

Air Express service

*RADIO-EQUIPPED TRUCKS

†TELETYPE NETWORK

More speed!
Constant shipment control!
No extra cost!

NCING:

✻ In one metropolitan center alone, Air Express has reduced average pick-up and delivery time by more than half! (And it was notably efficient to start with!)

Amazingly – by introduction of new equipment and new methods – Air Express is chalking up new records for cutting "ground time" of shipments.

Radio-equipped trucks in leading markets are now in constant touch with Air Express Dispatchers. Pick-up time is cut to a minimum. Deliveries are expedited.

All this speed-up of service with Air Express is now yours – with no added charges!

† Air Express now can practically pinpoint shipments. A key-city network is linked together by private teletype service, tied in with scores of other communities in a nationwide network.

All along the route, teletype carries the vital information of all load messages – weight, number of pieces, destination, plus special information or instructions.

Thus, the greatest possible control of Air Express shipments – at no increase in cost to you!

In fact, thousands of users regularly find "Air Express costs less" than any other service!

Two-way Radio of the most modern design connects this Air Express truck with central Dispatcher – cuts "ground time" for shipments more than half–yet, costs you no more!

New Teletype Service enables you, the shipper, or your consignee, to "keep an eye" on Air Express shipments – trace them en route – meet them on time – and at no extra cost!

For the world's most efficient, most complete air shipping service–linking some 23,000 U. S. communities, all by one through carrier–call

Air Express

GETS THERE FIRST via U.S. Scheduled Airlines

CALL AIR EXPRESS . . . division of RAILWAY EXPRESS AGENCY

AEROCOM'S 1046 H.F. TRANSMITTER

POWER + STABILITY

1000 WATTS WITH .003% STABILITY

Rugged, versatile general purpose H.F. transmitter—Aerocom's 1046 packs 1000 watts of power and high .003% stability under normal operating conditions (0° to +50° C.). Excellent for point-to-point or ground-to-air communications.

Multi-channel operation on telegraph A1, or telephone A3 with GM-8A modulator... new Aerocom 1046 can be *remotely controlled* with TMC-R at control position and uses only one pair of telephone lines. In A3 operation, the local dial control panel is located in modulator cabinet.

Transmitter cabinet has 8¾ inch panel space available for either local dial control panel or frequency shift keyer.

Model 1046 operates on 4 crystal-controlled frequencies (plus 2 closely spaced frequencies) in the band 2.0—24 Mcs. Operates on one frequency at a time; channeling time 2 seconds. Operates into either balanced or unbalanced loads. Operates in ambient -35° to+50° C. Power supply: nominal 220 volts, 50-60 cycles, single phase.

Complete technical data on request

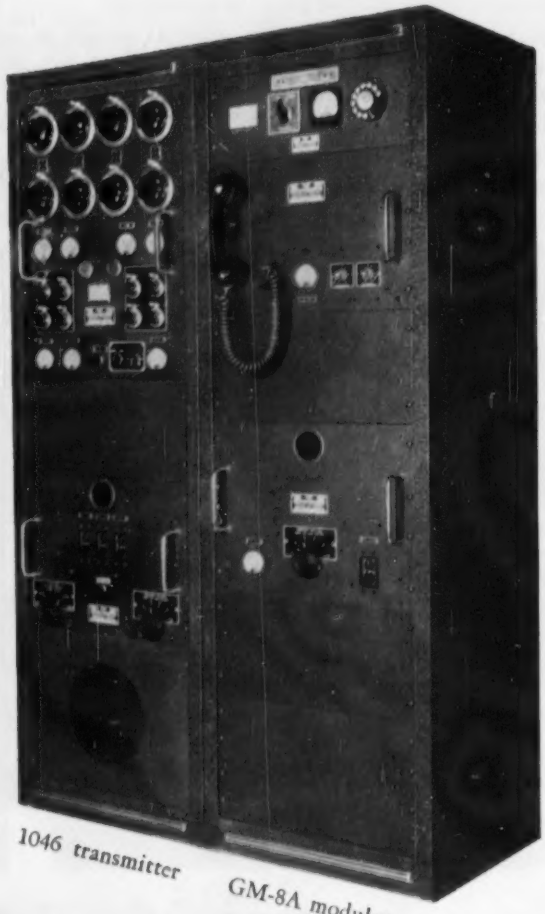

1046 transmitter GM-8A modulator

Now! Complete-package, lightweight airborne communications equipment by Aer-O-Com! Write us today for details!

AER-O-COM

105

3090 S.W. 37th AVENUE MIAMI 33, FLORIDA

$1.00
70¢
SMALLER AND LESS EXPENSIVE
The G-E Vac-u-Sel rectifier stack (in red) gives the same life, current capacity, and performance as the larger, ordinary selenium stack. Low-cost Vac-u-Sel rectifier stacks are ideal for such applications as coin-operated machines.

DESIGNED TO HELP YOU MEET PRICE COMPETITION . . .

G-E *Vac-u-Sel** Rectifiers Cost You Up to 30% Less

Here is a component rectifier stack that will out-perform ordinary selenium stacks, and yet cost you up to 30% less!

INITIAL COST IS OFTEN 30% LOWER: G-E Vac-u-Sel rectifiers can be made up to 30% smaller for any given application, due to the greater current-carrying capacity of the individual cells. Smaller size means a lower cost to you. These cells are produced by a unique G-E sphere-type vacuum-evaporation process that enables us to accurately predict the output and life characteristics of any model number. We are thus able to give you a stack with the exact life you require. You don't pay for more life than you need.

PICK THE LIFE YOU WANT: You can select a Vac-u-Sel rectifier that will last up to 80,000 hours—or more. But if your application calls for shorter life, we can give you a smaller, less expensive stack, which operates at greater than normal-rated current. You will find that even when overrated these top-quality G-E Vac-u-Sel rectifier stacks will perform with greater predictability than ordinary selenium. So, by tailoring each stack to meet your exact requirements, you receive the benefit of top quality at lower cost.

Contact your G-E Apparatus Sales Office, or write for Bulletin GEA-6273 to: Section 461-41, General Electric Co., Schenectady 5, N. Y.

*Vac-u-Sel is a trade-mark of the General Electric Co. It designates top-quality selenium rectifier cells manufactured by a unique sphere-type vacuum-evaporation process by the Rectifier Department, Lynn, Mass., headquarters for silicon, germanium, selenium, and copper-oxide component rectifiers.

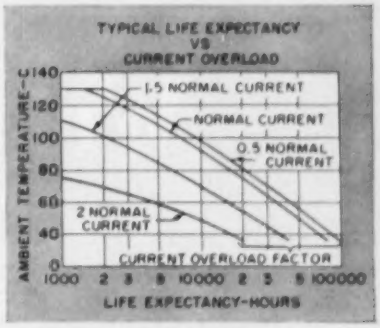

LONG LIFE is provided by G-E Vac-u-Sel rectifier stacks—even at high operating ambients and better than normal-rated current.

Progress Is Our Most Important Product

GENERAL ELECTRIC

Potter & Brumfield, inc.

PRESENTS

Series KM RELAY

Write for Samples and Quotations:

For quick delivery over 350 different standard relays stocked by 500 Franchised Distributors throughout the United States and Canada.

Potter & Brumfield inc.
PRINCETON, INDIANA
Subsidiary of AMERICAN MACHINE & FOUNDRY COMPANY

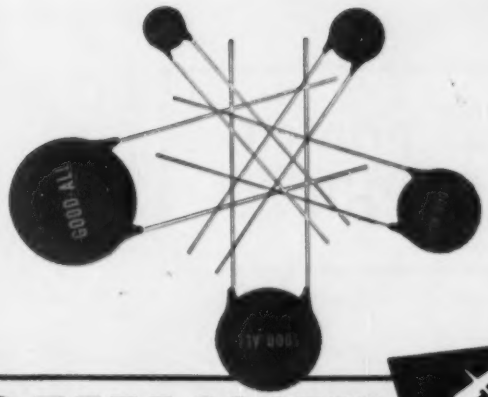

EPOXY COATED CERAMIC DISCS

. . . at No Premium Cost!

Good-ALL capacitors

High Voltage Breakdown Strength
Excellent Moisture Resistance • Durable • Attractive

Good-All's tough, durable EPOXY coated ceramic disc capacitors combine excellent dielectric strength and stability with high humidity resistance. Good-All's exclusive EPOXY coating process results in an intimate bond between the coating and the edge surface of the ceramic. This bond serves to block the voltage breakdown path across the ceramic edge. No wax coating is required on EPOXY coated discs.

TEMPERATURE COMPENSATING EPOXY DISC CAPACITORS

Good-All has designed a full line of TC discs in accordance with RETMA specification REC-107-A (class 1). These units are well suited for resonant circuits or other applications where HIGH Q and STABILITY of capacitance is essential. Small size gives an inherent advantage in VHF and UHF applications.

SPECIFICATIONS—Working Voltage: **600 VDC** • Flash Test Voltage: **1500 VDC** • Power Factor: **Less than .1% @ 1 MC** • Leakage Resistance: **Greater than 10,000 megohms** • Leads: **#22 gage tinned copper wire** • **Capacity Tolerance: ±5%, ±10%, ±20%**

MAXIMUM DIAMETER

Temperature Coefficient	1/4	5/16	1/2	5/8	3/4
P-100	1-3 mmf	4-9 mmf	10-30 mmf		
NPO	2-12	13-22	28-60	61-75 mmf	76-110 mmf
N-33	2-15	16-27	28-60	61-75	76-110
N-80	2-15	16-27	28-60	61-75	76-110
N-150	2-15	16-30	31-60	61-75	76-110
N-220	3-15	16-30	31-75	76-100	101-140
N-330	3-15	16-30	31-75	76-100	101-140
N-470	3-20	21-40	41-80	80-120	121-170
N-750	5-25	26-50	51-150	151-200	201-290
N-1400	15-50	51-100	101-200	200-250	251-470
N-2200	47-75	76-100	101-200	201-275	276-470

CAPACITANCE CHANGE VS. TEMPERATURE IN °C



Good-All's complete line of EPOXY coated ceramic disc capacitors are designed to fit both standard and specialized applications. Write or wire today for catalog containing more information on our TC discs and other EPOXY coated disc types listed below.

BY-PASS Good-All Type B (RETMA CLASS 2, Z5Z)
DUAL SHIELDED Good-All Type C
AC LINE BY-PASS Good-All Type D
STABLE Good-All Type E and EE
HIGH VOLTAGE Good-All Type G
TRANSISTOR CIRCUIT Good-All Type H

Our Sales Representatives will be happy to supply you with sample EPOXY coated discs for test against your specification.

GOOD-ALL ELECTRIC MFG. CO. OGALLALA, NEBR

A LEADING MANUFACTURER OF TUBULAR CAPACITORS

INSUROK® T-725 printed circuits used by PHILCO

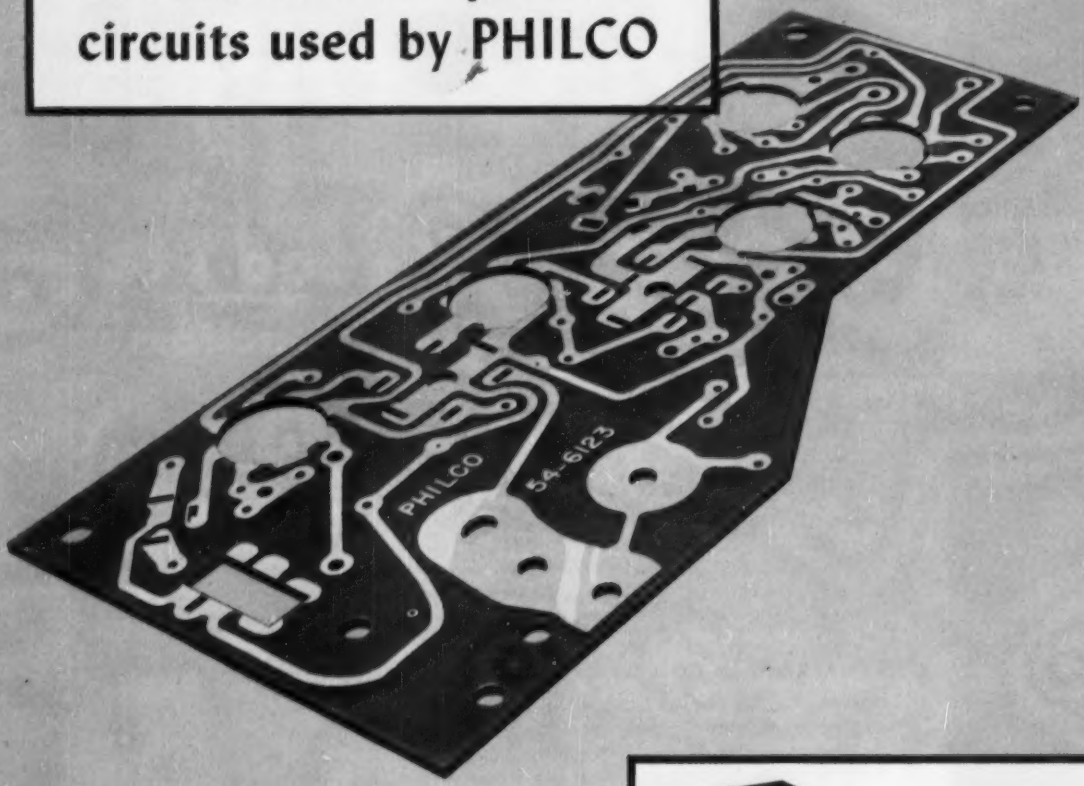

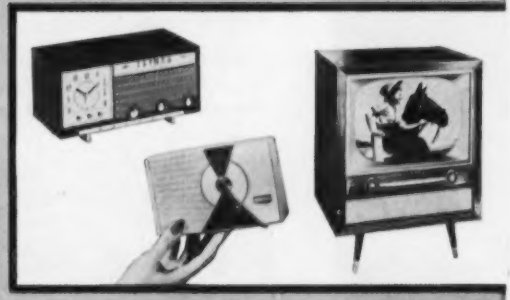

Philco design and production engineers are using Richardson Copper-Clad INSUROK T-725 laminate for printed TV and radio circuits.

Examples are Underwriters approved assemblies for Philco's 21" console TV, Philco's five tube table radio and Philco's transistorized portable radio. All use INSUROK T-725 printed circuits.

In the manufacture of printed circuit materials, the most important single consideration is the laminate. Richardson, a pioneer in the development of printed circuit laminates, has the necessary experience and know-how. Copper-Clad INSUROK T-725 is a laminate of outstanding excellence . . its electrical qualities remain remarkably stable under repeated temperature and humidity cycling.

For further information, write or phone today . . Chicago number, MAnsfield 6-8900.

founded 1858

RICHARDSON PLASTICS

MOLDED AND LAMINATED

. . better plastics for better products

THE RICHARDSON COMPANY
2797 Lake St., Melrose Park, Ill.

Waldes Truarc ring reduces valve body from 1 5/16" to 1 1/16", eliminates chrome plating

GYRO MIXING FAUCET

Single-handle kitchen mixing faucet controls hot and cold water, as well as volume. Radical design has no seals or spindles to replace. One Waldes Truarc retaining ring allows complete assembly and disassembly from either top or bottom of unit.

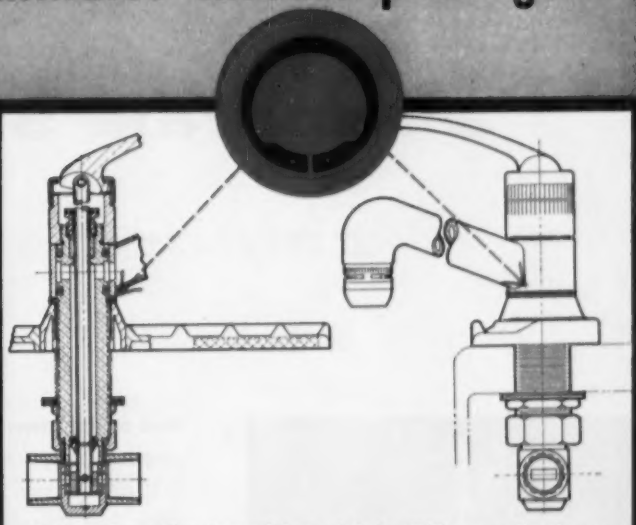

Aluminum Truarc Ring (external inverted Series 5108) acts as bearing retainer, insures precise alignment of spout and escutcheon, gives uniform shoulder with machining. Truarc ring provides shoulder that would otherwise require machining valve body to 1 5/16" against 1 1/16" used. Also eliminates expensive chrome plating of valve body.

Gyro Brass Manufacturing Corporation of Westbury, L. I., N. Y., uses a single Waldes Truarc retaining ring (Series 5108) both as a positioner and retainer on their Gyro Mixing Faucet. Aluminum Truarc ring not only eliminates expensive machining, but also does away with a chrome plating process that would be necessary if the shoulder were made of the solid material of the body.

You, too, can save money with Truarc Rings. Wherever you use machined shoulders, bolts, snap rings, cotter pins, there's a Waldes Truarc Retaining Ring designed to do a better, more economical job. Waldes Truarc Rings are precision-engineered...quick and easy to assemble and disassemble.

More than 5,000 stock sizes of the different Truarc ring types available. Ninety stocking points throughout U. S. A. and Canada.

Find out what Waldes Truarc Retaining Rings can do for you. Send your blueprints to Waldes Truarc engineers.

For precision internal grooving and undercutting...Waldes Truarc Grooving Tool!

Send for new catalog supplement

WALDES TRUARC® RETAINING RINGS

WALDES KOHINOOR, INC., LONG ISLAND CITY 1, NEW YORK

Waldes Kohinoor, Inc., 47-16 Austel Place, L. I. C. 1, N. Y.
Please send the new supplement No. 1 which brings Truarc Catalog RR 9-52 up to date.
(Please print)

Name.....
Title.....
Company.....
Business Address.....
City.....Zone.....State.....

E 008

WALDES TRUARC Retaining Rings, Grooving Tools, Pliers, Applicators and Dispensers are protected by one or more of the following U. S. Patents: 2,382,948; 2,411,426; 2,411,761; 2,416,852; 2,420,921; 2,428,341; 2,439,785; 2,441,846; 2,455,165; 2,483,379; 2,483,380; 2,483,383; 2,487,802; 2,487,803; 2,491,306; 2,491,310; 2,509,081; 2,544,631; 2,546,616; 2,547,263; 2,558,704; 2,574,034; 2,577,319; 2,595,787, and other U. S. Patents pending. Equal patent protection established in foreign countries.

Want more information? Use post card on last page.

for fast engineering, development and production

a separate Sperry division devoted to

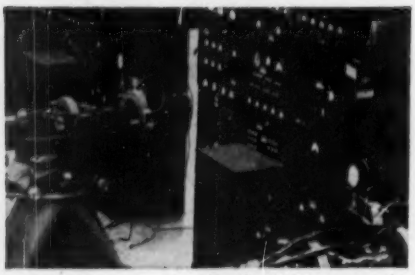

Production test consoles

Out of its many years of pioneering and managing major electronics systems, Sperry is keenly aware of the critical role that sub-systems and support equipment play in the *testing, evaluation* and *performance monitoring* of modern weapons systems.

Now—with emphasis upon faster and more extensive service to the customer — Sperry has organized its broad activity in this area into a streamlined team of specialists. It is the Microwave Electronics Division.

This team is a large and experienced one, resourceful engineers with inventive, systems knowledge supported by skilled technicians and craftsmen to convert ideas quickly into pilot models or quantities of hardware. Development, environmental and materials laboratories plus standards specialists combine their tools and talents to assure that items ranging from components to consoles will perform with certainty in operational use.

In addition to its widely-known Microline* test equipment, the new division is expanding its contributions to the military and industry with advanced weapon support systems, antennas and a broad line of precision components.

Emphasis is being placed too upon new instrumentation and standards for advanced research laboratories, special radar systems, target simulators, computers and evaluators for radar, electronic, missile and inertial guidance systems.

A proven key to the division's ability to solve new developmental problems rapidly is the efficient combination of engineering and development laboratories and shops. Each engineering group is supported by a development laboratory staffed with experienced technicians. Engineers work closely with machinists and assemblers to deliver pilot models on minimum schedules.

For quantity production, a complete manufacturing unit has specialized facilities to supply microwave products ranging from

Weapon system support equipment

microwave electronics

complex waveguide assemblies to complete racks of electronic equipment.

Military agencies or industrial companies concerned with any phase of electronic systems and sub-systems or the testing of such equipment can profit from employing these Sperry capabilities especially organized to speed up important projects and assure their success.

Write us for information about equipment now available or for proposals on new developments.

*T.M. Reg. U. S. Pat. Off.

Special antennas and system components

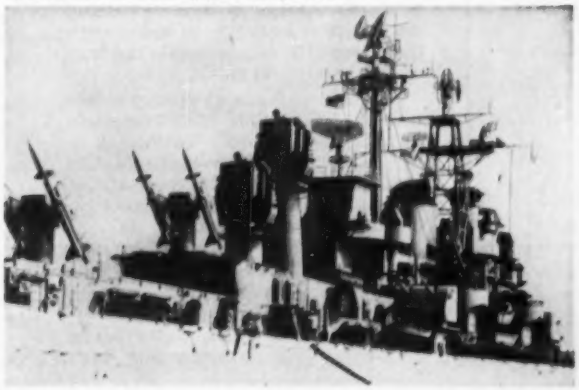

SPERRY

MICROWAVE ELECTRONICS DIVISION

GYROSCOPE COMPANY

Great Neck, New York

DIVISION OF SPERRY RAND CORPORATION

CLEVELAND • NEW ORLEANS • BROOKLYN • LOS ANGELES • SAN FRANCISCO • SEATTLE

IN CANADA: SPERRY GYROSCOPE COMPANY OF CANADA, LIMITED, MONTREAL, QUEBEC

New trends and developments in designing electrical products . . .

How to determine which General Electric Alnico Permanent Magnet grade offers the optimum set of magnetic and physical properties for a particular application

THE BASIC function of a permanent magnet is to provide a specific magnetic flux across a given air gap. The basic problem for the designer is to select a magnetic material with the optimum combination of magnetic and physical properties to fulfill this function.

Since the permanent magnet has considerable influence on the final size, cost, and efficiency of the product, it is important to know the primary characteristics of each of the seven available General Electric Alnico grades.

Each of these grades offers specific advantages in available energy, unit cost, and physical properties. No one grade excels in all of them.

In terms of energy product, cast Alnico 5 has no peer among magnetic alloys. Its 5 million minimum gauss-oersteds is 43% higher than Alnico 6.

Its demagnetization curve (Figure 1) shows that Alnico 5 has the highest residual induction of all the Alnicos, as well as relatively high coercive force. This means that a smaller cross-sectional area and less total volume will be required to maintain a given air gap density.

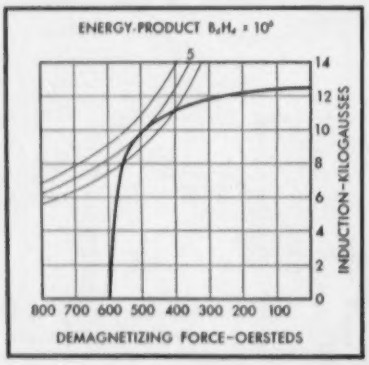

Fig. 1 — Alnico 5 Energy Product and Demagnetization Curves

Thus, where there are space restrictions, as in hearing aids, Alnico 5 has more available energy per unit volume. Where there are weight restrictions, as in airborne magnetrons, Alnico 5 offers more available energy per pound. And where there are cost considerations, as in loud speakers, Alnico 5 provides maximum external energy per dollar.

At the opposite extreme, Alnico 3 has one of the lowest energy products of the Alnicos – 1.38 million gauss-oersteds (Figure 2). About 3½ times more Alnico 3 than Alnico 5 is required to produce a given air gap field energy requirement.

However, because of its lower cost, Alnico 3 offers important savings in applications like toys and novelties, where performance and weight are not critical factors.

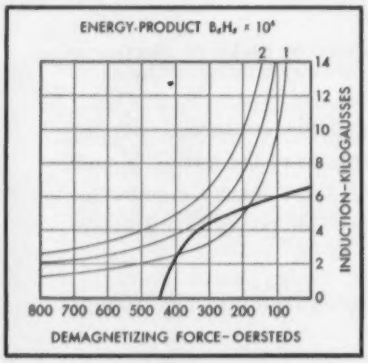

Fig. 2 — Alnico 3 Energy Product and Demagnetization Curves

Despite its relatively low energy product, Alnico 3 still provides more external energy, at lower cost, than does 37% cobalt steel – the best of all the magnet steels.

G-E Alnico 6 has an energy product of 3.5 million gauss-oersteds, ranking second only to Alnico 5. But the primary advantage of this grade lies in its flatter, more stable demagnetization curve (Figure 3, see top of next column).

Alnico 6 has ability to provide useful field energy under dynamic operating conditions. And in certain applications, Alnico 6, despite its lower energy product, will produce a higher gap flux density than Alnico 5.

For motors, generators and lifting applications, where the magnet is operating under varying demagnetizing influences, Alnico 6 offers greater stability and high useful recoil energy.

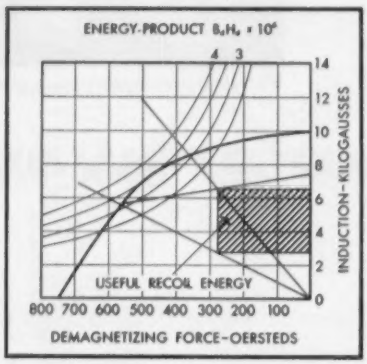

Fig. 3 — Alnico 6 Energy Product and Demagnetization Curves

Generally speaking, permanent magnets' physical properties are seldom the primary consideration when selecting magnetic materials. However, in certain high rotary speed applications, such as rotors, physical strength is of major importance. This necessitates the use of a sintered, instead of a cast, Alnico grade. These sintered magnets have tremendously improved physical properties, with but a slight sacrifice in magnetic properties.

Sintered Alnico 2, for example, has more than 20 times the tensile strength of cast Alnico 2. And, it has 10 times the transverse rupture strength, in addition to more uniform magnetic properties. Approximately the same order of structural improvements holds true for sintered Alnicos 4 and 5.

Selecting the proper magnetic material is a crucial and complex part of the design problem. For the assistance of a G-E Magnet Engineer in this, or any other, stage of your permanent magnet design, write: *Metallurgical Products Department of General Electric Company, 11137 E. 8 Mile Street, Detroit 32, Michigan.*

Progress Is Our Most Important Product

GENERAL ELECTRIC

Want more information? Use post card on last page.

MEMO

FROM: T. C. GAMS

TO: SYSTEM DESIGN ENGINEERS

SUBJECT: . . . and we mean **UNLIMITED!**

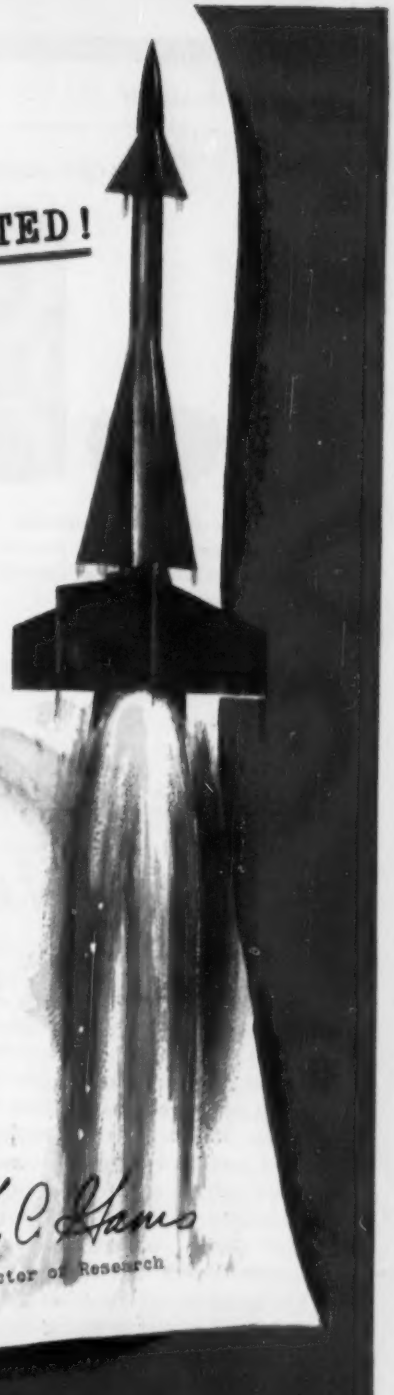

During the past 12 months, our research effort has been devoted to five advanced development programs. We selected these problems because we felt that the nation's missile and jet-frame programs would soon demand practical answers to them.

If you are up against the temperature, vibration, shock, reliability, size, and weight barriers, these new techniques are available to you at NJE—because NJE (as we have so often said) can create POWER SUPPLIES UNLIMITED.

1. **TRANSISTORIZED POWER SUPPLIES**
   Duplicate the regulation precision of vacuum-tube supplies at higher efficiency, with tubeless reliability and freedom from shock and vibration effects. Save weight and space. High-temperature types available in low power ranges.
2. **ULTRA-COMPACT SUPPLIES**
   Class H transformers, silicon diodes, ingenious mechanical configurations, new insulating and constructional materials lead to significant size and weight reductions at relatively high efficiencies.
3. **HIGH SPEED MAG-AMP SUPPLIES**
   All the stability and reliability of high-power magnetic-amplifier-regulated equipment without the crippling time-lag normally encountered.
4. **MIL-SPEC TECHNIQUES**
   Hermetically sealed supplies, splash-proof equipment, fully JAN-ized versions of commercial supplies. Complete environmental test facilities available for inplant inspection.
5. **HIGH ALTITUDE, HIGH VOLTAGE SUPPLIES**
   New techniques permit corona-free, regulated high voltage at 50,000 feet. Wide-range voltage adjustment, stabilities adequate for nuclear and photometric work, as well as CRT supply.

If you have a difficult power supply problem that fits into one of the above categories, talk it over with NJE...the one power supply source with competence and experience in every modern power supply technique.

Don't try to solve jet-age problems with propeller-age equipment.

T. C. Gams

Director of Research

NJE corporation

Electronic Development & Manufacturing

[illegible] CARNEGIE AVENUE, KENILWORTH, NEW JERSEY

Competent Engineering Representation Everywhere | Rapid, complete, competitive custom quotes from 1000 Amperes (low voltage) to 250 KV (low current)

POWER SUPPLIES UNLIMITED

MALLORY

MALLORY MERCURY BATTERIES



TYPE TNT SUBMINIATURE CAPACITORS

Mallory Mercury Batteries and Type TNT Subminiature Capacitors save space, provide superior performance in transistor circuits and other low-voltage miniature equipment.

Dependability in Miniature Size —to Work with Transistors

To power transistor circuits, Mallory Mercury Batteries are now manufactured by a unique "snap together" construction† that makes higher voltage ratings available at hourly operating costs even lower than conventional batteries. The new design comes in standard 15, 22½ and 45 voltages . . . can be produced in other ratings on order. A unique power source pioneered by Mallory, mercury batteries offer high energy content in small volume . . . far longer life in service and in storage. Service life up to three times that of usual dry batteries can be expected in transistor radios. Their constant discharge characteristic is ideally suited for transistor operation.

Subminiature Mallory Capacitors offer ratings as high as 80 mfd. at 3 volts with *newly* developed type TNT tantalum capacitor. Only .145" in diameter by ⅜" long, it is especially useful in transistorized circuits. In this tiny case are offered a range of ratings never before possible in such small size. Five different values are available: 80 mfd., 3 volts; 50 mfd., 6 volts; 25 mfd., 15 volts; 15 mfd., 30 volts; and 8 mfd., 50 volts.

We'll be glad to consult on your specific circuit requirements, and to send full technical data. Just write or call Mallory today.

†Patent applied for

Parts distributors in all major cities stock Mallory standard components for your convenience.

Serving Industry with These Products:

Electromechanical—Resistors • Switches • Tuning Devices • Vibrators
Electrochemical—Capacitors • Rectifiers • Mercury Batteries
Metallurgical—Contacts • Special Metals and Ceramics • Welding Materials

Expect more . . . get more from

P.R. MALLORY & CO. Inc.
MALLORY
P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, [illegible]

electronics

W. W. MacDONALD, Editor

AUGUST • 1956

CROSS TALK

▶**BUSINESS** . . . In common with most other major industries, electronics will do well this year when considered overall, despite some soft spots. The economy of the country is growing at a particularly rapid rate and people have money with which to buy. The soft spots are largely in household goods, perhaps because deals and discounts moved some of this year's merchandise late last year.

Even in household goods the picture is not all blue. Portable tv sets have made a hit. And color could bring in important dollars by Christmas.

▶**MONEY** . . . Talking with manufacturers in the middle west, we learned that planned expansions are being held back a little by the difficulty of borrowing money. Federal Reserve has been keeping a tight rein on credit, to guard against runaway inflation.

Rumour has it that there will be some slight easing of restrictions soon.

▶**PAY** . . . Heard several speeches dealing with the shortage of engineering manpower, and one thing stood out in all of them; Good starting salaries have shifted men from place to place but have accomplished very little in the way of inducing young men still in high school or just starting college to go into engineering.

Some of these smart youngsters, it seems, have checked up on the vital statistics and note that while engineers are today getting good starting salaries older men who got into the game before the shortage developed have not necessarily stepped up proportionately.

▶**TECHNICIANS** . . . Ran into a large company that had just completed a survey of technical skills throughout its several plants. Included all kinds of workers.

News here is that the survey uncovered enough people with unknown talent, acquired by various means, to materially help the engineering department at a time of shortage.

▶**PARTS** . . . With nuclear power already a reality, whole new families of component parts will have to be developed to withstand radiation.

Gamma radiation causes ionization leakage, modifies photoelectric properties of some materials. Insulation breakdown in a radiation field can cause serious leakage even at low voltage. Resistors, for the most part, bear up reasonably well, but capacitors often exhibit sharp increase in dissipation factor and some electrolytics are unusable.

This uncharted wilderness has few signposts but already industry explorers are trudging toward the goal.

LOOKING AHEAD . . .

Suspicion some transistors having theoretically infinite life in service may have finite shelf life just beginning to form in technical circles

Design refinements under way in east indicate post-deflection color-television picture tube may soon be available to manufacturers at substantially reduced price

Interest in all methods of reducing spurious radiation again on increase as result of accidental triggering of guided missiles by internal and external noise

Telephone bells will slowly but surely give way to telephone "beepers"; bells require too much power from transistorized switching systems

By KURT SCHLESINGER
TV Research Department
Motorola, Inc.
Chicago, Illinois

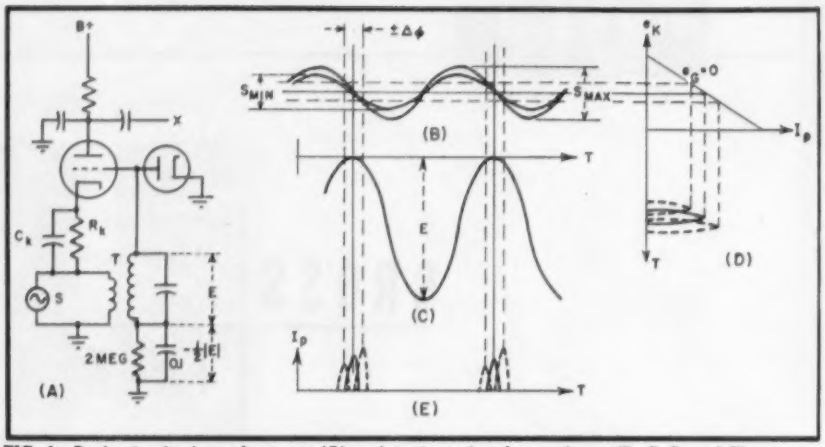

FIG. 1—Basic circuit of synchrotector (A) and various signal waveforms (B, C, D and E)

SAMPLING DETECTOR

ECONOMICALLY, an intercarrier tv receiver sound section is not simple, since it has to be designed for effective suppression of an undesired signal component of pulsed amplitude modulation. Conventional sound sections in monochrome sets, using the ratio detector, are approaching a tube count of five, since more than one sound i-f stage is often deemed necessary for efficient limiting. In color sets, there is the added difficulty of an attenuated signal level, since sound i-f has to be branched off at an earlier video i-f point.[1]

Several attempts at simplification have been made in the past.[2, 3, 4, 5] Recently, techniques studied during the development of triode decoders for color tv[6] have been applied to tv sound. The result is a simple tv-sound detector, using a conventional double triode. In contrast to the above references, this circuit employs a real, rather than a virtual cathode. Space-charge coupling is replaced by interelectrode capacitance and multigrid tubes by triodes. Since the system employs synchronous oscillation and detection, it is referred to as synchrotector.

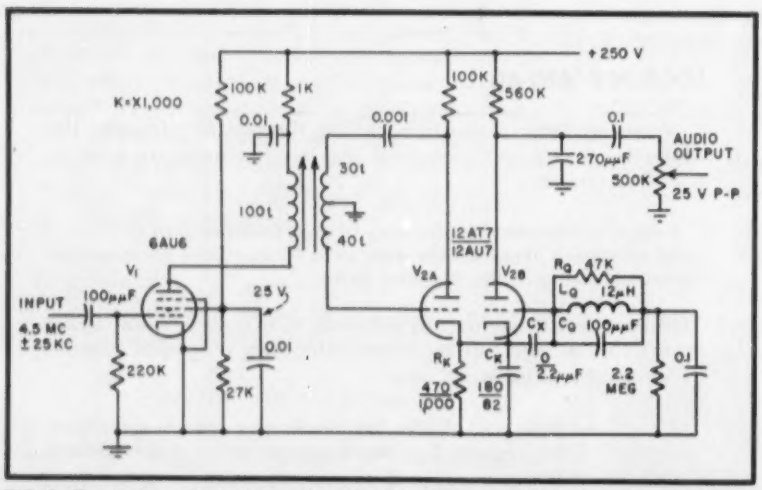

FIG. 2—Practical synchrotector circuit uses either 12AT7 or 12AU7. Upper values shown for R_K, C_K and C_X are for 12AT7 and lower values are for 12AU7

F-M Detection by Sampling

Figure 1A shows intercarrier signals coming from a preamplifier with low output impedance and some limiter action, such as a locked oscillator or simply an overdriven cathode follower. Figure 1B shows this f-m signal with some residual amplitude modulation. Tuned step-up transformer T generates sampling voltage E (Fig. 1C) with a voltage gain of at least 3 to 1.

To sample cathode current at zero passages of the signal, the phase between E and S is not quadrature, but is somewhat less than 90 degrees. The diode clamps the peaks of E at ground potential. This prevents grid current during sampling, since the cathode bias at zero signal is held positive by $R_K C_K$.

As center frequency f_c deviates by Δf, the sampling phase shifts off zero by the amount

$$\Delta\phi = (\pi/2)(Q)(\Delta f/f_c) \qquad (1)$$

For tv sound ($\Delta f = 25$ kc, $f_c = 4{,}500$ kc) and a circuit Q of 30, this phase deviation is ±15 de-

SUMMARY —— Double-triode circuit uses tube and circuit capacitances as coupling elements for synchronous oscillation and detection of 4.5-mc f-m television sound carrier. Technique of sampling near zero passage of carrier yields maximum f-m detection while residual amplitude modulation is ignored. Detector locks on signals of 6 mv or more and produces audio output of 25 v with a-m rejection of 40 to 50 db

for Intercarrier TV Sound



FIG. 3—Test signals of 4.5-mc f-m carrier with 70-percent sine-wave amplitude modulation (A) and same carrier with 60-cps pulsed amplitude modulation (B)

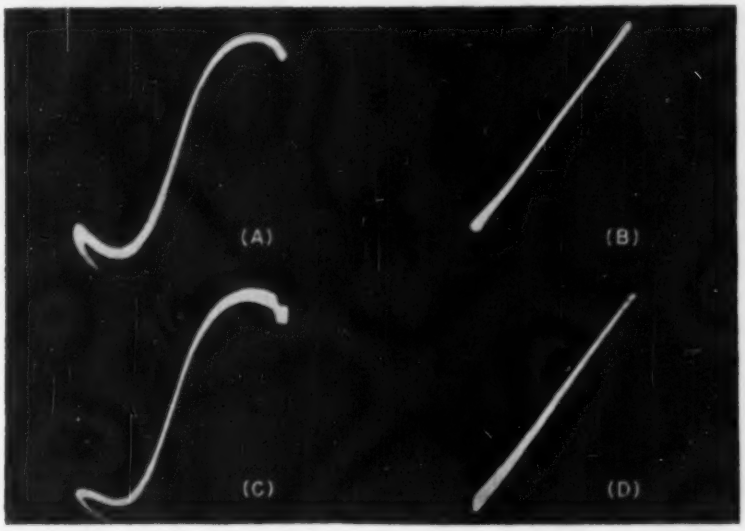

FIG. 4—Detected output at 75 kc (left) and 25 kc (right) deviation. Wave forms at top have a-m crossover on center while those at bottom have cossover off center

grees. The resultant plate-current pulse varies as shown in Fig. 1D. Figure 1E shows the plate current samples as a function of time. These are integrated by the plate bypass capacitor and their average is the audio output at X.

From Fig. 1 it can be seen that the sampling approach seems to offer the inherent advantages of linearity of response and a-m rejection. These features are obtained in conventional f-m discriminators only at the expense of two diodes in a balanced circuit.[7] By contrast, in a sampling type of f-m detector, it should not be necessary to use more than a single signal rectifier.

Linearity of response holds only for sampling during the linear rise of the signal. Amplitude-modulation rejection is strictly true only for a sampling signal E of constant amplitude. However, since the a-m response of synchronous detection changes sign on either side of zero passage, residual a-m may be cancelled in the output by slight off-centering of the sampling phase. Moreover, grid-voltage regulation is assisted by the high impedance of the tuned transformer-secondary. Experience has shown that there are practical circuits whose performance is in line with this idealization.

Practical Circuit

Figure 2 shows the practical form of the synchrotector. The circuit comprises a driver, locked

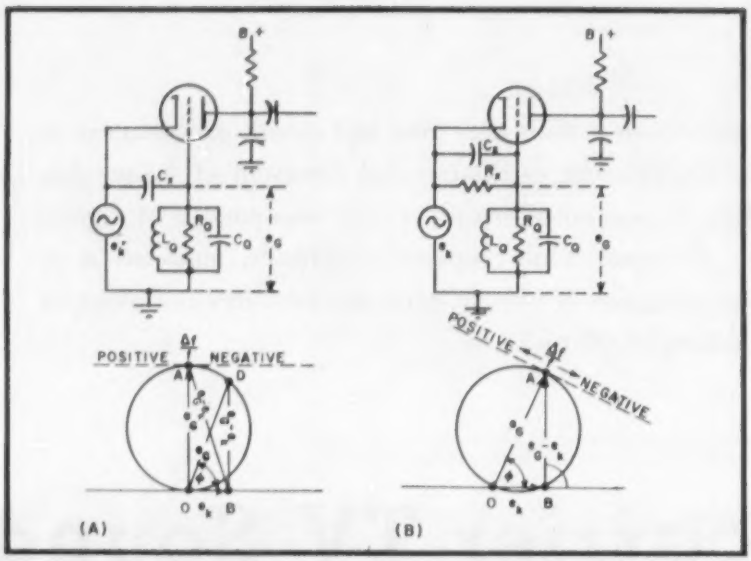

FIG. 5—Phasing for noncoincidence (A) and coincidence of peak output and quieting (B)

oscillator and sampler.

The driver is a conventional r-f pentode with low screen bias. This stage provides overload protection and gain, but cannot be counted on as a limiter, especially at the low signal levels concerned.

The double triode represents the synchrotector circuit proper. Tube V_{2A} is an oscillator with inductive feedback between plate and grid. The oscillator tank circuit forms the secondary of a bifilar transformer, whose primary connects to the driver plate at a step-up ratio of 2 to 1. The tuning slug passes through the triode plate coil, thus insuring good feedback while tuning.

The locked oscillator acts as an overdriven cathode follower. It is coupled to sampling triode V_{2B} through a common cathode connection. For f-m receiver applications, a passive cathode follower may be substituted for V_{2A}. Driving impedance R_xC_x has an important influence on quieting. In all other respects, the function of the sampling triode follows the general outline given before, except that a separate clamping diode was found unnecessary.

Table I—Computed data for circuit constants of Fig. 2

C_x ($\mu\mu$f)	ϕ (degrees)	f/f_c (percent)	f/bandwidth (percent)
2.2	70	1.1	16
5	80	0.5	7

Performance Test

To study the performance of the synchrotector, the signals shown in Fig. 3 were used. Both had a carrier frequency of 4,500 kc, deviated at a 60-cycle rate by either ±25 kc or ±75 kc, as desired. The f-m carrier in Fig. 3A was amplitude modulated by a sine wave of several kilocycles.

In Fig. 3B, the amplitude modulation consisted of a pulse at a repetition rate of 60 cps. This signal was useful for listening tests since it closely simulates the reception of a standard tv signal.

Figure 4A shows the synchrotector output from the signal of Fig. 3A using ±75 kc deviation. At this excessive deviation, the output has the shape of a half-wave as expected. Figure 4B shows the output with 25-kc deviation. At this reduced deviation, the output is linear.

The a-m rejection in Fig. 4A and 4B is balanced (optimized at center frequency). By contrast, the a-m crossover lies at the top end, or at the bottom end of the frequency scale in Fig. 4C and 4D. These conditions result from changing C_x from the value given in Fig. 2. Optimum linearity and output voltage are adjusted by tuning the inductance, L_0, of the sampling circuit.

The circuit of Fig. 2 has a lock-in threshold of 12 mv with a 12AU7 and 6 mv with a 12AT7. Since the output is 25-v peak-to-peak in both cases, the maximum conversion gains are 2,000 and 4,000. This high sensitivity permits stable operation from the second detector output, thus by passing the video stages.

Phasing Problems

It was found that there is no inherent coincidence in a triode-sampler between maximum signal output and minimum a-m noise. Optimum output happened with the grid tank tuned head-on, while optimum quieting occurred when tuning L_0 to a slightly higher frequency than the carrier.

Inspection of Fig. 1B shows that optimum quieting demands sampling during zero passage of cathode voltage e_x. Since the plate current is determined by the voltage between cathode and grid, this calls for voltage difference e_0-e_x

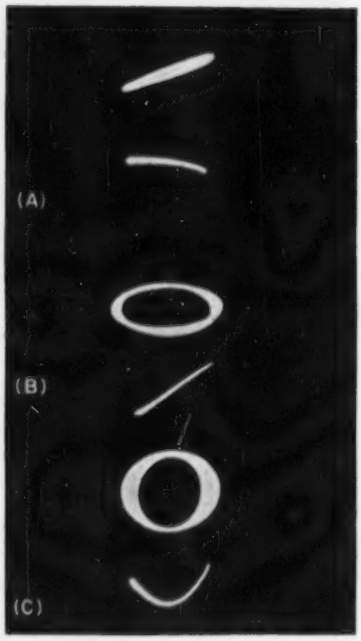

FIG. 6—Output and waveforms for three values of center frequency. Phase angle is 10 deg at upper bend (A) of sampling characteristic and 45 and 80 deg at linear part (B) and lower bend (C)

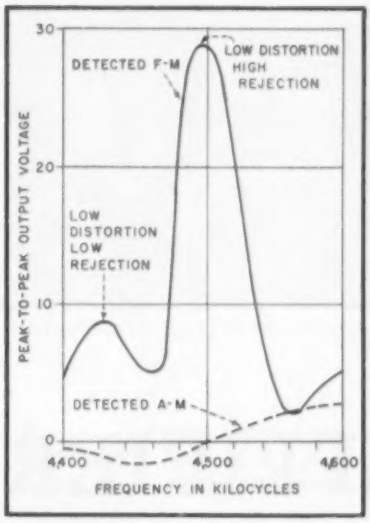

FIG. 7—Synchrotector f-m and a-m response characteristics

to be in quadrature with e_g for best a-m rejection.

Figure 5A shows voltage e_o, across a tuned grid, coupled to the cathode voltage, e_g, through an ideal capacitance C_x. For this network, the change of grid voltage with tuning is described by a circle diagram whose diameter OA is normal to the cathode voltage axis OB. Vector OA represents tuning for peak grid voltage and offers optimum linearity of phase detection. However, this condition does not coincide with quieting since the sampling voltage, vector $BA = e_o - e_g$ is not in quadrature with e_g. Detuning of the grid circuit to a higher frequency results in a-m rejection at point D ($BD \perp OB$). However, this happens at the expense of linearity since the phase modulation around OD is no longer strictly symmetrical. This is even more true for the second working point E, which is too far from resonance to be usable.

Vector triangle OBA stands for optimum f-m detection and triangle OBD for best quieting. The second condition differs from the first only by a slight detuning of the sampling circuit. As a first-order correction, this detuning can be minimized by circuit design.

The difference Δf for both tuning conditions may be formulated in terms of circuit components; in terms of carrier frequency

$$\Delta f/f = -\tfrac{1}{2}L_Q/(C_X R_Q^2) \qquad (2)$$

and in terms of tank circuit bandwidth

$$\Delta f/f = -1/(2\omega C_X R_Q) \qquad (3)$$

Equation 2 shows how to minimize the percentage detuning by making tank circuit inductance L_Q small, damping resistance R_Q large and by padding, if feasible, the grid to cathode capacitance C_X, with external capacitance.

For the phase angle between grid and cathode voltage,

$$\tan \phi = R_Q \omega C_X \qquad (4)$$

Using the circuit constants from Fig. 2, the data in Table I are computed.

To obtain optimum quieting, the grid circuit has to be detuned to an extent which is small, but not negligible in terms of its own bandwidth. It is therefore desirable to have additional means for centering the a-m rejection after tuning the grid for maximum signal.

Centering A-M Rejection

Figure 5B shows the most desirable mode of operation. The grid tuning function should be made to follow a circle diagram with inclined diameter OA; phase angle AOB, between resonant grid and cathode, being less than 90 degrees. If this relationship exists, grid peaking and minimum distortion becomes coincident with best quieting, since for peak tuning of OA, the voltage difference AB is in quadrature with OB. This mode can be realized by a resistive component R_X in shunt with coupling capacitor C_X. The expected crossover control from this move has been fully confirmed by experience.

In practice, it has been found more convenient to replace R_X by a scaled down value R_K in the cathode return and to adjust its effective value by a small cathode bypass capacitor, C_K, as shown in Fig. 2. It is then found that for best quieting the cutoff frequency $1/(2\pi R_K C_K)$ of the cathode network comes close to one half of the frequency of the intercarrier signal.

Figure 6 shows Lissajous figures for grid and cathode voltage e_g and e_K along with the output waveforms obtained for three separate values of center frequency. The phase angle is about 60 degrees in the linear part of the sampling characteristic and approaches 0 and 90 degrees at the upper and lower bend.



FIG. 8—Synchrotector audio output with constant deviation (A) and 75-μsec pre-emphasis (B)

Figure 7 shows the f-m and a-m response of the synchrotector as a function of carrier frequency. As anticipated from Fig. 1, the response to either type of modulation has the general shape of a cosine or sine function respectively, of the sampling phase. In the main lobe, there is satisfactory coincidence between best f-m detection and a-m rejection. Quieting factors of 40 to 50 db were readily obtained in sustained field tests.

Frequency response of the synchrotector is shown in Fig. 8, both for constant deviation (A) and also on a standard tv sound signal, using a preemphasis network of 75 microseconds in the transmitter (B).[8]

In the early phases of this work, much assistance and cooperation was given by Uziah Galil. The author is further indebted to G. Costello and A. F. Hogg for construction of equipment and testing of monochrome and color receivers using the synchrotector.

References

(1) R. G. Clapp, Color TV Receiver Design, *Proc IRE*, p 297, Mar. 1956.
(2) Zakarias, U.S. Patent 2-263-091, July 1940.
(3) W. E. Bradley, Single Stage F-M Detector, ELECTRONICS, p 88, Oct. 1946.
(4) R. Adler, The 6BN6 Gated Beam Tube, *Proc NEC*, p 408, 1949.
(5) J. Avins and T. Brady, A Locked-Oscillator Quadrature-Grid FM Sound Detector, *RCA Review*, p 648, Dec. 1955.
(6) K. Schlesinger, T.V. Detectors Use Pulsed Envelope Method, ELECTRONICS, p 142, Mar. 1954.
(7) H. S. Black, "Modulation Theory", p 213, Van Nostrand Co., N. Y.
(8) D. G. Fink, "Television Engineering", p 417, McGraw-Hill Pub. Co., New York, N. Y., 1952.

SUMMARY —— Simple R-C degeneration in emitter circuit achieves high-frequency compensation in transistor video amplifier for airborne radar system. Unequal degeneration in cascaded stages offers slight improvement in pulse rise time. Thermistor network can offset loss of gain with increasing temperature. Silicon transistors are employed

By RICHARD LESLIE

Sperry Gyroscope Company
Division of Sperry Rand Corp.
Great Neck, New York

TRANSISTOR AMPLIFIER

DESIGNED TO REPLACE its electron-tube counterpart in airborne radar systems, the transistor video amplifier incorporates many of the space, weight and power economies inherent in transistorized equipment. In design of transistor circuits for such environment, where large variations in temperature are present, the designer must take into account transistor parameter variations with temperature and minimize their effect.

Grounded-emitter amplifiers are used to obtain economical power gain with cascaded stages. Although the bandwidth of a grounded-emitter 904A silicon transistor is only 300 kc, pulse rise times on the order of a few tenths of a microsecond must be passed, requiring high-frequency compensation. After considerable experimentation with shunt and series peaking it was decided that R-C degeneration in the emitter circuit offered the best solution.

A shunt-peaked transistor amplifier was built having a gain-bandwidth product of 4×10^4 mc. Upon removal of the peaking coils and readjustment of the emitter network, the gain-bandwidth product had dropped only to 3×10^4 mc. Aside from the advantages of internal negative feedback, R-C degeneration avoids the difficult adjustments required in series and shunt peaking for optimum response.

Careful attention should be given to the choice of bias point. It is most desirable from standby con-

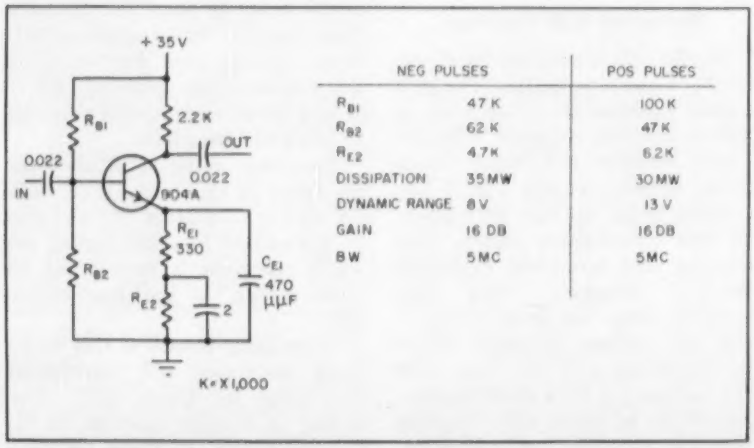

	NEG PULSES	POS PULSES
R_{B1}	47 K	100 K
R_{B2}	62 K	47 K
R_{E2}	4.7K	6.2K
DISSIPATION	35 MW	30 MW
DYNAMIC RANGE	8 V	13 V
GAIN	16 DB	16 DB
BW	5 MC	5 MC

FIG. 1—Grounded-emitter video amplifier stage with values and performance data for both positive and negative-pulse input

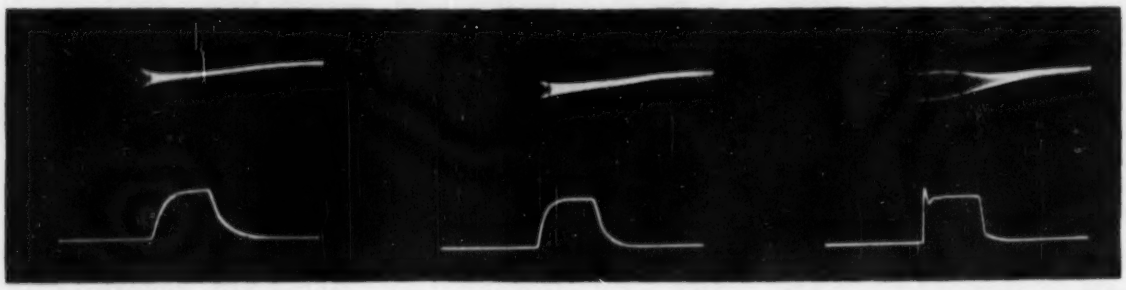

FIG. 2—Bandwidth and response to 2-μsec pulse for single stage. For $C_{E1} = 0$ and $R_{E1} = 0$(A): gain = 37 db, bandwidth = 250 kc and rise time = 1.3 μsec. For $C_{E1} = 0$ and $R_{E1} = 330$ ohms (B): gain = 16 db, bandwidth = 500 kc and rise time = 0.8 μsec. For $C_{E1} = 470$ μμf and $R_{E1} = 330$ ohms (C): gain = 16 db, bandwidth = 5 mc and rise time = 0.07 μsec

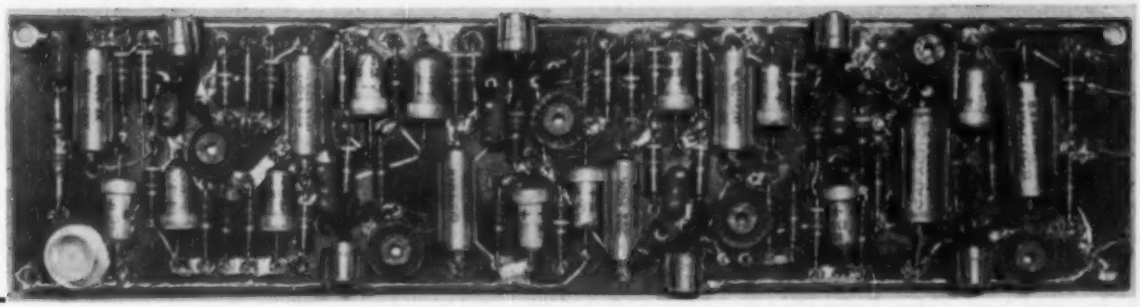

Printed-circuit transistor video amplifier. An earlier design, this amplifier uses shunt peaking coils

for RADAR VIDEO

siderations to operate each transistor at a high collector voltage and low collector current. A stage adjusted to amplify positive-going pulses can be so biased, thus favorably affecting bandwidth, stability, dissipation and dynamic range. Bandwidth is increased because of the decrease in collector capacitance and increase in alpha cutoff frequency with large collector-to-base voltages.

A negative-going pulse amplifier, on the other hand, can not be biased too high on the load line without adversely affecting bias stabilization and rise time. An experimental compromise must be reached between collector power dissipation, rise time and stabilization on the one hand, and dynamic range on the other.

A single stage with R-C degeneration in the emitter circuit can be adjusted to maximally flat gain response by fixing the emitter R-C time constant slightly greater than the collector time constant. A further adjustment must be made when cascading such stages because two maximally flat stages when cascaded do not make a maximally flat pair and also because of the loading effect of the second transistor stage on the first.

Temperature Stabilization

Although silicon transistors will operate without failure up to 150 C, the parameters can change as much as 50 percent as the upper temperature limit is approached. Taking the transistor h-parameters as an example, at 100 C h_{12} increases 50 percent, h_{11} increases 25 percent and h_{21} or alpha decreases 20 percent over the room temperature values.[1]

One of the primary goals in bias stabilization is to maintain constant emitter current throughout the temperature range. Although simpler operation results from constant base-current bias because of

Table I—Variation of Amplifier Characteristics With Temperature

Equal emitter degeneration — Fig. 4.			
Temperature	25 C	65 C	100 C
Plateau pulse gain	61 db	60.9 db	60.7 db
Overshoot pulse gain	63.1 db	61.9 db	60.8 db
Rise time	0.25 μsec	0.31 μsec	0.35 μsec
Bandwidth	2 mc	1.5 mc	1 mc
Unequal emitter degeneration — Fig. 6.			
Temperature	25 C	65 C	100 C
Plateau pulse gain	61.9 db	60.7 db	60.5 db
Overshoot pulse gain	64 db	63 db	62 db
Rise time	0.22 μsec	0.33 μsec	0.34 μsec
Bandwidth	2.05 mc	1.5 mc	1 mc

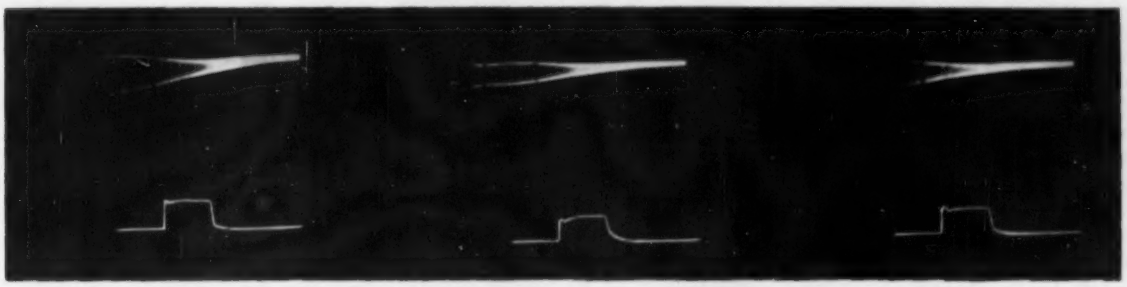

FIG. 3—Bandwidth and response to 2-μsec pulse for single stage. For $C_{E1} = 470$ μμf and $R_{E1} = 330$ ohms: gain = 18 db, bandwidth = 5 mc and rise time = 0.07 μsec when unloaded (A); bandwidth = 1 mc and rise time = 0.2 μsec when loaded (B). For $C_{E1} = 620$ μμf and $R_{E1} = 330$ ohms: gain = 16 db, bandwidth = 4 mc and rise time = 0.15 μsec when loaded (C)

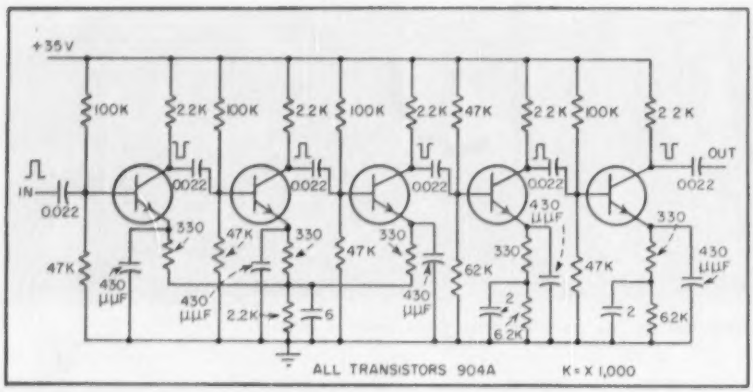

FIG. 4—Five-stage amplifier with equal amounts of degeneration in each emitter circuit

better linearity and higher input impedance, base-current bias permits greater temperature instability.

A principal cause of instability with constant base-current bias is the magnification by a factor of $1/(1 - \alpha)$, in the collector circuit, of the increase in collector cutoff current with temperature.[3] In silicon transistors, I_{co} changes rapidly with temperature but usually remains less than 5 microamperes up to 100 C.

Another phenomenon, even more pronounced in silicon than in germanium, is a change in input conductance which occurs over the entire usable temperature range.[3] This also results in a shift of the operating point and can be minimized by constant emitter-current bias.

Design Considerations

The circuit diagram of a stage with emitter degeneration is shown in Fig. 1. Resistor R_{E1} is partially bypassed by C_{E1} decreasing the degeneration at high frequencies.

The collector circuit capacitance was estimated to be 50 $\mu\mu$f. The load resistor was selected to be 2,200 ohms, a value experimentally found to allow a satisfactory compromise between gain and bandwidth. Hence the emitter time constant should be slightly greater than 0.1 microsecond for maximally flat gain response.

The value of R_{E1}, 330 ohms, was chosen as that necessary to reduce the low-frequency gain to approximately 15 db. Capacitance C_{E1}, calculated from the values of R_{E1} and collector time constant, was 330 $\mu\mu$f. Using a swept frequency oscilloscope display, the optimum value of C_{E1} was found to be 470 $\mu\mu$f, extending the bandwidth to about 5 mc with some high-frequency peaking.

Peaking was necessary to prevent excessive deterioration of rise time at high temperatures where alpha-cutoff frequency decreases. Measurements indicate that this parameter is down 20 percent at 100 C. Figure 2 illustrates the effect of the emitter network.

Emitter Resistance

Temperature stabilization is accomplished by inserting in the emitter circuit a relatively large resistor, R_{B2}, thereby effecting a constant emitter-current bias. The values of R_{B1}, R_{B2} and R_{E2} shown in Fig. 1 are based upon a compromise between the following four considerations:

Given the emitter bias current, 2 ma, and the power which may be expended in stabilization, 26 mw, the emitter to ground voltage and R_{E2} become known. The base resistors should be proportioned to give this d-c emitter voltage.

The ratio R_{B2}/R_{B1} should be as large as possible consistent with gain requirements, thereby increasing stability and lowering the collector current.

Resistor R_{B2} must be made large enough to prevent loading the previous stage.

If dynamic range is important, the operating point should be chosen in accordance with the polarity of the pulse.

The optimum values of R_{B1}, R_{B2} and R_{E2} were determined experimentally for each polarity pulse, and the results are tabulated in Fig. 1.

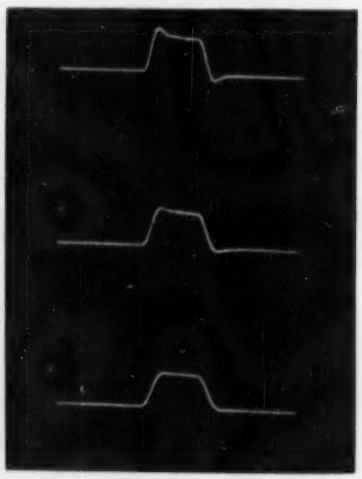

FIG. 5—Response of five-stage amplifier to 2-μsec pulse. Top: at 25 C, gain = 62 db, bandwidth = 2 mc and rise time = 0.25 μsec; middle: at 65 C, gain = 62 db, bandwidth = 1.5 mc and rise time = 0.31 μsec; bottom: at 100 C, gain = 61 db, bandwidth = 1 mc and rise time = 0.35 μsec

Supply Voltage

The higher the supply voltage consistent with allowable dissipation, the better the operating characteristics of the amplifier. A high collector-supply voltage allows a high value of R_{B2}/R_{B1} for a given operating point.

Alpha cutoff-frequency is increased and collector capacitance decreased with a higher supply voltage. A greater dynamic voltage swing is possible, an important consideration in output stages. Typical performance results obtained with a single-stage negative and positive-pulse amplifier are given in Fig. 1.

When two stages are cascaded, both the gain and bandwidth of the first stage are lowered because of the complex input impedance of the second stage. The first two oscillograms of Fig. 3 compare the frequency response of an unloaded stage to that of a loaded stage. The third oscillogram shows how the frequency response of the loaded stage is partially improved by increasing the emitter feedback capacitor from 470 $\mu\mu$f to 620 $\mu\mu$f. Figure 3 also illustrates the pulse

response of one stage under these three conditions.

In a linear amplifier comprising several stages, all transistors with the exception of the last two can be biased at a high collector voltage and low collector current because of the low level of the signals. The last two stages, which may have to accommodate large voltage swings and yet maintain linearity, should be biased in accordance with the pulse polarity.

In a typical five-stage amplifier with the low-level transistors biased identically as shown in Fig. 4, an adequately bypassed common-emitter-bias stabilizing resistor can be used for several stages.

Although this scheme has been used with four stages, it is expedient to limit the number to three because of the large bypass capacitor needed to prevent oscillation. The emitter feedback capacitors have been reduced to 430 $\mu\mu$f to provide maximal flatness for the five-stage amplifier.

Temperature Tests

Figure 5 shows the results of temperature tests on the five-stage amplifier. The average alpha-cutoff frequency of the 904A silicon transistors is 9.9 mc and the average alpha is 0.962. At 100 C, the gain drops slightly over 1 db from the room-temperature value of 62 db, while the rise time deteriorates. At low temperatures the gain decreases slightly, while rise time and bandwidth improve.

With shunt peaking, a better overall amplifier response curve results if the compensation is staggered. Figure 6 shows this idea applied to R-C degeneration in a video amplifier. The high-frequency responses of stages 1, 2, 4 and 5 have been emphasized by increasing their emitter degeneration resistors to 430 ohms. The low-frequency response of stage 3 has been emphasized by decreasing its emitter resistor to 150 ohms. This circuit shows a slight improvement in rise time at 25 C over the unstaggered amplifier of Fig. 4. Comparative data shown in Table I indicates nearly identical performance at elevated temperatures.

The power-supply drain of the amplifier shown in Fig. 4 is 315 mw at 35 v. The base-bias networks and the bias-stabilization networks dissipate about half the power. A similar electron-tube amplifier requires 4.5 w at 150 v, exclusive of heater power.

The six-stage printed-circuit video amplifier shown in the photograph was also temperature tested. This design employs shunt peaking coils. After 20 hr of temperature cycling from 25 to 100 C, the room-temperature gain and rise time had not changed. Moreover gain and rise time at 100 C were nearly identical at the beginning and end of the test.

Tests performed at alternate temperatures of −55 and +100 C for 24 hr in which the B+ voltage was cycled on and off ten times an hour showed no observable deterioration in amplifier performance.

In an application, the output pulse is used to trigger a transistor bistable flip flop. A method to compensate for both the loss in gain of the amplifier and loss in sensitivity of the flip-flop with increasing temperatures is shown in Fig. 7. A thermistor network, synthesized from empirical data, controls the bias applied to the diode gate and keeps constant the trigger threshold referred to the input

A scheme to compensate for loss in rise time with increasing temperature might be to apply positive feedback from emitter to emitter of consecutive stages through series thermistor-capacitor networks.

The author thanks Lawrence Greenspan for assistance in preparing this article.

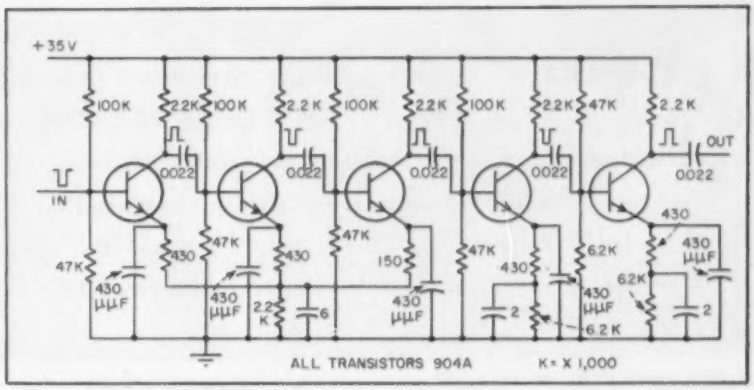

FIG. 6—Five stage amplifier with unequal amounts of degeneration in emitter circuits

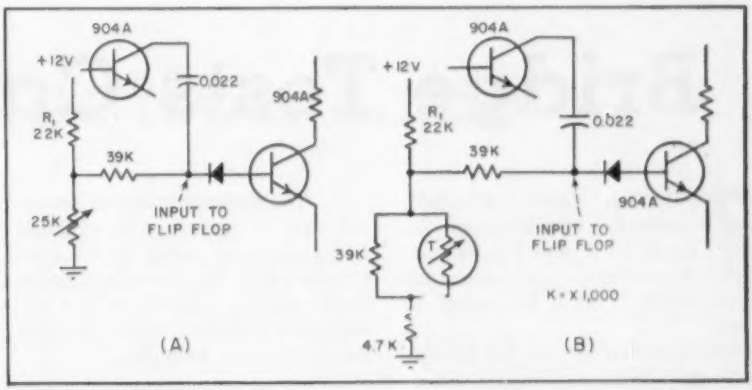

FIG. 7—Method for determining component values for thermistor network (A) and resulting thermistor network in emitter circuit to compensate for loss of gain with increasing temperature (B)

REFERENCES

(1) Type 904A *N-P-N* Grown Junction Transistor, Bull. No. DL-S 561, Texas Instruments Inc., Dallas, Texas, Sept. 1955.

(2) N. B. Saunders, Designing Reliable Transistor Circuits, *Electronic Design*, March, April 1955.

(3) Temperature Effects in Circuits Using Junction Transistors, License Bull. 979, RCA Laboratories Division, New York, May 1955.

SUMMARY —— One-mc bridge gives rapid indication of capacitance. Laboratory signal generator feeds bridge and electromechanical sweep unit. Bridge output feeds vertical crt plates while sweep unit drives horizontal plates. Modulation-pattern position gives capacitance and dissipation factor. Useful in production-line testing by unskilled operators, system measures capacitance variations of ±0.5 percent at rates up to 3,500 capacitors an hour

By JOSEPH BOER
Consulting Engineer
Glendale, N. Y.

Bridge Tests Capacitors

COMMERCIAL AND MILITARY equipment specifications require capacitance and dissipation-factor measurements of capacitors below 0.001 μf at a frequency of 1 mc.

Available test bridges for laboratory measurements require alternate manual adjustments to balance both the reactive and resistive components inherent at this frequency. Measurements of large quantities of capacitors on such a bridge is time consuming and requires skill.

The method to be described uses a unity-ratio-arm bridge. As seen in Fig. 1A, the bridge input voltage is obtained from a shielded r-f generator, set to the required frequency. The bridge output passes through a shielded frequency-selective amplifier and converter (communications receiver) producing an a-f voltage on the vertical plates of a crt. The electromechanical sweep unit seen in a photograph supplies the capacitance variation in synchronism with the linear horizontal sweep voltage applied to the crt horizontal deflection plates through the oscilloscope amplifier.

Bridge Circuit

The bridge consists of two equal precision resistors, 100 ohms each, with small and equal residual reactive components, and a precision variable air capacitor, C_s, 500 $\mu\mu$f (maximum capacitance) in parallel with a small variable air capacitor ΔC_s (35 $\mu\mu$f maximum capacitance). The capacitor to be tested is connected in the fourth arm. The generator voltage is introduced through a carefully balanced and shielded r-f transformer. There is no provision to balance out the resistive component of the unknown capacitor C_u, thus only an imperfect balance may be obtained by adjusting C_s.

The construction and small physical size of the ratio arms shown in a photograph inherently assures small residual values of parameters C_1, C_2, L_1, L_2 and C_c shown in Fig. 1B. Capacitors C_1 and C_2 are of the order of 0.3 $\mu\mu$f, while L_1 and L_2 are about 0.04 μH. Careful symmetrical arrangement of R_1 and R_2 makes the residuals equal from each side to the center. Owing to the small value of R_1 and R_2, the shunting effect of C_1 and C_2 can be neglected at 1 mc and only L_1 and L_2 need be considered. These must be equal for balance.

The ratio arms are balanced by selecting two resistors as nearly equal as possible. The small difference in d-c resistance is eliminated by adding a small length of manganin wire in series with the resistor having the lower value,

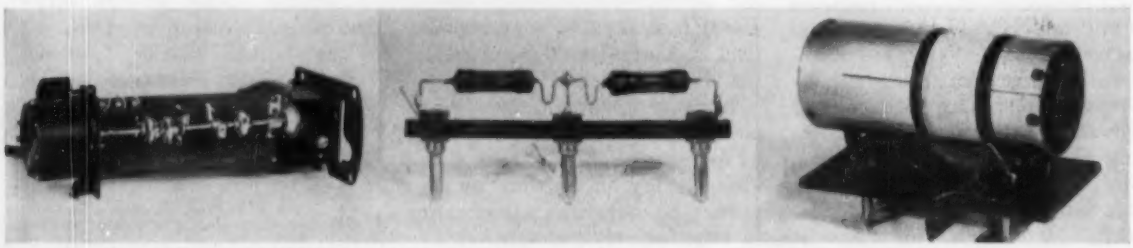

(B) Electromechanical sweep unit (left) has potentiometer at left, variable capacitor in center and a-c motor at right. Ratio arms of bridge (center) are balanced either side to center, while bridge transformer (right) is made from copper tube with lengthwise slots

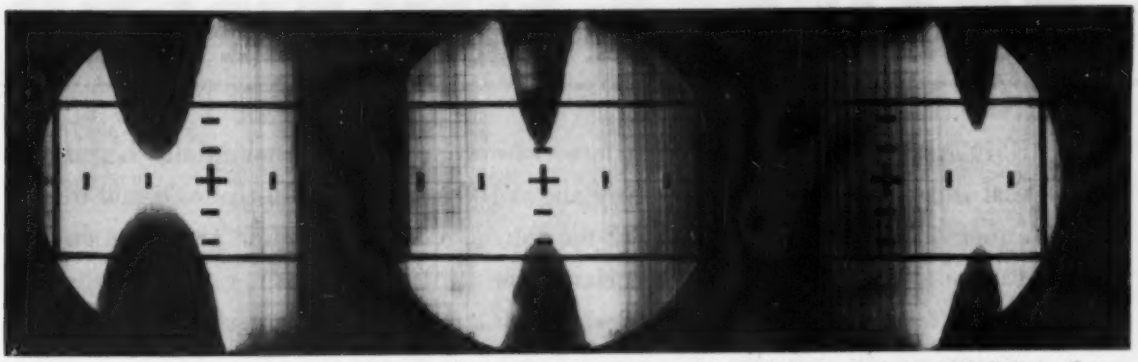

(C) Display on crt shows capacitance 1.0 $\mu\mu$f low, (left) ideal (Center) and 1.5 $\mu\mu$f high (right). Dissipation factor within limits in all cases. For small capacitance tolerances the limit lines enclose a rectangle as shown. For wider variations a trapezoidal pattern results

On Production Line

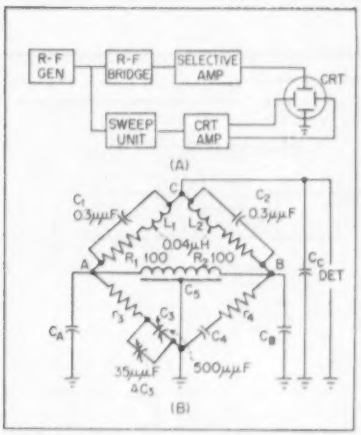

FIG. 1—Block diagram of system (A) and bridge circuit showing residual parameters (B)

until the two halves are equal as checked on a sensitive d-c bridge. The small increase in series inductance introduced by the small manganin loop is counteracted by a similar copper wire loop in the other arm as seen in a photograph. Opening or closing the loop will alter the inductance slightly until complete balance is obtained. Differences in C_1 and C_2 may be eliminated by the small copper flag at one end of the ratio arms. Final balancing is done at two widely separated frequencies in the bridge proper until reversal of the ratio arms does not affect the balance.

The balanced, shielded transformer construction makes C_A, C_B and C_S small and symmetrical with respect to bridge corners A and B. A copper tube with lengthwise slots acts as a Faraday shield between primary and secondary. The primary is wound outside of the shield, while the secondary is wound on a polystyrene tube about half the diameter of the copper shield and is placed in its center. Equalization of C_A with C_B is done by sliding the polystyrene tube with the secondary coil in an axial direction until transposing of the secondary leads leaves the bridge balance unaffected.

Linear sweep for the crt is produced by a rotating linear potentiometer mechanically coupled to a linear variable air capacitor driven by a constant-speed a-c motor.

Bridge Operation

To set up the bridge for large runs of production testing a capacitor with the required characteristics and allowable limits selected by careful laboratory measurements and connected to the unknown terminals of the bridge.

The motor-driven capacitor is set to mid-position corresponding to zero horizontal sweep voltage and the capacitance difference ΔC_S dial is set to zero. The generator and receiver are tuned to the selected frequency. The gain control and beat-frequency oscillator are then adjusted to give a vertical trace on the crt screen along the Y-axis.

Careful adjustment of the capacitance dial C_S will produce a distinct minimum balance position. Adjustment of the amplifier gain controls for a convenient amplitude will produce the point corresponding to the nominal value of the dissipation factor. Test capacitors with known dissipation factors are connected across the unknown terminals and the screen is calibrated accordingly, marking tolerance limits by any suitable means.

The Capacitance Difference dial is turned to +1, +2, +3 and so on. Minimum balance points are found by turning the sweep capacitor manually. Corresponding points and limits on the crt screen X-axis are then marked off. The capacitance difference dial is returned to zero and both dials are locked.

Photographs show a typical pattern as seen on the crt screen for a capacitor with the required nominal value of capacitance and dissipation factor.

Bibliography

J. Boer; Radio Frequency Limit Bridge, Thesis, Polytechnic Institute of Brooklyn, 1954.

L. Hartson, "Radio Frequency Measurements by Bridge and Resonant Methods", John Wiley, 1941.

B. Hague, "Alternating Current Bridge Methods", Pitman, 1945.

EXCITERS MULTIPLEX

SUMMARY —— Audio applied to serrasoid circuit phase modulates signal that is crystal controlled at slightly above 100 kc. Exciter multiplies signal to either 44 to 54-mc or 88 to 108-mc range. A similar exciter generates an audio-modulated 32.5-kc subcarrier to multiplex with main carrier. Units have a total audio distortion of less than 0.2 percent and a crosstalk figure of approximately —55db

By
H. G. STRATMAN
Senior Engineer
Gates Radio Co.
Quincy, Illinois

MULTIPLEX TRANSMISSION promises to provide the future for economic f-m broadcasting.[1] The equipment to be described consists of two f-m exciters capable of supplying a main carrier of 100 mc and a subcarrier of 32.5 mc to perform the multiplexing operation. Additional subcarriers may be added to the system whenever it is desired.

The method used to originate the 100 mc multiplex signal is shown in the schematic diagram of Fig. 1. The main channel unit initiates the signal with crystal oscillator V_1 operating slightly above 100 kc. The next two stages shape the waveform into a sawtooth and apply it to V_{4a}.

Assuming a constant train of sawtooth waveforms, the grid volt-

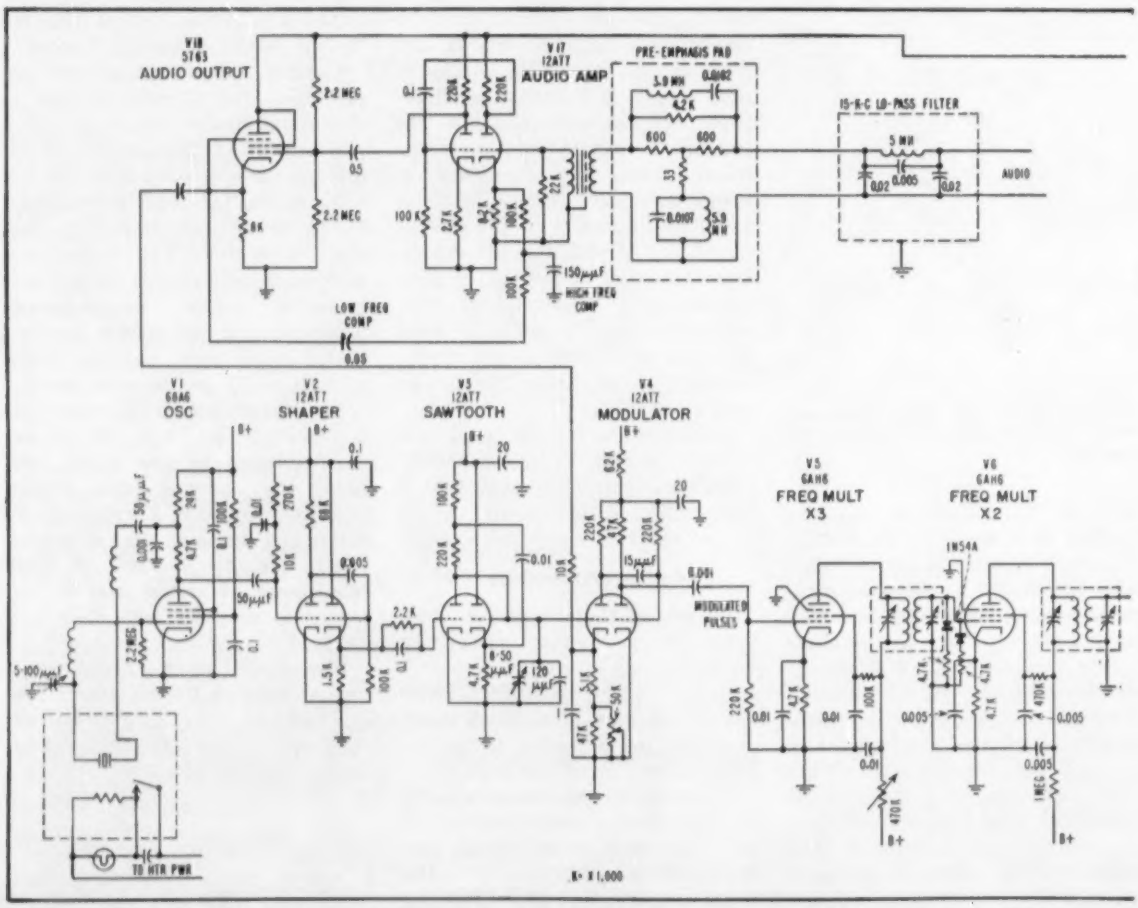

FIG. 1—Complete schematic of exciter capable of producing from 2 to 20 watts output power. Unit is normally used to drive power

age will rise linearly along the leading edge of the saw tooth waveform until the tube conducts, causing a sharp negative-going pulse to appear at the plate of the tube. If audio voltage is applied, it will cause the grid-to-cathode bias to vary at the applied audio frequency rate. The negative-going spikes at the plate of V_{4-A} will appear sooner or later in time, at an audio frequency rate, thus causing phase modulation.

Multipliers

The negative-going pulses appearing at the plate of V_{4-A} are inverted by V_{4B} and applied to frequency multipliers V_5 through V_9. These stages are coupled by double tuned transformers for added selectivity. The coupling is narrowed to the point where it just begins to affect the response at 15,000 cp.

This is done to attenuate spurious sidebands occurring in the vicinity of 100 kc.

Since the subcarrier modulates the main carrier about 10 percent, it starts out with a handicap of roughly 15 or 16 db with respect to 100 percent modulation of the main carrier by audio.

If the 100-kc beats are down 60 db below 100 percent modulation at 400 cycles, they will be only about 45 db down with respect to subcarrier modulation. This puts them in a range where they may affect subcarrier performance since each of these spurious sidebands will carry audio modulation.

Two germanium diodes are connected across the secondary of T_5. They increase the attenuation of crystal frequency beats from −50 to about −65 db..

Modulator

The output of V_9, drives the phase modulator, V_{13} and V_{15}. The subcarrier frequency is injected in push pull. The *R-C* network between the output of V_{16} and the phase modulator tubes is a de-emphasis circuit that tends to keep subcarrier modulation of the main carrier constant.

The 6146 power amplifier stage normally operates at the output

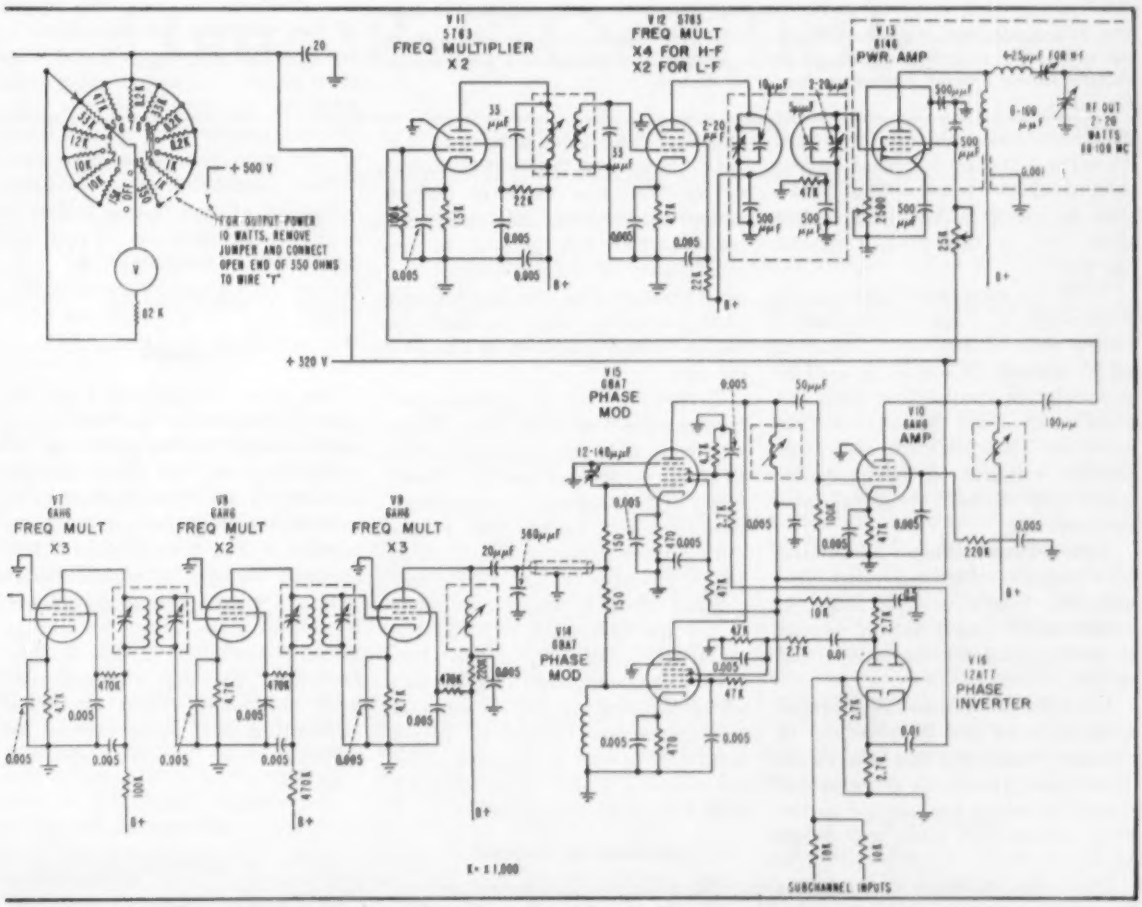
V11 5763 FREQ MULTIPLIER X2
V12 5763 FREQ MULT X4 FOR H-F X2 FOR L-F
V13 6146 PWR. AMP
+ 500 V
+ 320 V
FOR OUTPUT POWER 10 WATTS, REMOVE JUMPER AND CONNECT OPEN END OF 350 OHMS TO WIRE "Y"
RF OUT 2-20 WATTS 88-108 MC
V15 6BA7 PHASE MOD
V10 6AH6 AMP
V7 6AH6 FREQ MULT X3
V8 6AH6 FREQ MULT X2
V9 6AH6 FREQ MULT X3
V14 6BA7 PHASE MOD
V16 12AT7 PHASE INVERTER
SUBCHANNEL INPUTS

amplifiers from 250 watts to several kilowatts output by replacing original exciters in existing transmitters

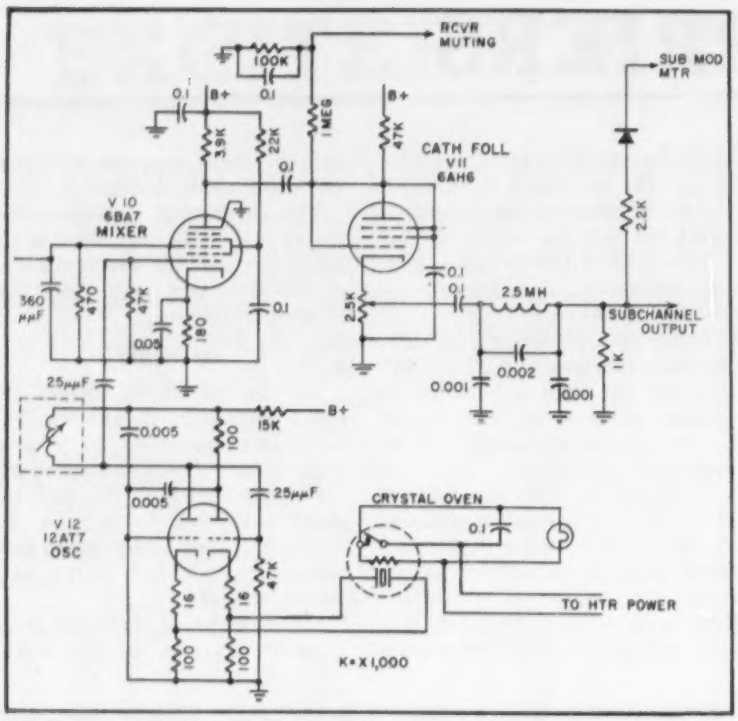

FIG. 2—Subcarrier output circuits. Preceding circuits are identical to those in main channel unit of Fig. 1. Negative voltage (—24 v) applied by voice-operated relay causes receiver muting between musical numbers when desired

frequency unless the exciter is used to drive a transmitter that has its own doubler. Quadrupling in V_{13} may be questioned as it is seldom done, but in this case it proved better.

With 320 volts on the plate of the 6146 stage, it is capable of 10 watts output with efficiencies in the order of 65 percent. When V_{13} is used as a doubler in conjunction with the 6146 stage only 6 watts output could be attained with the same element voltages. A strong spurious signal at half frequency also resulted.

Double-tuned stages were used to attenuate these spurious frequencies. Changing from single to double tuned stages did not appear to affect supcarrier crosstalk to any extent.

Voltages on all multiplier stages were kept as low as practical to prevent overdriving and saturation. This aided greatly in the attenuation of spurious frequencies to the point where they were well below 70 db.

The audio required to modulate the main carrier is supplied by V_{17} and V_{18}. The total distortion is less than 0.2 percent from 50 to 15,000 cycles. The rms value of output audio required to modulate the main carrier 100 percent is approximately 30 volts. Without the pre-emphasis pad, audio response of this amplifier would normally be flat to within 1 db from 50 to 15,000 cps.

However, owing to narrowing of bandpass in the multiplier stages of the exciter, the overall response at 15,000 cycles may fall off. Therefore 2 high frequency compensating capacitors was added. This raised the response approximately 3 db at 15,000 cps over that at 10,000 cps.

Since 50-cycle modulation tends to tax the maximum limits of the serrasoid modulator, a low frequency compensating capacitor was added to bring up the response at this frequency. It may be varied from 0.01 to 0.05 μf and will affect the response 3 to 4 db at 50 cycles with respect to 100 cycles.

Subcarrier Channel

The multiplex subchannel exciter unit with the exception of the last three stages, V_{10}, V_{11} and V_{12} is identical to the main channel exciter unit. A flat pad, in place of pre-emphasis, is normally used in the audio system but may be changed at the option of the broadcaster.

A 10-kc low-pass filter is normally used in the audio chain of the subchannel unit, while a 15-kc, low-pass unit is used in the main-channel exciter. On the main-channel exciter unit, the output of V_8 is fed to the phase modulator. On the subchannel exciter unit, the output of V_9 is fed to the grid of mixer tube V_{10}.

Oscillator

A stable Butler type oscillator, V_{12} feeds the other grid of mixture V_{10}. This oscillator frequency will differ from that of the output of V_9 by the subcarrier frequency. The subcarrier frequency output of V_{10} is then fed to cathode follower V_{11}. Between V_{11} and the output of the exciter a low pass filter is inserted that attenuates frequencies over 40 kc. A coaxial cable then connects the output of the subchannel exciter unit to the input of the main channel exciter unit.

The germanium diode rectifies a portion of this output which is applied to a test meter to read the approximate percentage of subcarrier modulation of the main carrier.

Crosstalk

The value of crosstalk from the main channel into the subchannel varies directly as the percentage of modulation on the main carrier and also varies with a difference in modulating frequency on the main carrier. The modulation frequencies above 4 kc appear to offend the worst. Fortunately, there is usually little energy present at these frequencies in the normal program. The best crosstalk figures obtainable, when sine-wave modulating the main carrier 70 percent, varies between —50 and —55 db.

REFERENCES

(1) W. N. Hershfield, Multiprogram F-M Broadcast System, ELECTRONICS, p 130, June 1956.
(2) J. R. Day, Serrasoid F-M Modulator, ELECTRONICS, p 72, Oct. 1948.

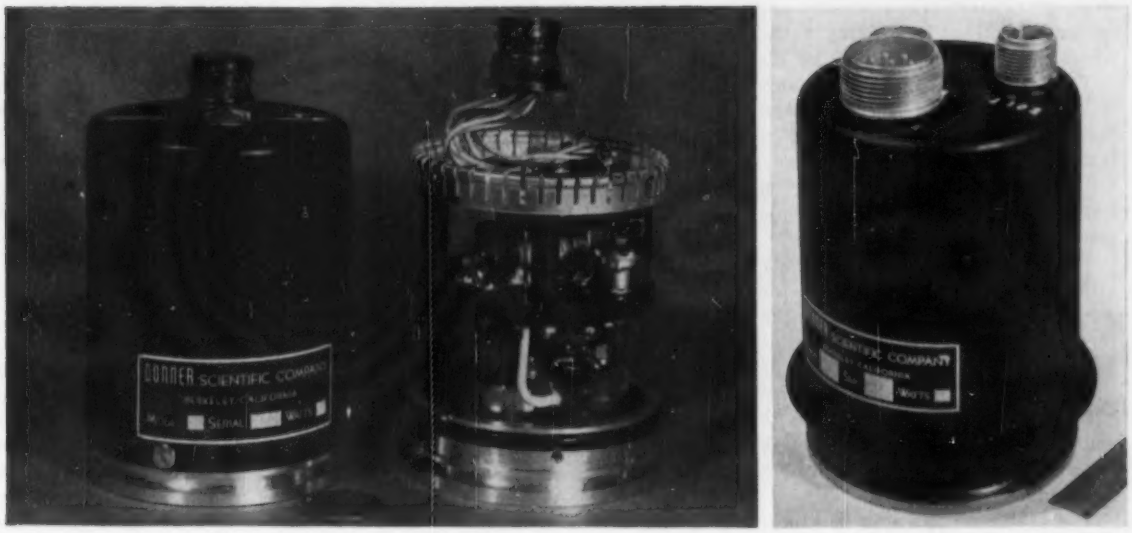

Transducer in its housing, left, transducer removed to show its construction, center, and power-supply in housing, right

Servo Accelerometer Uses R-F Oscillator

SUMMARY —— Instrument for measuring steady-state and low-frequency acceleration data incorporates 200-mc superregenerative oscillator with vane attached to moving coil as one plate of tuning capacitor. Oscillator is detuned in response to accelerating forces. Increased plate current flow through coil restores balance giving an indication of acceleration

By VICTOR B. COREY

Technical Director
Donner Scientific Company
Berkeley, California

ACCELEROMETERS gage acceleration by measuring the inertial force acting on a fixed mass. Usually the force is measured by deflection of a spring. Spring deflection is proportional to acceleration along the sensitive axis of the device.

Deflection Detection

Several methods may be employed to sense spring deflection. Bonded or unbonded strain gages sense deflection through differential changes in resistance of fine wires under stress. Other accelerometers utilize a differential transformer, low-friction potentiometer or the change in transconductance of a vacuum tube.

In the servo accelerometer shown in the photographs inertial forces on the accelerated mass do not result in spring deflection. Instead the forces are automatically opposed by precisely equal forces which insure negligible deflection of the mass with respect to the accelerating system. The instrument is a miniature self-contained servomechanism which automatically measures input acceleration by a null method of achieving balance between two opposing torques.

The device is comprised of an r-f oscillator, torque mechanism, and power supply and output system. Linear acceleration along the sensitive axis of the transducer causes an input torque on a pivoted inertial system comprised of an unbalanced moving-coil-and-vane assembly. If the input torque is not completely balanced by an opposing torque due to current in the moving coil, an angular displacement of the inertial system results. Only a minute angular deflection of the inertial system is required to produce the current through the moving coil necessary for a precise balance of torques.

R-F Oscillator

The r-f oscillator shown in Fig. 1A uses a 5718 triode in a modified Colpitts or ultraudion circuit. Inter-

electrode capacitances enter into the determination of the drive ratio, which is critically affected by C_2.

The tank circuit of the oscillator is comprised of fixed coil L_1 and C_1 and C_2 in series, each shunted by interelectrode capacitance. Capacitor C_1 is a variable capacitor which links the oscillator to the torque mechanism.

The fixed plate of C_1 is rigidly attached to the main oscillator structure. The variable plate is the formed end of a metal pointer or vane carried by the moving coil of the torque mechanism. Radio-frequency connection to the vane is made from the tank coil through the upper hairspring of the torque mechanism.

The oscillator operates in superregeneration with a primary frequency of approximately 200 mc. Cathode current is not continuous but flows in 1 μsec pulses at the quench frequency. With proper choice of C_2, the quench frequency may be varied smoothly from less than 5 kc to more than 500 kc or above by changing C_1 only 5 $\mu\mu$f.

Over the entire range of quench frequency the amplitude of the plate-current pulses remains substantially constant. Thus a change in C_1 introduces a corresponding change in average plate current through duty-factor modulation.

At a nominal plate-supply voltage of 150 v, average plate current i_p may be changed from less than 1 ma to 8 ma or more as the spacing between the parallel plates of capacitor C_1 is varied approximately 0.002 in. Plate current is roughly proportional to plate-tank capacitance and therefore varies approximately in inverse proportion to the separation of the capacitor plates; see Fig. 1B. This nonlinear relationship between capacitor plate separation and i_p is responsible for a noticeable change in servo loop gain over the operating range.

As C_1 is varied, i_p varies over a range which is entirely positive. However, to achieve torque balance under an acceleration which may be in either direction along the axis of the instrument, a fixed bias current i_b is supplied from a second d-c source. As shown in Fig. 2, net current i_o through R_L may have either direction and arbitrary magnitude, depending upon whether plate current i_p is larger or smaller than bias current i_b. Since the magnitude of i_p is controlled by C_1, changing this capacitor can change the current i_o through R_L over the same range as i_p, but with a division between positive and negative parts of the range which depends upon i_b.

The motor of the servo accelerometer is a precision D'Arsonval movement with the meter pointer replaced by a mechanically strong conducting vane formed at its outer end into the movable plate of capacitor C_1. The hairsprings are replaced with fine conducting filaments with negligible torque rating to insure that input torque arises from acceleration alone. The pivot-and-jewel bearings of the movement are used without change.

Theory of Operation

Fundamental operation of the accelerometer as a servomechanism results when i_o flows through the coil of the torque mechanism. Coil connections provide degenerative feedback, so that with no acceleration the torque arising from inequality of i_p and i_b moves the plate of C_1 toward a position where i_p equals i_b. The separation of the plates of C_1 for $i_o = 0$ is a function of oscillator characteristics, power supply and bias voltages, and the bias resistor. However, if no torque is applied, the only stable position of the system corresponds to $i_o = 0$, or zero output current through the load resistor R_L.

If the transducer experiences an acceleration a along its axis, input torque T_1 is

$$T_1 = b_1 M a$$

where b_1 depends upon the units used and M is unbalanced moment.

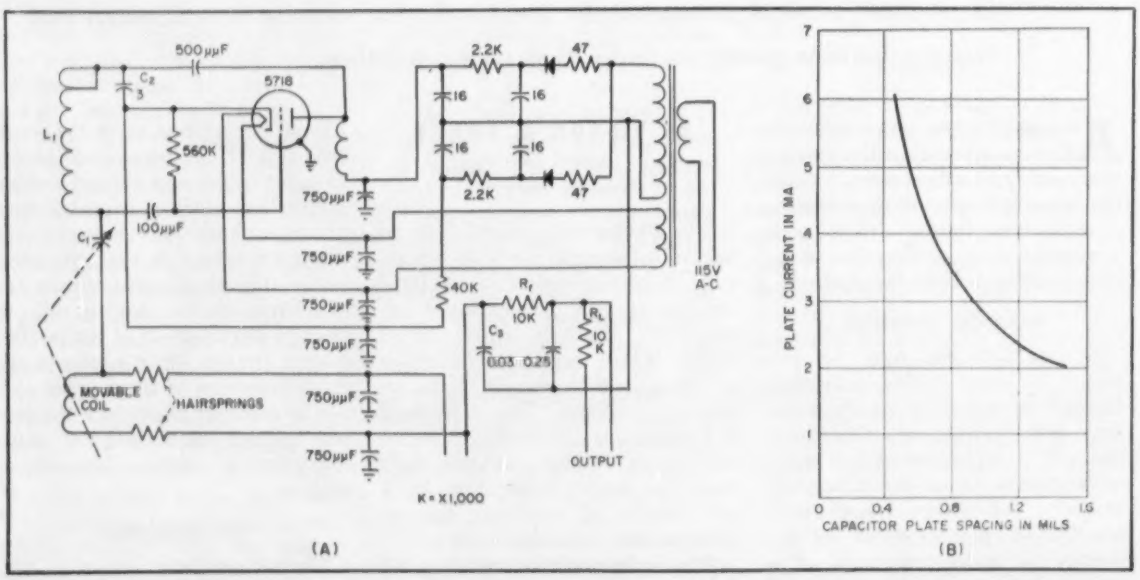

FIG. 1—Superregenerative oscillator shown with its power supply (A) uses 5718 triode in ultraudion circuit. Curve (B) shows how oscillator plate current varies with separation of tuning capacitor plates

Output torque T_2 developed by current i_s through the coil of the torque mechanism is

$$T_2 = b_2 i_s n B$$

where b_2 is a dimensional constant, n is the number of turns on the moving coil and B is magnetic flux density in the air gap. Torque balance is achieved if $T_1 = T_2$, or

$$i_s = b_1 M a/(b_2 n B)$$

Since b_1 and b_2 are constants and M, n and B are parameters fixed by design, input linear acceleration a is measured by current i_s which produce torque balance. The constant

$$k = i_s/a = b_1 M/b_2 n B$$

is a characteristic of an individual transducer known as the current sensitivity. It is commonly expressed as milliamperes per g of acceleration.

The rate of change in i_s with change in C_1 is so large that torque balance is achieved anywhere in the operating range of the accelerometer with a maximum angular deflection of the inertial system from 1 to 3 milliradians with respect to the case.

Basic output of the servo accelerometer is current i_s which is generated by the servo in proportion to applied acceleration. Voltage output of the transducer $i_s R_L$ is proportional to the load resistance across which it is developed. Size of the load is limited by the upper limit of voltage available from the transducer and its power supplies.

The power supply for the instrument operates from 115 v at any frequency from 50 to 900 cps and its power supply furnishes all voltages required for operation of the accelerometer: +150 v at 20 ma, −150 v at 20 ma and 6.3 v a-c at 250 ma. Voltages are not regulated, since closed-loop operation of the servo accelerometer makes the output essentially independent of plate and bias voltages, although the operating range is limited by these voltages.

Full-range output current into any load is approximately ±2 ma regardless of instrument range. Corresponding full output voltage across 20,000 ohms, R_f and R_L in series, is ±40 v. However, as the transducer is normally used, super-



FIG. 2—Bias supply provides direct current through moving coil that permits measuring acceleration in positive or negative direction along transducer axis

regenerative noise is sharply attenuated by the filtering action of R_f and C_f and a smooth output of ±20 v is available across R_L.

Because of the high gain of the servo system, damping must be introduced to provide stability. Shorted-turn conductors carried by the moving coil in the magnetic field of the torque mechanism provide velocity damping. Damping also results from the thin layer of air between the closely spaced parallel plates of C_1. In addition a phase-lead capacitor C_p is selected empirically for optimum transient response.

Characteristics

The servo accelerometer resolves changes in steady-state input acceleration on the order of one part in 100,000 of full range. A typical instrument with a range of more than 2 g responds reliably to input changes of 2×10^{-5} g, corresponding to a tilt of 0.02 milliradian. Such changes are reversible without apparent hysteresis.

Nominal tolerance on absolute accuracy of the transducer at d-c is 0.1 percent of full range. This includes shift in zero due to bearing friction and any deviation from linearity which may be introduced by the combination of linear hairsprings of finite spring constant and a nonlinear error detector. Superimposed on this characteristic is an increase of 0.024 percent in current sensitivity for each degree rise in temperature.

Accuracy is largely independent of changes in circuit parameters, such as those associated with the aging or replacement of the vacuum tube, alteration of supply voltages or drifting of the values of circuit components.

The servo's high closed-loop gain and the low moment of inertia of the moving system result in a natural frequency well above 100 cps. In most ranges the damping is below critical, so the accelerometer is as sensitive to input accelerations up to 100 cps or beyond as to steady-state acceleration. Unless care is exercised, a servo accelerometer intended for sensitive measurements of low-level d-c or low-frequency acceleration can be driven into saturation and overload by higher level accelerations associated with vibration at much higher frequencies. Accurate measurements of acceleration are insured only if the sum of intended input signal and any superimposed noise does not exceed the linear dynamic range of the instrument.

Servo Accelerometer

Among the most interesting applications is inertial stabilization of special aircraft.

Three servo accelerometers with sensitive axes fore-and-aft, right-and left and up-and-down furnish signals which permit rigid automatic control of acceleration, velocity and position of the vehicle in three dimensions. Since each servo accelerometer is a high-gain electromechanical amplifier, electrical attitude corrections may be summed into the instruments so that stabilization of the sensitive axes is not required. Similar techniques are used in another instrument which uses the servo accelerometer to obtain instantaneous vertical velocity.

The servo accelerometer is commonly used for precise telemetering of d-c and low frequency data, but the version pictured is not recommended for use at higher frequencies because of circuit microphonism.

Acknowledgment is due Paul C. Driver, Aviation Ordnance Department, Naval Ordnance Test Station, China Lake, California, for the development of working models of the servo accelerometer and Harold D. Morris and R. Lee Price of the Donner Scientific Company for contributions to the redesign and improvement.

Grid-Switched Gas Tube

SUMMARY —— Application of potential between any cathode strip and anode wire of lattice-structure tube causes glow at intersection. Each of 100 spots is sharply and exactly defined and can be made to glow in any sequence or arrangement. Device operates from coordinate-type inputs and is applicable for display of almost any kind of X and Y information

By F. B. MAYNARD*, J. CARLUCCIO and W. G. POELSTRA

Research Division
National Union Electric Corporation
Orange, New Jersey

PLOTTING mathematical operations, presentation of information and picture reproduction are some of the potential uses of a new display device under development. The heart of this device is a relatively thin gas-filled tube called a Lattice Videotron.

Tube Construction

The tube's portrayal area is composed of a multiplicity of criss-crossed elements and barrier ridges as shown in the photographs. This composite structure, or matrix, occupies the entire useful face of the tube. The cathodic elements are flat thin-metal strips, which may be of any number and of any width and length. The overlying ceramic barrier ridges are so proportioned that geometrically square islands of illumination are presented for each spot.

Anodic elements are fine wires supported at the ends and placed at right angles to the cathode strips. Neon or other suitable gas is used in the tube to present a brilliant, perfectly defined, cathode glow at each spot where an activated anode crosses an activated cathode. Potential required for this activation is approximately 300 volts. The current obtained in the discharge, which is dependent on the cathode area, is in the order of 33 μa per sq mm and is surprisingly constant from spot to spot.



Closeup of tube face shows lattice of cathode strips and anode wires

Tubes have been built in 10 by 10 and 15 by 15 arrays, giving 100 and 225 spots. There seems to be no limit to the total number of spots that could be developed. No increase in voltages to high values is required, as is usually necessary in large-size cathode-ray tubes.

All the spots in an individual tube will have the same color, although the color may vary from tube to tube depending on the type of gas used. Tricolor reproduction is possible by registering a suitable phosphor mesh with the spot array and deriving the luminescence of the phosphor from excitation by a suitable gas discharge.

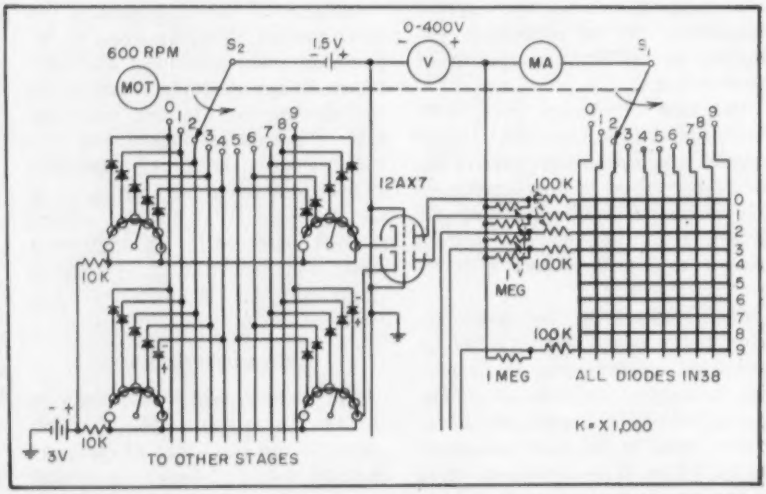

FIG. 1—Lattice-tube circuitry includes five 12AX7 tubes and associated switches, resistors and diodes. Each seven-point switch has contact spanning six points at any instant

Sweeps

Synchronized horizontal and vertical sweeps could be used to sweep the tube. This would give a flying-spot raster similar to that of a cathode-ray tube. Considerably less stringent sweep requirements are obtained by taking

*Presently with Motorola, Inc., Research & Development Branch, Phoenix, Arizona

for Display Presentation

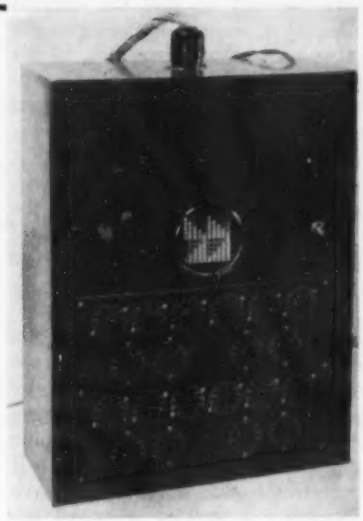

FIG. 2—Demonstration unit incorporates circuit of Fig. 1

advantage of the natural characteristic of the tube, which permits line-by-line sweeping.

In the application shown as a basic circuit in Fig. 1, a sweep is applied to the anodes by using a 10-point motor-driven rotary switch. From a second switch on the same motor shaft, a second sweep is applied to ten bus bars, which are connected to the cathodes through control switches and isolating diodes. Amplifier tubes are used as passing tubes between the switching matrix and the tube.

When any given anode is activated by the anode switch, the second sweep switch contacts the proper bus corresponding to that part of the raster. The control switches, which may be any kind of elements activated by suitable input signals, make contact only to the particular cathodes required for the portrayal at that part of the raster. Hence, a complete line of illuminated or dark spots as required, appears during the passage of the vertical sweep.

With the proper kind of switching, any possible combination of light and dark spots can be built up, to represent simple traces, to patterns and pictures.

The demonstation device shown in Fig. 2 was built to test some of the possible uses of this kind of display medium. A switching system was adopted that simulates the buildup of vertical bar graphs, certain configurations of patterns and crude picture-like arrangements. Figure 3 shows some of the patterns that can be formed using this device.

Pickup and Display

In the device shown in Fig. 4, the switches and isolating diodes are replaced by a Phototron, a 100-element photocell of matrix construction almost identical to the portrayal tube. With this, it is possible to portray continuously moving silhouettes of small objects held between a light source and the photocell face. If an object is held between a light source and the photocell, a silhouette will appear on the display tube due to the fact that the tube face will be dark where the light has been interrupted by the object.

Ring Counter

A ring counter is used in place of mechanical switches. The counter contains ten 12AU7 tubes with the plate of the left-hand section of each tube connected to the anode of the photocell and display tube. One of the 12AU7 triode sections is nonconducting while the other nine sections are conducting, which causes one anode in both the photocell and display tube to be at the supply potential. Application of input pulses to the ring counter causes each succeeding tube to become nonconducting, with the other nine always remaining conducting. The positive end

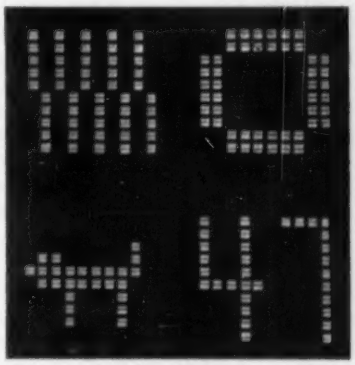

FIG. 3—Patterns generated with Fig. 1

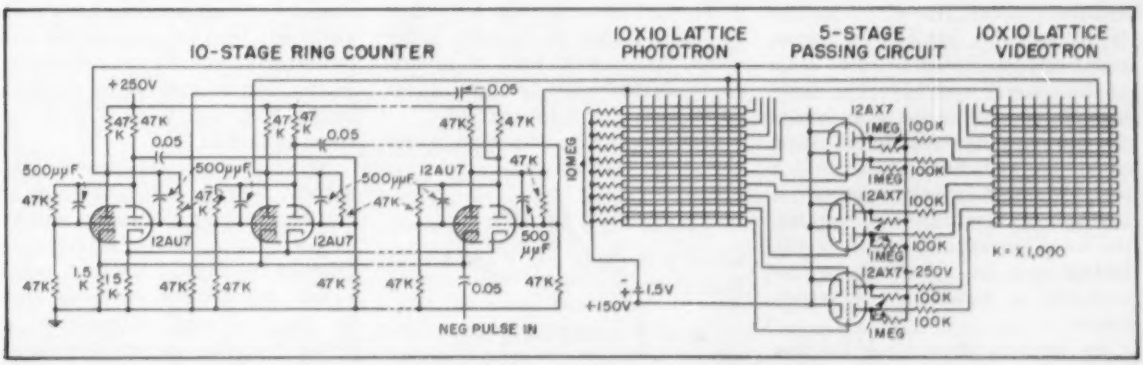

FIG. 4—Lattice tube used in conjunction with 100-element photocell portrays continuously moving silhouettes of objects held between light source and photocell

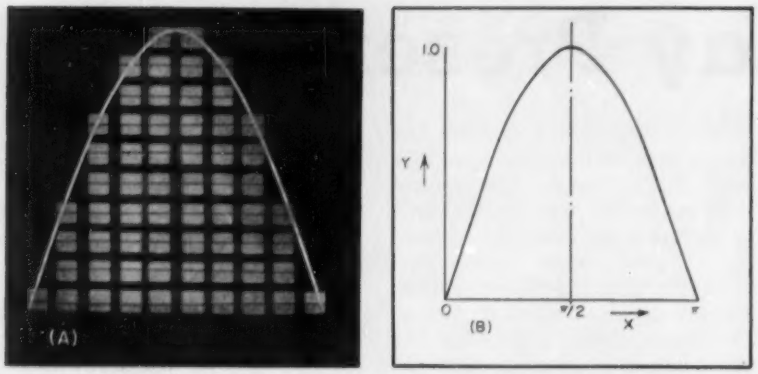

FIG. 5—Integral evaluation using tube face (A) and plot for mathematical evaluation (B)

of the supply is connected in succession to one anode at a time, which permits line-by-line sweep.

When light strikes a cathode of the photocell a current flows through the 10-megohm resistor connected to it, causing one of the 12AX7 triodes to conduct. The plate of the triode is driven negative and the display tube glows in the same place the photocell was excited.

For picture reproduction, the particular tube shown is not practical. However, with a 100 by 100 array of 10,000 spots, which is within the realm of present technology with this tube, a simple image of approximately newspaper quality resolution could be reproduced. This might have some uses in wired television for certain monitoring purposes and for the reproduction of wire photos.

Definite Integral Evaluation

A novel and perhaps useful application in mathematical analysis is obtaining the numerical value of the definite integral for an arbitrary curve. One classical way is to rule off, under the curve, equal squares based to some scale of the curve, and counting these squares to obtain the area under the curve. With this device spots could be switched on within a suitably scaled superimposed curve. Instead of counting the squares, the total courrent delivered to the matrix can be measured by introducing a meter in the return circuit.

An example illustrating the use of this tube in obtaining the value of a definite integral can be shown



FIG. 6—Circuit for integral evaluation is similar to Fig. 1, with switch S_2 substituted for 3-v battery at left in Fig. 1

with the aid of Fig. 5A. Those spots are lit that most clearly define the area under half a sine wave. The amount of glow that falls outside the curve and the unlit portion under the curve are approximately equal. The anode current for this configuration was found to be 3.4 ma; total current, with all spots glowing, was 5.2 ma.

The plot of half a sine wave, which has an amplitude of 1 unit with the abscissa having π units, is shown in Fig. 5B. The area of the equare enclosing the curve is equal to 1 by π or 3.14 sq units. Using the relationship $A_c/A_T = I_c/I_T$, $A_c/3.14 = 3.4/5.2$, $A_c = 2.05$ sq units, where A_c = area under curve, A_T = total area of square, I_c = current due to glow under curve and I_T = total current.

Mathematically, the area under the curve is given by

$$A_c = \int_a^b y\,dx$$

where $y = \sin x$, $a = 0$ and $b = \pi$. Substituting,

$$A_c = \int_0^{\pi} \sin x\,dx = 2 \text{ sq units}$$

This result of 2 square units is in close agreement with the result of 2.05 obtained from the display tube.

Evaluation Procedure

In general, to find the definite integral of some function, plot the curve on graph paper and, to the same scale, plot an identical curve on the tube allowing all the spots under the curve to glow. Construct a square on the graph paper that is proportional to the total area of the active tube face. Setting the ratio of currents equal to the ratio of the areas on the graph, permits calculation of the area under any curve.

It is also possible to obtain the integral of a given curve, except for an arbitrary constant, by modifying the method of switching used when determining the value of the definite integral. Suppose it is desired to find the integral curve of some function $y = f(x)$ between certain limits. Integrating the area under curve between a and b,

$$\int_a^b y\,dx = G(b) - G(a) = A_c$$

Replacing b by the variable x

$$A_c = G(x) - G(a)$$

which expresses the integral of the arbitrary curve as a function of x.

Thus, to find the integral curve, the given curve is set up as described for the evaluation of the definite integral. The circuit is similar to that shown in Fig. 1 except that motor-driven switch S_2, is shown in Fig. 6, connects the cathodes to the circut, successively, from left to right in such a way that once having been connected, a cathode will remain connected until all cathodes have been switched; then all connections will be destroyed and the cycle repeated. Flicker can be reduced by rotating switches S_1 and S_2 in Fig. 1 ten times as fast as S_2.

By switching in this manner, the current flowing into the tube at any time during the sweep will be proportional to all of the cathodes between the edge of the tube, point a and the cathode corresponding to the independent variable x. Hence, the total current flowing at any given time will be proportional to the integral of $f(x)$.

By HERBERT J. FRASER
School of Electronics and Communications
Sydney, Australia

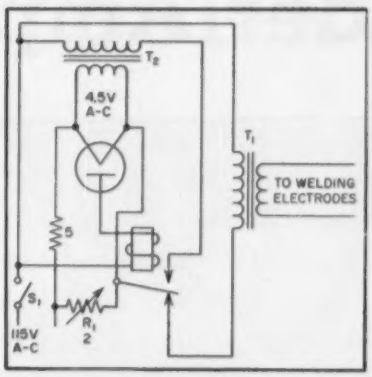

FIG. 1—Current-integrating controller uses tungsten-filament diode

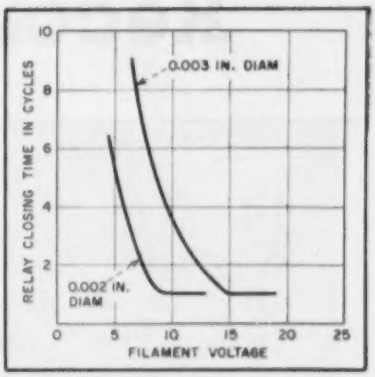

FIG. 2—Relay closing time as a function of diode filament voltage

Controller Integrates Spot-Welding Current

SUMMARY —— Current-integrating relay automatically changes welding time to compensate for changes in weld resistance or line voltage. Simple diode circuit can also be used in repetitive r-f heating cycle applications

CONVENTIONAL TIMERS in small resistance spot welders do not compensate for variations in welding due to changes in weld resistance or line voltage.[1] The controller shown in Fig. 1 automatically compensates for changes in both these factors.

Circuit Operation

The weld is initiated by closing S_1. The voltage developed across R_1 is supplied to the filament circuit of the tungsten-filament diode. The diode filament temperature increases with time until there is sufficient electron emission to operate the relay in the anode circuit and switch off the welding current.

The diode plate voltage is sufficiently high to ensure operation in the saturated region, thus making the plate current independent of the plate voltage. The saturated plate current increases steeply for small changes in filament temperature, thus the relay operates at a precise filament temperature and is independent of small changes in pull-in current.

The relay is held in by heating the filament from T_2 until S_1 is again opened to reset the relay for the next weld. If the welding current is abnormally low or high due to changes in weld resistance or line voltage, then a correspondingly longer or shorter welding time will be taken to close the relay.

Figure 2 shows experimental curves of welding time versus filament voltage for two diodes with different diameter filaments. Filament length was 5 cm in both tubes and relay pull-in current was 8 ma. Each cycle of relay closing time is 0.02 second.

The minimum voltage point on each curve is the least voltage for which the relay would operate reliably. The maximum voltage is that for which the filament burned out before the relay operated. To obtain a large range of welding currents with a given size filament wire, both the current required by the relay and relay pull-in time should be small.

Comparison of Results

A number of test welds between oxidized and clean 0.002-in. diameter tungsten wire and 0.03-in. nickel wire were made to compare the controller with a conventional timer. Welds were attempted with the clean tungsten wire for a line variation of ±10 percent. With the timer, a 10-percent drop in line voltage resulted in no welding at all and a 10-percent rise resulted in all the welds burning through. Good welds were made consistently with the controller over this range of line voltage.

The current-integrating relay can be applied effectively to repetitive r-f heating applications.

The author acknowledges the assistance of D. Stace in obtaining the experimental curves.

REFERENCES

(1) "Industrial Electronics Reference Book", p 509, John Wiley, 1948.

Recorder Amplifier for

SUMMARY —— General-purpose low-frequency amplifier accepts input of 0.02 to 80 volts, provides fixed or variable gain and 5-step filter network for flight-test recording of signals from synchro, gyro and servo control systems. Dual-amplifier rack mounting simplifies maintenance

By CECIL C. PINE
Engineering Section Head
for Instrumentation and Development
Sperry Gyroscope Co.
A division of the Sperry Rand Corp.
Ronkonkoma, L. I., N. Y.

MANY AIRBORNE control devices utilize a 400-cps suppressed-carrier signal. The recording amplifier used in testing these systems must provide amplification or attenuation, as required, and demodulation for presentation to the end recording device. In many cases, it is also desirable to provide filtering networks to suppress certain frequency components of the signal or to alter its phase.

These requirements have prompted the design of a general-purpose amplifier incorporating several features which increases its utility as a flight-test instrument. Among these are the choice of fixed or variable gain control, a five-step filter and a variable bias control.

The amplifier circuitry is shown in Fig. 1. The attenuator consists of an eleven-position switch and a series of precision resistors providing ten sensitivities.

The signal-amplifier stage consists of a cascaded 12AT7 producing negligible phase shift over the desired range of sideband frequencies. Stabilization is obtained by feedback from the plate of the output stage to the cathode of the input stage. Gain is controlled by varying the feedback voltage. A fixed-gain potentiometer is provided so that the gain may be adjusted to conform to the sensitivity ranges. A variable-gain potentiometer may be selected by a switch. This permits the amplifier-recorder system to be used in a manner similar to that of a vacuum-tube voltmeter with specific full-scale ranges, or as a variable-gain unit where any desired voltage within the limits of 0.02 v and 80 v will produce a full-scale output.

A bias signal is provided equivalent to four times the signal amplitude required to produce full-scale deflection on the recorder. This bias voltage is mixed with the signal voltage at the output of the amplifier. Both phase and amplitude of the bias signal may be controlled by the bias adjustment. This signal may be inserted or removed panel switch.

Both sections of a 12AU7 are connected in parallel matching the input impedance to the ring demodulator. The demodulator input

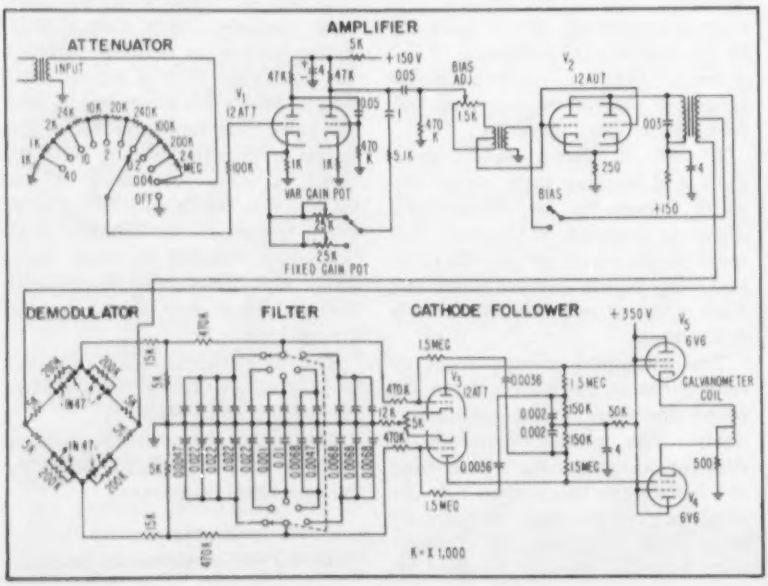

FIG. 1—Amplifier provides cathode-follower output to drive galvanometer coil of pen recorder used in flight testing of wide variety of aircraft electronic equipment



FIG. 2—Characteristic curves for 5-step filter network. Arrangement introduces about 3 db attenuation at each position

FLIGHT TESTING



Two-amplifier rack unit shows placement of parts. Both amplifiers are powered from common supply at top

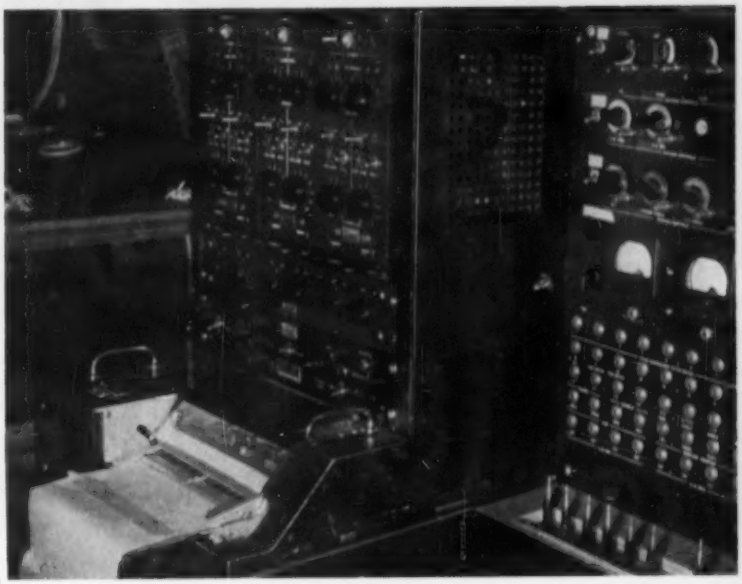

Bank of six amplifier units mounted above multichannel pen recorder in DC-3 test plane. Linearity of system, is about 2 percent of full scale deflection. Variation between scales is less than 3 percent at full-scale pen deflection

transformer is designed for a high degree of output balance. Secondary windings are identical in configuration and are coupled to the primary winding by a symmetrical core of high quality material. Electrostatic shields eliminate capacitive coupling between the windings.

Demodulation

Galvanometer-type recording instruments require a direct-current input. A ring demodulator is well suited for demodulation because it is insensitive to quadrature components of the suppressed carrier signal. Since the signals to be examined contain only sideband frequencies, it is necessary to insert the carrier before demodulation.

The ring demodulator uses a series-parallel resistor arrangement to minimize output variations due to changes in the diode characteristics. Each crystal is essentially an on-off switch, since the back and forward resistances of the circuit are governed almost entirely by the values of the parallel and series resistors respectively. Forward resistance of each leg of the bridge circuit is a function of the 5,000-ohm resistor and forward resistance of the diodes in series. Since the forward resistance of the diodes is low, the resistance of the circuit is almost entirely a function of the resistor. The back resistance of each leg is a function of the combination of the diodes and the 200,000-ohm resistor in parallel. Since the back resistance of the diodes is high the effective back resistance of the circuit is essentially that of the parallel resistor. Large changes in the diode characteristics have relatively small effects on the bridge balance. Although the circuit is inefficient, it does provide good stability.

The design of the filter network specifies the frequency response of the recording system. In the present case, system response was limited by the response of the galvanometer pen to a value below the desired maximum. Compensation in the form of positive feedback through a lead network was required to raise the overall response to the desired frequency. Response curves for the five filter positions are shown in Fig. 2.

A centering potentiometer is provided in the cathode circuit of the 12AT7 push-pull circuit. This tube is operated with low quiescent current, therefore, unbalance in the two tube elements is minimized and little nonlinearity is introduced by the initial adjustment of the centering potentiometer.

Power Supply

Selenium rectifiers are used in a voltage-tripler circuit in the power supply to obtain the required 350 volts for the cathode-follower. The plate voltage to the signal amplifier stage is regulated by an OA2 tube. The power supply also provides approximately 150-volts bias on the filaments of the 6V6 tubes to bring the cathode-filament voltage differential within ratings.

The amplifiers are packaged with two channels in each unit and use a common power supply. This design is desirable from the standpoint of servicing since any dual unit may be removed from the multichannel recording system for service without disrupting the entire system.

Centering drift was checked by making recordings at one hour intervals for eight hours. The results indicate that the drift is within the reading accuracy of the recording and may be considered negligible.

Installation at Supersonic Naval Ordnance Research Track, NOTS, China Lake, Calif. Electronic flash equipments are tripod-mounted units at center and left. Flash-control equipment is in one of trucks at right

SUMMARY — Control unit limits number of flashes of any one unit, in group of electronic flash units operating simultaneously at high repetition rates, to number necessary for required exposure in photographic stroboscopic study of rapid, nonrepetitive motion. Unit makes extensive use of commercially available plug-in circuits such as triggers, counters and oscillators

COUNTERS CONTROL

By SAMUEL E. DORSEY

Electronic Engineer
Research Department
U. S. Naval Ordnance Test Station
China Lake, California

AFTER development of the NOTS mobile high-speed multiple-flash equipment[1], a need arose for greater numbers of flash lamps operating simultaneously at high flash rates. A control unit was designed to limit the number of flashes, in each of two groups of lamps, to the minimum necessary for obtaining the required data.

Previously, triggering of all flash lamps was simultaneous and the lamps were allowed to flash until all the energy in the high-voltage capacitor bank was consumed. Such continuous flashing of all lamps put an overload on the electronic equipment which flashed the lamps and usually resulted in weak photographic images in all but the first flash lamp group.



FIG. 1—Complete flash control system

Flash System

The principal parts of the complete control system are diagrammed in Fig. 1. Only one flash unit and flash lamp are shown following each driving amplifier, although many more are usually used.

The timing source is a commercial audio oscillator. Its frequency is monitored continuously by Lissajous patterns on an oscilloscope against an accurate 1,000-cps timing signal broadcast by radio link from a centralized location at NOTS or by an electronic frequency counter. The start device can be a microphone, photocell or a make-or-break circuit arrangement.

The signal from the timing source is shaped into pulses and gated. The gating is triggered by the pulse from the starting device and by the outputs of the preset electronic counters within the flash control unit. Gated pulses are amplified by the control unit and the driving amplifiers, then fed into the flash units. The flash units are powered by a capacitor bank charged to a high voltage. When triggered by a pulse from its driving amplifier, each flash unit delivers a predetermined fraction of the energy of the capacitor bank to its flash lamp, causing the lamp to light for an extremely short period of time.

Control Unit

The simplified block diagram of the control unit in Fig. 2A depicts three gates and three counters. Figure 2B shows the sequence of control. Each of the three electronic counters can be preset to re-

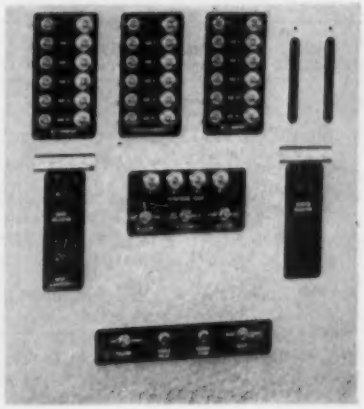

Front panel of control unit

Interior of truck containing flash-control equipment. Control unit is at upper left, with audio oscillator, oscilloscope and timing receiver below

HIGH-SPEED FLASH

ceive any number of pulses from 1 through 64 before injecting into its output the type of pulse which will actuate properly the circuits to which the counter is connected.

The start pulse opens the gate to driving amplifier 1 to start its lamps flashing in synchronism with the pulses from the timing source. The pulses which trigger this driving amplifier are also fed into counter 1, preset to count just enough pulses to produce the required number of flashes. At the end of this count, a pulse from counter 1 closes the gate to driving amplifier 1, causing its lamps to stop flashing. The output pulse from counter 1 also opens the delay gate, directing the timing pulses to the delay counter.

At the end of the delay preset into this counter, a period calculated to allow the object being photographed to approach the second station, the output pulse opens the gate to driving amplifier 2, allowing timing pulses to trigger the flashing of its lamps. Counter 2 is preset to stop the triggering of driving amplifier 2 after its lamps have delivered their preset number of flashes. The lamps are flashed only when needed to photograph the passage of the object through their stations, with just a few extra flashes to make certain the flight is not missed.

Timing

Figure 3 is a simplified circuit diagram of the control unit. Extensive use is made of commercially available plug-in units to simplify the under-chassis wiring of the pulse devices. These are indicated as blocks in Fig. 3.

For timing, there is a choice of either the output of the control oscillator (the timing source) or a single-pulse pushbutton. The timing input actuates V_{1}, a 2C51 Schmitt trigger, which shapes the timing signals into pulses. The 12AU7 start-signal amplifier, V_{2}, works in conjunction with the input selector switch and feeds the start input to the first 2D21 thyratron trigger, V_{3}. This switch, its four positions selecting phase inversion or not, with or without positive bias, allows operation on either positive or negative start signals from microphone, photocell, or make-or-break circuits. Semiremote manual operation is provided for testing purposes through the relay and the manual start switch.

Gating

Operation of the gating function is identical for each of the three gates. As an example, the principal parts of the second gate circuit, V_{14}, are shown in Fig. 4. The gating line has three resistances connecting it to the cathode of thyratron trigger V_{13}, to the plate of the thyratron trigger V_{13} and to the negative bias. These resistances are proportioned to cause the following operational sequence: when neither thyratron is conducting, the voltage on the gating line is held so

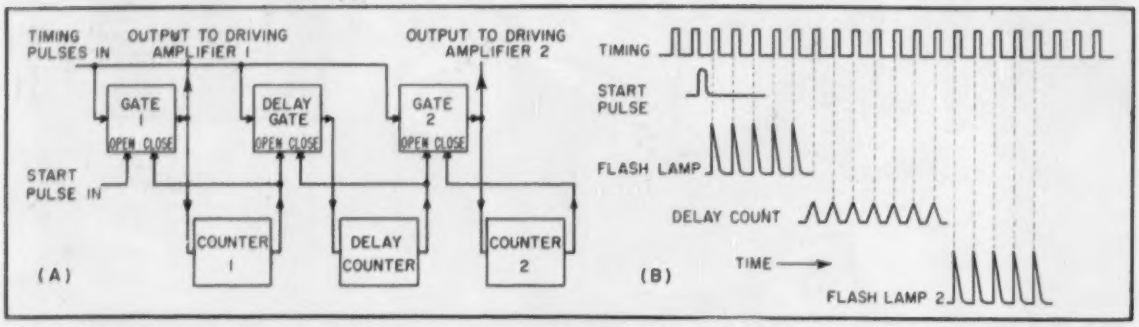

FIG. 2—Simplified block diagram of control unit (A) and sequence of timing pulses (B). Each of counters can be preset to receive one to 64 pulses before producing an output pulse

far negative that the gate is biased beyond cutoff and does not pass any pulses; when V_{1a} starts conducting, the rise of positive voltage on its cathode decreases the negative voltage on the gating line sufficiently so that V_{1a} is permitted to pass the pulses until V_{2a} starts conducting. The drop of voltage on the plate of V_{2a} makes the gating line again sufficiently negative to cut off passage of pulses through V_{1a}.

Bypass capacitor C in the gating line introduces a small delay as well as decoupling between the thyratrons.

Gate Switches

The switches in the gating lines (Fig. 3) improve the utility of the control unit. The gate 1 stop switch can cause output 1 either to stop on the count of counter 1 or to run free. The same control can be exercised over output 2 by the gate 2 stop switch. The gate 2 start switch permits the start of output 2 either by the delay counter or in synchronism with output 1 from V_{2a}.

Blocking oscillator V_{2a}, a 6J6, feeds output 1; V_{2a} feeds output 2. Each of these outputs has two connectors: one yields positive pulses; the other, negative. Double polarity allows the instrument to be used with both positive and negative input driving amplifiers.

In each blocking oscillator, positive pulses are obtained from a resistor between cathode and ground; negative pulses, from a resistor between the plate circuit and the plate

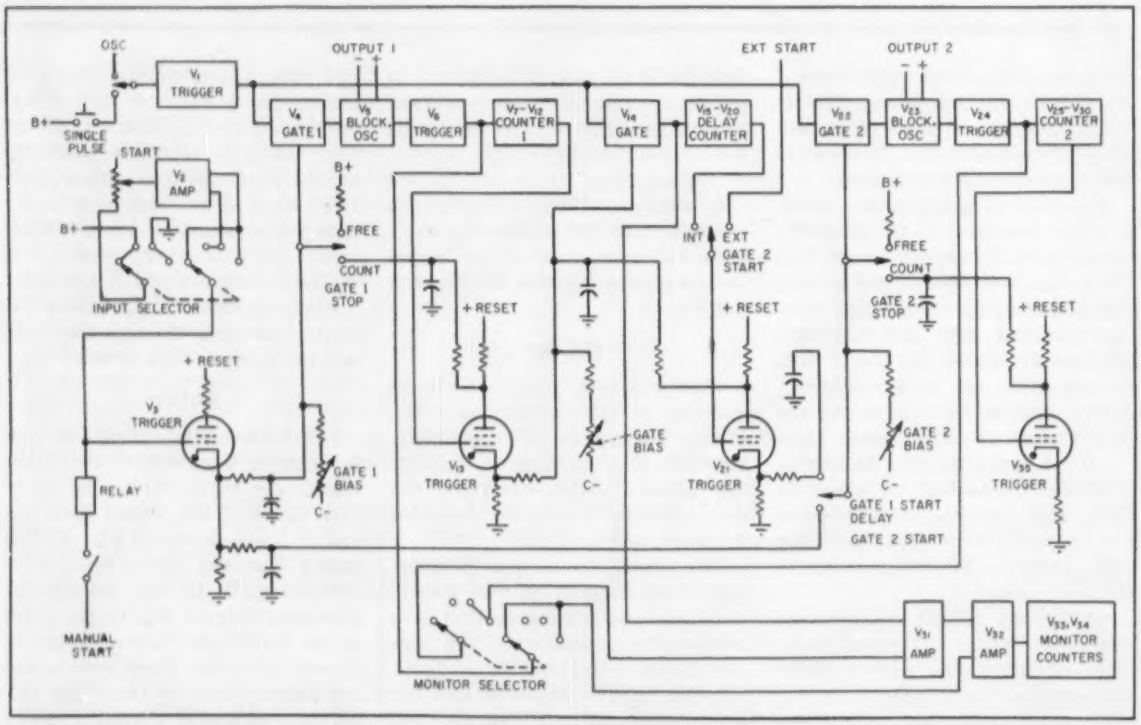

FIG. 3—Complete block diagram of control unit. Blocks indicate commercially available plug-in units

supply. In this way, the undershoot occurring in the transformer at the end of each pulse is prevented from passing into the output. The plates of V_4 and V_{2a} are tied to the plates of their respective blocking oscillators for direct drive.

Counters

The 2C51 Schmitt triggers, V_5 and V_{2a}, furnish the pulses which drive counters 1 and 2. Delay gate V_{14} drives the delay counter.

Any pulse count from 1 to 64 can be set into each predetermined counter by manipulating the six switches on each counter. Resetting the instrument makes the counter ready and gives indication by lighting the indicator neon lamp adjacent to each switch that is in add position. At the completion of the count, the circuit will generate a positive-going pulse in its output and indicate by lighting all of its indicator lamps.

Each of the predetermined counters is composed of a chain of six 12AU7 Eccles-Jordan binary units with proper switches, indicators and interconnections. The circuit of one binary stage is given in Fig. 5. With the add-nonadd switch in the nonadd position and the unit reset, the right-hand triode of the 12AU7 will be nonconducting. A negative pulse on the input will result in a steep negative-going step in the output. In this case, the binary does not add anything but acts as an amplifier or pass device to the following binary.

If the switch is in the add position and the unit is reset, the right-hand triode will conduct. The left-hand triode will be nonconducting and the indicator lamp will light. A negative pulse in the input of the binary will result in a positive-going step in the output, to which the following binary stage is insensitive. The binary will then have to wait the natural period of the preceding chain of binaries before it can deliver a negative-going pulse to its output. Thus a count of 2^n is added to the overall count of the entire binary chain, where n is the number of preceding binaries.



FIG. 4—Principal parts of gate 2



FIG. 5—Binary unit of predetermined counter

The last stage of the binary chain feeds the grid of a thyratron. This type of circuit reacts to a positive-going signal and not to a negative, as binaries do. Therefore, the output of the last binary in the chain is taken from the left-hand plate circuit.

The NE-2 internal neon lamp is not used as an indicator, but as a pass device for the relatively large reset pulses. It acts as an open circuit except at resetting.

The monitor counter consists of a pair of commercially manufactured counter decades, V_{3a} and V_{3b}, as shown in Fig. 3. These two decades, fed by isolating and mixing amplifiers V_{1a} and V_{2b}, total the count of the delay counter alone, the delay and 1, the delay and 2 or all three counters, depending on the position of the monitor selector switch.

Maximum Count

The maximum count may be as high as 64 times 3 or 192. The monitor counter displays the count only to 99. The zero or one in the hundreds place can easily be assumed through foreknowledge of the setting of the counters.

Resetting the control unit is accomplished manually by momentary actuation of a three-circuit reset relay operated by a pushbutton switch either on the panel or at a semiremote position. The relay performs the following functions: the thyratrons are reset by the removal and reapplication of the plate supply voltage on their plate circuits; the predetermined counters are reset by the application of a positive voltage pulse through their internal neon lamps (used as pass devices) to their properly selected grid-return circuits; the monitor counters are reset by opening and closing of appropriate grid-return circuits.

Applications

The control unit, in conjunction with the NOTS mobile flash equipment, is used on the aeroballistics test range to make measurements of velocity, drag and other ballistics coefficients on missile models whose flight patterns must be determined before tests can be made in the aeroballistics laboratory.[3,4] On other test ranges at NOTS, the equipment is used to solve such ballistic problems as the behavior of small-caliber ammunition or rockets when fired at various angles from rapidly moving vehicles.[4] One of the photographs shows the equipment on location at the Supersonic Naval Ordance Research Track (SNORT) where such measurements are currently being made.

A control unit such as this, when used in conjunction with apparatus similar to the NOTS mobile flash equipment, can have many applications in industry and research where extremely rapid, nonrepetitive motion demands photographic stroboscopic study.

REFERENCES

(1) E. C. Barkofsky, Ballistics Photography Uses Mobile Flash, ELECTRONICS, p 128, July 1952.

(2) E. Barkofsky, R. Hopkins and S. Dorsey, Microsecond Photography of Rocket in Flight, ELECTRONICS, p 142, June 1953.

(3) E. C. Barkofsky, Multiple-Image Silhouette Photography for the NOTS Aeroballistics Laboratory, *Jour SMPTE*, p 480, June 1952.

(4) D. R. Beresford, An Application of Micro-Flash Photography and an Optical Lever Technique to Exterior Ballistics Problems, *Photographic Science and Technique*, p 172, Nov. 1953.

MAGNETRON TESTER DETECTS LOST PULSES

SUMMARY —— Foreseeable airborne target speeds require continuous radar information flow otherwise missing transmitted pulses may cause loss of target. Missing pulses in radar magnetron output are detected by this test set using coincidence techniques. Switch sets level, at which pulse is considered missing, in 10-percent steps. Video circuits are not used and only one adjustment is required for calibration

By
PETER KOUSTAS and DANIEL D. MAWHINNEY

Tube Division
Radio Corp. of America
Harrison, N. J.

MODERN MISSILE and aircraft speeds impose stringent requirements on radar magnetrons. To provide the continuous flow of data necessary for tracking and destruction of high-velocity targets a radar magnetron must deliver a virtually uninterrupted succession of output pulses. At foreseeable target speeds exceeding mach 2 the omission of even a single transmitted pulse may easily result in a miss or complete loss of target.

This article describes the types of missing-pulse detectors used at present for production testing of magnetrons as well as a new type developed by the authors.

Definition

In radar terminology a missing pulse is one having an energy content less than a specified percentage, usually 70 percent of normal, at the desired output frequency. Such a pulse may be caused by arcing or moding of the magnetron during all or part of a pulse period. Briefly, moding is oscillation at other than the desired frequency and may occur at frequencies from a few hundred to several thousand megacycles away from the operating frequency.

Test specifications for radar magnetrons give the maximum per-

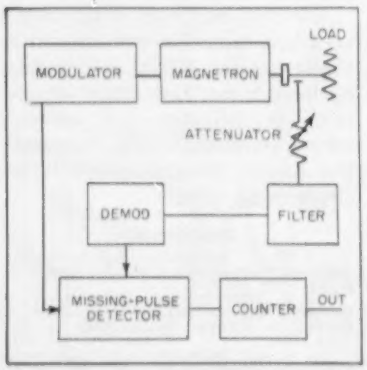

FIG. 1—Basic missing-pulse detection system

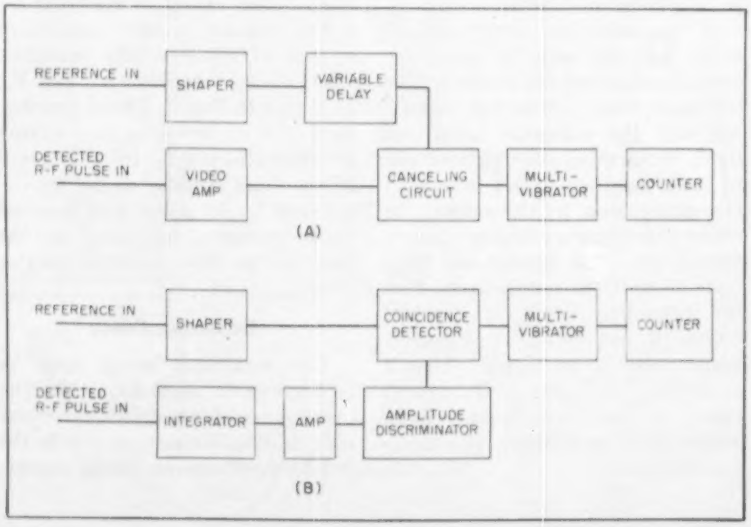

FIG. 2—Comparison of direct-cancellation type (A) and coincidence type (B) missing-pulse detectors

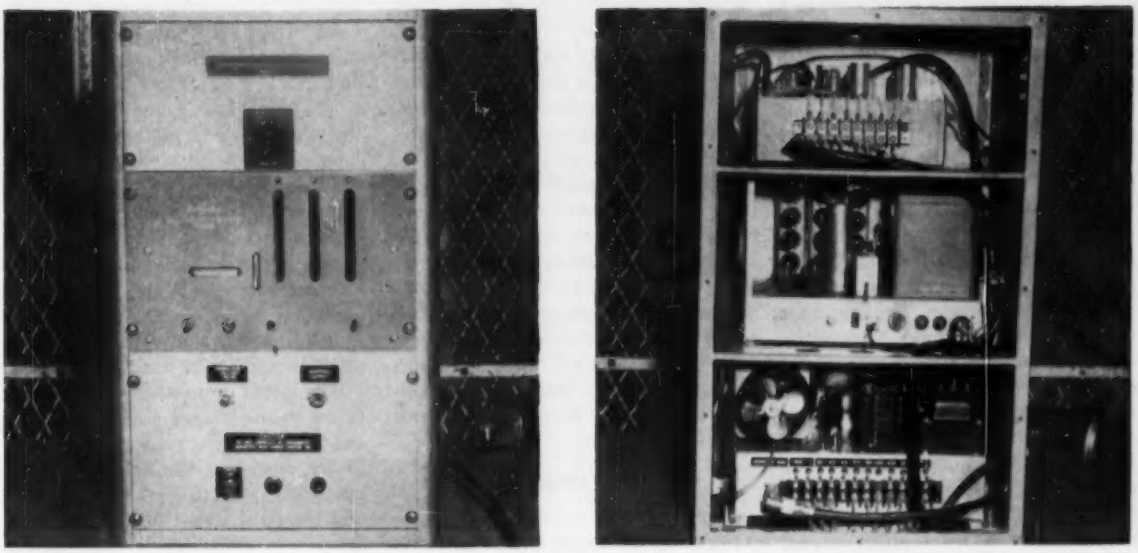

Front and rear views of complete test instrument show the missing-pulse detector (top), the eelctronic counter (center) and regulated power supply (bottom)

missible number of missing pulses as a percentage of the pulse-repetition rate. These range from 0.25 to 5 percent, depending on magnetron type and application. They are usually measured over a five-minute period.

General Concepts

Instruments for the detection of missing pulses must respond to pulses of improper frequency, inadequate amplitude and inadequate width.

A block diagram showing the basic elements of a missing-pulse detection system is shown in Fig. 1. A reference input signal, derived from the magnetron trigger circuit, informs the detector that an r-f pulse should be present. A demodulated sample of the magnetron's r-f output is obtained by a probe or a directional coupler inserted in the transmission line between the magnetron and its load. The probe or coupler is adjusted to provide an average power of a few milliwatts to the detector circuit.

The variable attenuator in the sampling circuit is used to adjust the r-f input level. The frequency filter allows only pulses of the correct operating frequency to reach the demodulator. The action of subsequent circuits is such that pulses at other frequencies will be registered as missing.

Cancellation

Two general types of missing-pulse detectors seem to be in use at present. They are the direct-cancellation type and the coincidence type block diagrams of which are shown in Fig. 2.

In the direct-cancellation type of Fig. 2A the reference input signal is a sample of the magnetron plate-current pulse. This pulse is standardized as to amplitude and width in the shaper and is then applied through a variable-delay network to one input of a canceling circuit. A sample of the magnetron r-f pulse is rectified by a linear crystal demodulator, amplified and applied to the other input of the canceling circuit. This is a pulse-amplitude and pulse-width discriminator circuit.

It may employ either a difference or adding amplifier depending on the relative polarities of the two inputs. In either case there is no output from the canceling circuit when the two inputs are identical. A change in the width or amplitude of the r-f pulse results in an output signal which registers a missing pulse on a standard electronic counter.

The magnetron plate-current pulse occurs a fraction of a microsecond before the r-f output pulse reaches the pickup point. Consequently, a variable-delay network is used in the reference input circuit to assure that both pulses arrive simultaneously at the canceling circuit.

In this system it is difficult to get a suitable sample of the magnetron plate-current pulse for the reference signal. In addition, the internal circuit design is complicated since video frequencies must be handled throughout.

Operating adjustments are extremely critical and susceptible to drift with time. As a result, the equipment must be recalibrated for each test. For proper performance it must be operated by specially trained personnel.

Coincidence

In the coincidence-type missing-pulse detector of Fig. 2B changes in the energy content of the r-f output pulse are converted to changes in the amplitude of a triangular

wave. An r-f sample is applied to a linear crystal demodulator and the demodulated signal fed to an integrator circuit. The integrator output is a triangular wave with a peak amplitude proportional to the energy content of the initiating r-f pulse.

A simple amplitude discriminator, usually a one-shot multivibrator, triggers when the amplitude of the integrated pulse equals or exceeds a predetermined value. The output is then applied to a simple coincidence detector. A shaped reference signal derived from the magnetron modulator circuit is also applied to the coincidence detector.

There is no output when both signals are present. When an r-f pulse is missing the coincidence stage delivers an output signal which triggers a conventional electronic counter.



FIG. 3—Power-resistance characteristic of 1/100 amp fuse and 821B barretter

FIG. 4—Barretter output voltage oscillograph



FIG. 5—Barretter voltage-output characteristics

Although this type of missing-pulse detector is less critical than the direct-cancellation type, it involves a large number of operating adjustments as well as the use of an oscilloscope and is not well suited for use by unskilled production-testing personnel. Also, the demodulator crystals burn out frequently and must be operated at low levels to assure a linear relation between r-f energy and demodulator output. The permissible r-f input levels are frequently so low that operating adjustments and measurements are difficult to make.

New Detector

The missing-pulse detector developed by the authors uses no video circuits, does not require a complex setup procedure and has only one operating adjustment. Although similar to the coincidence-type detector, it avoids the crystal demodulator difficulties by using a thermal detector; either a bolometer or barretter. This demodulator delivers an integrated signal having a peak amplitude proportional to the r-f energy content of each magnetron pulse.

When installed in a waveguide or coaxial cable a barretter will convert incident electromagnetic energy into heat, hence its resistance will vary cyclically at the magnetron pulse-repetition rate. The thermal sensitivity converts microwave pulse energy into signals to detect missing pulses. Little fuse type 8AG 1/100-amp fuses or equivalent provide performance equal to that of commercial barretters and permit a substantial reduction in cost.

Typical relations between r-f power input and resistance for a NARDA type 821B barretter and a 1/100-ampere fuse are shown in Fig. 3. The nonlinearities at the lower ends of the characteristics are caused by thermal radiation and conduction losses.

Raising the barretter or fuse temperature above that of its surroundings with a bias current, improves the linearity and minimizes effects of ambient temperature changes. A bias current of 6 ma plus the average energy from the sampled magnetron output is sufficient to put the operating point in the region of linear operation for an 821B.

The bias current also provides the voltage drop which forms the integrated output signal. Thus, changes in resistance produced by the magnetron output pulses produce proportional changes in the potential across the barretter terminals. Figure 4 is an oscillograph showing the signal output voltage obtained when a sample magnetron pulse is applied to the barretter.

The peak amplitude is proportional to the energy content of each output pulse. The resistance change of the barretter element is dependent upon both the peak power P_{pk} and the pulse duration. The rate of temperature change is exponential and may be expressed as T/t, where T is the thermal time constant of the barretter element and t is the duration of the applied pulse.

Output Characteristics

If the slight nonlinear relation between input power and barretter resistance is disregarded these factors may be related by a constant K. The peak value of the barretter output voltage is then

$$e_{max} = I\,KP_{pk}\,(1 - \epsilon^{-T/t})$$

where I is the bias current in amperes, P_{pk} is the peak applied power in watts, and K is a constant of proportionality. This relationship is shown graphically in Fig. 5.

If the barretter thermal time constant T is equal to ten or more r-f pulse lengths, the deviation from linearity during the first 10 percent of exponential change is only 0.55 percent which may be neglected.

The signal voltage across the barretter will be a direct function of pulse duration as well as peak power. Thus, the amplitude of the output signal is closely related to the energy content of each pulse.

The thermal time constant of a 821B barretter is 350 microseconds and that of the 1/100-ampere fuses approximately the same. Both types, therefore, are suitable for use at the pulse lengths usually employed in magnetron testing.

A schematic diagram of a missing-pulse detector that works up to 2,000 pps is shown in Fig. 6.

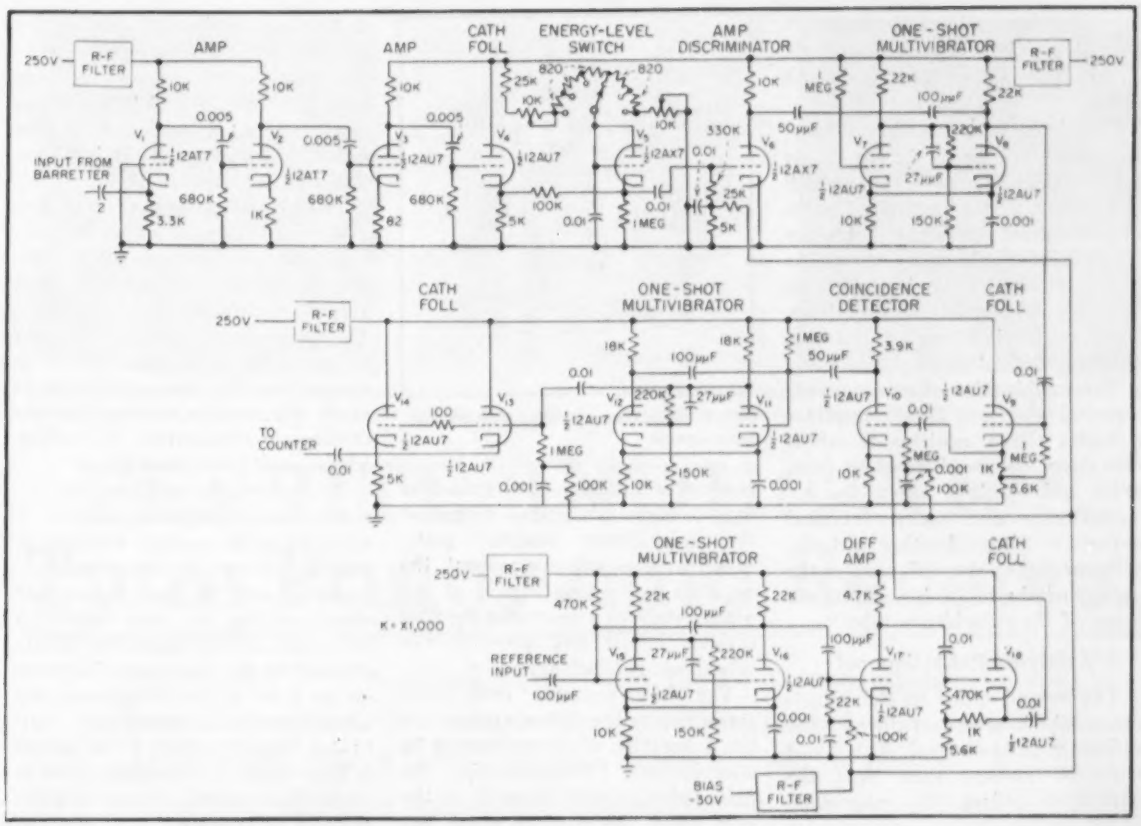

FIG. 6—Missing-pulse detector circuit can operate at pulse repetion frequencies up to 2,000 cps

The r-f signal channel receives the detected pulse from the barretter. The input stage V_1 is operated as a cathode-driven amplifier to match the low output impedance of the barretter. A low-impedance circuit at this point also minimizes stray signal pickup when equipment is in the vicinity of high-power magnetrons.

Detected Pulse Amplifiers

Two additional stages of amplification are provided by V_2 and V_3. The total voltage gain of the three stages is approximately 450, providing an output signal of about 45 v peak from a barretter signal of approximately 0.1 v peak. Because there is no need to reproduce video information the bandwidth of this amplifier is 50 kc.

Cathode follower V_4 is used as a buffer between the third amplifier V_3 and the amplitude discriminator V_5. This discriminator contains the only equipment operating adjustment. The adjustment sets the energy level which pulses must contain not to be counted.

The output of V_4 is applied through a 100,000-ohm resistor to the cathode of V_5, connected as a diode, and is made normally conducting by a positive voltage applied to its plate through the arm of the six-position switch. The switch is a voltage divider whose position determines the potential applied to the plate of V_5. Its six positions permit the selection of relative pulse-energy levels between 50 and 100 percent in 10-percent steps. After calibration it is set to the energy level below which it is desired to make a pulse register as missing.

When V_5 is conducting most of the signal voltage is developed across the 100,000-ohm series resistor because of the low shunt impedance presented by the diode and the plate bypass capacitor. When the signal voltage reaches a sufficiently positive value the cathode will be driven positive with respect to the plate and conduction will stop.

At this point approximately nine-tenths of the signal voltage above the cutoff value will be developed across the megohm cathode resistor. The voltage at which cutoff occurs is determined by the d-c potential of the plate and consequently by the position of the selector switch.

The signal across the 1-megohm cathode resistor is applied to the grid of V_6 which is biased just beyond cutoff to prevent response to spurious signals or power-supply transients.

Amplitude Discriminator

When the input signal is large enough to drive V_6 to conduction, a negative trigger appears at the plate circuit of V_6 and is coupled to the grid of the conducting half V_7 of a single-shot multivibrator. The output signal at the plate of

V_8, the nonconducting half of the single-shot multivibrator is a negative-going 50-microsecond pulse.

This pulse is produced only when the input to discriminator V_5 is greater than the preset value which determines that a normal r-f pulse at the correct operating frequency is produced by the magnetron. The gain obtained in V_6 provides adequate voltage to assure positive, noncritical triggering of the one-shot multivibrator.

The combination of an amplitude discriminator and triode amplifier provides sharp, positive threshold operation and good freedom from drift which might affect the accuracy of count over extended periods of time. Another cathode-follower buffer stage V_9 couples the output of the multivibrator to one input of the coincidence tube V_{10}.

Reference-Pulse Channel

The second input to the coincidence tube is processed through the reference-pulse channel. This input must be present each time the modulator pulses the magnetron and is derived from a negative pulse obtained from the pulse supplied to the magnetron or from any negative-going signal developed by the modulator circuit.

The reference input is used to trigger single-shot multivibrator V_{12} and V_{13}, producing a 25-microsecond pulse which is differentiated by the coupling network consisting of a 100-$\mu\mu$f capacitor and a 22,000-ohm resistor and is applied to amplifier V_{17}. This normally cut-off amplifier responds only to the positive spike or trailing edge of the differentiated pulse which then appears at its plate as an amplified negative pulse. This pulse is fed through the cathode follower V_{15} to the cathode of the coincidence tube V_{10}.

Coincidence Detector

Coincidence detection is accomplished in V_{10} which is noramlly cut off by a 30-v negative d-c grid bias as shown in Fig. 7. The signals derived from the r-f detector channel and reference channel are applied respectively to the grid and cathode of V_{10}.

When an r-f pulse is missing, the negative-going 30-v cathode pulse

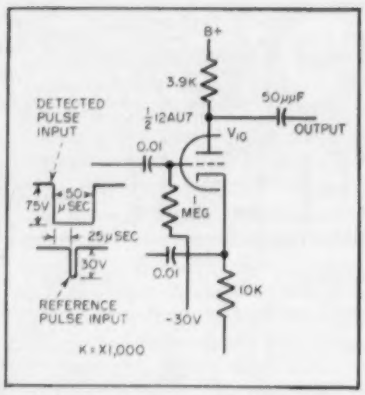

FIG. 7—Coincidence detector with normal input signals

overcomes the 30-v fixed grid bias and develops an output signal at the coincidence detector plate. When both signals are present, the negative-going grid signal of approximately 75 v overrides the 30-v cathode signal and prevents the tube from conducting.

The 75-v negative grid pulse starts before the cathode pulse, and has a duration of approximately 50 microseconds. Consequently, the grid pulse is still present at the grid after the cathode pulse has passed resulting in no output when both pulses are present.

To obtain a standardized output to drive a commercial electronic counter the output of V_{10} is applied to one-shot multivibrator V_{11} and V_{12}. This multivibrator drives cathode-follower output V_{13} and V_{14} in parallel, which delivers a positive 100-v pulse at low impedance.

Adjustment

The initial adjustment of this missing-pulse detector requires an oscilloscope to view both the demodulated r-f input signal and the waveform at the cathode of V_6. The barretter output signal may be easily simulated by a source of short rectangular pulses having a duration of 1 to 5 microseconds and a repetition frequency with a duty cycle of approximately 0.001. These pulses are applied to an R-C integrating network, and the voltage across the integrating capacitor is used as the input signal. Pulse amplitude is adjusted to give a peak signal voltage of approximately 0.1 v.

The energy level-selector switch is first set at the 100 percent or maximum plate-voltage position. The plate voltage on V_5 is then varied by the two 10,000-ohm potentiometers in series with the switch until an output is just produced at the cathode of V_9.

The d-c plate voltage of V_5 is then measured. Signal input is then reduced 50 percent and the 10,000-ohm potentiometers adjusted until output appears at the cathode of V_9. The plate voltage of V_5 should again be measured. The input signal is removed and the two potentiometers again adjusted to provide the two voltages just measured. No further adjustment is necessary.

To operate the missing-pulse detector, the r-f signal-input level is adjusted by the variable attenuator, stating from the maximum-attenuation position, until the counter stops counting the pulse repetition frequency. At the beginning of this adjustment the energy-level selector switch is set at the 100-perecent position which automatically calibrates the instrument. The switch is then turned to the energy level at which it is desired to make a pulse register as missing.

Conclusions

Complete shielding of the missing-pulse detector is needed to prevent spurious signal pickup. As an additional precaution against such pickup, low-pass filters were inserted in the power supply leads at the points where these leads enter the instrument. The power supply incorporates voltage regulation to guard against line fluctuations. After several hours of continuous operation the values of certain resistors changed sufficently to cause improper operation. But proper operation could be restored by cooling. To eliminate this, a blower was installed and no further heating difficulty was experienced during several months of continuous operation.

The maximum pulse-repetition frequency which can be used with the instrument is approximately 2,000 cps because the thermal lag of the demodulator element limits the amount of cooling between pulses. However, magnetrons normally operate well within the instrument's capabilities.

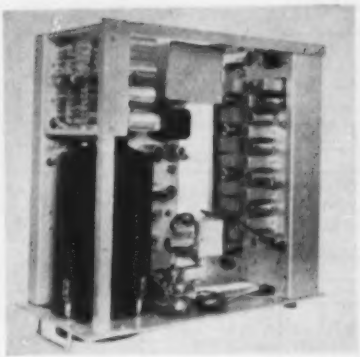

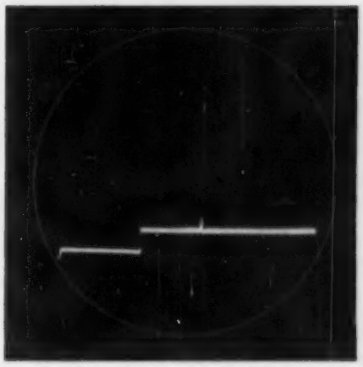

Reading on slide-rule dial corresponds to position of step on crt, left. Controllable inductors are in rectangular cans on r-f chassis at right in top view of receiver, center. Panoramic display, right, shows 1-μv and 1,000-μv signals separated by 500 kc

FERRITE INDUCTORS Tune Panoramic Receiver

SUMMARY —— Scanning from 100 to 150 mc is accomplished by double superheterodyne that features high sensitivity with low image response. Electrically tracked ferrite inductors in tuned circuits of three r-f amplifiers, oscillator and mixer contribute to image rejection. Step display on crt facilitates measuring frequency of intercepted transmission

By FRED C. GABRIEL

Engineering Department
CGS Laboratories, Inc.
Stamford, Connecticut

DESIGNING A VHF RECEIVER with rigid specifications on noise figure and spurious-response level becomes a substantial problem when the receiver is a wide-range panoramic. Solving it hinges upon selecting a sweep component which will give the desired frequency coverage and still lend itself to the design of optimum receiver circuitry.

The use of controllable inductors as tuning elements has made it possible to construct a panoramic receiver to sweep from 100 to 150 mc with a noise figure of about 10 db and with spurious responses (cross-modulation) approximately 70 db below signals. Image responses are about 120 db down. A block diagram of the receiver is given in Fig. 1.

In superheterodyne receivers, noise figure and spurious-response level are determined by the front end. Considerations of overall gain and selectivity can largely be deferred to the design of the i-f amplifier. Figure 2 shows the sweep-tuned sections of the receiver including r-f amplifiers, mixer and oscillator.

Of the various elements available for panoramic tuning, controllable inductors offer advantages in size, weight, stability and freedom from moving parts while meeting the requirement for a 2.25-to-1 reactance swing to cover the 100 to 150-mc range. In addition, they are readily ganged for multiple-tuned circuits and can be made to track accurately in quantity receiver production. Simple circuits can also provide adjustable scan rate, sweep width and sweep center frequency if needed.

Controllable inductors selected are CGS type XH-147 Increductor units. The construction of these inductors is shown in Fig. 3A. A rod of high-frequency ferrite material forms the core of the signal winding. The incremental permeability of the core, and hence the inductance of the winding, is varied by the amount of magnetic flux created by current in the control winding and carried in the laminated iron yoke. A bias winding establishes the operating point of each inductor. Tracking between units is obtained by adjustment of the d-c supplied to this winding.

The receiver front end was designed to provide the desired degree of image rejection and spurious-response suppression with due regard for the varying Q characteristic of the controllable inductors. Figure 3B shows measured Q values obtained for a typical XH-147 controllable inductor resonated with a fixed capacitor and tuned over the 100 to 150-mc band. The control current required to accomplish this is also plotted.

Front End

In the receiver front end, the signal is first amplified in a low-noise, cascode stage with tuned input and

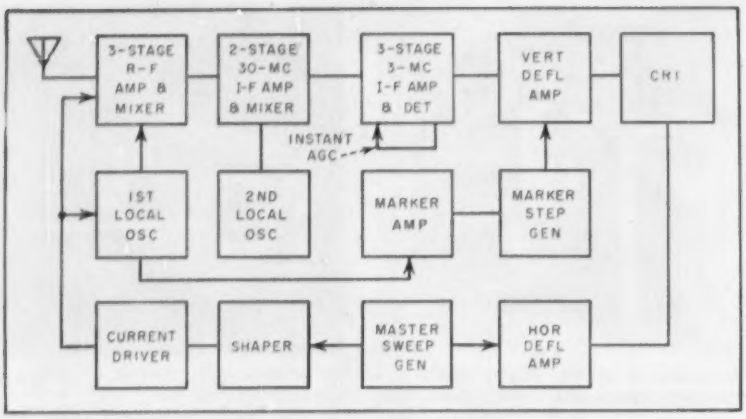

FIG. 1—Double superheterodyne receiver includes five intermediate-frequency stages following sweep-tuned radio-frequency section

output circuits. The use of series-resonant voltage step-up to the input grid makes possible a lower noise figure than is obtainable with untuned inputs.

The input stage is followed by two pentode r-f amplifiers and triode mixer linked by double-tuned interstage networks. The controllable inductors in the tank circuits are individually packaged units with no inductive coupling between them. Hence it is necessary to provide external coupling elements in the form of capacitors *C* which provide an impedance common to both tuned circuits in the pairs.

A capacitor used in this manner provides a coupling coefficient *k* which decreases with increasing frequency to compensate for the rising Q of the controllable inductors. The result is a gain-bandwidth characteristic substantially flat over the frequency range of the receiver. The term *kQ* which determines the ouput voltage of the coupled circuits at resonance is held approximately constant.

The triode mixer receives the output of the r-f stages and the local oscillator, which is tuned by a controllable inductor identical to those in the r-f section. Series and shunt tracking coils adjust the tuning range of the oscillator to the 130 to 180-mc range required for operation with a 30-mc i-f. The tracking inductors are analogous to the series and shunt tracking capacitors commonly used in manually tuned receivers.

I-F and Video

A two-stage i-f amplifier operating at 30 mc is followed by a crystal controlled second local oscillator and a mixer. A second i-f of 3 mc is thus produced. It is amplified in three pentode stages, detected, amplified and applied to the vertical deflection plates of the display tube. The double superheterodyne circuit makes it possible to achieve an effective receiver bandwidth of 30 kc, providing more-than-adequate signal resolution. The practical resolution of current models of the receiver is limited by cathode-ray tube and spot size.

To provide a logarithmic display of signal amplitude on the crt, a fast-acting agc voltage is applied to the grids of the 3-mc amplifiers. This gives these stages a signal-compressing action which causes a 60-db range in signal strength to appear as a 6-to-1 variation in pip height on the display screen.

Control current for all the con-

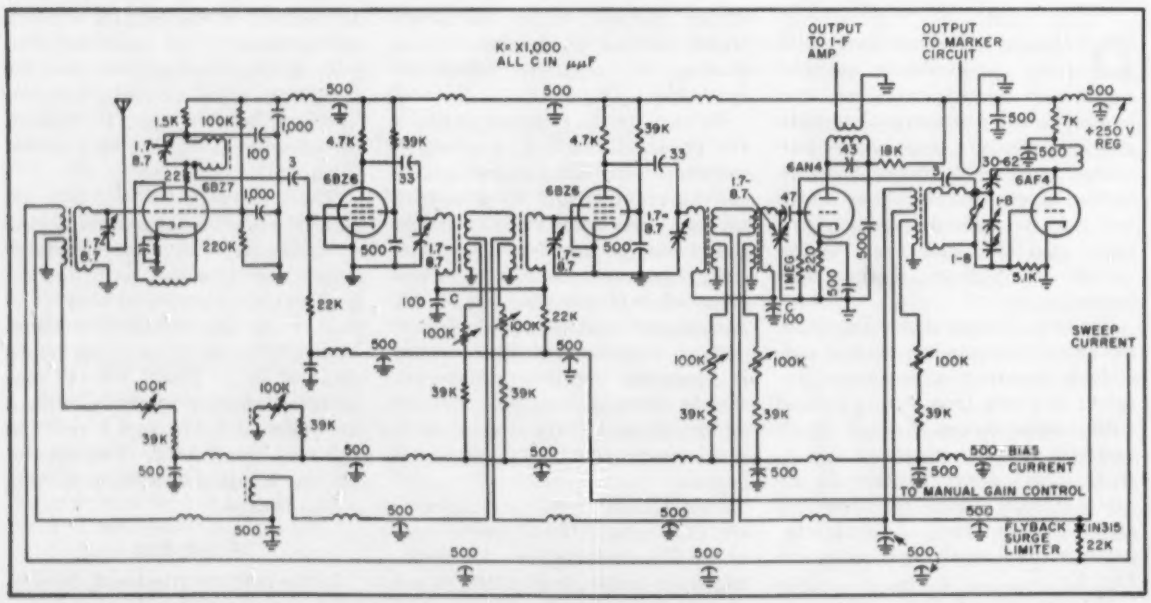

FIG. 2—Seven controllable inductors tune r-f stages, mixer and oscillator. Manually adjusted gain bias is applied to second and third r-f amplifiers. Capacitors C are external coupling elements of controllable inductors

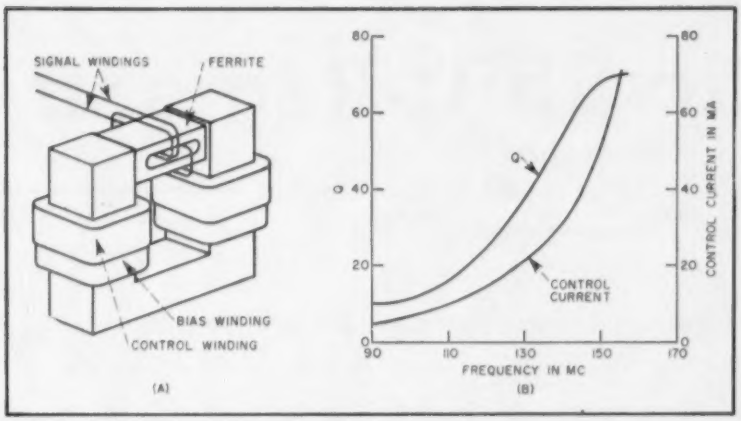

FIG. 3—High-frequency controllable inductor (A) and control and Q characteristics as functions of frequency (B)

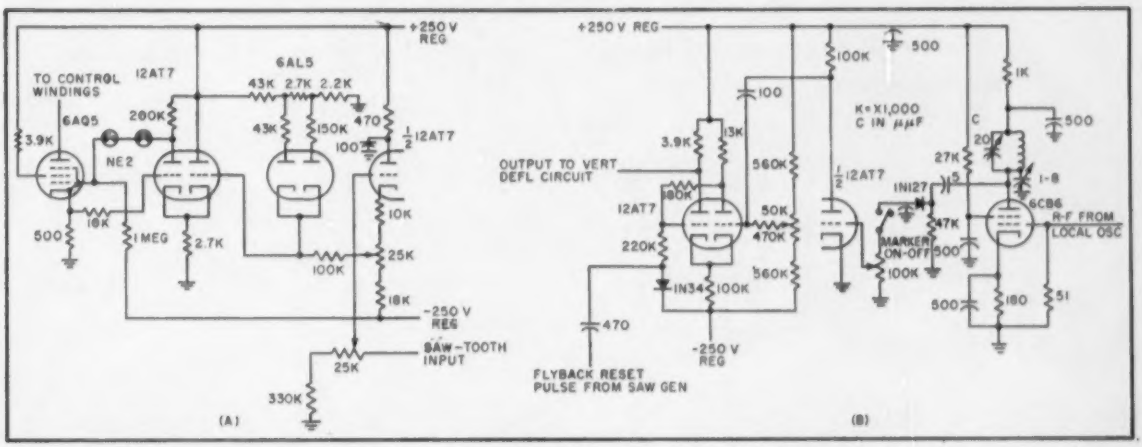

FIG. 4—Biased diodes shape sawtooth signal to produce linear frequency sweep (A). Trigger circuit produces step marker on baseline of cathode-ray oscilloscope (B)

trollable inductors is supplied by a single 6AQ5 with high negative feedback. The tube functions as a high-impedance current source feeding all the controllable-inductor control windings in series. The high-impedance current driver tends to make the current output closely follow the input waveshape despite an inductive load.

The frequency-control current curve (Fig. 3B) reveals a nonlinear relationship. Therefore, some modification of the saw-tooth sweep waveform is needed to produce a frequency sweep which is linear with time. Two successively biased shunt diodes operate on the saw-tooth wave and introduce gradual curvature.

The modified saw-tooth is amplified and applied to the grid of the 6AQ5. The shaper and driver are shown in Fig. 4A. The two neon lamps between the amplifier and current driver act as a d-c capacitor providing direct coupling between the stages while dropping the d-c level to a suitable value.

The receiver is swept at 10 cps. The retrace portion of the sweep waveform resets all the controllable inductors to the same initial magnetic state, thus avoiding mistracking due to hysteresis.

Markers

Frequency measurements of displayed signals are facilitated by a movable, step-type marker on the crt baseline controlled by a knob and calibrated slide-rule dial. The operator adjusts the knob until the vertical step coincides with the pip representing the signal. Frequency can be read from the dial with an accuracy of better than 1 percent.

The marker circuit is passive to avoid oscillator radiation and interference. The marker knob rotates variable capacitor C in Fig. 4B which resonates with a fixed inductor over the range 130-180 mc, the range of the receiver local oscillator. Dial calibration, however, is from 100 to 150 mc.

A sample of the sweeping local-oscillator voltage is amplified and applied to this tuned circuit, causing it to ring briefly when frequency coincidence occurs between the sweeping oscillator and the manually tuned tank circuit. The ringing waveform is rectified and used to turn on a Schmitt trigger circuit connected to the vertical deflection system of the crt. This creates the step in the baseline. The trigger circuit is reset during the flyback interval by a retrace pulse derived from the sweep generator.

The design of receiver and controllable inductors was under the direction of Carl G. Sontheimer and W. Reid Smith-Vaniz.

Magnetic Shift-Register

By R. C. KELNER and M. H. GLAUBERMAN
Asst. Chief Engineer *Senior Engineer*
Laboratory for Electronics, Inc.
Boston, Mass.

SUMMARY — Printed decimal digits 0 to 9 are easily recognized by a magnetic shift register using digital-to-analog converters at each stage. Recognition is obtained using a waveform-fitting function instrumented with the shift-register for correlation. Equipment responds to best fit, hence complete correlation is not necessary to identify input. Unit is thus insensitive to noise from imperfectly formed digits and/or dirt

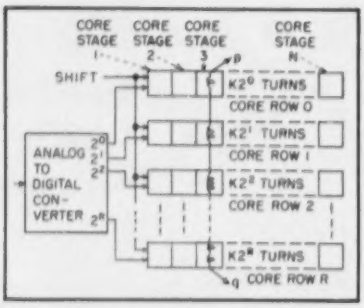

FIG. 1—Block diagram of magnetic shift-register

MAGNETIC SHIFT-REGISTER with simple digital-to-analog converter at each stage is to be described. A waveform-fitting function is presented, which coupled with the shift register, identifies time functions associated with the printed digits 0 through 9.

Magnetic Shift Register

The nature of a magnetic shift register can be reviewed by referring to core row zero in Fig. 1. The register consists of N cores in series. Information is read into the first core where it remains until the register is shifted. The shift windings of the N cores are connected in series. In advancing the information from core 1 to core 2 the shift signal erases the content of core 1. The next shift pulse advances the content of core 2 to core 3, erasing 1 and 2 and advances any second read-in signal in core 1 to core 2 and so forth.

The register of Fig. 1 does not recirculate so that on the shift pulse following that which advances the first bit to the Nth core, the first bit is stepped out of the register. Access to the information in the cores can only occur during the shift pulse time. A single shift signal suffices to advance any information to the next stage from each preceding stage.

Digital-to-Analog Converter

Returning to Fig. 1, assume that the input signal is binary coded and quantized to R bits. Each register core row has one of the R bits as its input data. The R cores of each register stage have $K2^R$ turns of wire wound around each core and these windings are all in series aiding, terminating at points p and q.

This arrangement is illustrated only for stage 3 and $K = 1$. The voltage across terminals pq is $E_{pq} = K\,(a2^0 + b2^1 + \ldots r2^R)$, when the register is shifted, where a, b, . . ., r are either 1 or 0, dependent on whether there is or is not information in core rows a, b, . . ., R.

The digital-analog conversion (dac) action is shown in Fig. 2. Curve (A) is an aperiodic function quantized in amplitude to seven bits and in time to fifteen samples by a binary coder. Curve (B) represents

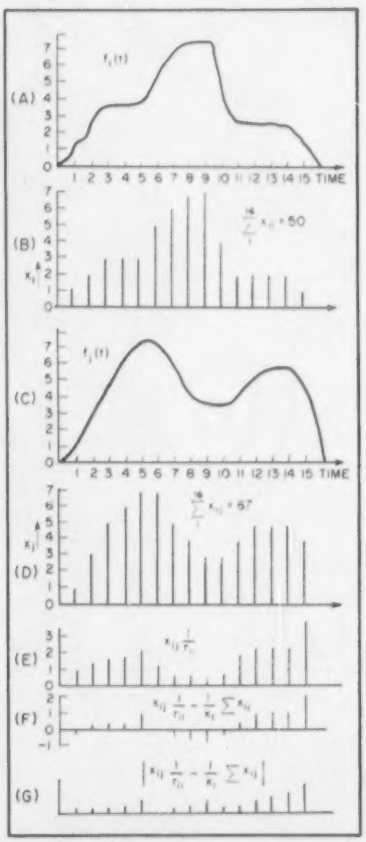

FIG. 2—Reference correlation waveform (A) is quantized (B) and compared with second function (C) obtained from numeral passing by light slit and is shown in quantized form (D). Comparison of quantized wave forms is made by operating on (E) and (F) to obtain auto correlation function (G)

Correlator



FIG. 3—Digit 7 moving across light slit

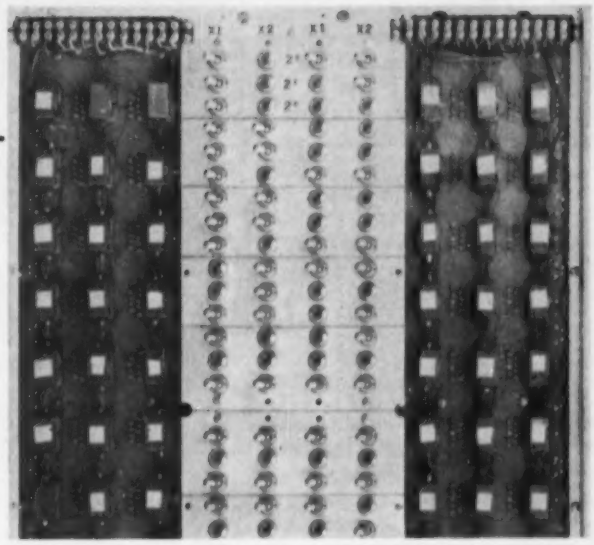

Magnetic shift-register correlator. Switches are used to set up storage of any two arbitrary waveforms at one time

the output across the dac winding of the first stage of the register in Fig. 1. The output of the second stage is identical in shape but displaced in time by the time between samples, the shift pulse repetition interval. In general the envelope of the time-amplitude response of the ith stage of the register is similar to that of the input function, from which it is delayed a time i.

The important factors involved in the accuracy of the binary to analog conversion are the current-flux characteristics of the cores, the tolerance range of the capacitors and the spread in diode threshold levels and back impedance characteristics.

Printed-Number Identification

Electrical signals, characteristic to the digits to be recognized, were obtained by moving the numbers across a brightly illuminated narrow slit of light with a germanium photocell mounted nearby. As the number passes the slit, the photocell output varies in time as a function of the amount of black passing by the slit. The long dimension of the light slit is slightly greater than the width of the widest number to eliminate a need for precise lateral registration.

Its narrow dimension is small enough to bisect horizontal strokes that make up the number. The geometry is shown in Fig. 3. Oscilloscope pictures of the waveform characteristic of the ten digits are shown in a photograph.

A theoretical study, for slit-to-number orientations between 0 and ±60 degrees was made to test the efficacy of such well-known criteria as the correlation coefficient and the correlation function to distinguish between the digit waveforms.

Correlation

The final correlation criterion examined and the one that was instrumented, is

$$\theta_{(j,\,l)} = \sum_{i=1}^{n} \left| x_{ij}\ 1/r_{il} - 1/k_l \sum_{i=1}^{n} x_{il} \right| .$$

The subscript i denotes one of n sampling intervals. The subcript j represents the general unknown or input waveform corresponding to one of the ten digits to be identified. Subscript l represents the general known or reference waveform that is permanently stored in the shift register correlator. The amplitude of the input waveform j at sampling time i is x. The amplitude of the stored reference waveform at sampling time i is μ. When the input is the same as the stored waveform $j = l$, the case of auto-correlation, the first product of the equation is equal to unity for every i.

The summation in the second term of the equation represents the integral of the unknown input and the factor $1/kl$ is chosen to make the second term product unity when $j = l$. The equation is identically equal to zero when $j = l$. For cross-correlation $j \neq l$, the individual i terms of the total summation, which are equally likely to be positive or negative, are made positive by the absolute value brackets.

The number correlation function, $\phi_{(j,\,l)}$ is explained in more detail in Fig. 2. Curve (A) shows an arbitrary function $f_1(t)$ which will be used as a standard with which to compare a second function $f_j(t)$. The ordinate is divided into 7 quanta and 0 to indicate the response of the adc at the sampling times shown on the abscissa. Curve (B) represents the analog to digital conversion as the waveform is shifted into the register. The ordinates have the values $x_{11} = 1$, $x_{21} = 2$, $x_{31} = 3$, $x_{41} = 3$, etc. and their sum $\sum_{1}^{18} x_{il} = 50$.

Having obtained these values by observation the correlators' $\frac{1}{kl}$ factor is set equal to 1/50 and each

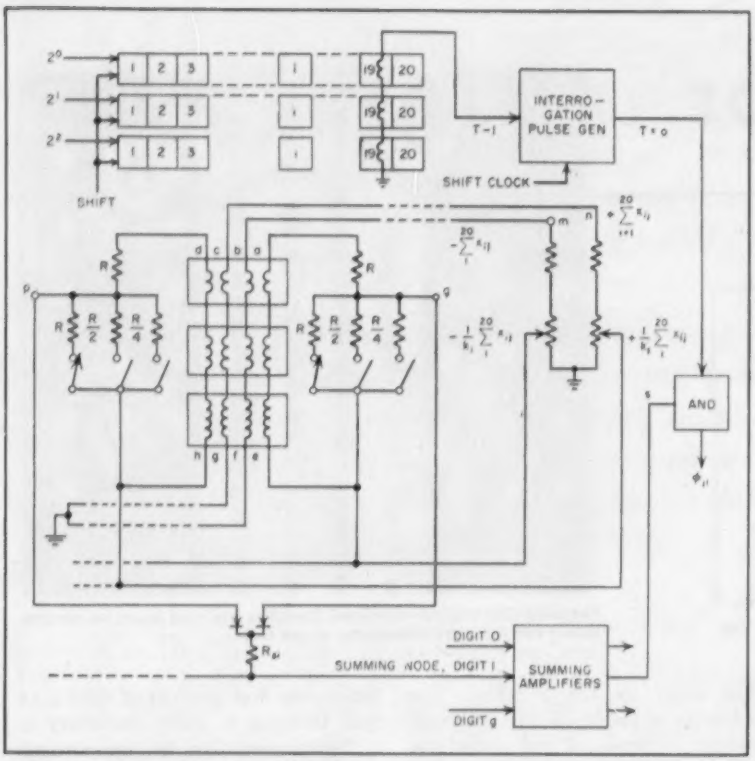

FIG. 4—Instrumentation of correlator

of the $1/r_{ij}$ factors is set to make the corresponding x_{ij} terms equal to unity: $1/r_{1\,1} = 1/1$, $1/r_{21} = \frac{1}{2}$, $1/r_{31} = \frac{1}{3}$, $1/r_{41} = \frac{1}{4}$, etc. Each term of the sum is thus unity and the function nulls for autocorrelation.

Curves (C) to (G) show the details of cross-correlation where a second function $f_j(t)$ is compared to the reference function $f_1(t)$. Curve (D) shows the unknown after digital conversion. The ordinates x_{ij} have the values $x_{1j} = 1$, $x_{3j} = 3$, $x_{5j} = 5$, $x_{6j} = 6$, etc. and their sum $\sum_{1}^{16} x_{ij} = 67$.

Curve (E) illustrates the first term of the equation $\frac{x_{ij}}{r_{ij}}$

The numerator takes the values of the (D) curve and the denominator the (B) curve:

$$\frac{x_{1j}}{r_{1j}} = \frac{1}{1}, \frac{x_{2j}}{r_{2j}} = \frac{3}{2}, \frac{x_{3j}}{r_{3j}} = \frac{5}{3},$$

$$\frac{x_{4j}}{r_{4j}} = \frac{6}{3}, \text{ etc.}$$

In (F) each ordinate in (E) has $\frac{\Sigma x_{ij}}{k_j}$ subtracted from it. The numerator is 67 while the denominator's value is 50, the sum of the ordinates of the reference function (B). Comparison of (F) and (G) shows the advantage of taking the absolute value in order to get a maximum spread in response between cross and autocorrelation.

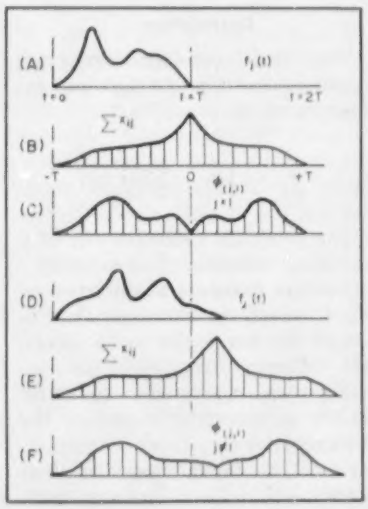

FIG. 5—Curves show the significance of time response in autocorrelation

Figure 4 illustrates the instrumentation of the correlating function. After time and eight-bit amplitude quantization, the function is shifted into the 20-stage shift register. Since all stages are identical, only the ith stage is singled out and exploded. The voltage across terminals a-e is $+x_i$ and across d-h, $-x_i$. Windings b-f and c-g are run serially and additively through all 20 stages of the register, with opposite sense, so that the voltage at m and n is minus and plus $\sum_{i=1}^{20} x_{ij}$ respectively.

The multiplier constant $\frac{1}{r_{ij}}$ is established by the resistors between a-e. With the given resistor ratios, the binary switches can set in attenuation factors varying from 1 to $\frac{1}{8}$. This range accommodates the 7 quantized values of x_i. The switches are so ganged that x_{ij} and $-x_{ij}$ are always attenuated by the same factor. (The multiple resistors and switches were for experimental purposes. In practice, only two each are required for $+x_i$ and $-x_i$). The outputs across q-e and p-h are then respectively plus and minus $\frac{1}{r_{ij}} x_{ij}$, representing the first term of the

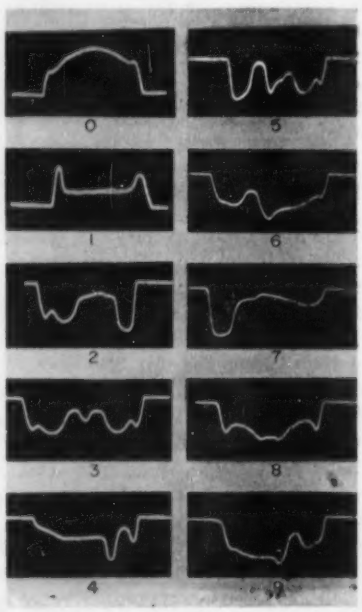

Waveform characteristic of digits 0 to 9

correlation function. The second term of the function is developed at

s and t where $\pm\sum_{i=1}^{20} x_{ij}$

is attenuated by $1/k$. The subtraction of the two terms within the absolute value bracket is made by connecting s and t to terminals h and e, the low potential ends of the $\pm x_{ij}$ windings and the difference appears between ground and points p and q.

There appears from p to ground

$$-\frac{x_{ij}}{r_{ii}}+\frac{x_{ij}}{k_i},$$

and from q to ground $+\frac{x_{ij}}{r_{ii}}-\frac{\Sigma x_{ij}}{k_i}$

The diodes connecting p and q to the common resistor R_{ci} serve as full wave rectifiers and the absolute value of the ith term of the total sum appears across this resistor. Similar connections to the summing node are made from the other 19 stages. This indicates that the absolute value of the 20 terms of the total summation are all collected by the summing amplifier whose output is then the desired function

$$\theta_{(j,\,l)}=\sum_{i=1}^{20}\left|\frac{x_{ij}}{r_{ii}}-\frac{1}{k_l}\sum_{i=1}^{20}x_{ij}\right|.$$

Time Response

As the waveform is shifted into the register it progresses from left to right and is said to be in registry when the leading edge is in the Nth register change.

The number of core stages N is equal to or greater than the number of times the function M is sampled by the adc. The function in registry defines time $T = 0$ and, for autocorrelation, it is at this time that the $1/r$ factor in the Nth stage of the register attenuates the first ($n = 1$) time-sampled ordinate of the unknown such that $\frac{x_1}{r_n} = 1$.

Carrying this on, for autocorrelation, at $T = 0$ the remaining

$$\frac{1}{r}$$

factors are set such that each of the following products is equal to unity: $\frac{x_2}{r_{N-1}}, \frac{x_3}{r_{N-2}}$, etc. Also at this time xi, the integral of the function, is reduced to unity by the $\frac{1}{k}$ factor.

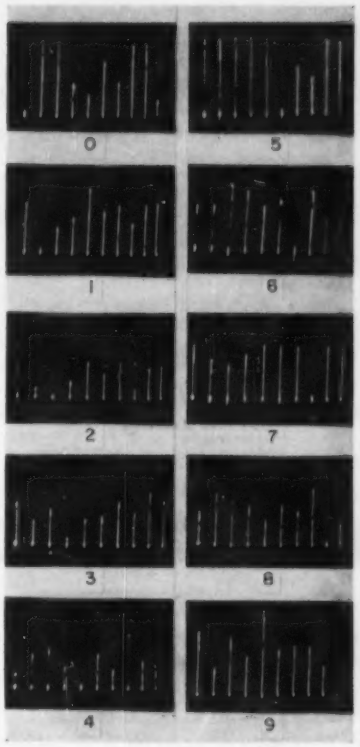

FIG. 6—Waveforms shown quantized

The significance of the time response is reviewed in Fig. 5. Diagram (A) shows an input function that will be autocorrelated When the function is in registry, the core stage and sum attenuators reduce each term of the function to unity making the sum equal to zero. Curve (B) shows the construction of the integral from the time the $i = 1$ ordinate (leading edge) shifts into the first core stage until the $i = T$ ordinate leaves the final core stage N.

The maximum occurs when the ordinates are in registry at $T = 0$. Curve (C) shows autocorrelation at $T = 0$ when the $i = 1$ ordinate is in core stage N and the $i = T$ ordinate is in the core stage $(N - T)$. Instrumented as in Fig. 4 the curve appears at the output of the summing amplifier and the $T = 0$ point on the curve is selected in the AND gate which is opened only at $T = 0$ by the interrogation signal.

The output is zero for autocorrelation. The curve in (D) represents a second function to be correlated with that in (A). Its integral, shown in (E), is diplaced to the right since its time duration is longer. The integrals in (B) and (E) can reach peak value at the same time. Regardless of the duration the $T = 0$ ordinate in (B) and (E) can be equal or unequal.

Curve (F) shows the cross-correlation observed at the output of the summing amplifier in Fig. 4. In this case the output of the AND gate is greater than zero.

Digit Storage

To store the waveforms associated with the ten digits there are ten sets of windings on each core stage, a $1/r$ and $1/k$ attenuator associated with each set and ten summing amplifiers each gated with the $T = 0$ (interrogation) pulse. Ten lines, so gated, corresponding to the digits 0 through 9 go to an amplitude selector having ten output lines.

The characteristic of this selector is that a pulse appears only on the output line whose corresponding input was the smallest of the ten input signals. Signals appearing on the output lines could operate terminal equipment, such as printers, sorters and accumulators.

Complete correlation is not necessary to identify the input waveforms since the equipment responds to the best fit. The correlator is thus insensitive to noise such as caused by imperfectly formed digits and dirt on the printed media.

The correlator has two complete sets of windings on each of the core stages and by changing the binary ordered toggle switches it can be made to store any two arbitrary waveforms at one time.

The waveforms in Fig. 6 were taken at the $T = 0$ gated output of a summing amplifier with the numbers corresponding to the waveforms in a photograph going under the photocell in the sequence 0, 1, 2, 3, . . . 9.

The authors acknowledge the assistance of J. S. Shipman, H. Rubinstein, M. E. Hale and R. C. Preece, staff members of the Laboratory. The work was sponsored by the Chase Manhattan Bank.

SUMMARY —— Synchronously switched biased diodes insert impedance in control circuit during power half-cycle to increase voltage gain by factor of three or four over half-wave amplifier, while maintaining effective 10,000-ohm input. Simplified design reduces number of components by one-half to two-thirds that of conventional system

By GEORGE SCHOHAN*
Eclipse-Pioneer Division
Bendix Aviation
Teterboro, N. J.

Transient-Controlled

HALF-WAVE bridge-type magnetic amplifiers have found extensive application for the solution of various instrumentation and control problems. However, mutual coupling between signal turns and power turns requires the installation of a series control resistor to avoid loading amplifier and signal source during the power half-cycle. Additional amplifier stages are then required to increase the circuit gain back to a satisfactory level.

These considerations suggest the use of a synchronously operating on-off switch to insert an impedance in the control circuit during the power half-cycle only. One electrical synchronous-switch analogy is the biased-rectifier shown in Fig. 1. When point 1 goes positive, the rectifiers conduct and signal current through R_L is equal to E_{signal}/R_L providing $E_{supply}/R_s \leqq E_{signal}/R_L$. When point 1 goes negative, E_{signal} sees the impedance $R_s + R_L$, which is usually high if $E_{supply} >> E_{signal}$.

Application

The application of this technique to the standard half-wave magnetic amplifier is shown in Fig. 2A. Providing the bias resistances are sufficiently high, the signal source may be considered to be isolated from the amplifier during the power half-cycle. During the reset half-cycle, the bias rectifiers conduct and the signal may be assumed impressed directly across the control windings.

With this arrangement, the voltage gain of the standard amplifier increased by a factor of three or four while maintaining an effective 10,000-ohm input.

The transient controlled amplifier uses a Supermalloy core. This material has a narrower hysteresis loop than Orthonol, signifying a reduced magnetizing-current level. A second important characteristic is the core state after the removal of magnetizing and saturating

*Work done while with Magnetics Division, Naval Ordnance Laboratory, White Oak, Md.



FIG. 1—Biased-diode synchronous switch used in transient controlled amplifier

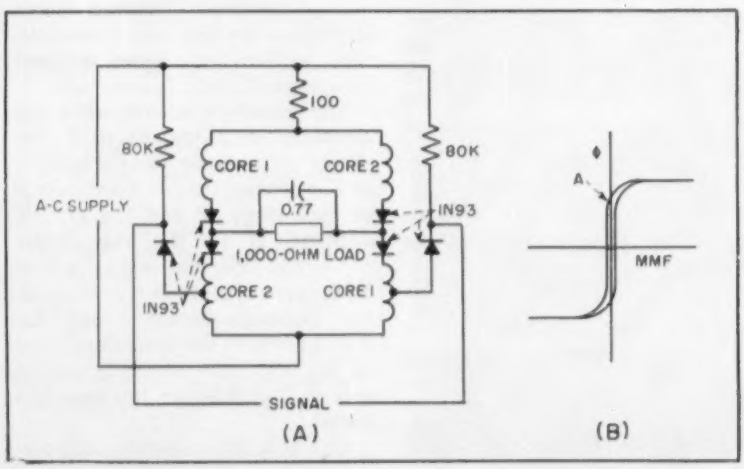

FIG. 2—Transient-controlled magnetic amplifier circuit (A) uses Supermalloy core material having hysteresis loop shown at (B)

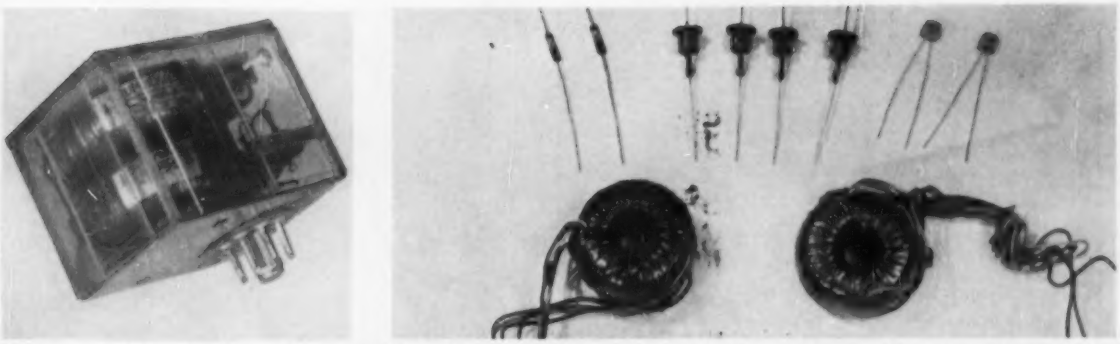

Transient-controlled magnetic amplifier encased in plastic plug-in, left, mount uses only a few more components than conventional half-wave amplifier circuits. All components are shown at right

Magnetic Amplifier

force. The flux-operating point is then at Point A of Fig. 2B which, for Supermalloy, represents a less saturated core condition and consequently a high impedance.

Core Action

Figure 3A shows the core action during the power half-cycle. Application of a signal of polarity shown opposes the reset action of core 1 and this core will fire first in the power half-cycle. On conducting and with proper adjustment of C_o and R_{line}, the resultant transient current is made to approach zero previous to firing of core 2. The core-1 flux is then positioned at point A of Fig. 2B. The core is then a high impedance, and requires volt-time area before it can again saturate. The current established when core 2 fires, therefore, takes a path through its own power windings and is displaced in time from the core-1 current as shown in Fig. 3B. As a result of this cross-firing effect the capacitor voltage reverses in polarity as shown in Fig. 3C and a charge of polarity shown in Fig. 3A will exist on C_o at the end of the power half-cycle.

In Fig. 3D, it is seen that during the control half-cycle, the capacitor is free to discharge through rectifier D_1 and D_1' via the core-1 power windings and the supply source. The discharge-current wave shape

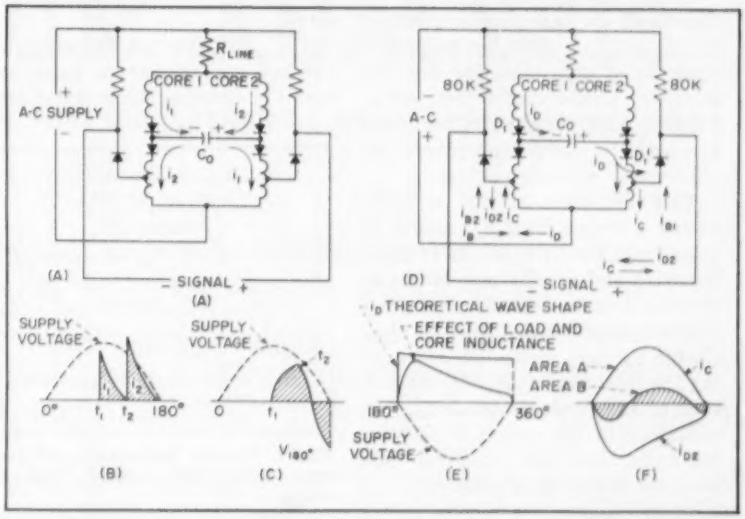

FIG. 3—Amplifier action during power half-cycle (A) with circuit waveforms (B and C). During control half-cycle (D) waveform is as shown at (E). Input impedance can be determined from net control circuit current

is shown in Fig. 3E. A portion of this current, i_{dc}, passes through the control winding of core 2 via the signal source. This component opposes the normal flow of signal current and also negates the control action on core 2. However, the overwhelming effect of i_d on core 1 control results in a net increase in circuit gain. Any current flow opposing i_d through rectifiers D_1 and D_1' during this period is countered by the autotransformed bias current.

The signal-source component of i_d and i_{dc} is limited by biased rectifier D_c. The condition imposed is that $i_d \cong i_b - i_c$. (1) with the chief result that i_{dc} is increasingly ineffective at higher signal levels.

From Fig. 3F, the amplifier input-impedance level may be expressed as

Z_{in} (with capacitor) = Area A/Area B Z_{in} (no capacitor) (2)

Design of this circuit is concentrated on obtaining the maxi-

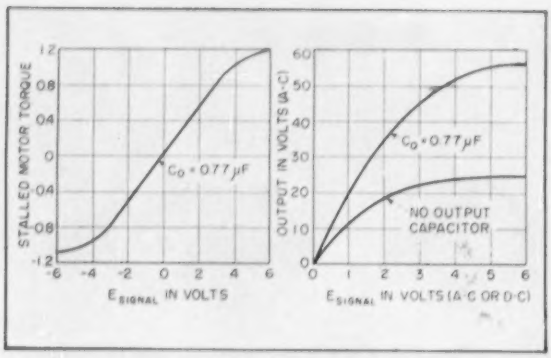

FIG. 4—Gain curves for transient controlled magnetic amplifier with a 400-cps servo motor and tachometer system (left) and with 1,000-ohm resistive load (right)

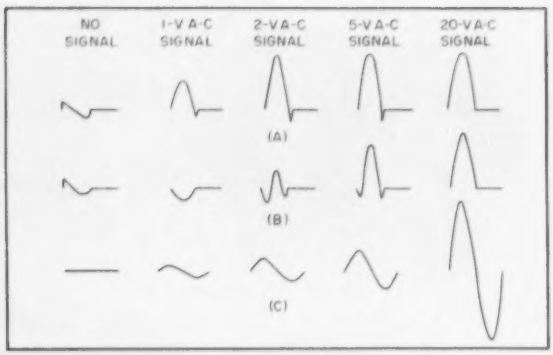

FIG. 5—Control current waveshapes for transient controlled magnetic amplifier without (A) and with (B) output capacitor; waveforms for similarly designed half-wave amplifier (C)

mum gain with minimum control-circuit current. The core mean length of magnetic path should be as short as possible. Also a high ratio of power turns to control turns is necessary for voltage gain.

Operation of this amplifier is dependent on near-perfect rectifier characteristics. Selenium rectifiers were found unsuitable for this application; silicon diodes were satisfactory, with germanium rectifiers a substitute when temperature requirements are not critical.

This amplifier is not suitable where a proportional d-c output is required. The circuit is phase-sensitive and equally responsive to either a-c or d-c signal inputs. The output capacitor is free to discharge through a parallel load during the reset half-cycle. The magnitude of the fundamental frequency contained in the output is thereby increased and the amplifier approaches full-wave operation.

Amplifier Performance

The operation of this circuit allows insertion of a load in parallel with the output capacitor. The amplifier was initially adjusted to operate a typical 400-cycle instrument-type servo system and a load-resistor value then chosen so that the various effects of the output capacitor would be apparent.

The amplifier components are given in Table 1. The gain curves are shown in Fig. 4. Measurements of amplifier delay showed a value of 1 cycle of the supply frequency or less.

The control-circuit current levels were measured by a harmonic wave analyzer for determination of amplifier input impedance. Control current wave shapes are drawn to scale in Fig. 5 for comparison. The quiescent control-circuit current in the biased-rectifier circuit is believed due to core and rectifier mismatch.

The amplifier performance was checked with a 400-cps servo system. For damping, tachometer feedback was placed in series with the control transformer to avoid loading effect. This increased the amplifier input-impedance level by approximately 2,500 ohms. The control transformer-to-motor gear ratio was increased until the system was damped with no loss.



FIG. 6—Velocity characteristic of servo sys.em using transient-controlled magnetic amplifier

Table I—Design Data for Transient Controlled Magnetic Amplifier

	Uncompensated Servo	Compensated Servo
Core	1 x 1⅝ x ⅝ in. wound 0.002 in. Supermalloy tape	
Windings		
N_p	3,400 turns, No. 32 wire	3,400 turns, No. 32 wire
N_s	150 turns (tap at 3,250 on N_p)	225 turns (tap at 3,175 on N_p)
R_{bias}	100 ohms	80 ohms
C_s	0.77 μf	0.64μf
Integrator		
C_f	—	7 μf
R_f	—	44,000

Bandwidth was found to be 15-cps, measured at the 90-deg phase-shift point, with damping adjusted for a 2.2 db rise. Static accuracy was less than 0.17 deg and drift was less than 0.02 deg with a supply voltage change from 80 to 135 volts. Figure 6 shows velocity constant.

Perhaps the only unfavorable characteristic noted was the velocity error caused by the electrical characteristics of the tachometer. To correct for this a capacitor-resistor combination was installed. The capacitor is charged by core-transformer action during the power half-cycle and is free to discharge through the control windings during the reset half-cycle when the bias rectifiers conduct.

To avoid undesirable unbalance effects with the integrator, the circuit was compensated, as shown in Table 1. These adjustments give linear velocity-error correction, as noted in Fig. 6. By increasing feedback, velocity errors of less than 1 deg were obtained at speeds near the maximum slewing speed of the servo motor. The control-circuit current increased with velocity, rather than with signal voltage.

The author wishes to acknowledge the work of J. J. Suozzi, who first applied the biased-rectifier technique described, to the Orthonol-core half-wave amplifier.

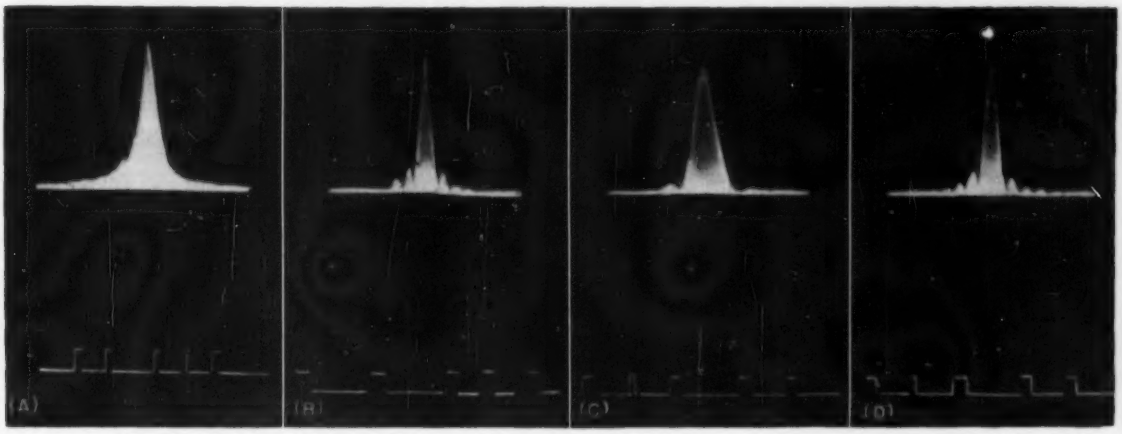

FIG. 1—Superimposed spectra of five-pulse group (A) are separated by selector to show spectrum of first (B), second (C) and third (D) pulse. Intensified pulse display of selector is shown below each envelope

Gate Selects Pulses for SPECTRUM ANALYSIS

By ALAN ROSS and LEONARD SIMON*

Leader, Circuit Group
Polarad Electronics Corporation
Long Island City, N. Y.

SUMMARY —— Selector passes single pulse from train to spectrum analyzer for investigation. Pulses from 0.2 to 150 μsec wide at repetition rates up to 10,000 pps can be chosen for individual analysis. Auxiliary display shows pulse train with selected pulse intensified for identification and as aid in setting gate-width controls to pass entire pulse

IN THE DESIGN and development of systems utilizing multipulse groups it is necessary to separate, observe and identify the spectra of the individual r-f pulses which comprise the group. The rise time, width, separation, distribution of energy and other characteristics of the individual pulses must be determined. To do so, each pulse must be isolated.

A spectrum analyzer display alone is unsatisfactory since it would consist of the spectra of the individual pulses superimposed upon one another as shown in Fig. 1A.

To obtain the spectrum of an individual pulse, the system must be sensitive to that pulse, and insensitive to all others. This can be done by gating one of the elements in the system to switch the spectrum analyzer on, when the pulse under observation occurs, and off, when all undesired signals appear.

An oscilloscope display is therefore required to show both the pulse group being observed and the position of the gate. Figures 1B, 1C and 1D show the selector display and the resultant pulse spectrum on the analyzer. Width and position controls adjust the location of the gate to cover any one of the desired r-f pulses.

First Pulse Gating

To select the first pulse in a group, the gate must begin before the pulse and remain on until the pulse is over. This cannot be done with conventional gate generating circuits, since there is always a delay between the occurrence of the initial pulse and the action of the circuits generating the gate. In the multipulse spectrum selector the switch is left open at all times and the trailing edge of the first pulse is used to generate a rejection gate.

Diode Switch

The switching method chosen places the keying instrument between the mixer and first i-f stage of the spectrum analyzer.

The keying device is a coaxial diode switch shown in schematic

* Work done while with Polarad Electronics Corp.

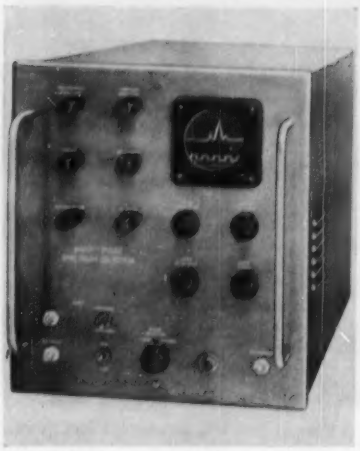

Control panel of multiple-pulse selector

diagram, Fig. 2. The 1N23B crystals, designed for coaxial mounting, are placed in series in a 50-ohm coaxial line terminated in a 52-ohm resistance. A d-c bias is placed on the crystal through an isolating choke. When the crystals are biased on by an externally applied d-c voltage, the attenuation through the line is 15 db. When the crystals are biased off by reversing the voltage, the attenuation is over 60 db. This switch is used in the 50-ohm line between the spectrum analyzer mixer and the spectrum analyzer i-f amplifier. Fixed external bias is applied to maintain the switch in either the on or off condition. Bias is applied through R_1. Gate pulses are superimposed on the bias by the mixing action of R_1, R_2, and R_3.

A block diagram of the method in which the switch was used is given in Fig. 3. The output of the spectrum analyzer mixer is detected and used to trigger the circuit that generates the gate, closing the switch and allowing the proper pulse to pass through the system. The video from the detector is also displayed on an oscilloscope so the gate can be adjusted properly.

This gating system requires no external trigger and will work quite satisfactorily on the r-f pulses alone. The system operates in the region from −40 dbm to 0 dbm with pulse widths from 0.2 to 10 microseconds and down to a minimum spacing of 0.2 microsecond. Maximum overall pulse-group length can be up to 100 microseconds.

The 160-mc spectrum analyzer mixer output is fed to the spectrum selector i-f, a ±12.5-mc bandwidth amplifier shown in the circuit of Fig. 4. One output is taken from the i-f amplifier and fed to the diode switch for application to the spectrum analyzer. A second output is applied to the trigger and deflection circuits of the spectrum selector. The signal to the spectrum analyzer is amplified 10 db by the first three i-f stages, which form a stagger-tuned triplet, and is then inductively coupled to the diode switch. The signal to the spectrum selector is amplified by an additional six i-f stages for a total gain of 60 db.

First Pulse Operation

With the selector in the FIRST-PULSE position a negative bias is applied to the diode switch. The attenuation offered to the spectrum analyzer signal is 15 db and the switch is effectively closed. A positive trigger, occuring after the first pulse in the group, flips the bistable-multivibrator reject-gate generator. The output of the reject-gate generator is applied to the switch through cathode follower V_{9b} (Fig. 4), blocking the signal to the spectrum analyzer for the remainder of the pulse group. An end-of-group trigger from the phantastron then resets the reject-gate generator and opens the switch.

In the OTHERS position of the switch, no bias is applied to the diode switch and the r-f signal is attenuated 60 db. All pulses are then blocked except for the duration of a negative gating pulse generated by accept gate V_{9a} and applied through cathode follower V_{9b}. By controlling the timing and width of the accept-gate triggering pulse the desired pulse is chosen from the group.

The signal to be applied to the spectrum selector is amplified by the additional six i-f stages, detected and used to provide the crt display and to trigger the selector control circuits. Automatic gain control is used with the i-f amplifier to prevent overloading on large signals. The Schmitt multivibrator V_{10} shapes all pulses alike so that they may be used for triggering the sweep phantastron V_{10}.

Two outputs are taken from the phantastron, a sawtooth and a gate. Their duration of 10 to 100 microseconds is determined by the setting of the GROUP LENGTH control. This control is set by the operator so that the sawtooth is slightly longer than the pulse group. The sawtooth is fed through sweep expander V_{9a} to provide crt horizontal deflection.



FIG. 2—Crystal-diode switch used to gate spectrum analyzer i-f input selects individual pulse for analysis

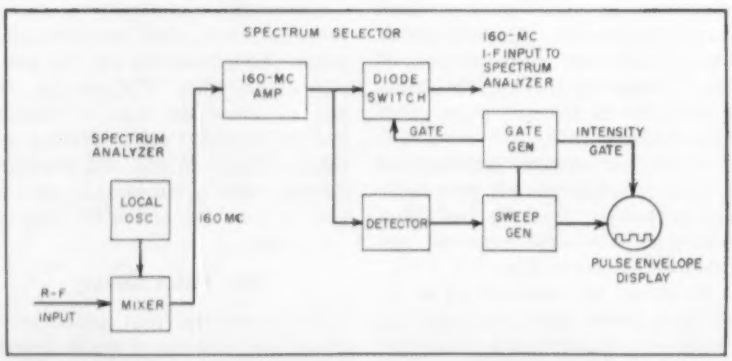

FIG. 3—Selector is inserted between mixer and i-f of spectrum analyzer

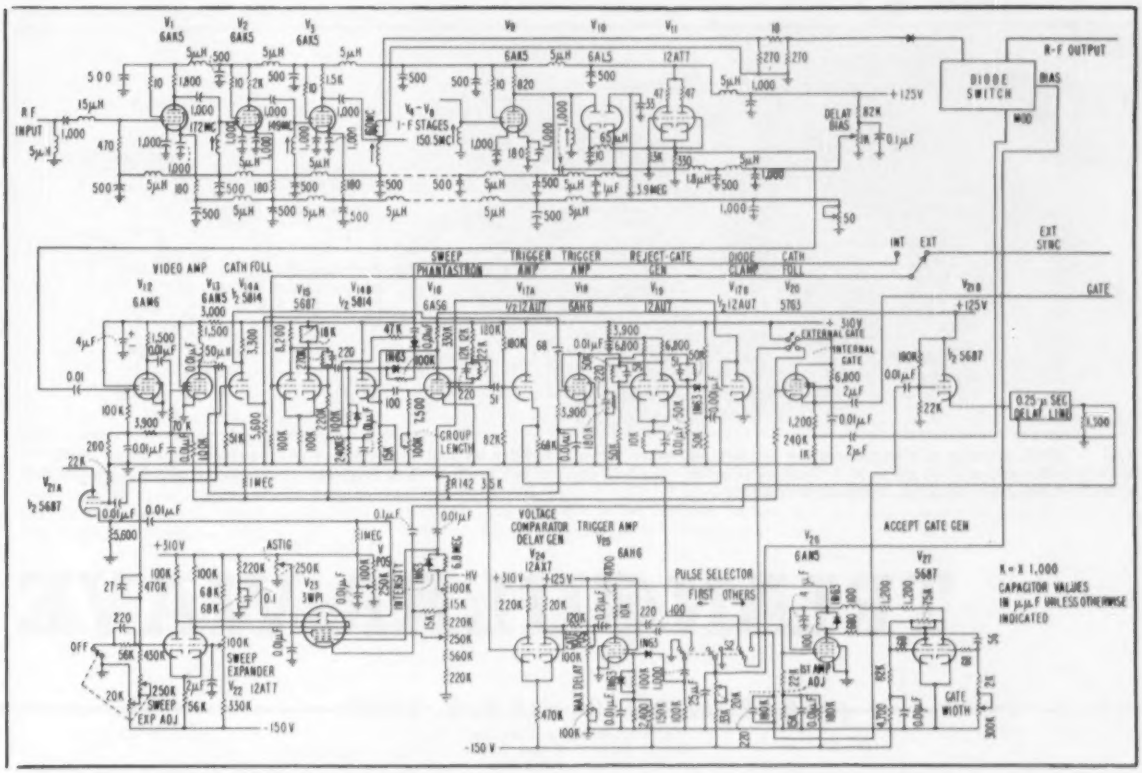

FIG. 4—Pulse selector circuit includes 3-in. cro to show pulse train with selected pulse intensified as aid in identification

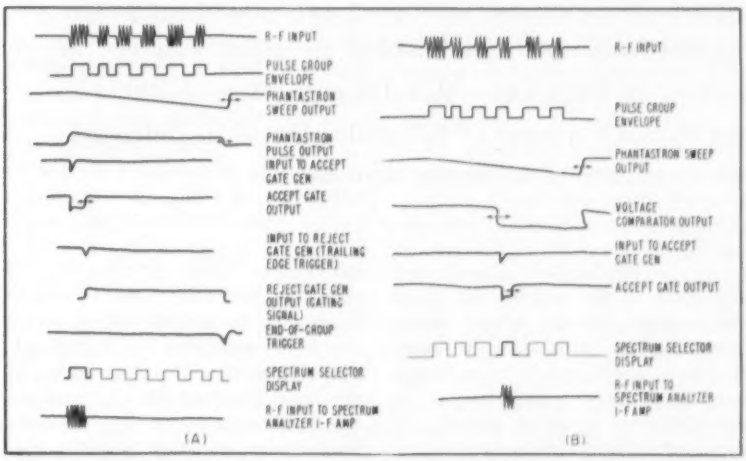

FIG. 5—Waveforms at various points in selector circuit for first pulse (A) and other pulse (B) setting of selector switch. In first pulse position, selector functions only to close gate at end of initial pulse

The gate, which occurs simultaneously with the sawtooth, is differentiated and amplified. The leading-edge trigger pulse is used, in FIRST-PULSE position, to trigger accept-gate generator V_{27}.

The width of the V_{27} output pulse is set by the GATE-WIDTH control. The lagging edge of the V_{27} pulse provides the trailing-edge trigger which flips reject-gate generator V_{19}.

The positive pulse output of V_{19} opens the crystal-diode switch. The lagging edge of the differentiated phantastron gate, end of a group trigger, is used to reset the reject-gate generator and return the crystal switch to its normally closed state. Thus the first pulse is passed while all other pulses are blocked.

Time Relationships

Figure 5A illustrates the time relationships between the r-f signal pulses, the sawtooth, the triggers, the spectrum selector display and the spectrum analyzer display for the FIRST-PULSE position.

In the OTHERS position the phantastron sweep output is fed to voltage comparator delay generator V_{25a}, the ouput of which is a negative pulse. The position of the leading edge of this pulse is set by the gate positioning control. A negative pulse derived by differentiation from the leading edge of this pulse triggers the accept-gate generator. The negative output pulse of the accept-gate generator closes the normally open crystal-diode switch, permitting the signal to pass to the spectrum analyzer. The desired pulse is thus selected by the positioning control and the proper width set by the width control. Figure 5B illustrates the time relationships in the OTHERS position.

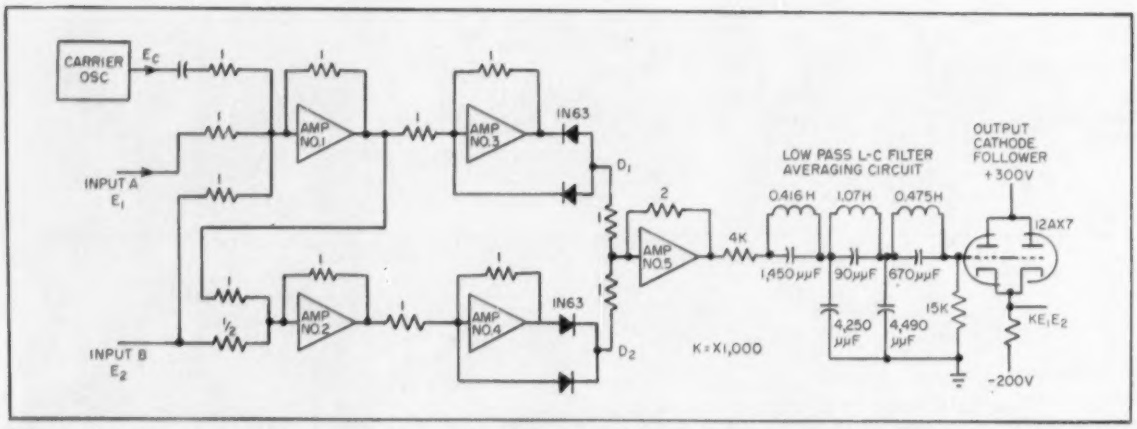

FIG. 1—Block diagram of triangular-wave function multiplier. Circuit provides an absolute accuracy of 0.7 percent from 56 mv to 20.6 v, with a usable range of 10 mv to 37 v. Stability is better than 0.08 percent full scale with a precision of approximately 0.1 percent full scale and frequency response between 0 and 1000 cps

TRIANGULAR-WAVE

By R. A. MEYERS and H. B. DAVIS

Instrumentation Division
David Taylor Model Basin
Carderock, Maryland

SUMMARY — Four-quadrant electronic multiplier for analog computers uses triangular-wave carrier-oscillator signal added to input voltages to achieve an absolute accuracy of 1 percent with a dynamic range of 500 to 1. Actual precision is better than 0.1 percent of full scale. Circuit is independent of tube characteristics and free of balancing adjustments

UNDER DEVELOPMENT for the U. S. Navy's Bureau of Ships, a new electronic multiplier aids in the solution of ship-design problems.

The chosen design has produced an instrument which is independent of tube characteristics, has an excellent dynamic range and is free of balancing adjustments.

Multiplier Development

Multiplier development is based on the difference in magnitudes method.[1] This method can be stated by

$$K E_1 E_2 = Av\,[(E_1 + E_2 + E_c) - (E_1 - E_2 + E_c)] \quad (1)$$

Equation 1 is valid if the assumptions are made that Av is the average value of the quantity included in the brackets, taken over one cycle of the carrier E_c, E_c is the carrier voltage whose waveform varies linearly with time, E_1 and E_2 are signal voltages which vary arbitrarily with time, E_c is the difference function and K is a constant of proportionality.

Further the peak value of the quantity $|E_1 + E_2|$ should never be greater than the peak value of $|E_c|$ or $|E_1 + E_2| \leqq |E_c|$, and the frequency of the carrier voltage E_c should always be at least ten times higher than the highest frequency component of E_1 or E_2.

Figure 1 explains the solution of Eq. 1. The operation is as follows: A carrier oscillator generating a triangular waveform provides the carrier voltage for the instrument. This carrier, E_c, is added to the two input functions E_1 and E_2 in operational amplifier No. 1. In amplifier No. 2, the output of amplifier No. 1 is added to the input function $2E_2$. To perform the subtractions of the absolute magnitudes, constant polarity signals with absolute magnitudes of $|E_1 + E_2 + E_c|$ and $|E_1 - E_2 + E_c|$ are needed. Mixing is done in two full-wave rectifiers D_1 and D_2. Amplifiers No. 3 and No. 4 are used to produce a push-pull signal to feed D_1 and D_2.

By making the output of rectifier D_1 negative and rectifier D_2 positive, the difference of the two absolute quantities is obtained directly by adding in amplifier No. 5. The output of amplifier No. 5

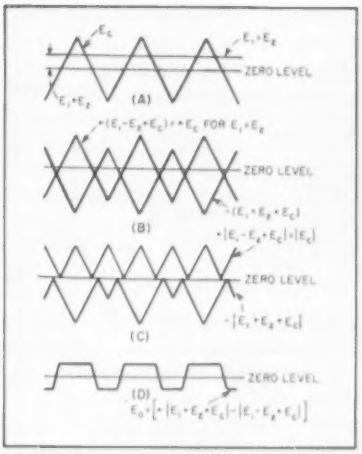

FIG. 2—Direct-current input and carrier waveform (A) are amplified and output (B) fed to rectifiers. Rectifier outputs (C) are amplified and filtered (D)

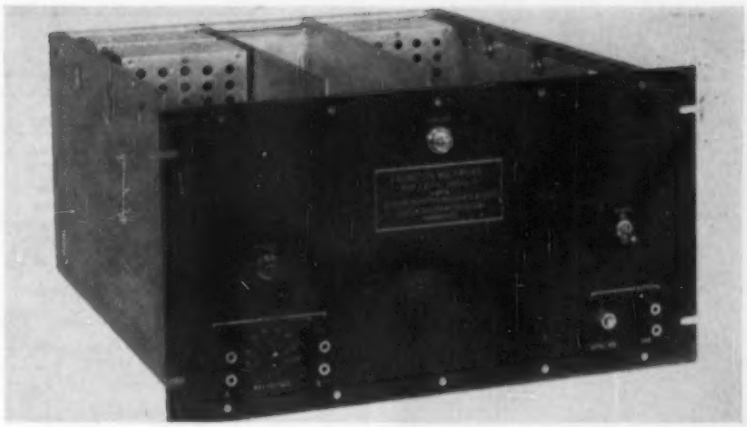

Function multiplier helps solve ship-design problems. Two analog input-voltages may vary arbitrarily with time and may contain components in the frequency range from 0 to 150 cps. The unit can detect products as low as 5 mv and has a drift of less than 10 mv over an 8-hour period after a half-hour warm up

Analog Multiplier

is averaged by a low-pass filter. This filter output is proportional to the desired product KE_1E_2.

Figure 2 shows the theoretical waveform appearing at different points in the multiplier for equal d-c voltage inputs.

Figure 3 shows the actual waveforms of the difference function E_e appearing at the output of amplifier No. 5.

Design Considerations

From Eq. 1, a method of accurately adding and subtracting the function E_1, E_2 and E_c must be devised.[3] Operational amplifiers such as are used in analog computers were chosen.

Only d-c operational amplifiers can be used to meet the zero frequency requirement of the multiplier. To minimize errors due to straight-line approximations, the fundamental carrier frequency should be at least 10 times the highest input frequency. Input functions having frequencies up to approximately 200 cps were anticipated. This input frequency brings the amplifier requirement to 2 kc, assuming a sine-wave carrier. However, the carrier must vary in a linear manner and the amplifier must pass the fundamental frequency plus higher harmonics if the carrier waveform is not to be distorted.

By using input and feedback resistors of 150,000 ohms for the amplifier, the frequency response remains reasonably flat to approximately 50 kc. The significant carrier-voltage harmonics must be held within this limit. Since the amount of output voltage from the multiplier depends directly on the amount of signal-amplitude swing of the amplifiers, it is desirable to make this swing as large as practical. A peak voltage swing of ± 80 v, without noticeable distortion, is sufficient for the amplifier. With the limitation in mind that $E_e \geqq |E_1 + E_2|$, E_e was chosen to have a constant peak amplitude of ± 40 v, leaving a maximum of ± 40 v peak swing for the sum of E_1 and E_2. An input attenuator is provided to maintain the above conditions over the range from 0 to ± 200 v peak.

Direct-current drift is an additional problem encountered using d-c operational amplifiers. Since the multiplier must go to zero frequency, there will be no difference in an applied d-c input signal and a d-c drift. For this reason, chopper stabilization is used on operational amplifiers. A circuit diagram of the d-c amplifier is shown in Fig. 4.

Carrier Voltage

A triangular-waveform carrier is used in this multiplier largely because of amplifier bandwidth limitations and filter considerations.

A comparison of the Fourier analysis of the triangular waveform and the saw-tooth waveform shows that the triangular waveform contains no even harmonics and the amplitude of harmonics above the seventh is so small as to be negligible. The saw tooth contains both odd and even harmonics of relatively large amplitudes out to at least the tenth harmonic. Therefore, for a given amplifier bandwidth, a higher frequency carrier can be used.

A check of amplifier response for a triangular-waveform carrier showed that the highest frequency

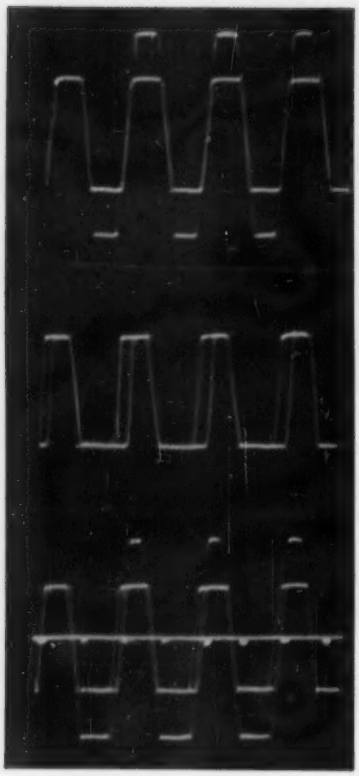

FIG. 3—Waveforms show effect of increasing E_2 with E_1 zero (top), holding E_2 constant and varying E_1 (center) and varying both inputs (bottom). Varying E_1 while holding E_2 constant changes symmetry but not amplitude. Varying both inputs changes both amplitude and symmetry

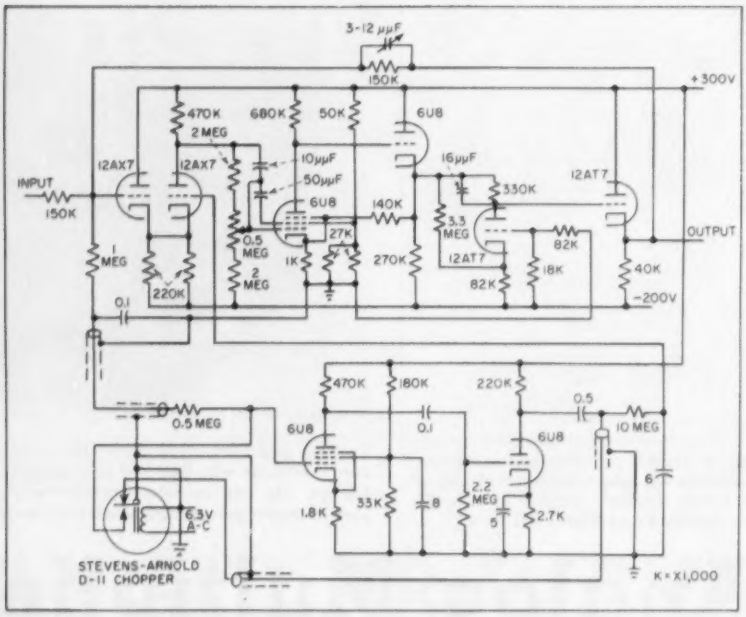

FIG. 4—Direct-current operational amplifier with chopper stabilization

that could be passed without distortion was approximately 6.3 kc, hence this frequency was used. Harmonics above the seventh do not appreciably affect the linearity of the triangular waveform. A circuit diagram of the carrier oscillator is shown in Fig. 5.

Following the combining of the signals in amplifiers No. 1 and No. 2, it is necessary to take the absolute magnitude of the signals. This is done by the full-wave rectifiers. The subtraction is accomplished in amplifier No. 5 by adding a positive signal from one rectifier to the negative signal from the other.

The output of amplifier No. 5 is a difference function E_o, which may bear little similarity to the output waveform obtained after averaging. Averaging is done in a conventional L-C filter circuit. By filtering out the sinusoidal waveforms contained in the periodic function, the voltage remaining is the desired average or d-c value of the input waveform.[4]

If a 150-cps signal is being ap-

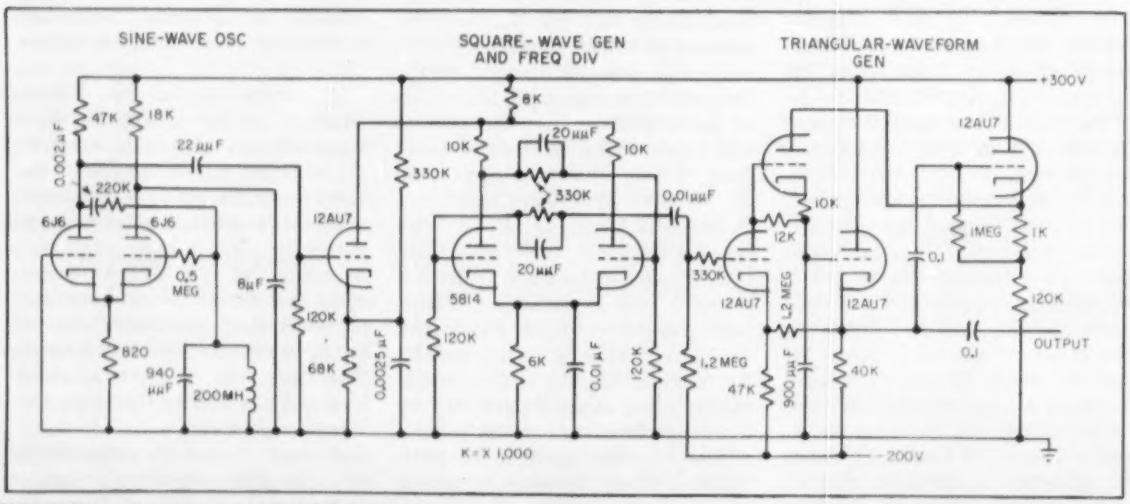

FIG. 5—Triangular-wave carrier-oscillator circuit

plied to each multiplier input and it is desired to pass the 300-cps output frequency with zero phase shift while completely suppressing the carrier, an attenuation of 50 db or more is required at the carrier frequency. To reach this attenuation it was necessary to accept a phase shift of 15 degrees at 300 cps.

Performance

Accuracy is usually specified as a percentage of full scale. Based on an output of 21 v, the error as a percentage of full scale is better than 0.1 percent. A more useful method of specifying the accuracy is in terms of the absolute magnitude of the error at the output. Absolute error is the percentage by which the indicated product varies from the correct product.

A test over the range of from 0.056 to 20.6 v peak gave an average error of 0.7 percent. Errors did not exceed 5 percent between the limits of 0.035 to 26 v peak output.

The precision or the accuracy to which results may be repeated is better than 0.1 percent of full scale. This percentage is nearly the accuracy to which the measuring instruments could be read or estimated and is not necessarily the precision of the multiplier alone.

The frequency response of the multiplier is flat to approximately 1,000 cps. However, the useful range is limited either by the permissible phase shift of the product, or by the allowable distortion as the signal frequency approaches the carrier frequency. Practically all of the phase shift is due to the filter.

Instrument drift is assumed to be due primarily to the output cathode follower. After approximately a 30-minute warmup, the drift about the zero point did not exceed 10 millivolts. A drift test of the instrument from a cold start is shown in Fig. 6A.

A check of the linearity was made on the 20-v input range. Linear curves were obtained keeping one input constant and varying the other input. The results, seen in Fig. 6B, show a variation of less than 0.5 percent.

The dynamic range is considered as the ratio of the output obtained with maximum input signal to the output obtained with no input signal. Since the output with maximum input is 37 v peak and the output with no input is 7 millivolts peak, the actual dynamic range is better than 5,000 to 1. The absolute error decreases as the dynamic range is decreased. For example, if it is desired to use the instrument over a dynamic range in which the absolute error is 0.7 percent or better, then the dynamic range should be 20.6/0.056 = 368 to 1.

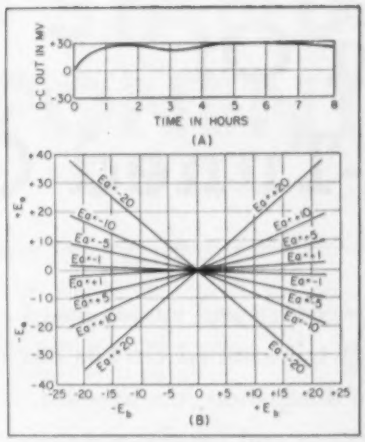

FIG. 6—Curves show results of drift test (A) and linearity test (B)

Results

Operation of the multiplier may be judged by the waveforms shown in Fig. 6. In these oscillograms the upper figure of each group shows the input waveform which is applied to each multiplier input, and the zero reference.

Figure 7 shows the 100-cps sine wave applied and the double frequency and d-c level shift produced by multiplying (top). Center and bottom are similar patterns produced by triangular and square-wave inputs, respectively.

It is expected that a larger dynamic range could be obtained with as good accuracy and precision by inserting two identical L-C filters as the load for the full-wave rectifiers. The advantages would be larger dynamic range, lower output impedance and elimination of the cathode-follower output. The disadvantages would be that the output amplifier would have to operate at a gain of 7 or more to attain the larger dynamic range and that two filters would be required instead of one.

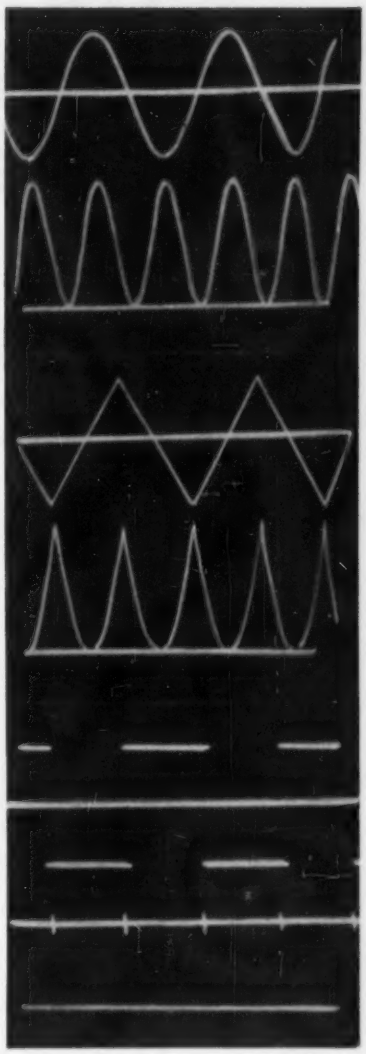

FIG. 7—Multiplier test patterns show 150-cps input with 300-cps output (top), 100-cps triangular-wave input with 200-cps parabolic wave output (center) and 8-cps square-wave input with d-c output (bottom). Horizontal lines are zero references

REFERENCES

(1) R. L. Mills, A New Electronic Multiplication Method Involving Only Simple Conventional Circuits, Magnolia Petroleum Co. Technical Report No. 689 (00)-4, Nov. 1953.

(2) J. R. Ragazzini et al, Analysis of Problems in Dynamics by use of Electronic Circuits, *Proc. IRE*, May 1947.

(3) H. B. Davis, A Stable D-C Operational Amplifier, David Taylor Model Basin Report 898, May 1954.

(4) W. J. Cunningham, Performance Curves for M-Derived Filters, Cruft Laboratory, Harvard University, Cambridge, Mass., Sept. 1944.

Design Of Triple-Tuned Circuits

SUMMARY —— Procedure and curves based on normalized low-pass filter enable the design of triple-tuned circuits having a maximally flat response and taking parasitic dissipation into account. Typical circuits and examples are given for interstage and band-pass filters

By PHILIP R. GEFFE

Director, Research and Development Hycor Division of International Resistance Co.
Sylmar, California

CONVENTIONAL DESIGN procedures for interstage triple-tuned circuits have the disadvantages that formulas taking parasitic dissipation into account are not generally available and that conventional designs work between equal terminations. The latter causes a 6-db loss in voltage gain, in addition to the insertion loss of the filter.

Low-Pass Prototype

The chart in Fig. 1 gives the element values of a low-pass filter normalized for a one-ohm source, open-circuit load and cutoff at one radian a second.

To design a low-pass filter to work from a source of R ohms and cutoff at f_c only impedance and frequency scaling to the normalized filter need be applied, using the following equations:

$$L' = RL/2\pi f_c \quad (1)$$
$$C_1' = C_1/2\pi f_c R \quad (2)$$
$$C_2' = C_2/2\pi f_c R \quad (3)$$

The result will be a low-pass filter having the flat-loss given in the chart and attenuation varying with frequency as follows:

(Continued on page 188)

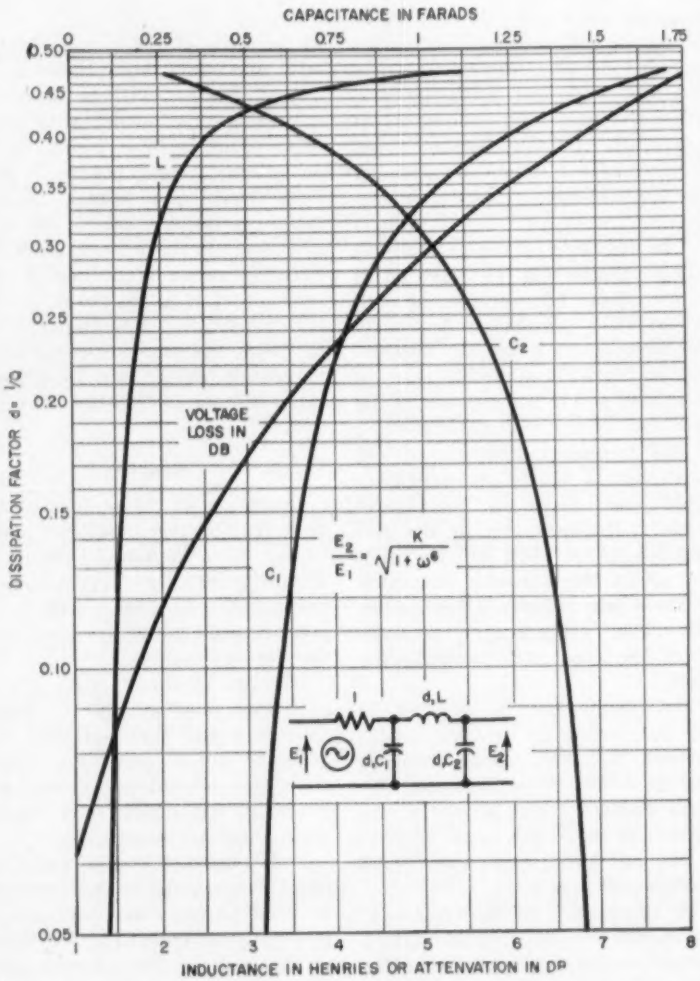

FIG. 1—Curves give normalized values of L, C and d used in design procedure

ELECTRONICS REFERENCE SHEET

CINCH ☆ STANDARD COMPONENTS

AUTOMATION...automatically made, therefore made with precision metal and electrical components. CINCH automatically assembled parts assure the uniformity and quality mandatory for use in AUTOMATION in the end users equipment.



CINCH SUB-MINIATURE SOCKETS insure positive electrical control, hold tubes securely in place, permit easy maintenance replacement, yield maximum insulation and minimum high frequency loss.

CINCH SOCKETS
CINCH MANUFACTURING CORPORATION
AND
HOWARD B. JONES DIVISION

TUBE (RECEIVER, TRANSMITTER AND SPECIAL): BATTERY, ALL TYPES
C-R TUBE
CRYSTAL
ELECTROLYTIC
GLASS TYPE; 4 TO 7 PRONG
LAMINATED
INFRA-RED RAY TUBE
HIGH ALTITUDE AIRBORNE TYPES
KINESCOPE; MAGNAL, DUODECAL, DIHEPTAL
LOKTAL-MINIATURE-MULTIPLUG-NOVAL-OCTAL (MOLDED BAKELITE, STEATITE, TEFLON, KEL-F AND LAMINATED)
PLEXICON
PRINTED CIRCUIT
SPECIAL SOCKETS TO SPECS
SUB-MINIATURE; HEARING AID TYPES
TV; 110V CIRCUIT BREAKAWAY
VIBRATOR
PENCIL TUBE TRANSISTOR
DIODE



Cinch components available at leading electronic jobbers —everywhere.

Centrally located plants at Chicago, Shelbyville, Pasadena and St. Louis.

(SHOWN ENLARGED)

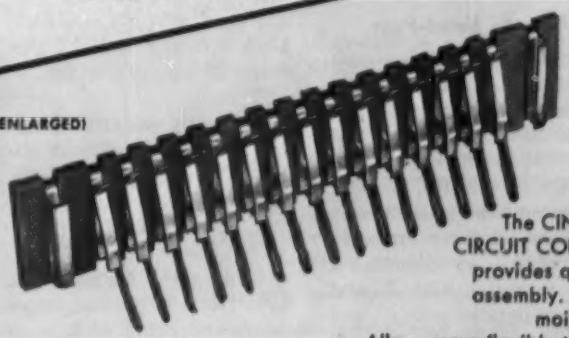

Quantity production of low loss Mica components. Finest molding machines and equipment operated under most experienced guidance and engineering supervision with adequate and unequaled facilities has advanced CINCH to the foremost in production of low loss Mica components in quantity.

The CINCH EDGE CIRCUIT CONNECTOR provides quick, easy assembly. Eliminates moisture trap. Allows more flexible tolerances. Lower cost. Available in materials for both Military and Commercial use.

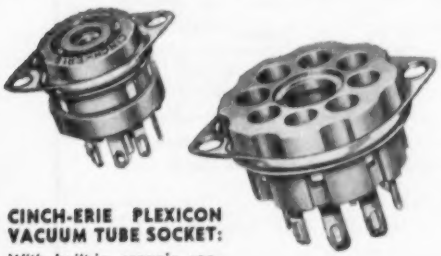

CINCH-ERIE PLEXICON VACUUM TUBE SOCKET: With built-in ceramic condensers, Plexicon Tube Sockets, no larger than standard receiver socket, provide the most effective method of by-passing . . . with condenser close to tube element providing shortest path to the ground . . . capacity up to 1,000 MMF—the tube element may be coupled or by-passed as desired.

☆ CINCH metal plastic assemblies fully perform the service for which they were designed and often have anticipated the engineering needs of the future. So that today, judged by demand and usage, CINCH components are "the standard".

CONSULT CINCH



CINCH MANUFACTURING CORPORATION
1026 South Homan Ave., Chicago 24, Illinois
Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

Design of Triple-Tuned Circuits

(Continued from page 186)

$$A = \sqrt{1 + (f/f_c)^6} \qquad (4)$$

for any frequency f.

Where $d < 0.05$ the following approximate formulas give good accuracy

$$C_1 = \frac{1}{2 - 3d}, \quad L = \frac{4 - 12d}{3 - 12d} \qquad (5)$$

$$C_2 = \frac{3 - 12d}{2 - 7d} \text{ and Loss} =$$

$20 \log_{10} (2d^2 - 2d + 1)$ in db

By setting $d = 0$ in Eq. 5 the correct values for lossless inductors and capacitors are obtained, hence

$C_1 = 1/2, L = 4/3, C_2 = 3/2$ and Loss = 0 db (6)

To choose the value of d a relationship between the band-pass filter and its low-pass prototype, must be used, thus $d = f_c/Q_{BP}(f_2 - f_1)$ (7) where Q_{BP} is the Q that is used in each branch of the band-pass filter, f_2 and f_1 are the cutoff frequencies of the band-pass filter and $f_c = \sqrt{f_2 f_1}$. The value of d obtained from Eq. 7 is used to obtain element values and flat-loss from the chart. This value of flat loss will apply both to the band-pass filter and to its low-pass prototype.

Low-Pass to Band-Pass

To transform from a low-pass to a band-pass filter, scale the normalized low-pass filter to an impedance level of R ohms and cutoff f_c. The cutoff frequency is equal to the bandwidth, $f_2 - f_1$, of the desired band-pass filter.

Next, tune all three branches of the filter to f_c by inserting a capacitor in series with L' and inductors in parallel with C'_1 and C'_2, as shown in Fig. 2. Thus L' and C' resonate at f_c as do L'_1, C'_1 and L'_2, C'_2.

Performance

If the flat-loss is ignored the relative attenuation is

$$A = \sqrt{1 + y^6}, \text{ where} \qquad (8)$$

$$y = b(f/f_c - f_c/f), \; b = f_c/f_2 - f_1 \qquad (9)$$

For calculating the attenuation at frequencies remote from the pass-band the following approximation may be used

$A \leq y^3$ or $20 \log_{10} A \leq 60 \log_{10} y$ in db (10)



FIG. 2—Transformed band-pass filter



FIG. 3—Scaled band-pass filter designed from chart

Tolerances of from 1 percent to 5 percent on element values and 15 percent on Q will usually give satisfactory results provided that each branch of the filter is adjusted to resonate accurately at f_c.

Examples

As an example, design an interstage filter to work from a 10,000-ohm plate resistance, having 3 db points at 9 and 11 kc, coil Q of 25 and giving 50 db attenuation at 20 kc.

Here $f_c = \sqrt{f_1 f_2} = \sqrt{99} = 9.95$ kc, $b = 5$, at $f = 20$ kc, $y = 7.56$ hence $20 \log_{10} A = 60 \log_{10} 7.56 = 52.7$ db.

Evidently one triple-tuned circuit will have sufficient attenuation. From Eq 7, $d = 0.20$. Entering the chart at $d = 0.20$ obtain $C_1 = 0.720$, $L = 1.66$, $C_2 = 1.25$, Loss = 3.5 db.

Scaling the normalized prototype to 10,000-ohm impedance level, and cutoff at 2 kc, obtain $C'_1 = 0.00573$ μF, $C'_2 = 0.00995$ μF and $L' = 1.32H$. So the band-pass filter will have the configuration shown in Fig. 3.

Choosing C' to resonate with $1.32H$ at 9.95 kc gives $C' = 194$ $\mu\mu F$. Similarly, $L'_1 = 44.6$ MH, $L'_2 = 25.7$ MH. Since the series coil is large enough to cause difficulty with its self resonant frequency, tap L'_1 and L'_2 at 10 per cent of their inductance. This will reduce the impedance level of the series arm by a factor of 10 to give the final design shown in Fig. 4.

As another example, a 200-cps signal varies by ± 5 per cent, and it is desired to measure the second harmonic present while attenuating the fundamental and a large third harmonic by 80 db. Design a filter which will work from a 20,000-ohm source. Inductor Q's of 16.6 are available.

If cutoff frequencies of 370 cps and 430 cps are chosen, then $f_c = 399$ cps and $f_2 - f_1 = 60$ cps. Then $b = 6.65$. To check the attenuation in the pass-band, write $y = 0.682$ at $f = 420$ which is the maximum signal frequency and $A = 20 \log_{10} \sqrt{1 + (0.682)^6} = 0.426$ db.

At 600 cps, the third harmonic, $y = 5.58$, A = $60 \log_{10} 5.58 = 44.8$ db.

From these calculations it is apparent that two triple-tuned circuits will be needed, and the pass-band variation is 0.85 db.

From Eq. 7, $d = 0.4$ which gives $C_1 = 1.25$, $C_2 = 0.68$, L = 2.57 and loss = 6.8 db.

Raising this filter to a 20,000-ohm impedance level and a 60 cps cutoff gives $C'_1 = 0.166$ μF, $L' = 136.3$ H and $C'_2 = 0.0902$ μF.

Finding values to resonate with C'_1, L', C'_2 at 399 cps gives $L'_1 = 0.958$ H, $C' = 0.00117$ μF and $L'_2 = 1.76$ H and the configuration shown in Fig. 5.



FIG. 4—Final interstage filter design derived from circuit of Fig. 3.



FIG. 5—Final band-pass filter configuration for second harmonic of 200-cps

MALLORY





Especially designed for automatic assembly methods, this line of Mallory controls provides superior performance on printed circuit applications.

New Mallory Controls for Printed Circuits

ECONOMICAL STRIP TYPE CONTROLS FOR PRINTED CIRCUIT USE



This simplified series of controls, a Mallory "first", consist of resistance wafers attached directly to a phenolic panel, in single, dual and triple units. You save in installation cost, for multiple units can be mounted as easily as a conventional single. You save in component cost, too . . . for these Mallory controls give you multiple units at substantially lower price than that of a corresponding number of individual controls. Resistance values cover the range from 250 ohms to 10 megohms. Numerous adaptations available. Write to Mallory for technical data.

FOR your printed circuit designs, plan to take advantage of the simplified assembly and extra performance values offered by this new series of Mallory carbon controls.

A variety of designs is available. Included are self-supporting snap-in models for top of panel mounting . . . threaded bushing models . . . and types for mounting directly on the circuit panel. All are built with mounting lugs and terminals, precision-positioned for foolproof, fast assembly by automatic production machines. All incorporate these Mallory features:

High stability resistance element, made by special Mallory process, minimizes drift under severe humidity and temperature variations . . . gives long life.

Unusually low electrical noise.

New "floating ring" line switch, using a unique contact action, can be supplied on the new controls . . . far outlasts ordinary switches, gives clean, sharp make and break.

A complete selection of resistance values and tapers is available to match your circuit requirements. For complete data, write or call Mallory today.

Serving Industry with These Products:

Electromechanical—Resistors • Switches • Tuning Devices • Vibrators
Electrochemical—Capacitors • Rectifiers • Mercury Batteries
Metallurgical—Contacts • Special Metals • Welding Materials

Parts distributors in all major cities stock Mallory standard components for your convenience.

Expect more . . . get more from

P. R. MALLORY & CO. Inc.
MALLORY
P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

Want more information? Use post card on last page.

Electrons At Work

Edited by ALEXANDER A. McKENZIE

Forecast Of Propulsion By Solar Power

Model aircraft carrier powered by four silicon cells shown on deck moves through water when sun shines. According to Hoffman Electronics Corp. engineers, the sun delivers a kilowatt of power on every square yard of the earth's surface at full sunlight

Air Traffic Control System Speeds Landings

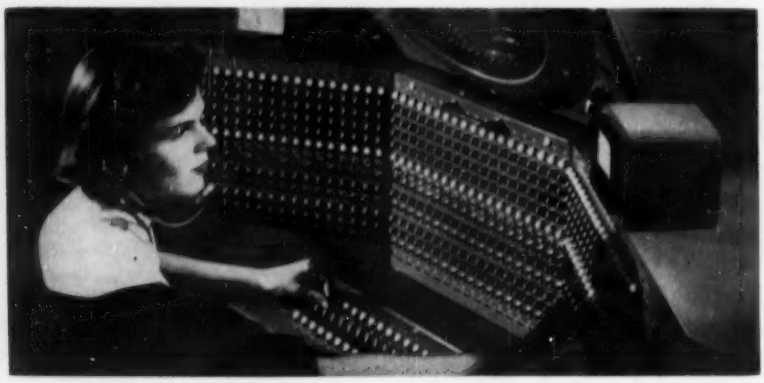

Volscan monitor console built by Crosley for the Air Force can handle as many as 120 landings an hour. The system comprises radar and computers. When an aircraft 40 to 60 miles away is picked up by the operator on the radar screen, its location is spotted with a light gun. The computers in which solutions to approach problems are stored assign a cube in space to the arriving aircraft. Heading, altitude and air speed are transmitted by radio to the pilot who brings his craft, by a unique path, to an entry gate at 1,000 feet and two miles from touchdown. Either GCA or ILS takes over for final leg of the approach

Meltback Process Increases Transistor Range

A METHOD of controlling the distribution of impurities in grown-junction transistors, called the "meltback" process, is described by Robert N. Hall of the GE Research Laboratory. The technique will make it easier to manufacture transistors with useful power gains at high frequencies.

P-layers as thin as 0.2 or 0.3 mil have been produced, using the meltback technique. This is now being done reproducibly.

Several years ago, the "rate-growing" system for producing transistor crystals was developed. This process takes its name from the fact that the solid crystal is drawn out of a pool of molten semiconductor at varying rates. In the pool are dissolved such "impurities" as antimony and gallium. When the crystal grows quickly, one type of impurity predominates in the layer then being formed. When the crystal grows slowly, the dominant impurity is of the other type. The crystal ingot formed in this way is thus made of a succession of layers, distinguished from one another by the predominant type of impurity. After the ingot has cooled it can be sliced into thousands of pellets, each with three layers, n-p-n.

The meltback method takes this process one step further. After a crystal of germanium or silicon has been grown (in this case at a steady

kepco

VOLTAGE REGULATED POWER SUPPLIES

for powering electronic equipment

KR SERIES

with ***NEW-IMPROVED FEATURES***

★ ***FAST*** RECOVERY TIME

★ ***GOOD*** STABILITY

★ ***LOW*** OUTPUT IMPEDANCE

KR Voltage Regulated Power Supplies are conservatively rated and are designed for continuous duty at 50°C ambient.

REGULATION: Less than 0.2 volts for line fluctuation from 105-125 volts and less than 0.2 volts for load variation from 0 to maximum current.

RIPPLE: Less than 3 mv. rms.

STABILITY: The output voltage variation is less than the regulation specification for a period of 8 hours.

RECOVERY TIME: Less than 50 microseconds. The excursion in the output voltage during the recovery period is less than the regulation specification.

OUTPUT IMPEDANCE: Less than 0.1 ohms from 20 cycles to 100KC. Less than 0.5 ohms from DC to 20 cycles. Many units have very much lower output impedance.

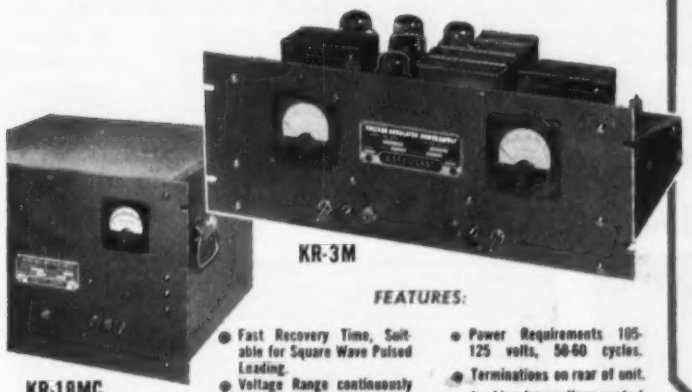

KR-3M

KR-18MC

FEATURES:

- Fast Recovery Time, Suitable for Square Wave Pulsed Loading.
- Voltage Range continuously variable without Switching.
- Either Positive or Negative may be Grounded.
- Oil Filled Condensers.
- Wire Harness and Resistor Board Construction.
- Power Requirements 105-125 volts, 50-60 cycles.
- Terminations on rear of unit.
- Locking type voltage control AC, DC Switches, Fuses, and Pilot Lights.
- Color Grey Hammertone.
- Guarantee One Year.

All models available for 400 cycle operation on special order.

1.5 Amp. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR16	0-150	Each supply	19"	12¼"	17"	$625
KR17	100-200	has two	19"	12¼"	17"	$625
KR18	195-325	15 Amp.	19"	12¼"	17"	$695
KR19	295-450	outputs	19"	12¼"	17"	$695

600 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 8	0-150	Each supply	19"	10½"	13"	$330
KR 5	100-200	has two	19"	10½"	13"	$240
KR 6	195-325	10 Amp.	19"	10½"	13"	$240
KR 7	295-450	outputs	19"	10½"	13"	$250

300 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 12	0-150	Each supply	19"	7"	11"	$270
KR 3	100-200	has two	19"	7"	11"	$180
KR 4	195-325	5 Amp.	19"	7"	11"	$180
KR 10	295-450	outputs	19"	7"	11"	$190

125 ma. KR SERIES

Model	Volts	6.3V AC	Rack Mount W	H	D	Price
KR 11	0-150	Each supply	19"	7"	11"	$180
KR 1	100-200	has one	19"	7"	7½"	$ 90
KR 2	195-325	3 Amp.	19"	7"	7½"	$ 90
KR 9	295-450	output	19"	7"	7½"	$ 97

To include 3" Current and Voltage Meters, Add M to Model number (e.g. KR 16-M) and Add $30.00 to the Price.
To include Dust Cover and Handles for Table Mounting, Add C to Model number (e.g. KR16-C) and Add $10.00 to the Price.
To include Meters, Dust Cover and Handles, Add MC to Model number (e.g. KR-16 MC) and Add $40.00 to the Price.

PRICES F.O.B. Flushing.

A LINE OF 50 MODELS
Available from Stock - Catalog on Request

RESEARCH • MANUFACTURING
KEPCO Laboratories

KEPCO LABORATORIES

131-38 SANFORD AVENUE • FLUSHING 55, N.Y. • INDEPENDENCE 1-7000

VISIT BOOTHS 1063-64 WESCON SHOW LOS ANGELES AUG 21-24

The Front Cover

SHOWN on the front cover are the capsule standard cockpit unit and details of the new type of instrumentation that will be used in it.

Among the hazards from which a modern pilot must be protected are solar radiation and its effects on structures and materials, instrumentation and vehicle temperature. There are also cosmic radiation, winds and turbulence, meteoroids and the chemistry of composition, dissociation and ionization that effect the pilot and his immediate environment.

A central digital computer shown here will handle the computation and control functions of aircraft. The so-called flat television tube, although transparent, will handle information display.



Computer for T2V capsule cockpit with magnetic drum at right

Douglas Aircraft is Navy's BuAer prime contractor. Litton Industries is building the 18-pound computer. In an emergency, the standard cockpit, complete with instruments will be ejected from its aircraft.

rate), long thin slivers, like wires, are cut from it. The tip of each of these wires is then melted and refrozen, forming alternating layers, as described above. A pellet is then cut from the end, and the process is repeated.

Since the area of the wire tip that is melting and freezing is so much smaller than the corresponding cross-sectional area of the parent crystal, the cooling process takes place not in 20 minutes but in less than a second. In this short time the number of impurity atoms migrating from their proper layers into adjoining ones is reduced to about 1/30th the former figure. The entire cycle of melting, cooling, and removal of the finished pellet takes less than a minute.

One characteristic of the new process is that the concentration of impurities in the crystal's emitter region is much richer than that found in the remainder of the transistor. This is due to the fact that the emitter region does not pass through the final melting-freezing cycle, but is merely separated from the rest of the crystal "wire". The *n*-type emitter layer consequently possesses the concentration of impurities that is to be found in the wire as a whole.

The concentration of impurities in the wire itself is much higher than in the layers which have melted and frozen, because during the recrystallizing process these layers have drawn from the melt only a small percentage of the available impurities.

For example, a germanium crystal, growing at a moderate rate, will pick up 1/10th of the concentration of gallium in the melt but only 1/300th of the amount of antimony. Consequently 10 units of gallium and 300 units of antimony must be present in the wire in order to cause one unit of each of these impurities to appear in the final pellet.

As a result of this high concentration in the original wire, the emitter region of a meltback transistor will contain 290 units of excess donor impurities, compared with approximately one unit for the corresponding region of a rate-grown transistor.

Performance can best be described in terms of power gain and the upper frequency at which the transistor will oscillate. Germanium meltback triodes have been produced with power gains of as high as 25 decibels at a frequency of five megacycles per second. Some

Mill Operates After Breakdown Using TV Eye

Operator at controls of slab rolling mill watches position of the ingot shown on the screen of tv monitor (left center) as seen by camera (upper right). Equipment on order from Marconi by Abbey

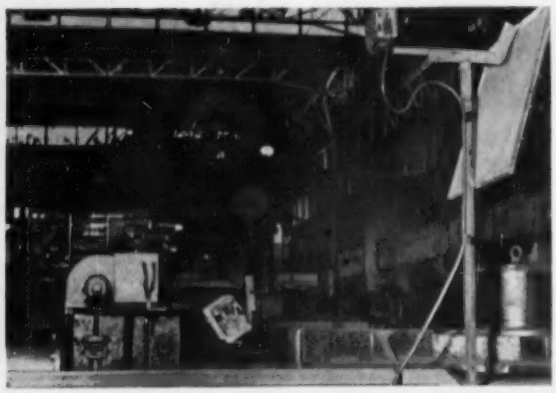

Works of The Steel Co. of Wales was rushed into operation after failure of slab manipulator necessitated use of a crane at the far side of damaged turnover mechanism, out of view of operator

Another product surprise from Helipot!

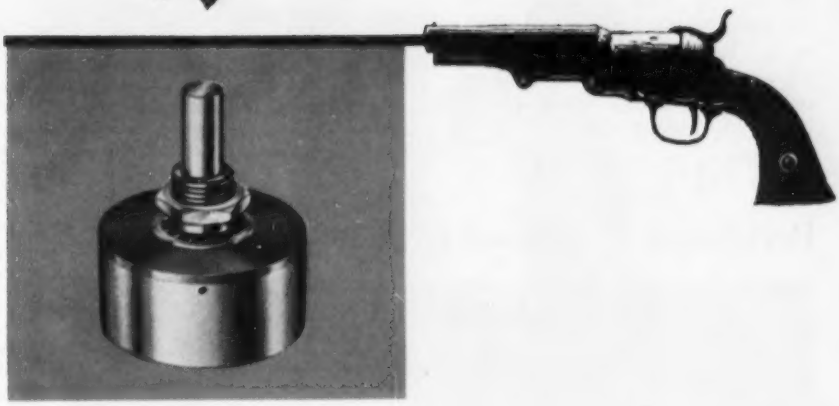

Fanfare & Cigars

Tooting a symbolic clarion and passing out imaginary cigars, Helipot introduces one of its new-born offspring . . . the series 5300 precision potentiometer.

A single-turn unit, it's 1-1/4 inches in diameter . . . designed for bushing mounting. With its innards comfortably ensconced in an accurately drawn one-piece aluminum cup, the 5300 gives you ruggedness, compactness and long life. We proud papas direct your attention to such salient features as the range of total resistance . . . from 25 to 49,000 ohms . . . linearity as close as $\pm 0.25\%$ . . . and considerable improvement in torque, noise and mechanical runout.

For vital statistics on this prodigy of a progeny, write for data file 801.

Helipot makes precision potentiometers . . . linear and non-linear . . . in the widest choice of sizes, mounting styles and resistances. Many models are stocked for immediate shipment. Our engineers will gladly adapt standard models to your requirements or design entirely new HELIPOT* precision potentiometers for you.

Helipot

first in precision potentiometers
Helipot Corporation, Newport Beach, California
Engineering representatives in principal cities
a division of Beckman Instruments, Inc.

*REG. U. S. PAT. OFF.

Want more information? Use post card on last page.

of these triodes have reached oscillation limits of 100 mc, and limits of 50 mc are common. Tetrodes have oscillated at frequencies as high as 200 mc.

The same qualities that make meltback transistors operate well at high frequencies—thin base regions and large impurity gradients at the emitter junction—also cause them to exhibit good low-frequency characteristics. Grounded-emitter current gains of several hundred are typical with values in the thousands being common. Furthermore, this gain remains high, up to collector currents of a hundred milliamperes, many times higher than with those produced by earlier methods.

Drone Television Reconnaissance

Television pickup from an experimental aerial drone system makes it possible to send back views of sites 40 miles distant. Developed at Signal Corps Engineering Labs, Fort Monmouth, N. J., the 135-pound tv station is carried in a converted L-17 aircraft. Separate electronic equipment is required to control flight from the ground as shown above

Periscopic Television In A Furnace

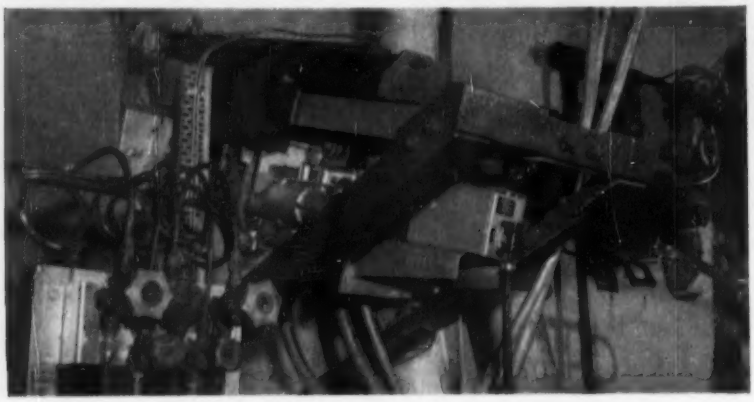

In modern boiler furnaces, it is essential that jet-injected pulverized fuel remain ignited at all burners lest a serious explosion result. A new periscopic television unit developed by Babcock and Wilcox, Ltd. and manufactured by Marconi enables all burners to be observed on one television screen. The periscope, containing lenses and prisms, is water-cooled. An air blast keeps fly ash from settling on the lens windows. The unit is retracted during normal operation at which time photoelectric monitoring is employed

Compensating Voltage Dividers for Frequency

By LYMAN W. ORR

Electronic Defense Group
University of Michigan
Ann Arbor, Michigan

CERTAIN difficulties in constructing frequency-compensated voltage dividers arise often enough to deserve comment. Attention will be confined here to the deleterious effect of stray capacitance C_s, from the input resistor R_1 in Fig. 1 to the grounded shield. This difficulty is prominent in high-voltage dividers where the physical dimensions of R_1 are necessarily large. A method of compensation is shown in Fig. 2.

An example is a 200-to-1 divider for 50-kv input having R_1 = 200 megohms and C_1 4 $\mu\mu$f.

Resistor R_1 is a cylindrical type $\frac{1}{2}$ inch in diameter and 4 inches long. When centrally located inside a metal enclosure $3\frac{1}{2} \times 6 \times 8$ in., the stray capacitance from R_1 to the case, though only a few $\mu\mu$f, is large enough to cause serious difficulty.



FIG. 1—Voltage divider uncompensated for stray capacitance

In the absence of such strays, a simple adjustment of C_2 making $R_2 C_2 = R_1 C_1$ is sufficient to produce a flat frequency response. In this case the step function response is similar to Fig. 3A.

Althouh a low stray capacitance is desirable between node A and ground, its presence does not produce an undesired effect on the response of the divider itself. The presence of a stray capacitance between node B and ground is of no consequence because it is in shunt with C_2 and can be compensated by appropriately adjusting the latter.

When the distributed stray capacitance C_{s1} is present it is impossible to produce a flat frequency

A COMPLETE LINE OF DEPENDABLE ENCAPSULATED RESISTORS

PERMASEAL®

PRECISION WIREWOUND RESISTORS FOR 85C AND 125C AMBIENTS

For applications requiring accurate resistance values at 85C and 125C operating temperatures—in units of truly small physical size—select the precise resistor you want from one of the 46 standard Permaseal designs in tab or axial lead styles.

Winding forms, resistance wire and embedding material are matched and integrated, resulting in long term stability at rated wattage over the operating temperature range. The embedding material is a special plastic that extends protection well beyond the severe humidity resistance specifications of MIL-R-93A and Proposed MIL-R-9444 (USAF).

These high-accuracy units are available in close resistance tolerances down to ± 0.1%. They are carefully and properly aged by a special Sprague process so that they maintain their accuracy within the limits set by the most stringent military specifications.



SPRAGUE

FOR COMPLETE DATA WRITE FOR COPY OF SPRAGUE ENGINEERING BULLETIN NO. 122A

SPRAGUE ELECTRIC COMPANY • 35 MARSHALL ST. • NORTH ADAMS, MASS.

Designed for
Application

The No. 80070 Series of Cathode Ray Tube Bezels

The MILLEN "Designed for Application" line of plastic and cast aluminum panel bezels includes units for the 1", 2", 3" and 5" tubes. The 5" size is also available with a special neoprene cushion for the new flat faced tubes as well as the standard cushion. The finish on all types, either metal or plastic is a handsome flat black. The 2", 3" and 5" sizes include a green plexiglass filter. Mumetal and nicaloi shields are also available for all types of cathode ray tubes for use with any of these bezels.

JAMES MILLEN MFG. CO., INC.

MAIN OFFICE AND FACTORY
MALDEN
MASSACHUSETTS



FIG. 2—Voltage divider compensated for stray capacitance with metal plate

response by adjusting C_2. Here the step-function response, when $R_2 C_2 = R_1 C_1$, is similar to Fig. 3C. This compromise gives equal sinusoidal response at very high and very low frequencies with a dip at some intermediate frequency.

To compensate for this, it is possible to design a structure that gives a distributed capacitance C_{s2} between R_1 and node B of the divider as indicated in Fig. 2. The added structure may consist of a small metal plate or open wire mesh placed near R_1 and connected to B. Its correct placement can best be found by adjustments and examination of the step-function response as illustrated in Fig. 3. In taking these oscillograms the square-wave generator was set at 120 cps for the entire series of tests.

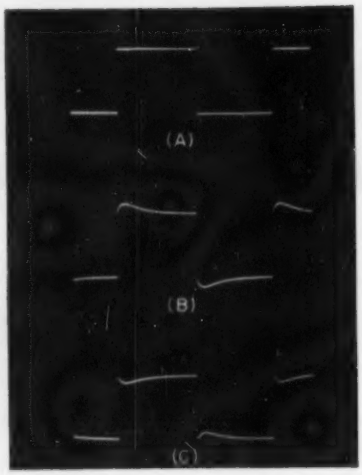

FIG. 3—Step function response with correct adjustment (A) strays overcompensated (B) and strays uncompensated (C)

Tiny TV Checks Boiler Tubes

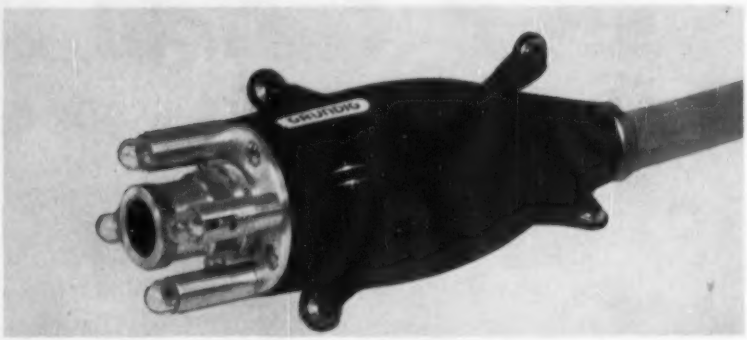

Called the smallest tv camera in the world, the device shown has rollers to ease its passage through boiler tubes and four lamps to supply illumination for inspection. It is made by Grundig of Germany

Manganese-Bismuth Magnets in Production

LATEST ACCOMPLISHMENT in the long line of research leading to more effective use of magnetic alloys is the purification and combining of manganese and bismuth by Westinghouse engineers for Air Research and Development Command (ELECTRONICS, p 7, July 1956).

The special characteristics of the alloy—which was named Bismanol by U. S. Naval Ordnance Laboratories—have been previously described (ELECTRONICS, p 198, June 1953).

According to Clarence Zener, Westinghouse has developed a method of grinding together man-

VHF transistors NOW!

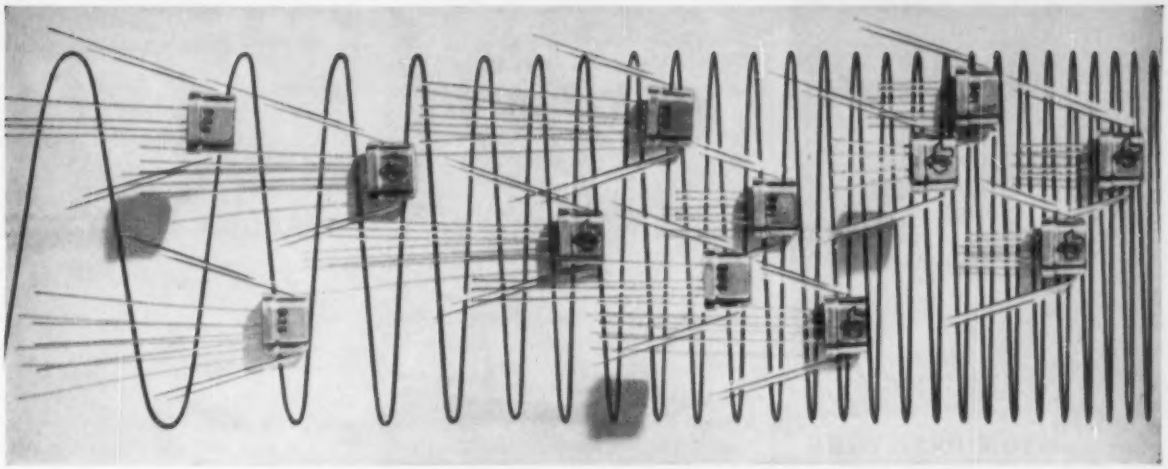

NEW 'GROWN-DIFFUSED' TYPES COMMERCIALLY AVAILABLE IN PRODUCTION QUANTITIES

HIGH GAIN VHF TRANSISTORS with usable power levels and band widths are now immediately available from Texas Instruments . . . another first for the leading producer of silicon and germanium transistors. Your design horizons are now extended to include all-transistor TV, FM, and VHF receivers . . . and transistorized amplifier, oscillator, or switching applications in communications, telemetering, or radar.



NEW VHF GERMANIUM TRANSISTOR

OSCILLATING FREQUENCY IS ABOVE 250 MEGACYCLES . . . alpha cutoff frequency is 200 mc. Typical gain is 12 db at 100 mc (unregenerative). This performance in a production transistor was unheard of prior to perfection of the "grown-diffused" method – an exclusive Texas Instruments technique.



NEW HF SILICON TRANSISTORS

FREQUENCIES TO 30 MEGACYCLES, rated 30 volts and 125° C, make these "grown-diffused" units ideal for high temperature military and commercial applications. They increase to 10 the types of silicon transistors now available from Texas Instruments, and represent the continual improvement in frequency, gain, and power made by the pioneer producer of silicon transistors.

OTHER NEW SEMICONDUCTOR DEVICES FROM TI

NEW HIGH POWER TRANSISTORS – 12-watt dissipation germanium power transistor and 8.75-watt dissipation silicon power transistor. NEW HIGH VOLTAGE RECTIFIERS – full wave and single junction half wave 1500-volt silicon units stable to 150° C. NEW HIGH CONDUCTANCE DIODES – 4 types of axial-lead silicon junction diodes with 100 ma forward currents and 0.1 μa back currents.

All these devices in production and available immediately. Write today!

LOOK TO TI FOR: GERMANIUM VHF, POWER, RADIO, & GENERAL PURPOSE TRANSISTORS ● SILICON HF, POWER, & SMALL SIGNAL TRANSISTORS ● SILICON RECTIFIERS AND DIODES

TEXAS INSTRUMENTS
INCORPORATED
5000 LEMMON AVENUE DALLAS 9, TEXAS

★ *See our exhibit at the Wescon Show*

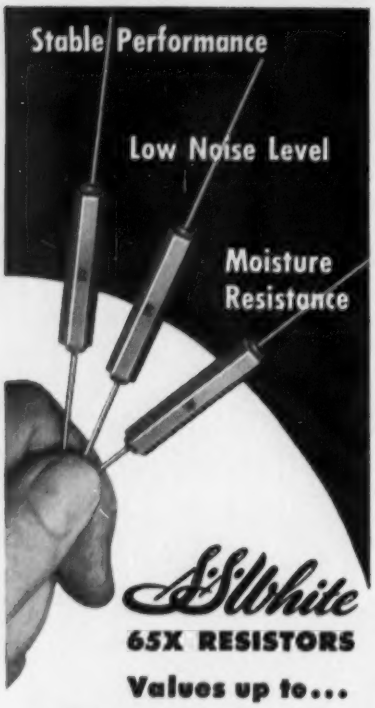

S.S.White

65X RESISTORS

Values up to...

10,000,000 megohms

Here is a line of compact, high value molded resistors designed to meet the demands of a wide range of commercial, industrial and scientific applications.

Their excellent performance characteristics and wide range of values are ideally suited for atomic survey meters, radio and television service, scientific measuring devices, as well as many precision instruments.

They are subjected to an aging process in production to insure stability of resistance values in actual service.

Get full information on S.S.White 65X Resistors today. You will find they will meet and in many cases exceed the most stringent military requirements.

BULLETIN 5409
has full details. Send for a copy. Attention Dept. R.

S.S.WHITE INDUSTRIAL DIVISION
10 EAST 40th STREET • NEW YORK 16, N. Y.

Western Office:
1839 West Pico Blvd., Los Angeles 6, Calif.

Want more information? Use post card on last page.

ganese and bismuth under an inert atmosphere of helium gas. If the mixture were exposed to oxygen in the air it would burst into flame spontaneously.

The mixture is sealed in a glass vessel under low-pressure helium. The manganese and bismuth are caused to unite chemically at about 520 F. The resulting product is reground to a fine powder and the particles are imbedded in a plastic matrix, oriented in a powerful magnetic field and molded to the desired shape.

▶ **Easier Working**—Besides being at least ten times less likely to suffer demagnetization than most commercial magnets, the fact that individual grains of powder are insulated from each other makes the finished magnet nonconducting, as contrasted with conventional types.

Whereas most magnets must be machined to shape, the new forms can easily be drilled, tapped or cut, the ease depending upon the plastic binder used.

Weighing manganese-bismuth compound in gas chamber to prevent ignition

Because bismuth is in short supply, the cost and volume of the new material will cause no competitive threat to existing commercial magnets. Its use will probably be in research or military applications.

Transformerless Line Output Preamplifier

By RUFUS P. TURNER
Consulting Engineer
Los Angeles, Calif.

DEVELOPMENT of a miniature, transistorized preamplifier having an input impedance higher than 100,000 ohms, output impedance in the order of 500 ohms, good frequency response, fair voltage and power gains and low d-c drain, but using no transformers whatever, has recently been completed.

The common-emitter circuit is customarily used in transistor-type preamplifiers because this arrangement provides good gain at low battery drain. The common-emitter circuit suffers, however, from an inconveniently low input impedance (1,000 ohms or less) and also from an output impedance (20,000 ohms or higher) which often is too high for some applications. Unless input and output transformers are permissible, this circuit therefore cannot be substituted readily for its vacuum-tube counterpart.

A suitable R-C amplifier circuit was obtained by cascading three transistors, as shown in Fig. 1. The input transistor, Q_1, is connected as a common-collector to provide high input impedance. This stage has slightly less than unity voltage gain but does provide power gain in the order of 12 db.

The second transistor, Q_2, is operated as a common-emitter and supplies reasonable voltage and power gain in spite of the mismatch at its input. The output transistor Q_3, like the input stage, is connected as a common-collector.

The common-collector circuit is similar to the vacuum-tube cathode

Mobile Amplifier



A new twin-beam power tube, registered as 6524, has been designed for use in the region of 100 to 470 mc. According to RCA, it can be used in intermittent service as a push-pull r-f class-C f-m telephony amplifier with power output up to 20 watts at 462 mc or 56 watts at frequencies up to 100 mc

Shock, Vibration
and Pressure Changes...

—because

E-I

VISIT BOOTH 74
WESCON SHOW

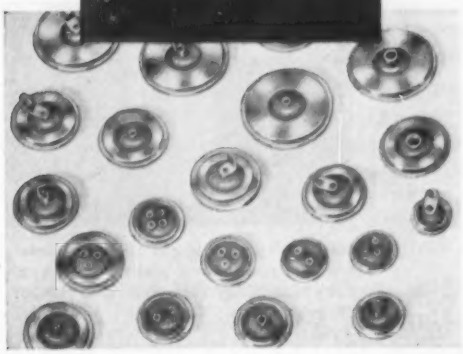

COMPRESSION
END SEALS*

—are practically indestructible!

E-I Compression End Seals are the most effective seals available today for tubular components. Specially developed by E-I to exceed every requirement of the most critical modern application, they afford the highest degree of immunity to shock and vibration, violent change in pressure, temperature and humidity yet attained. Years of rigorous application experience prove this fact.

High performance E-I Compression Type Terminations are also available in multiple headers, single lead terminals and plug-in connectors. Volume production and a tremendous range of standard types offer two-way economy that makes it possible to specify the extra dependability afforded by E-I terminations at no extra cost.

THREADED COMPRESSION END SEALS

BEVELED COMPRESSION END SEALS

Contact your nearest E-I field engineer for complete information on —

* SPECIAL APPLICATION AND CUSTOM SEALS
* CRYSTAL AND SUB-MINIATURE CLOSURES
* DIODE AND TRANSISTOR CLOSURES
* PLUG-IN CONNECTORS
* MULTI-LEAD HEADERS
* SINGLE LEAD TERMINALS

*PATENT PENDING —
ALL RIGHTS RESERVED

E-I®

ELECTRICAL INDUSTRIES
44 SUMMER AVENUE, NEWARK 4, NEW JERSEY

for PRINTED CIRCUITS

Available in 5 Sizes

1. DX-1052. Length 2-13/32". 10 contacts, spaced 5/32". For cards 0.057" to 0.067" thick.
2. DX-1852. Length 3-21/32". 18 contacts, spaced 5/32". For boards 0.060" to 0.071" thick.
3. DX-2252. Length 4-9/32". 22 contacts, spaced 5/32". For boards 0.060" to 0.071" thick.
4. DX-2842. Length 4-9/32". 28 contacts, spaced 1/8". For boards 0.060" to 0.071" thick.
5. DY-4453. Length 4-9/32". Double row, total of 44 contacts, spaced 5/32". For printed circuit boards 0.062" to 0.100" thick.

Nylon plastic shells . . . gold plated contacts

DX contacts of phosphor bronze; DY of beryllium copper. All contacts "grip" the board, which enters to a depth of approximately 11/32". Each rated at 5-amp. Polarization studs provided. Flashovers 2000 and 2500 v. 60 cps ac rms.

Single-row types for boards printed on one side only, or both sides common. Double-row type for boards printed both sides having different circuits, not common.

Please refer to Dept. 120

CANNON PLUGS (40th YEAR)

CANNON ELECTRIC CO., 3209 Humboldt St., Los Angeles 31, California. Representatives and distributors in all principal cities

Want more information? Use post card on last page.

follower in the respect that its input impedance is high and output impedance low, power gain is provided and voltage gain is under 1. The output impedance of Q_3 is 500 ohms.

Although the common-emitter and common-collector circuits require d-c bias voltages of opposite polarity, use of a single battery has been made possible in this preamplifier circuit by operating an *npn* transistor in each of the common-collector stages and a corresponding *pnp* transistor in the common-emitter stage. Maximum d-c drain is 600 microamperes.

At 1,000 cps, the measured input impedance of the preamplifier is 0.2 megohm. Higher values may be obtained by selecting transistor Q_2 individually for this characteristic. Maximum input voltage before the onset of peak clipping in the output waveform is 4 millivolts rms.

Corresponding maximum output voltage is 0.2 volt rms. Power gain is 56 db and voltage gain is 34 db, or 50 times. Total harmonic distortion at 1,000 cps is 1.2 percent. Figure 2 is a plot showing frequency response, with respect to the response at 1,000 cps.

Space requirements for the amplifier are modest. By employing ¼-watt composition resistors and subminiature tantalum electrolytic

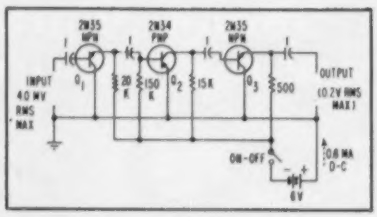

FIG. 1—Transistorized preamplifier has 0.2-megohm input impedance and 500-ohm output impedance



FIG. 2—Frequency response of preamplifier is essentially flat from 200 to 20,000 cycles

capacitors, the entire amplifier, exclusive of batteries, may be mounted on a 3 x 2 in. card. The lenient d-c requirements enable the use of flashlight cells for bias.

If a volume control is required in the preamplifier, a 15,000-ohm potentiometer may be substituted for the 15,000-ohm load resistor in the collector circuit of Q_2. The slider of this potentiometer would be connected to the 1-μf coupling capacitor leading to the base of Q_2.

Pulsed Light Generator Aids Plant Research

By R. W. Treharne, C. R. Nosker and P. R. Rambow

C. F. Kettering Foundation, Yellow Springs, Ohio



Single cell plants in containers at center are mounted above platform made of neon tube folded back on itself a number of times

Photosynthesis is the process whereby living plants convert carbon dioxide from air and water into sugars, starches and other carbohydrates using sunlight as a necessary energy source for the chemical reactions.

In addition to the more obvious chemical reactions that sunlight must produce in the living plant, there are important chemical reactions that proceed best in darkness at the expense of chemical energy formed in the light. A unique means for separating these light and dark reactions is to use light pulses of controlled repetition rate.[1]

In the instrument described here, flashing light pulses are controlled by an astable multivibrator. As shown in Fig. 1, the output of multivibrator V_1 is used to trigger mono-

Just announced!

-hp- X365A Isolator

Broadband X-band ISOLATOR

covers 8.2 to 12.4 KMC

One isolator for entire X-band! Maximum forward attenuation 1.5 db; at least 25 db reverse attenuation! Low 1.2 SWR! Models for other bands coming soon!

No longer must you buy expensive narrow-band Isolators for every frequency band you work with. The new *-hp-* X365A is a true broadband Isolator—one precision instrument giving you almost flat rejection over the entire X-band.

-hp- X365A employs the Faraday principle of field rotation. Two axially magnetized ferrite rods mounted inside a round, vaned waveguide, rotate the planes of polarization 45° each. This rotation, in combination with precisely located attenuator cards, permits forward power to pass almost without loss, while reverse power is virtually cancelled out.

-hp- X365A Isolators are precisely machined and finished, yet ruggedly constructed of top quality materials. *-hp-* 365A series Isolators for other waveguide bands will be announced soon.

TYPICAL APPLICATIONS

Arrangement for using *-hp-* X365A Isolator to prevent shifting of klystron oscillator frequency due to load variations.



Arrangement for using *-hp-* X365A Isolator to prevent mutual coupling of klystron oscillators.

BRIEF SPECIFICATIONS

Frequency Range:	**8.2 to 12.4 KMC**
Minimum Reverse Attenuation:	**25 db**
Maximum Forward Attenuation:	**1.5 db**
Maximum SWR (either end):	**1.2**
Maximum Power Dissipation:	**5 watts**
Overall Length:	**9¾"**
Price:	**$225.00**

Specifications subject to change without notice. Price f.o.b. factory.

Get Details from Your *-hp-* Representative, or Write Direct!

HEWLETT-PACKARD COMPANY

3808A Page Mill Road, Palo Alto, Calif., U.S.A.
Cable "HEWPACK" DAvenport 5-4451

Field engineers in all principal areas

See this new *-hp-* equipment at WESCON Booths 1050-1051

Complete coverage in waveguide equipment, too!

4 NEW SUBMinax®

(shown actual size)

look to AMPHENOL for RF Connector PROGRESS

AMPHENOL's Subminax have provided the electronic industry *for the first time* with extremely reliable subminiature RF connectors. Where space and weight savings are important, but not at the expense of reliability, AMPHENOL Subminax are finding ever-increasing utilization. Now, four new 50 ohm connectors have been added: 27-27 hermetic seal receptacle, 27-801 cable termination, 27-800 printed circuit receptacle and 27-28 Subminax to BNC adapter. Write for data sheet, which includes a listing of all thirty available Subminax RF connectors.

AMPHENOL now adds modified versions of the LT series of RF connectors to its large availability listing. Specifically designed for use with Teflon RG-117/U coaxial cable (also made by AMPHENOL), the LT series 82-116 plug and its matching 82-117 receptacle are made largely of aluminum to keep weight low and cadmium-plated for durability. Impedance is 50 ohms, maximum voltage rating is 5000 volts. Write for data.

NEW LT SERIES

(shown one-half size)

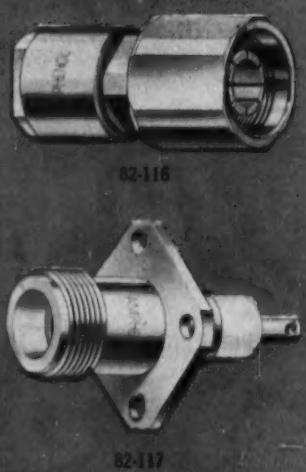

AMPHENOL

AMPHENOL ELECTRONICS CORPORATION
chicago 50, illinois
AMPHENOL CANADA LIMITED • *toronto 9, ontario*

stable multivibrator V_3, which serves both as an amplifier and pulse shaper to drive hydrogen thyratron V_4. A specially designed neon tube with heavy nickeliron or tungsten electrodes is in the plate circuit of V_3.

The flash tube is made of ¼-inch glass tubing folded back upon itself three times to form a 12-inch long platform of light above which a small vessel containing single cell plants (algae) can be suspended. The tube is half silvered on the bottom to concentrate light up into the

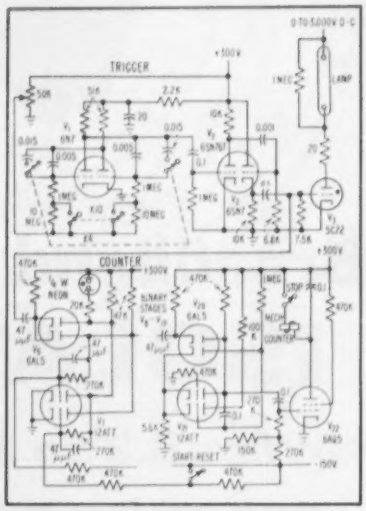

FIG. 1—Pulsed light generator for photosynthesis research. Binary chain counts number of pulses

algae vessels and is filled with neon at 15-mm pressure. Other gases can be used to produce any desired light spectrum.

Power for the light pulses is obtained from a high-voltage rectifier circuit. The time constant of the filter components in the high-voltage power supply is chosen to permit sufficient power storage recovery between flashes for intense light pulses at the highest flash rates.

The flash rate is continuously variable from one per second to 180 per second. The light-pulse duration is about 70 microseconds at all flashing rates.

A one-megohm resistor across the lamp maintains plate voltage on the thyratron preparatory to triggering. The thyratron grid regains

Magnetics, Inc. makes the performance-guaranteed tape wound core

Core quality is no longer your worry—it's ours, for we guarantee performance of our tape wound and bobbin cores to mutually agreed upon specifications. What's more, you can specify a host of extra Magnetics, Inc. exclusive features. These include the Aluminum Core Box*, to withstand the rigors of temperatures to at least 450°F., vacuum impregnation, heavy winding stresses and vibration—and the color-coded bobbin core, for error-free handling in storage and assembly.

Why not write today for your copy of Catalog TWC 100-A? And if you have an application problem, our sales engineers are ready to provide you with expert assistance. *Magnetics, Inc., Dept. E-29, Butler, Pennsylvania.*

*Patent Pending



Magnetics' bobbin cores, too, are performance-guaranteed!

MAGNETICS inc.

CABLE: Magnetics

Relay Sales

Telephone Relays
Midget Relays
Keying Relays
Rotary Relays
Sealed Relays
Sensitive Relays
Latching Relays
Stepping Relays
Delay Relays
Timers
Contactors
Motor Starting Relays
Differential Relays
Polarized Relays

RELAYS NOW!

Your immediate needs for one or more relays of any kind are shipped from our greatly enlarged stock which includes hundreds of types in all popular contact arrangements and coil ratings.
Complete stocks of current standard types of leading manufacturers are maintained for your convenience.
All relays are new, inspected and unconditionally guaranteed to be as represented.
24 hour delivery is routine. Phone us.

Distributor for ADVANCE RELAYS

SCHRACK MOTOR CONTROLLER
These contactors offer several exclusive features including phase protection, adjustable overload from unity to 140% of rating and complete ceramic insulation. Sizes 0, 1, 2 and 3. NEMA enclosures available.

STEPPER


SCHRACK

KEYING

TELEPHONE

Write for Relay Sales Catalog C-7

TELEPHONE TYPE RELAYS
We can furnish from stock or fabricate practically any telephone type relay. C. P. Clare. Automatic Electric. Phillips Control. North Electric.
MORE THAN A MILLION DEPENDABLE RELAYS IN STOCK
Write, wire or phone for immediate quotations.

Phone West Chicago 1100
RELAY SALES, INC.
P.O. Box 186-A Route 64 at E. J. & E. R. R.
West Chicago, Illinois

control when the plate voltage drops owing to the heavy conduction current through the flash tube during discharge.

The total number of light pulses for a given experiment is controlled by a binary counter circuit consisting of tubes V_8 through V_{20}. The mechanical relay registers once for every 256 counts and neon interpolation lights are added to give the total flash exposure for each experiment.

A considerably simpler modification of this equipment can be made if a third trigger electrode can be used on the flash tube. The trigger circuit is shown in Fig. 2. Such an electrode consists of a few turns of

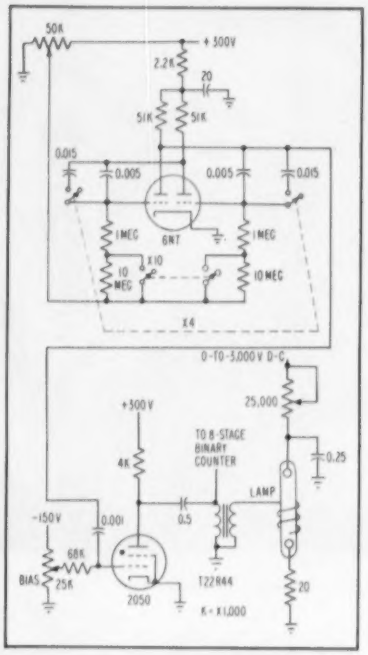

FIG. 2—Alternate simplified triggering system can be used if light source is not submerged in a conducting medium

wire wrapped around the outside of the flash tube at about the center of the tube. A trigger voltage from a 2050 thyratron is sufficient to cause ionization of the flash-tube gas to start the main power supply discharge through the tube.

The experimental procedure for studying photosynthetic reactions in algae calls for the immersion of the flash tube and vessels containing the algae into a constant tem-

PRECISION

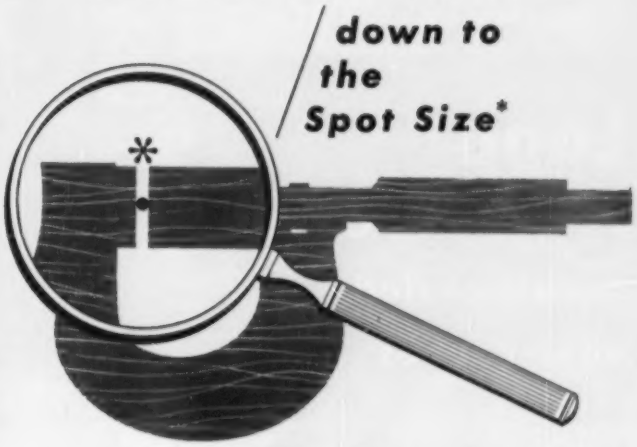

329-A

In one phrase, that's the story of the Du Mont **Type 329-A.** From the input attenuators, right through to the cathode-ray tube, tolerances have been held to a level that **means what you can read – you can trust.** Accuracy of measurement is limited primarily by the size of the fluorescent spot (and with the superb characteristics of our mono-accelerator cathode-ray tubes, that's an especially significant statement).

Prove to yourself what the extra precision and convenience of the Type 329-A will mean to you. Call your nearest Du Mont representative for a demonstration, or write to Technical Sales Dept. at the address below.

CONTINUOUS SWEEP CALIBRATION. If you can read numbers you can make precise time measurements. Adjust the event to be measured to fill exactly a major interval on the screen. Then read time directly from the large legible dial **with no interpolation,** no need to count squares. Accuracy? Better than 5% (including sweep generator and cathode-ray tube).

REAL SWEEP LINEARITY. Our test spec reads "no 10% increment of sweep shall vary from another 10% increment by more than 5% in time interval represented." In short, any non-linearity of sweep will be **less than a trace-width!**

CALIBRATED SWEEP EXPANSION. Exclusive Du Mont "Notch" speeds a segment of the sweep by a factor of exactly 10. Result – effectively two calibrated rates during the same sweep. Expanded portion is displayed in proper relation to the unexpanded portion. Uncalibrated notch offers greater expansion (up to 100 times on lower sweep ranges).

AMPLITUDE CALIBRATION. Accurate (±2%) voltage standard is applied by a flick of a convenient front-panel switch to calibrate screen in any of 11 full-scale ranges from 0.2 to 400 volts.

HIGH PRECISION TYPE 5ATP- CATHODE-RAY TUBE. Only a tube built to our stringent tolerances could exploit fully the precision inherent in the circuitry of the Type 329-A. Based on the mono-accelerator principle, the Type 5ATP- offers the superb deflection linearity as well as the freedom from spot and field distortions required to render measurements valid right down to the resolving power of the trace.

DC TO 10 MC (30% DOWN) VERTICAL RESPONSE is the nominal bandwidth of the Type 329-A. But owing to the gradual fall of the frequency response beyond this point, the amplifier is usable to 20 mc and beyond. Unique amplifier design assures display of d-c signals **with no d-c slump.**

HIGH-LOW-GAIN SELECTOR permits doubling deflection sensitivity (at some sacrifice in bandwidth) to 0.05 volt per major scale division for studies involving very low signal levels.

DUAL INPUT CONNECTORS permit switching from one signal source to another without changing leads.

MAJOR SPECIFICATIONS

Frequency response: dc to not more than 3 db down at 10 mc; rise time, .035 usec

Deflection factor: 0.1 d-c volt/major division†; high-gain switch gives optional double sensitivity at 5 mc bandwidth approx.

Sweep rates: driven or recurrent sweeps, continuously variable, calibrated from 1 sec to 0.1 usec/major div.†; max. rate, 7"/usec (20 milli-micro-seconds/minor scale division).

Sweep expansion: notch expansion, variable or calibrated rate, 10 times sweep rate on most ranges with calibrated notch and up to 100 times rate with uncalibrated variable notch

Amplitude Measurement: 11 full-scale ranges from 0.2 to 400 volts full scale

Cathode-ray tube – Type 5ATP- Mono-accelerator, operated at 6000 volts (equivalent light output to post-accelerator tube operated at 10KV.

Price $1090.00

TYPE 336-A

The **Type 336-A** offers all of the superb measuring facilities of the **Type 329-A,** but has a vertical frequency response extended to 18 mc (3 db down) at a sensitivity of 1 dc volt full scale. With pulse response of 0.02 usec, the **Type 336-A** is particularly well suited for measurement of very high-speed phenomena. **Price, $1125.00**

*Spot Size = 0.02" (approx.) †Major scale division = 0.7 inch (10 minor divisions)

DU MONT Technical Sales Department • ALLEN B. DU MONT LABORATORIES, INC. • 760 Bloomfield Ave., Clifton, N. J.

DON'T MISS THE DuMONT INSTRUMENT EXHIBIT AT WESCON BOOTHS 939-940

Lapp

TUBE SUPPORTS for air-cooled power tubes

Since forced-air-cooled tubes were first introduced, equipment manufacturers have been designing their own supports, many of which have been produced by Lapp. To standardize the great variety of tube support designs, Lapp set out to design a complete line which is now available and offers the equipment manufacturer a valuable service by way of more economical production, interchangeability and availability of replacement units. Lapp Tube Supports are compact, efficient and attractive in appearance. Their duty is threefold . . . they support the tubes, insulate, and furnish an air duct which channels air over tube fins for maximum cooling. Write for Bulletin 301, with complete description and specification data. Lapp Insulator Co., Inc., Radio Specialties Division, 903 Sumner Street, LeRoy, New York.

Lapp

perature water bath. The growing plant takes in carbon dioxide and gives off oxygen. Photosynthetic reactions can be detected, therefore, by measuring the oxygen evolution at constant temperature and pressure conditions.

The trigger electrode system for the use of a flash lamp under water presents some difficulties. If any conduction or capacitive losses exist between the trigger electrode and ground, the trigger voltage may not be of sufficient magnitude to produce initial ionization of the flash tube gas.

These losses can occur in a water bath containing excessive amounts of ionic impurities. Under such conditions there would be a shock hazard to the operator. For applications where water immersion of flash tube is not required however, this alternate circuit because of its simplicity is more desirable.

The authors acknowledge the ideas and assistance contributed by H. A. Tanner, director of research and K. A. Clendenning, biochemist of the C. F. Kettering Foundation.[3]

REFERENCES

(1) R. Emerson and W. Arnold. A Separation of the Reactions in Photosynthesis by Means of Intermittent Light, *Journ of Gen Physiol*, Mar. 20, 1932.

(2) K. A. Clendenning and H. C. Ehrmantraut. Photosynthesis and Hill Reactions by Whole Chlorella Cells in Continuous and Flashing Light, *Archives of Biochem*, Dec. 1950.

Glo-Balls Measure Electric Fields

By JOHN D. SALISBURY
University of California
Radiation Laboratory
Livermore Site
Livermore, Calif.

ELECTRIC FIELD distribution in resonant cavities can be measured simply and directly.

A thin-wall, glass ball (see Fig. 1) containing gas at a low pressure is introduced into the cavity at a point where the voltage gradient is to be measured. Input power is raised until the gas within the ball ionizes. The voltage induced in a monitor loop is read the instant before the ball glows, giving the maximum meter reading since the induced voltage drops somewhat

Want more information? Use post card on last page.

...Use SIZE 8 Synchros
with No Sacrifice in Accuracy or Reliability
SIZE 10
50 GMS.
SIZE 11
113
GMS.
SIZE 15
128 GMS.
BuOrd SIZE 15
174 GMS.
cppc
SIZE
8
32GMS.
ILLUSTRATIONS
ACTUAL SIZE
Why use 1945 Synchros in 1956 designs?
In equipment which must be flown, you want the least possible bulk and weight.
Clifton Precision's new Size 8 series of Synchros is in production and providing the highest accuracy and reliability in the industry. Samples from stock. Write or phone MAdison 6-2101 (Suburban Philadelphia)
ALL TYPES AVAILABLE

STANDARD UNITS — ROTOR — STATOR — IMPEDANCE

SYNCHRO FUNCTION	CPPC TYPE	Input V400cy	Input Amps	Input Watts	Ohms (DC)	Output Rotor	Sensitivity (MV/deg)	Output Volts	Sensitivity (MV/deg)	Input Volts	Input Amps	Input Watts	Ohms (DC)	Zro	Zso	Zrss	Phase R-S	Shift S-R	Nulls (MV)	Possible Error	Possible Spd	Length in inches
Torque Transmitter	CGC-8-A-7	26.0	.100	.5	37	—	—	11.8	200	—	—	—	12	54+j260	12+j45	76.4+j19.6	8°	—	30	7'	14'	1.240
Control Transformer	CTC-8-A-1	26.0	.050	.25	143	24	410	11.8	200	11.8	.090	.23	25	220+j740	28+j110	246+j60		8.5°	30	7'	14'	1.240
Control Transformer	CTC-8-A-4	—	—	—	381	24	410	—	—	11.8	.037	.09	60	508+j1680	67+j270	640+j190	—	9.2°	30	7'	14'	1.240
Control Differential	CDC-8-A-1	—	—	—	36	11.8	200	—	—	11.8	.085	.21	25	38+j122	27+j120	48.6+j13.8	—	9°	30	7'	14'	1.240
Electrical Resolver	CSC-8-A-1	26.0	.039	.43	230	23.2	400	10.6	180	11.8	.084	.27	27	280+j600	38+j136	70+j136	20°	11°	30	7'	14'	1.240
Torque Receiver	CRC-8-A-1	26.0	.100	.50	37	—	—	11.8	200	—	—	—	12	54+j260	12+j45	85.1+j20.4	8°	—	30	30'	30'	1.240
Vector Resolver	CVC-8-A-1	1-26	.057	.34	78	—	—			11.8	.294		27	103+j444	28.8+j27.9		10.2°	—	1MV/V			1.240

TYPICAL SYSTEM WITH ELEMENTS

SYSTEM	Input V400cy	Input Amps	Input Watts	Output Volts	Sensitivity (MV/deg)	CPPC TYPES	Input Z	Output Z	Phase Shift	Nulls (MV)	REMARKS
Transmitter→C.T.	26	.110	.74	23.6	408	CGC-8-A-7→CTC-8-A-4	58+j226	626+j233	19°+	50	Hi Z Load on CT
Transmitter→C.T.	26	.111	.75	23.3	407	CGC-8-A-7→CTC-8-A-4	58+j226		19°	50	50K Load on CT
Transmitter→C.T.	26	.111	.83	20.8	363	CGC-8-A-7→CTC-8-A-4	64+j221		17°	50	5K Load on CT
Transmitter→4 Parallel CT's	26	.145		21.8	381	CGC-8-A-7→4x CTC-8-A-4			28°	40	CT Interaction ½° Max.
Transmitter→Differential→C.T.	26	.134	1.78	19.5	340	CGC-8-A-7→CDC-8-A-1→CTC-8-A-4		748+j364	40°	40	CT Output to Hi Z
Series Vector→Electrical Resolver	1→26	.103	.67	4.9	85	CVC-8-A-1→CSC-8-A-1	55+j230	32+j68	32°	40	$E_o = .19\ E_i \sin\theta_1 \sin\theta_2$
Series Vector Resolvers	1→26	.110	.55	5.2	91	CVC-8-A-1→CVC-8-A-1			20.2°	40	$E_o = .2\ E_i \sin\theta_1 \sin\theta_2$
Transmitter→Receiver	26	.200	1.0	—	—	CGC-8-A-7→CRC-8-A-1			—	—	Torque 2400 mg-mm/deg.

LOOK TO CPPC FOR cppc SYNCHRO PROGRESS

CLIFTON PRECISION PRODUCTS COMPANY, INC.

CLIFTON HEIGHTS — PENNSYLVANIA

Parabolic
MICROWAVE ANTENNAS
for all bands 2000 mc - 4000 mc
7000 mc
X and K

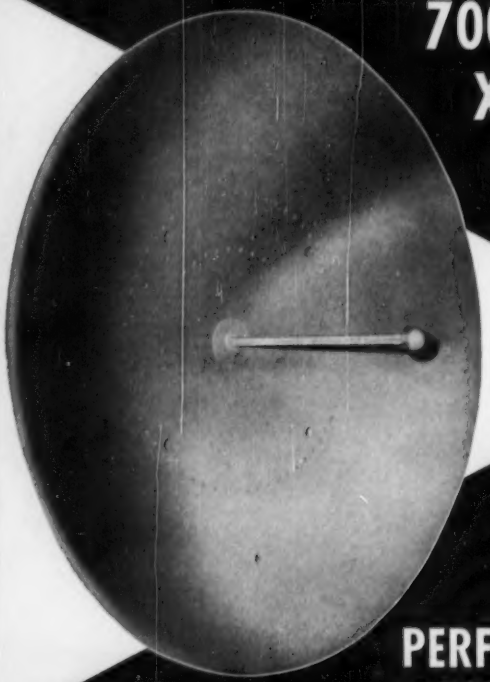

4000 mc antenna with Gabriel waveguide feed.

with these
PERFORMANCE ADVANTAGES

- Low VSWR
- High gain
- Low side and back lobes
- Pressurized feeds
- All-weather dependability
- Ready adaptability to special service requirements

2000 mc antenna with dipole feed.

For every microwave application, Gabriel can furnish antenna equipment of proved efficiency and reliability. The experience and facilities of Gabriel Laboratories offer prompt, dependable solution of your antenna problems. And the manufacturing plant of Gabriel Electronics Division assures volume production *to the Laboratories' performance specifications.*

For analysis of your antenna or microwave problems, write us or telephone NEedham 3-0005 (through Boston).

GABRIEL ELECTRONICS DIVISION
THE GABRIEL COMPANY, Needham Heights 94, Massachusetts

when ionization takes place.

The magnitude of the gradient at the measured point, corresponding to any arbitrary loop voltage, can be calculated easily if the gradient required for ionization is known and the ionization point of the ball is stable. Measurements can be made at a number of points, and a profile of the magnitude variations of the electric field intensity due to the pertubing effects of drift tubes can be plotted. Integration of the plot will yield end-to-end voltage for a given loop voltage. Such



FIG. 1—Glo-balls with diameters of ¼, ½ and 1⅜ inches are used respectively at 100, 25 and 50 mc, while the larger ones are for 12.5 mc



FIG. 2—Simple representation of a linear accelerator cavity

measurements have been made on a large linear accelerator.

► **Past Method**—Distribution of the electric field intensity E in a cavity resonator is of interest. Perturbations owing to drift tubes increase the complexity of mathematical calculations to a point where solutions are unreliable or impossible. It is therefore necessary to perform measurements either on models or on full-scale cavities to obtain this information.

Electric field intensity measurements within cavity resonators have been made in the past by the

PORTRAIT OF A CHAMPION

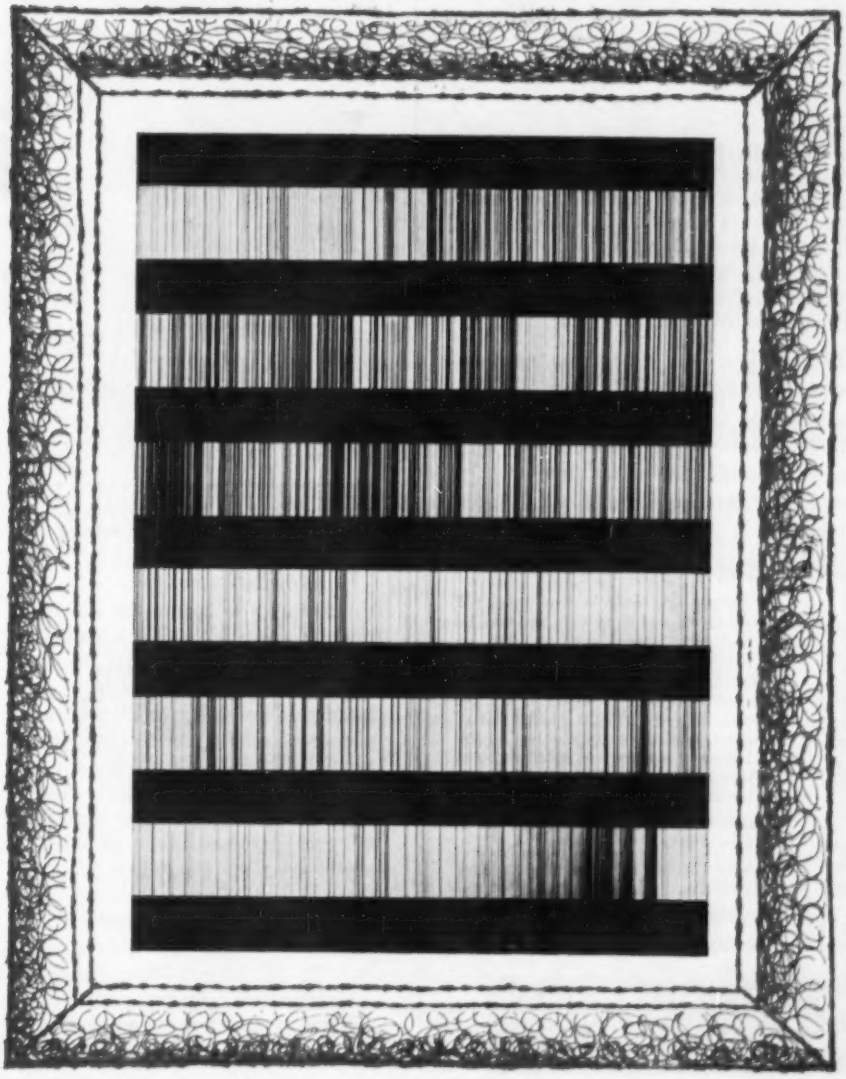

Nichrome*, the famous alloy whose spectrogram you see here, is as truly a masterpiece as any Rembrandt or DaVinci hanging in the galleries—and for largely the same reason.

For the principal elements in Nichrome, *anyone* can combine. What gives Nichrome its unapproachable superiority over all other heat-resistance alloys, is the truly personal elements that go into its making—the all-important, highly specialized skills of the Driver-Harris technicians.

Step-by-step from melting through every processing operation, from furnace to finished spools of wire (some drawn as fine as .0005 dia.) exacting metallurgical controls and checks operate to assure the peerless and enduring qualitites of Nichrome. These quality controls represent 58 years of continuous alloy research that have established Nichrome as the time-tested standard by which all similar alloys are measured.

Yes, there is only one Nichrome, and it is made only by Driver-Harris.

And in recognition of its unique properties, the United States Patent Office in August, 1908, granted solely and exclusively to us the trade-mark NICHROME.

*T. M. Reg. U. S. Pat. Off.

Driver-Harris COMPANY

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Louisville, Los Angeles, San Francisco • In Canada: The B. GREENING WIRE COMPANY, Ltd., Hamilton, Ontario

MAKERS OF THE MOST COMPLETE LINE OF ELECTRIC HEATING, RESISTANCE, AND ELECTRONIC ALLOYS IN THE WORLD

NEW!

FM Standard Signal Generators

MODEL 210 SERIES

Measurements' new Model 210-A is a light and compact instrument designed for the use of laboratories, manufacturers, communications systems, and radio service organizations requiring an accurate, moderately-priced FM Signal Generator in the frequency range of 86 to 108 megacycles. It is an excellent instrument for research on FM, multiplexing and telemetering equipment.

Other Model 210 FM Signal Generators, with a tuning ratio of approximately 1.2 to 1 are available for use within the limits of 30 to 200 megacycles with a deviation of at least 150 Kc.

FEATURES

- Wide deviation with low distortion
- Low spurious residual FM
- Individually calibrated, direct-reading dials
- Accurate output voltage calibration—low VSWR.
- Operates at fundamental carrier frequencies.
- Vernier electronic tuning

SPECIFICATIONS

CARRIER FREQUENCY RANGE: 86 to 108 Mc. Individually calibrated dial with ± 0.5% accuracy.

TUNING: A vernier frequency dial having 100 divisions is geared to the main dial. Electronic tuning of ± 0-30 and ± 0-300 Kc is provided by the calibrated frequency deviation dial.

OUTPUT VOLTAGE: 0.1 to 100,000 microvolts (−7 to −127 DBM) across a 50-ohm termination.

OUTPUT SYSTEM: Mutual inductance attenuator with 50 ohm source impedance with a low VSWR. Continuous monitoring of output level with accurate barretter bridge.

MODULATION: 400 and 1000 cycle internal audio oscillator. Deviation directly calibrated in two ranges: 0 to 30 Kc and 0 to 300 Kc. Can be modulated from external audio source providing 5 volts across 10,000 ohms.

MODULATION FIDELITY: Frequency deviation response is within ± 0.5 db from d. c. to 15,000 cycles, and is down approximately 3 db at 70 Kc. Transient response is excellent, and distortion is less than 1% at 75 Kc deviation.

RESIDUAL FM: Spurious residual FM is 60 db below 75 Kc deviation.

POWER SUPPLY: 117 volts, 50-60 cycles, 45 watts.

DIMENSIONS: 10"x14"x7¼" overall.

WEIGHT: Approximately 25 lbs.

Laboratory Standards — MEASUREMENTS CORPORATION — BOONTON · NEW JERSEY

field-perturbation or BB method. This method consists of introducing a metallic or dielectric sphere (BB) into the cavity at a point to be investigated, observing the resulting frequency shift Δf and from this, calculating the relative field intensity at the point.

If the sphere is of dielectric material and if its volume is small compared to that of the cavity, the frequency shift is proportional to the volume of the sphere and to the square of the electric field intensity at the point.

The method requires a considerable amount of special frequency-measuring equipment, as well as ideal conditions. It is preferred to sample as small a volume as possible, but there is a practical limit because as the size of the BB is reduced the resulting frequency shift is also reduced, so that even with a mechanically rigid cavity and precise frequency measurements the Δf is lost in the inherent random variations of the system.

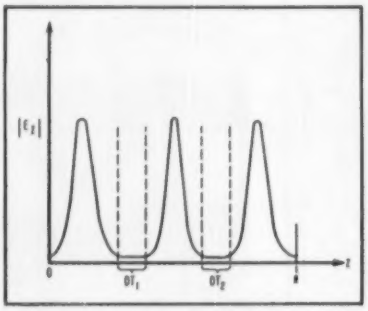

FIG. 3—Magnitude of E field along axis of cavity for constant end-to-end voltage

The glo-ball circumvents the frequency drift problem because its ionization point is, for all practical purposes, unaffected by frequency changes normally encountered during a run. It can be made many times smaller in diameter than the BB and therefore it can be used to explore regions where size is a limiting factor, such as the bore of a drift tube in a linear accelerator.

Also in regions of rapidly changing field intensity, it is desirable to make each measurement over a volume as small as possible, since the field intensity is a point func-

Solve Computer and Automatic Control Problems -AT THE CORE!

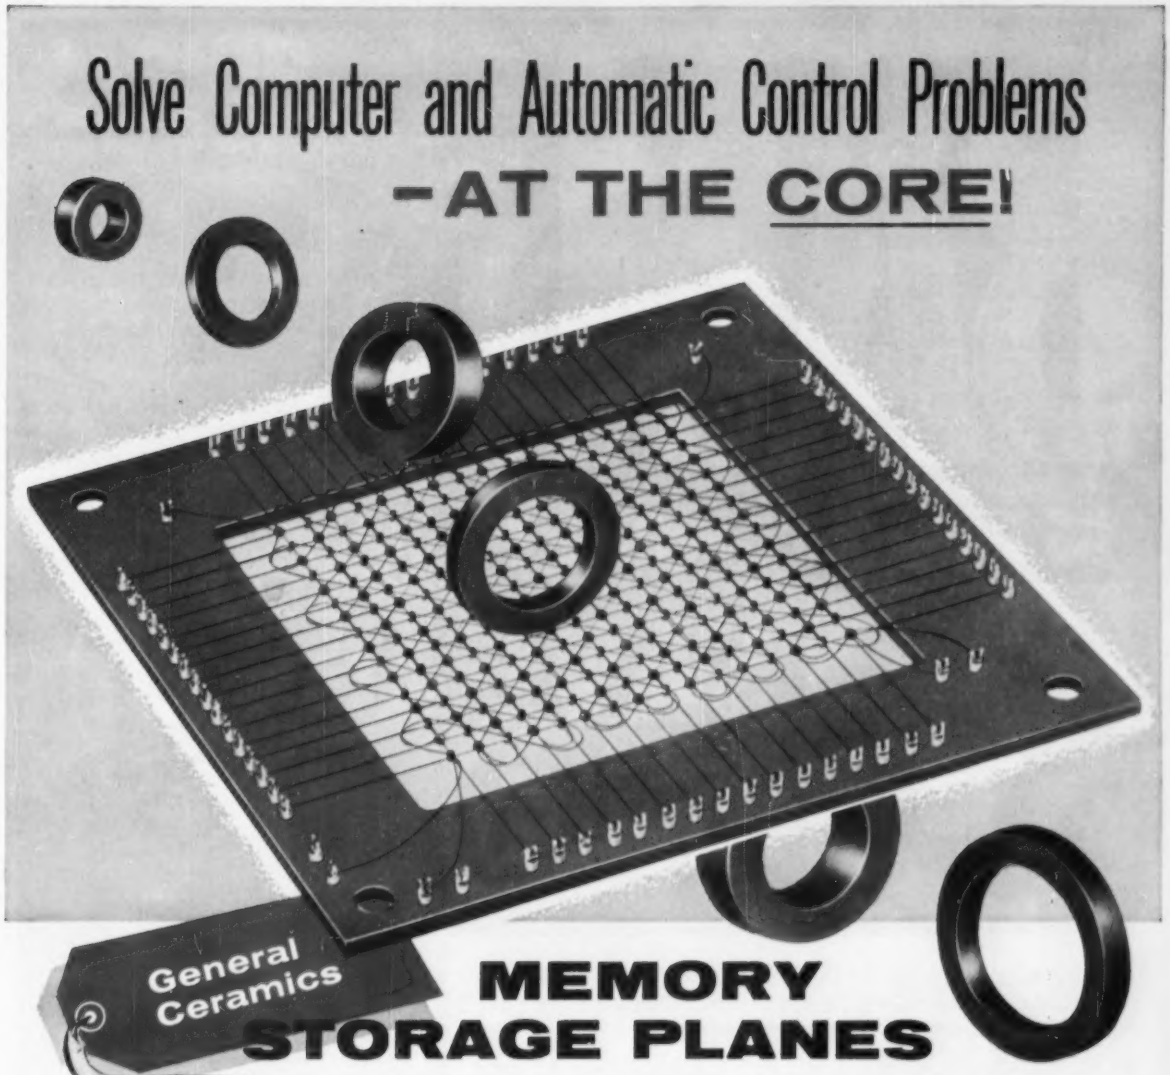

General Ceramics

MEMORY STORAGE PLANES

-design **speed, accuracy and reliability into your controls and systems**

-with **the added advantages of lightweight, compact size and maintenance-free operation**

Ferramic® Magnetic Memories offer electrical and mechanical superiorities of especial interest to design and project engineers. Ferramic cores, and complete memory planes, by General Ceramics open new design horizons in the areas of control for conveyors, elevators, traffic, telephone switching, production machines, signalling, processing equipment and other systems. If your problem involves computers, switching or automatic controls, request bulletins on Ferramic Memory Planes. Standard configurations are available, special types designed to specification. Address Dept. E.

-be sure **it's Ferramics®, the exclusive product of the General Ceramics Corporation, original developer of the rectangular hysteresis loop ferrites for memory systems.**

50th ANNIVERSARY 1906 to 1956

General CERAMICS CORPORATION

Telephone VALLEY 6-5100

General Offices and Plant: KEASBEY, NEW JERSEY

Headquarters for STEATITE, ALUMINA, ZIRCON, PORCELAIN SOLDERSEAL TERMINALS, "ADVAC" HIGH TEMPERATURE SEALS, CHEMICAL STONEWARE, IMPERVIOUS GRAPHITE, FERRAMIC MAGNETIC CORES, MAGNETIC MEMORY PLANES

BAM!

AS 2 PIECES BECOME 1

SAVE 43¢!

Recently, Raytheon asked PRESTEEL to draw electronic components to close tolerances in cupro-nickel. To cold-work this metal was a brand new challenge — but, thanks to our long experience, we succeeded.

We learned that two identical end rings were later brazed to form a single unit — at considerable expense and with many rejects.

"Why can't PRESTEEL make the unit as a single stamping?" we asked. Design surveys showed all kinds of problems. But we still thought it could be done — and asked a chance to prove it at our own risk.

Our engineers designed a special set of dies. Result — a new **double** end ring at $3.07 per unit, 43¢ less than the old cost per set of two. Plus extra savings on brazing costs . . . and no rejections!

Have **you** an "impossible" pressing problem? Bring it to PRESTEEL — and save! Send the coupon today.

WORCESTER PRESSED STEEL COMPANY

Get a quote from the leader — PRESTEEL!

103-D Barber Ave., Worcester 6, Mass.

Please ask your representative to call ☐
Please send newest brochure ☐

Name_____

Title_____ Company_____

Street_____

City_____ Zone_____ State_____

tion and the glo-ball integrates the field over its diameter. The center of the ball is therefore a position reference to plot the data that consists of the average values of field intensity for the space occupied by the ball.

▶ **Operation**—In use, the glo-ball is pulled through a cavity on a line along which it is desired to know the field magnitude distribution, for example, the axis of a linear accelerator. At various points along the axis, the ball position is recorded and the cavity energy is raised until ionization or glow occurs. At this instant, the voltage on a monitoring loop is recorded and the energy level is quickly lowered to zero.

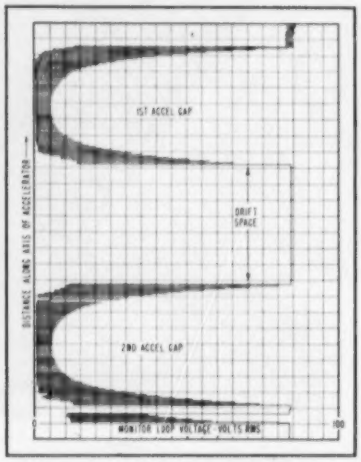

FIG. 4—Section of recorder chart shows monitor loop voltage plotted against glo-ball position for two gaps of a long linear accelerator tube

The latter action is necessary to preserve the stability of the ionization point. Because the ball ionizes at a constant magnitude of electric field, it is apparent that the data obtained consist of monitoring loop voltages versus ball position for this value of electric field.

Referring to Fig. 2, the voltage on monitoring loop M is noted at the time of ionization of the glo-ball located a distance z from m on the z axis. Since this is also the axis of the accelerated particles, it is normally the only path along which the distribution is of interest. As indicated, the desired

LIQUID COOLING of Electronic Tubes

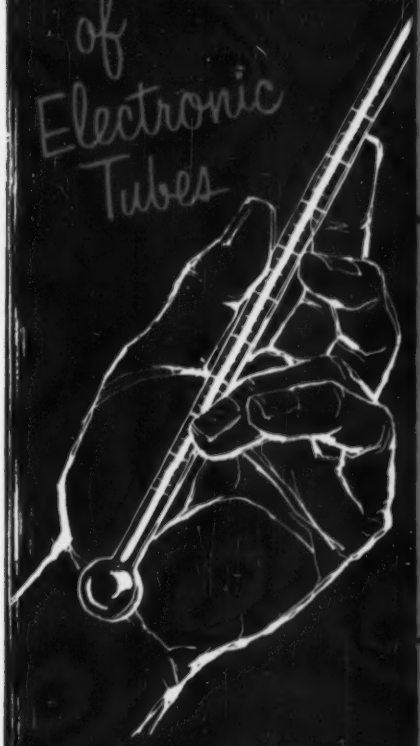

WITH **Eastern** COOLING UNITS

By a sustained program of research, Eastern continuously extends the uses of the latest units in electronic tube cooling, pressurizing electronic equipment, and pumping fuels and hydraulic fluids. Research and testing laboratories, a model shop, and three manufacturing plants provide the specialized equipment and manpower to turn out fully qualified units to meet appropriate government specifications.

From our extensive line of existing units, adaptations of these units, or completely new designs, Eastern can provide equipment to handle your project well. Your inquiry is welcomed.

EASTERN INDUSTRIES, INC.
100 SKIFF STREET
HAMDEN 14, CONNECTICUT

Eastern Cooling Units provide coolant liquid for maintaining within safe operating temperature limits liquid cooled electronic tubes or similar devices. The units are completely self-contained and usually comprise such components as heat exchangers, fans or blowers, liquid pumps, reservoirs, flow switch, thermostat, etc.

Cooling units can be modified as required for varying conditions encountered in land or sea as well as aircraft service. Almost all units are designed to meet such specification as MIL-E-5400 and MIL-E-5272.

The units shown below are intended only to illustrate the varying requirements which can be satisfied. By utilizing fairly standard components and designs based on broad experience in this field, Eastern is able to provide at minimum cost equipment exactly suiting a specific requirement.

Eastern welcomes your consultation on liquid cooling problems ranging from 200 to 20,000 watts dissipation.

Write for Aviation Products Bulletin 330.



MODEL MB-175, TYPE 200 DISSIPATION: 2,000 watts. ALTITUDE RANGE: sea level to 50,000 feet. POWER REQUIRED: 28 volts D.C. WEIGHT: 25 pounds. SIZE: 10" x 15-15/16" x 10¾" high.



MODEL E/MT-205, TYPE 200A DISSIPATION: 1600 watts. ALTITUDE RANGE: sea level to 5,000 feet. POWER REQUIRED: 28 volts D.C. WEIGHT: 25 pounds. SIZE: 10" x 21" x 10" high.



MODEL MB-177, TYPE 202 DISSIPATION: 1700 watts. ALTITUDE RANGE: sea level to 50,000 feet. POWER REQUIRED: 110 volt, 400 cycle, 3 phase. WEIGHT: 27 pounds. SIZE: 10" x 19 15/32" x 7¾" high, per JAN-C-1720A, also 81-01.



MODEL E/MT-210, TYPE 200 DISSIPATION: 1500 watts. ALTITUDE RANGE: sea level to 10,000 feet. POWER REQUIRED: 208 volts, 400 cycle, 3 phase. WEIGHT: 35 pounds. SIZE: 11½" x 19½" x 12½" high.



MODEL E/MT-200, TYPE 201 DISSIPATION: 1,000 watts. ALTITUDE RANGE: sea level to 50,000 feet. POWER REQUIRED: 28 volts D.C. WEIGHT: 14½ pounds. SIZE: 10" x 10" x 6" high.



MODEL HC, 5-A DISSIPATION: 1,000 watts. ALTITUDE RANGE: sea level to 5,000 feet. POWER REQUIRED: 100 to 110 volts D.C. WEIGHT: 10 pounds. SIZE: 7½" x 13½" x 5-1/16" high.

Want more information? Use post card on last page.

HYSOL 6600

epoxy casting resin

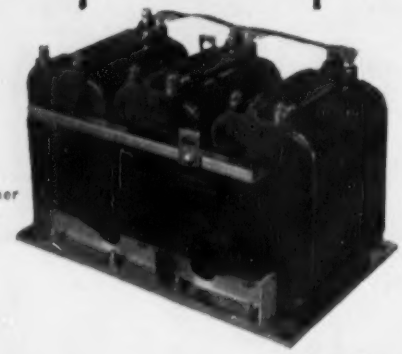

3-phase plate transformer (2½ KVA)

For These RAYTHEON Transformers . . .

Filament Transformer



Dual high-reactance Filament Transformer

HYSOL 6600 is a new epoxy casting resin especially developed for MIL-T-27A and other Military Specifications. After more than two years of development and evaluation in our own and government laboratories, it is now being economically used in transformer production by RAYTHEON.

HYSOL 6600 was specifically produced for transformers for electronics, instrument transformers, power bushings and related equipment. It is a filled epoxy base in the form of a soft solid which melts to a low viscosity liquid. Complete Technical Data Bulletin available on request.

Houghton Laboratories manufactures complete lines of Electrical Insulating Materials, Adhesives and Sealants, Tooling Materials and cast products as rod, sheet and tube.

PROGRESSIVE PRODUCTS THRU CHEMICAL RESEARCH
HYSOL
Product of HOUGHTON LABORATORIES, INC.

HOUGHTON LABORATORIES INC.

100 HOUGHTON AVE. OLEAN, NEW YORK

In Canada

HYSOL (Canada), LTD.

Leaside, Toronto 17, Ontario

mode has the E vector parallel and the H vector transverse to the axis of the cavity, a right circular cylinder. In the unloaded cavity E is constant with respect to z, but the presence of the drift tubes DT_1 and DT_2 perturbs the field, producing one of varying magnitude similar to that of Fig. 3. The shape of this curve can be obtained by plotting values of inverse monitoring loop voltages obtained during the glo-ball run. This is because the field intensity E at a point in the cavity is proportional to the voltage V_L, generated in a fixed loop which couples part of the magnetic flux. That is $E_z = k_z V_L$ where k_z is a function of position.

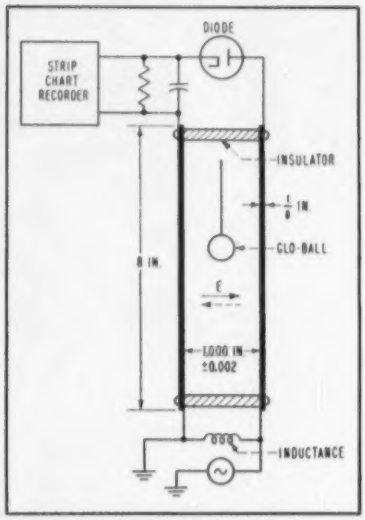

FIG. 5—Parallel-plate calibrator

At a given point in the cavity, k_z is constant for a particular mode of operation and a fixed monitoring loop.

Figure 4 shows part of a recorder chart (2 gaps) which was taken during a glo-ball run on a long linear accelerator.

▶ **Construction**—When the first glo-balls were made, approximately 10 percent had the required sensitivity and stability. They ranged in size from ¼ inch to 1¼ inches in diameter with a considerable range of sensitivities. In general, the sensitivity decreases with decreasing ball diameter and increases as the frequency of the r-f power in-

INSIDE, WHERE IT COUNTS, HUGHES DIODES LOOK LIKE THIS

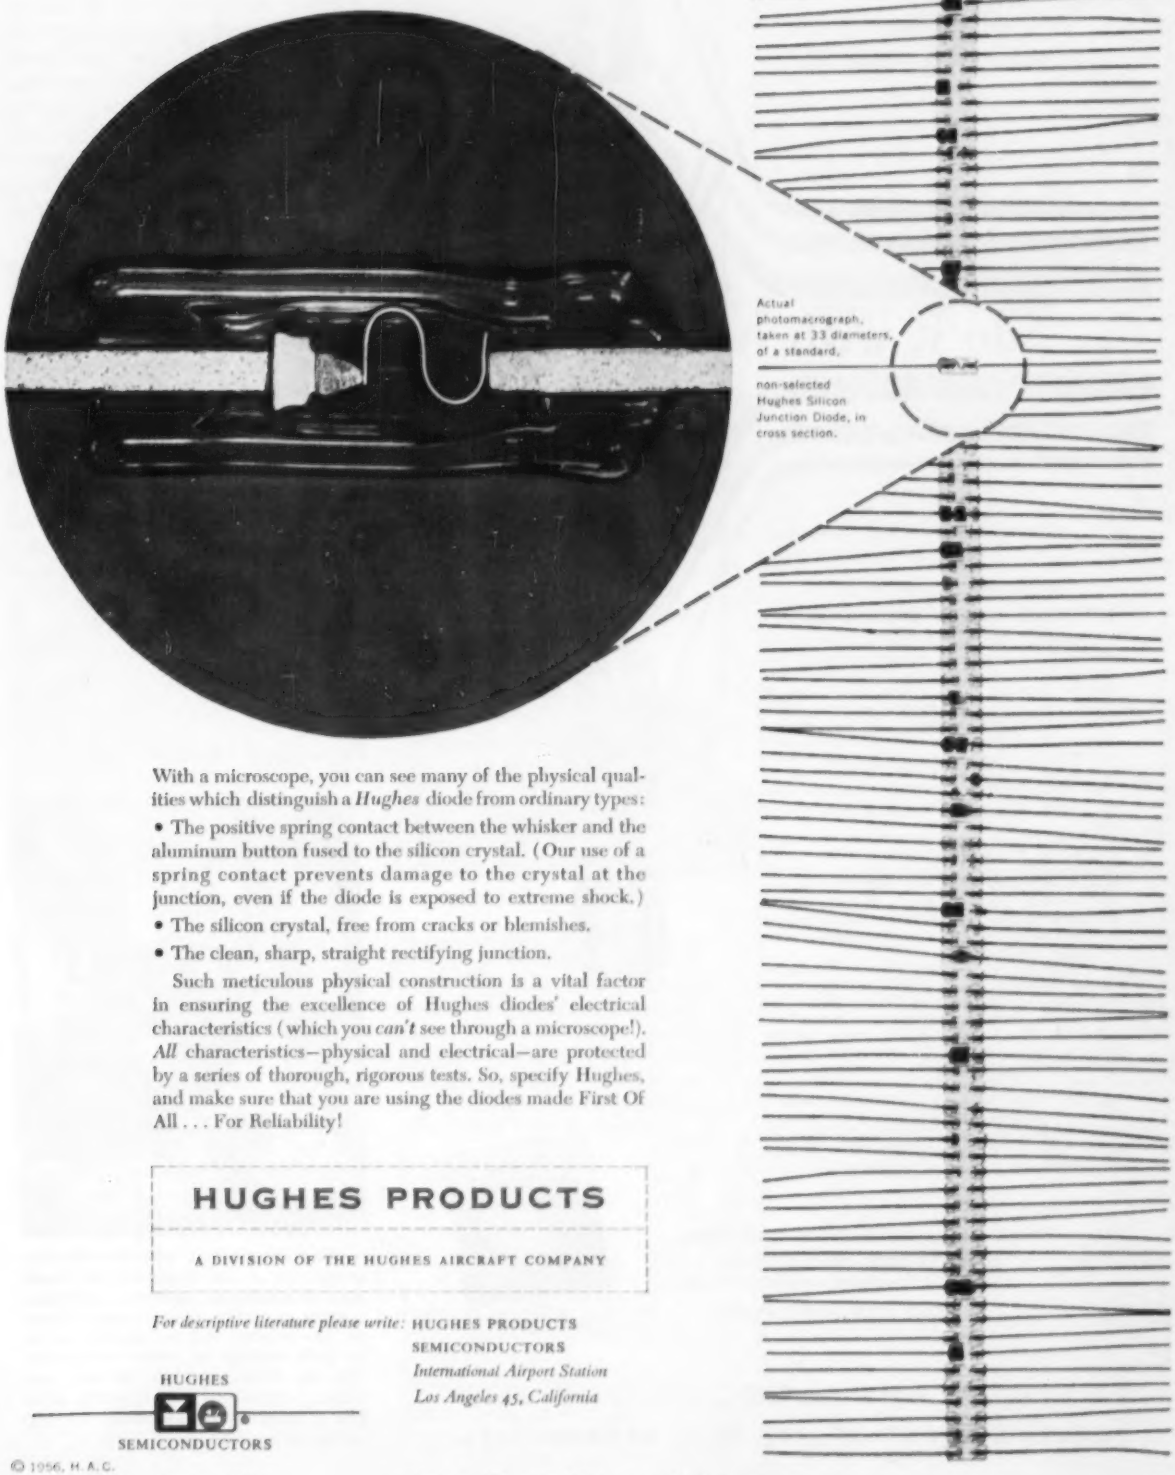

Actual photomacrograph, taken at 33 diameters, of a standard, non-selected Hughes Silicon Junction Diode, in cross section.

With a microscope, you can see many of the physical qualities which distinguish a *Hughes* diode from ordinary types:

- The positive spring contact between the whisker and the aluminum button fused to the silicon crystal. (Our use of a spring contact prevents damage to the crystal at the junction, even if the diode is exposed to extreme shock.)
- The silicon crystal, free from cracks or blemishes.
- The clean, sharp, straight rectifying junction.

Such meticulous physical construction is a vital factor in ensuring the excellence of Hughes diodes' electrical characteristics (which you *can't* see through a microscope!). *All* characteristics—physical and electrical—are protected by a series of thorough, rigorous tests. So, specify Hughes, and make sure that you are using the diodes made First Of All . . . For Reliability!

HUGHES PRODUCTS

A DIVISION OF THE HUGHES AIRCRAFT COMPANY

For descriptive literature please write: HUGHES PRODUCTS
SEMICONDUCTORS
International Airport Station
Los Angeles 45, California

HUGHES
SEMICONDUCTORS

© 1956, H. A. C.

LOW NOISE PLUS INTERCHANGEABILITY

Recent advances in germanium mixer diodes have appeared most promising, providing they are used in conjunction with special biasing circuits, low impedance IF inputs and RF microwave mixers specially designed for the purpose. Actual systems experience with germanium mixer diodes is still limited, and hence, it is not well known how their field reliability in such matters as high temperature operation, pulse burnout, etc. compares with the time-tested silicon diode.

To allow our customers to achieve super low noise figure performance without the inconvenience of modifying their IF and RF circuits, we now offer the 1N415E (double ended) and 1N23E (single ended) silicon diodes which are comparable in performance to the 1N263, but are interchangeable with the 1N23 series.

These diodes are produced to the same upper overall noise limit of 7.5 db (with IF noise figure of 1.5 db) as that specified for the 1N263 germanium diode. Hence, existing systems, designed for 1N23 series design centers can invariably be improved by the simple expedient of direct substitution. The RF and low IF impedance of the 1N263 does not lend itself to such direct interchangeability. Try these new silicon types. We are sure that your enthusiasm will match those of users now reporting systems noise figures including duplexer loss as low as 6.45 db.

The information above has been taken directly from our new 8-page technical brochure on silicon diodes.

SEND FOR YOUR COPY.

MICROWAVE ASSOCIATES INC.

22 CUMMINGTON STREET, BOSTON 15, MASSACHUSETTS

creases.

The balls were pumped to about 15 microns and outgassed for one hour in an oven. They were then filled with helium to a pressure of about 1,000 microns and sealed. Further work by J. F. Steinhaus has shown that additional treatment and somewhat higher pressures, about 15 millimeters of mercury, produced more stable balls and a higher percentage of useful ones. A typical, sensitive, ½-inch diameter ball will ionize in a field of about 170 volts rms per inch at a frequency of 50 mc.

A localized static charge of electricity has been found to cause as much as 50-percent increase in the ionization point. With successive firings this effect gradually diminished as the charge leaked off. As a precautionary measure, all glo-balls are now dipped in antistatic solution prior to the initial calibration.

The calibration procedure consists in suspending the glo-ball between two parallel plates of diameter equal to about 8 times the spacing, which normally was one

Breeding Better Cattle

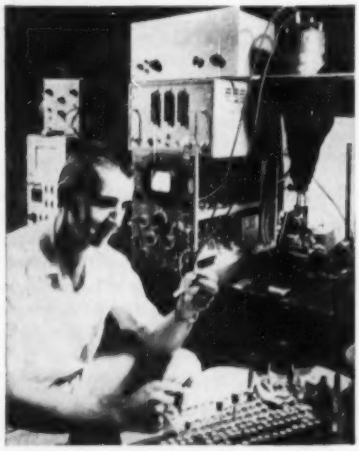

In the photograph, a professor of dairy physiology at the University of Illinois uses a microscope, multiplier phototube, cathode-ray oscilloscope, electronic counter, line selector and tv camera monitor to study motility of cattle sperm cells. The Du Mont equipment shown may make possible fast and accurate selection of high-fertility specimens for producing better cattle

Your future in **MICROWAVES** *at the*



HUGHES RESEARCH LABORATORY

The Microwave Laboratory at Hughes conducts fundamental research and long-range development in the field of microwave components and techniques. The antenna program is concerned with research on linear and two-dimensional arrays of slot radiators; transmission and radiation of surface-guided waves; very high resolution radar antennas; and the development and engineering of airborne communication, navigation and fire control antennas.

Instrumentation is developed for new measuring equipment to meet needs of the program. This has included development of automatic impedance and antenna pattern recorders, microwave power supplies stabilized in amplitude and frequency, microwave circuitry, and microwave applications of ferrite devices.

Scientific Staff Relations

HUGHES

RESEARCH AND DEVELOPMENT LABORATORIES
HUGHES AIRCRAFT COMPANY
Culver City, Los Angeles County California

These positions in the Microwave area are open now in the Hughes Research Laboratory:

MICROWAVE ENGINEERS

with experience in magnetrons, klystrons, microwave transmitter and receiver circuitry, microwave mixers, duplexers and cavities.

VIDEO CIRCUIT ENGINEERS

with experience in video amplifiers, pulse circuitry, coding and decoding circuits, and delay lines.

MICROWAVE STANDARDS ENGINEERS

to do precise calibration from primary and secondary standards, using the finest facilities available for standards calibration.

MICROWAVE ENGINEERS

to participate in basic research on microwave breakdown in gases or wave propagation in ionized gases.

MICROWAVE ENGINEERS

to participate in development of new techniques for measurement of the magnetic and electric properties of materials at microwave frequencies.

You are invited to send resumes of your education and experience to the address at left.

VACATIONING IN SOUTHERN CALIFORNIA? YOU ARE INVITED TO VISIT HUGHES.

versatile new

PENTA PL-172

external anode

1-KW BEAM POWER PENTODE

new design principle gives extra-high power at low plate voltages



This new pace setter delivers high power at low plate voltage for a variety of r-f and a-f applications. The exceptional performance of the PL-172 is due to the exclusive new suppressor grid vanes which direct electrons to the plate in beams, giving true beam tube characteristics. For critical Class AB$_1$ linear amplifier applications, for high power audio service, or for high-efficiency, low-drive Class-C use, the PL-172 is a logical choice.

USE IT AS A CLASS-AB$_1$ LINEAR R-F AMPLIFIER—

Delivers over 1000 watts useful output at only 2000 plate volts, over 1500 watts at maximum ratings.

AS A CLASS-C AMPLIFIER—

Over 2000 watts useful output at high efficiency. Driving power less than 5 watts.

OR AS A CLASS AB$_1$ AUDIO AMPLIFIER—

Over 1200 watts per pair at 1500 volts. Up to 3000 watts at maximum ratings. Low output impedance simplifies output transformer problems.

RATINGS

Heater Voltage	6.0 volts	Plate current, max.	1.0 amperes
Heater Current	7.5 amperes	Plate dissipation, max.	1000 watts
Plate voltage, max.	3000 volts	Transconductance	21,000 μmhos

A COMPLETE LINE OF HIGH-EFFICIENCY POWER TUBES



Plate current curve at zero grid voltage shows why the PL-172 gives high power gain and operates efficiently at low voltages.

Write for complete technical data and suggested operating conditions.

Representatives in principal cities.

PENTA *laboratories, inc.*

316 N. Nopal St., Santa Barbara, Calif.

Visit our booth #1145 **WESCON SHOW**

inch. The ball as shown in Fig. 5 is located at the center of the plates where the E field is collimated. The plates are then excited by a steadily increasing r-f voltage at the frequency at which the ball is to be used. At the instant of ionization the voltage is turned off leaving a record of its maximum excursion on the recorder chart. During successive trials, this value of maximum deflection is found repeatable to better than 1 percent for a stable ball. Its calibration is therefore the voltage at ionization divided by the plate spacing.

It was necessary to provide a low-resistance direct-current path, such as a choke, between the plates to prevent the formation of a d-c field, which seriously affects the calibration.

► **Instrumentation**—During a glo-ball run it was found desirable to use a high-voltage monitoring loop to avoid large errors owing to the nonlinearity of diodes at low r-f voltages. This did not eliminate the necessity for measuring a relatively low voltage when cross-calibrating the temporary to the permanent loops, but this operation was only done once and considerable care could be expended to insure accuracy.

The conception of the glo-ball, its construction and application and the development of much of the associated electronic equipment now in use was due to O. A. Fredricksson, W. W. Klein and the author. Many persons have contributed to the further development and application of the glo-ball technique. This work was done under the auspices of the U. S. Atomic Energy Commission.

Transhorizon Circuit Authorized

FIRST international radiotelephone circuit using tropospheric overhorizon techniques will be operated by American Telephone and Telegraph Co. together with Radio Corporation of Cuba using 840 and 880 mc.

Although military circuits have for some time been in operation, this is the first intercompany serv-

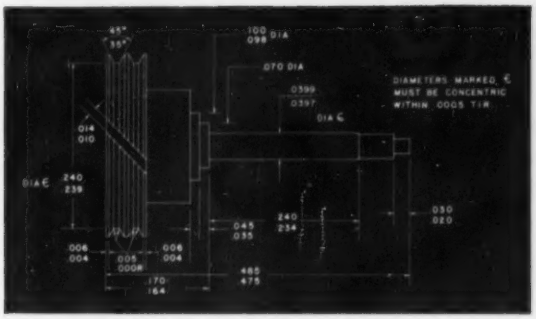

Inspection of incoming precision shafts took 10 to 15 minutes each by mechanical gaging—involved concentricity, diameters, shoulder locations, and other tough-to-measure dimensions to tolerances of .0002". Doing the work on a Kodak Contour Projector cut time to 2 to 3 minutes per shaft.



The problem was to check many small calculating machine parts averaging about 13 critical dimensions for each with shapes mostly complex. With carefully engineered mechanical gages, inspection time averaged 50 seconds each. Optical gaging on a Kodak Contour Projector brought the average down to 12 seconds.

Spacing the parallelism of a special tuning condenser for electronic test equipment had to be held to very close tolerances. "Use of the Kodak Contour Projector," the company reports, "permits economical measurements of parallelism to an accuracy impossible to obtain by other methods."

On a flexible rubber-like part, rejects ran as high as 30%. By using a Kodak Contour Projector to measure the parts and then plotting results by statistical quality control methods, production changes were made that resulted in rejects dropping from 30% to less than ¼ of 1%. Optical gaging eliminated distortion of the part while gaging, and proved 4 to 5 times faster than usual methods.

One instrument inspects these varied parts

Here is another economy optical gaging can provide: switching from one part to a second part requires only a change of chart and fixture. You still use the same basic instrument. And with a Kodak Contour Projector, the variety of parts you can check is almost without limit. Here's why:

1. *Capacity*—Screen size on an optical comparator does not restrict the size of parts you can handle, for multiple-position fixtures allow the handling of parts larger than the screen itself. What's important is the staging area—and Kodak's unique relay lens provides uniform ample clearance regardless of magnification. The distortion-free image lets you measure anywhere on the viewing screen. The choice of lenses, of horizontal or vertical projection, and of surface or shadow illumination gives you the greatest possible flexibility.
2. *Ease of operation*—Kodak Contour Projectors are designed for maximum speed and minimum operator training. The bright screen image reduces fatigue, lets you use the instrument in normal room light. Images are erect and unreversed at all magnifications. Finger-tip controls are within convenient reach of the operator.
3. *Optical stability*—The adjustment-free optical elements on Kodak Contour Projectors eliminate the need for operator adjustments. Rigidly mounted lenses and mirrors maintain alignment and position. Rugged construction withstands rough and heavy use.



Whether you are now using optical gaging or just considering it, you should have a copy of the booklet, "Optical Gaging with Kodak Contour Projectors." It gives complete details on Kodak optical gaging equipment and how it can work for you. Write to *Special Products Sales Division.*

EASTMAN KODAK COMPANY, Rochester 4, N. Y.

the KODAK CONTOUR PROJECTOR

Kodak

ENGINEERS, PHYSICISTS

Electronics

If you can do original work

. . . you should consider The Johns Hopkins University Applied Physics Laboratory (APL), where creative ideas are recognized and supported.

The Laboratory is primarily concerned with research, development and engineering of guided missiles and missile systems. A sizeable program of fundamental research is concurrently in progress.

APL is responsible for technical direction of the Navy's Bumblebee guided missile program. As pioneers in guided supersonic flight, APL developments include the first supersonic ramjet, and the missiles TERRIER, TALOS, and TARTAR. The Laboratory presently is engaged in further development of these and more advanced missiles.

An organization of and for scientists and engineers, APL's staff of 1200 includes nearly 500 professional men. Two features distinguish the organization: (1) the self-impedance of staff members who work in an atmosphere of free inquiry and are unhampered by the usual administrative details, (2) the fluidity of relationships among the groups engaged in the many areas of technical endeavor.

Problems are attacked by teams, each composed of members drawn from all requisite professions. A close contact between research and engineering is maintained. This team approach allows each staff member to acquire broad knowledge of the problem under attack, find his creativity heightened and supported. Salaries are comparable to those of other R & D organizations in the missile field. Relocation expenses are paid for applicants selected.

Our new air-conditioned laboratories are exceptionally well equipped. Their location in the Washington, D. C.-Baltimore periphery places staff members near fine housing in all price ranges and near recreational and cultural facilities. Several excellent universities in the area make it convenient for staff members to avail themselves of our liberal educational benefits.

OPENINGS EXIST IN:

ANALYSIS: Dynamic analysis of closed-loop control systems; analysis and synthesis of guidance systems; counter-counter measures systems; electrical noise and interference.

DESIGN: Control and guidance circuitry; telemetering and data-processing equipment; microwave components, antennas, and radomes; transistor and magamp applications; external missile systems.

TEST: Prototype engineering and field test evaluation.

For Additional information write: Professional Staff Appointments

The Johns Hopkins University Applied Physics Laboratory

8609 Georgia Avenue, Silver Spring, Md.

ice, which will serve subscribers in Cuba and the United States via Florida City, Fla., a distance of 180 miles.

Television transmission service will be offered later.

Metal Ceramic Miniatures

SEVERAL new tubes for use at high temperatures and under conditions of considerable acceleration have been constructed having the form of cylinders from which flat tabs radiate (ELECTRONICS, p 12, June 1956).

The Eimac type CD-16 is a dual triode that will withstand 15 g acceleration at frequencies up to 2,000 cycles and envelope temperatures up to 300 C for extended periods. The location of the electrodes and the orientation of the connection tabs is shown in the drawing.

Operating at 250 volts with a plate current of 9 ma, the noise

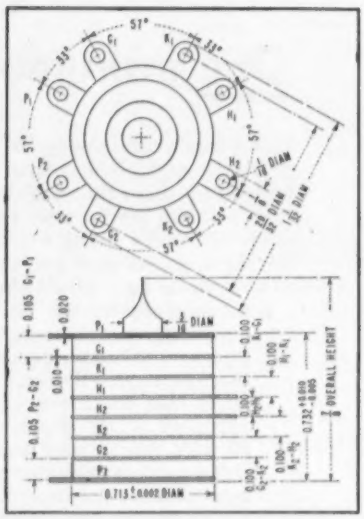

Twin-triode receiving tube construction

output across a 2,000-ohm plate-load resistor will not exceed 75 millivolts with 15 g acceleration in any direction at any frequency from 0 to 2,000 cycles. No mechanical resonances exist in this range.

Type CD-18 is a miniature sharp-cutoff pentode. At plate and screen supply voltages of 120 v d-c with a cathode resistor of 200

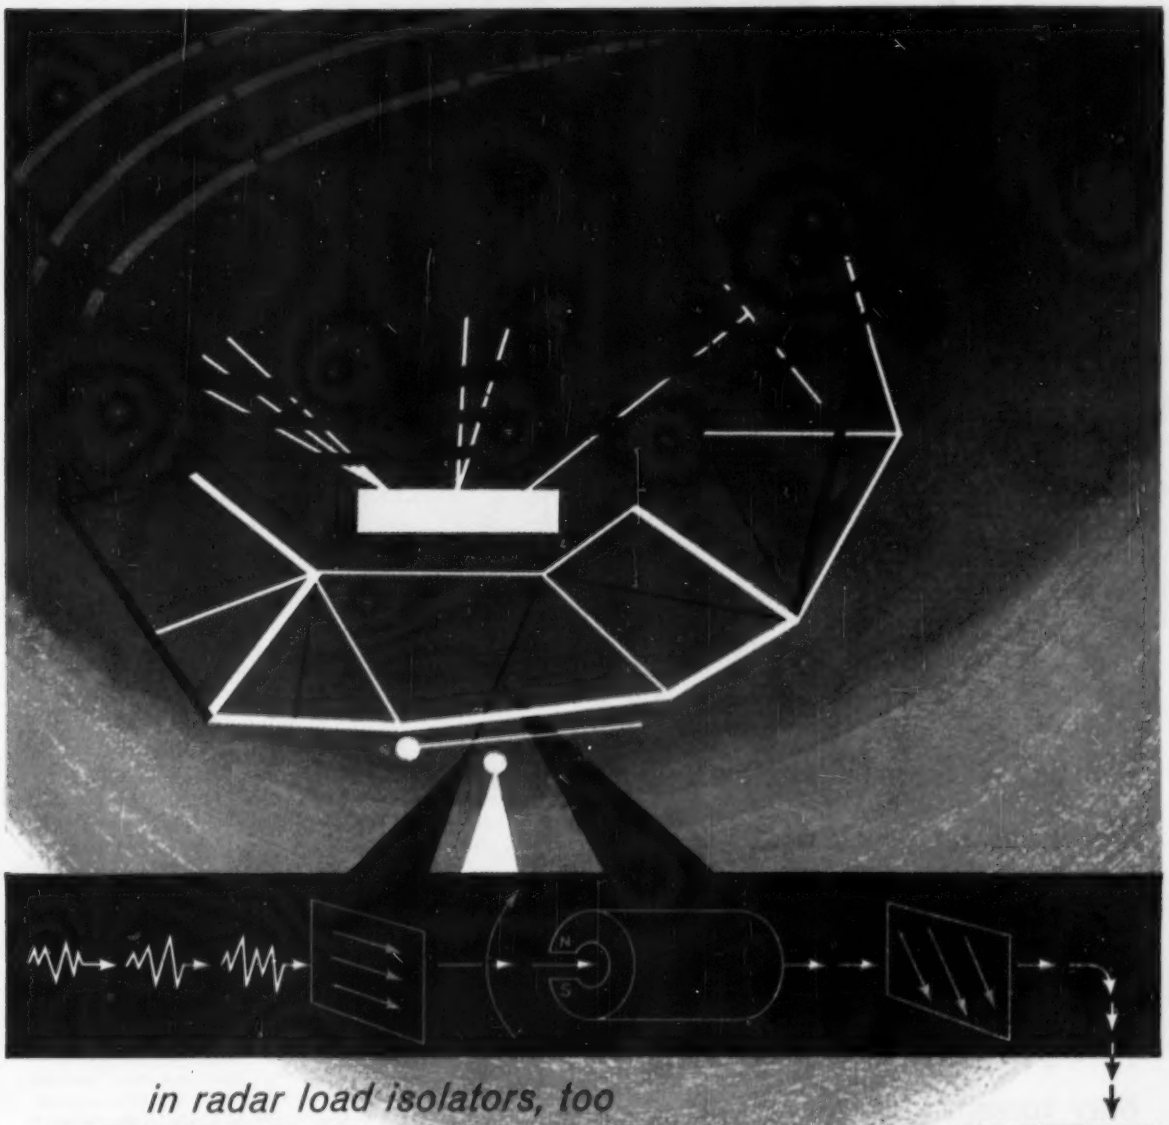

in radar load isolators, too

CRUCIBLE PERMANENT MAGNETS

give maximum energy. . . minimum size

Special applications, such as radar load isolators, demand compact but powerful magnet assemblies. And this is but one of the many places where the *consistently* higher energy product provided in Crucible Alnico magnets pays off.

These Crucible Alnico permanent magnets can be sand cast, shell molded, or investment cast to exact size, shape or tolerance requirements . . . and in any size from a mere fraction of an ounce to hundreds of pounds.

The design and production of permanent magnets has been a Crucible specialty ever since Alnico alloys were discovered. It's one of the good reasons why so many people bring their magnet applications to Crucible. Why don't you? *Crucible Steel Company of America, The Oliver Building, Mellon Square, Pittsburgh 22, Pa.*

CRUCIBLE first name in special purpose steels

Crucible Steel Company of America

NEW!---IMPROVED!

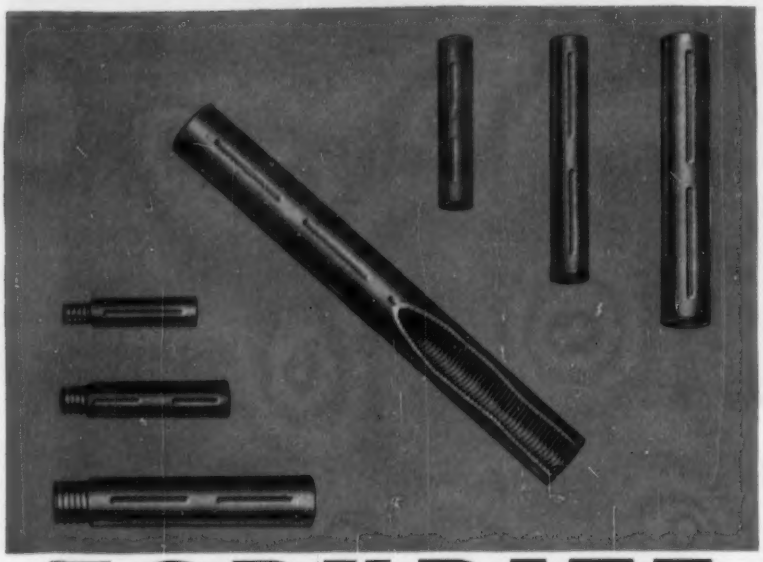

TORKRITE

Your answer for smooth torque without stripping!

NEW TORKRITE tubing is now scientifically brushed and lubricated to give that extra protection which ensures better performance.

IMPROVED TORKRITE is internally threaded and embossed to provide a smooth and constant torque action, engineered to meet every requirement.

ONLY TORKRITE COIL FORMS have these **NEW** built-in qualities.

* * *

Write for our latest brochure showing complete line of CLEVELITE* Phenolic tubing.

*Reg. U. S. Pat. Off.

THE
CLEVELAND CONTAINER COMPANY
6201 BARBERTON AVE. CLEVELAND 2, OHIO
PLANTS AND SALES OFFICES:
CHICAGO • DETROIT • MEMPHIS • PLYMOUTH, WIS. • ODENBURG, N.Y. • JOHNSBURG, N.J. • LOS ANGELES

ABRASIVE DIVISION at CLEVELAND, OHIO
Cleveland Container Canada, Ltd., Prescott and Toronto, Ont.

Representatives:

NEW YORK AREA: R. T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND: R. S. PETTIGREW & CO., 62 LA SALLE RD., WEST HARTFORD, CONN.
CHICAGO AREA: PLASTIC TUBING SALES, 5215 N. RAVENSWOOD AVE., CHICAGO
WEST COAST: IRV. M. COCHRANE CO., 408 S. ALVARADO ST., LOS ANGELES



Exploded view of Eimac 33C3A2 dual triode

ohms, less than 100 millivolts noise voltage will develop across a plate loading resistor of 10,000 ohms at 15 g in any direction between 20 and 2,000 cycles.

The terminal structure of both tubes has been designed to adapt these tubes for integration into automatic circuit module construction.

Teleprinter Performs Stunts



So-called stunt box used with Teletype Corp. model 28 printer may have as many as 42 functions, of which 10 are reserved for conventional actions such as line feed, shift and carriage return. Up to 32 circuits can thus be controlled by groups of character combinations sent in a predetermined sequence

PERTINENT PATENTS

By NORMAN L. CHALFIN
Hughes Aircraft Co.
Culver City, Calif.

NEED for patent examiners is probably greater than ever before. Details of employment opportunities for engineers in this field are appended following the patents reviewed this month.

Character Writing

Two recently issued patents represent an interesting technique in

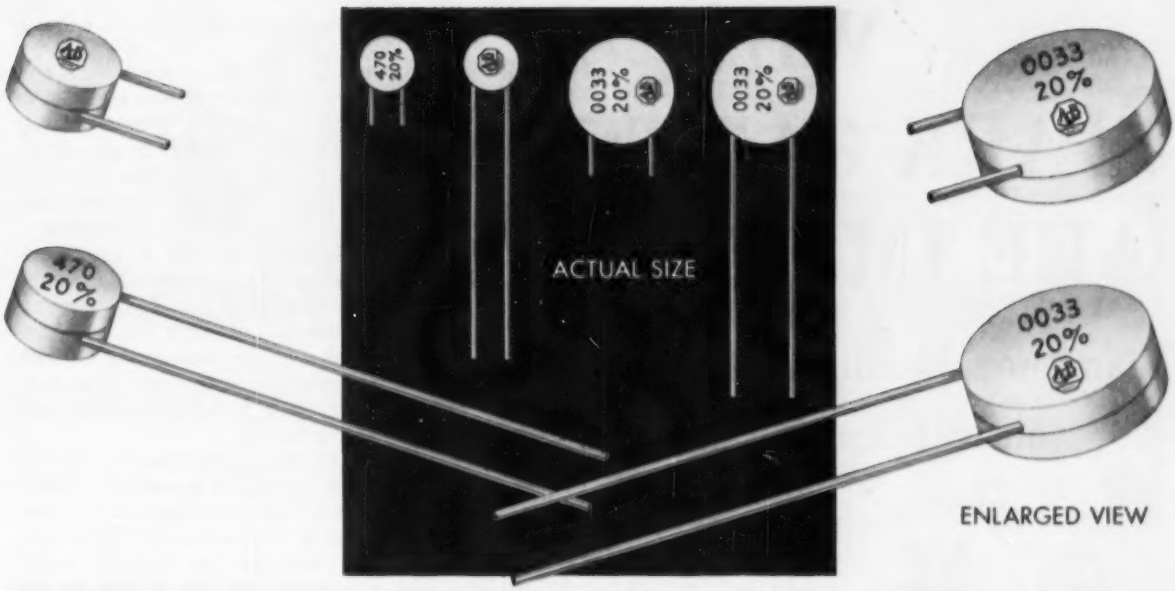

Ceramic Encased Capacitors for Continuous Operation

AT 150 C AMBIENT TEMPERATURE

These Allen-Bradley capacitors are encased in a ceramic shell—an excellent insulation. They can, therefore, be mounted adjacent to "live" parts without danger of leakage or voltage breakdown. They are available in RETMA and MIL values from 2.2 to 3300 mmfd.

Allen-Bradley encased capacitors are rated at an ambient temperature of 150 C (continuous operation at 500 volts d-c). Ordinary uninsulated capacitors have a maximum ambient temperature rating of only 85 C. Also at a given capacitance at 25 C, Allen-Bradley encased capacitors, over a temperature range from minus 55 C to plus 150 C, will not vary more than plus or minus 30%. These encased capacitors are uniform in configuration and dimensions, a feature of great value in automatic assembly operations. Being completely free of wax, sticking together and gumming up of production machinery are eliminated.

Since the ceramic shell takes the place of the usual resin coating, there is no resin on the lead wires, making it possible to solder closer to the dielectric disc with resultant lower series inductance. These capacitors can be supplied with long or short leads for manual or automatic assembly operations.

Allen-Bradley encased capacitors are another contribution to the military effort to obtain superior electronic components. Send for data on these ceramic encased capacitors, today.

Allen-Bradley Co., Milwaukee 4, Wis. • In Canada—Allen-Bradley Canada Limited, Galt, Ont.

OTHER QUALITY COMPONENTS FOR RADIO, TV & ELECTRONIC APPLICATIONS



Fixed Molded Resistors
1/10, 1/2, 1 & 2 watt



Variable Molded Resistors
1/2 & 2 watt



Ferri-Cap Feed-thru Filters
with ferrite material

Ferrite Components
High Efficiency

ALLEN-BRADLEY
RADIO & TELEVISION COMPONENTS
QUALITY

Allen-Bradley Co.
110 W. Greenfield Ave., Milwaukee 4, Wis.

Please send me technical data on the A-B ceramic encased capacitors.

Name_____

Address_____

City_____ State_____

WHY SPARK GAP TUBES ARE IMPORTANT–

and how Bendix Red Bank can help you with spark gap problems!

Bendix Red Bank "Spark Gap" Tubes are specially designed to do two big jobs in electronic circuits.

First, to act as a "*triggering*" *switch*—as on jet ignition systems. Here, Bendix* Spark Gaps pass high currents with relatively low voltage drop and have the advantage of being able to handle high voltages in small space. Further, these tubes can be made insensitive to ambient temperature variations and are not normally affected by pressure, altitude, or humidity changes.

The second function of Bendix Spark Gaps is as a *protective element*—guarding radar equipment against voltage overload, to name one example. Here, Bendix Spark Gaps keep high voltage surges from getting through to damage circuit components.

Our design and manufacturing experience with spark gap tubes is extremely broad. If our extensive line of these tubes . . . ranging from 750V to 50KV in DC breakdown voltages . . . does not already contain a type to fit your needs, we are in a position to design one to handle the job with the exact degree of efficiency that you require.

To find out more about what we can do to help you with your spark gap problems, get in touch with RED BANK DIVISION, BENDIX AVIATION CORPORATION, EATONTOWN, NEW JERSEY.

* TRADEMARK

West Coast Sales and Service:
117 E. Providencia Ave., Burbank, Calif.
Export Sales and Service:
Bendix International Division,
205 East 42nd St., New York 17, N. Y.
Canadian Affiliate:
Aviation Electric, Ltd., P. O. Box 6102,
Montreal, Quebec.

Red Bank DIVISION

Bendix AVIATION CORPORATION

the use of cathode-ray tubes.

Patent 2,728,872 was awarded to H. M. Smith, for a "Direct Viewing Storage Tube with Character Writing Electron Gun". The patent is assigned to Hughes Aircraft Company of Culver City, California.

As shown in Fig. 1, the invention consists of a cathode-ray tube in which there is a beam-forming system followed by a first set of deflection plates. Beyond the first set of deflection plates there is a character mask. Details of the mask are shown in Fig. 2.

The first beam-deflecting system under control of appropriate deflection-voltage generators directs the beam to the position of a given letter position of the character mask. The beam that passes through the character-shaped opening of the mask now has a cross-section of the character shape. Electron lenses

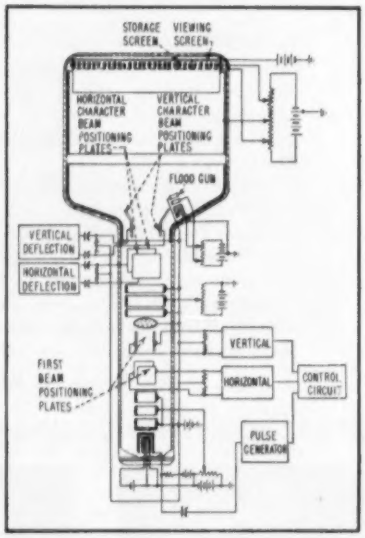

FIG. 1—Elements of the character-forming tube

sharpen this character-shaped beam and a second set of deflection plates direct the character-shaped beam to the viewing screen.

Each selected character is positioned to follow the last in succession and when a complete line of text has been displayed the next character appears on the line below. Any message typed on the viewing face of the cathode-ray tube may be stored on the face by the storage screen as long as the storage screen

a quick release fastener that...

solves alignment problems

Illustration indicates infinite variety of positions assumed by screw fastener to compensate for misalignment.

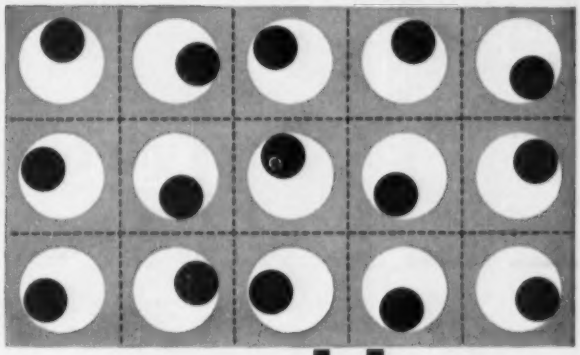

"FLOATING SCREW" ASSEMBLY COMPENSATES FOR OUT-OF-LINE DOORS AND PANELS

Installation of access doors and panels is made easy and production is speeded with Southco Quick-Release Fasteners. The wide alignment tolerances of Southco's "Floating Screw" adjust automatically to misalignment, saving mechanics' time. Also, the Southco "Floating Screw" insures accurate and uniform closure throughout the life of the equipment, compensating for warpage and bends resulting from hard usage.

One Southco grip length can meet most panel thicknesses on the average assembly—no need to specify many fastener sizes!

For complete information, write Southco Division, South Chester Corporation, 233 Industrial Highway, Lester, Pa.

© 1954

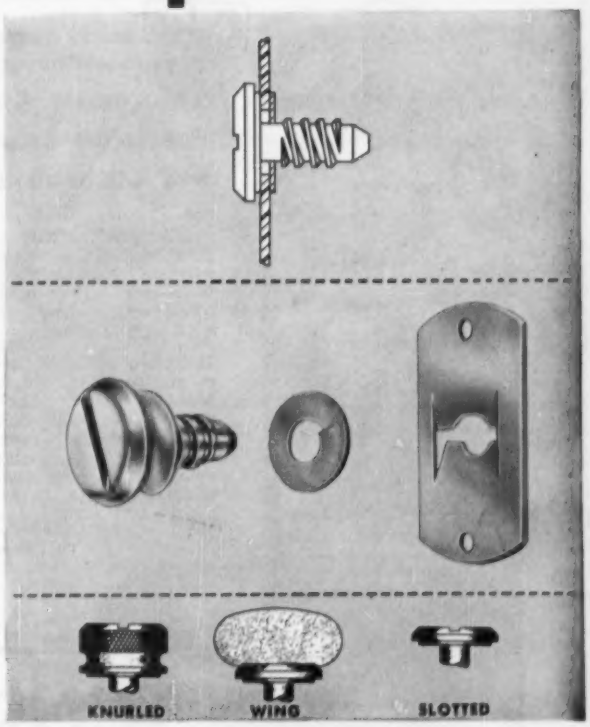

SOUTHCO DIVISION LION

SOUTH CHESTER CORPORATION • LESTER, PENNSYLVANIA

Celco breaks through to higher performance ratings in:

Magnetic Amplifiers, Precision Transformers, and Saturable Reactors.

Celco developments on these components include precision high temperature windings and impregnation to permit higher operating temperatures, with reduced size and weight, with high reliability.

Units are available hermetically sealed or encapsulated, with epoxy resins or silicone rubber. For the maximum performance with difficult space requirements, Celco specialized experience can prove invaluable in the development of your new high reliability components.

Send us your specifications, or call RAmsey 9-1123 . . . today . . . for engineering consultation on your critical applications.

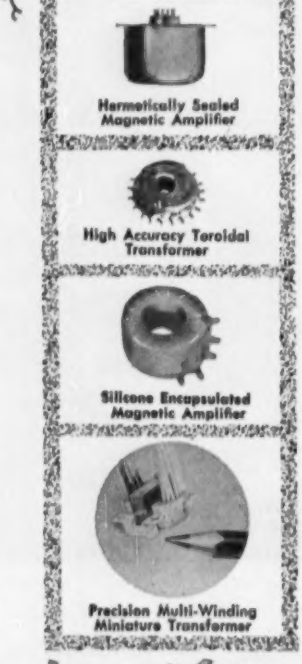
Hermetically Sealed Magnetic Amplifier
High Accuracy Toroidal Transformer
Silicone Encapsulated Magnetic Amplifier
Precision Multi-Winding Miniature Transformer

Celco
Constantine Engineering Laboratories Co.
MAHWAH, N. J.

Your plant is only hours away by the Celco Air Fleet

is activated. So long as the flood gun activates the storage screen the stored image may be viewed. Deactivating the storage screen removes the image and a new message may be written.

► **No-Storage Type** — In Patent 2,735,956 awarded to J. T. McNaney for "Cathode Ray Apparatus" a similar apparatus is shown without the storage elements. This patent is assigned to General Dynamics Corp.

FIG. 2—Mask used in storage tube



FIG. 3—One-line character tube

In Fig. 3 the elements of the McNaney system are shown. It would appear that this device might be intended for film recording use rather than for direct viewing since from the description it appears that a single line of letters only may be displayed.

A form of the device is shown in the McNaney patent for use with ppi type displays and in connection with radar identification systems.

Combined Tuner

In a recent patent 2,686,221 issued to J. Avins of RCA a combination a-m/f-m/tv receiver system is described wherein sound signals from any one of the three are de-

CORES

Name it . . . if it's a Ferrite, a Magnetic Iron Core, a Molded Coil Form (Iron and phenolic) or an E. E. Core, MOLDITE makes it and MOLDITE is your one consistently dependable source.

MOLDITE continues to pioneer with new methods and techniques closely related to automation in manufacturing stud and studless powdered iron cores. This will enable MOLDITE to produce faster, better and cheaper.

In addition, color TV is finding MOLDITE in the forefront with highly specialized equipment built and designed by MOLDITE engineers for both quality and quantity production.

Truly MOLDITE means Cores Unlimited for unlimited electronic applications today . . . tomorrow!

Send for our Catalog 120

NATIONAL MOLDITE COMPANY

1410 CHESTNUT AVE., HILLSIDE 3, N. J.

IRON CORES • FERRITES • MOLDED COIL FORMS • E E CORES

Robert T. Murray Co.
604 Central Avenue
East Orange, N. J.

William A. Franklin
3 Holly Road
North Syracuse, N. Y.

Jerry Golten Co.
2750 W. North Ave.
Chicago 22, Ill.

Engineering Services Co.
4550 Main St.
Kansas City, Mo.

Perlmuth Electronics Assoc.
2419 South Grand Ave.
Los Angeles, Cal.

John S. Plewes Co.
52 Humbercrest Blvd.
Toronto 9, Ontario

Jose Luis Ponte
Cardoba 1472
Buenos Aires

Want more information? Use post card on last page.

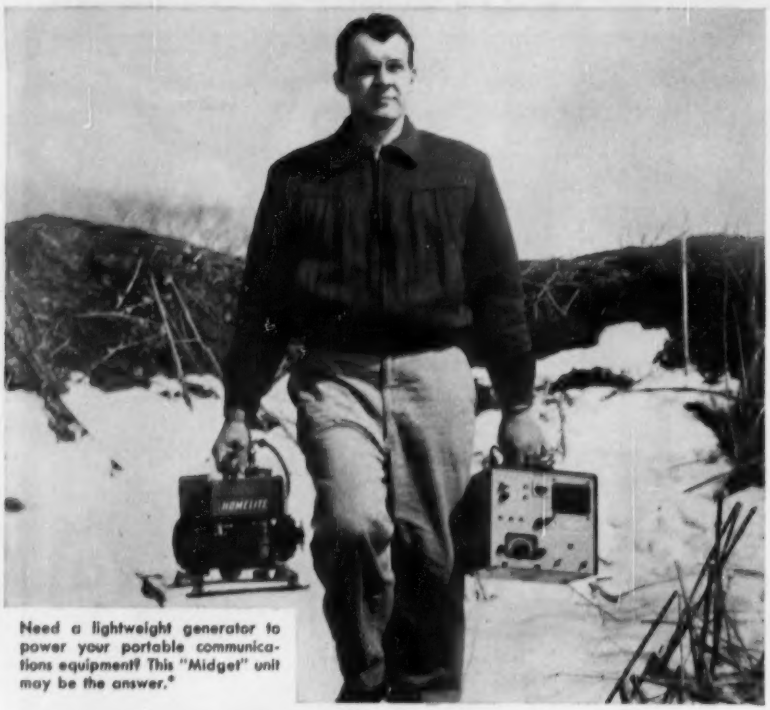

Need a lightweight generator to power your portable communications equipment? This "Midget" unit may be the answer.*

Homelite Generators Meet Toughest MIL Specifications

If you're looking for lightweight, gasoline-engine-driven generators which will meet even the toughest MIL specifications, get in touch with Homelite.

With over 30 years' experience in designing and building hundreds of thousands of dependable gasoline-engine and electric-motor driven generators from .15 KW to 5 KW in all voltages and frequencies, you can be assured that Homelite will find a quick and correct solution to your most exacting electric power requirements.

Write or call today. You will receive prompt, competent, and confidential service.



* This is the first generator of this size procured to meet the requirements of MIL G-10286A and the requirements of the reference engine specifications MIL-E-11275. Weighs only 22 pounds complete. It has a military rating of .15 KW, 120 V., 60 cycles, single phase, 1.0 P.F., reconnectable to 120 V. DC. One gallon of fuel will operate this generator for more than eleven hours *at full load*.

Manufacturers of Carryable Pumps, Generators, Blowers, Chain Saws

PERFORMANCE-DEPENDABILITY-SERVICE

HOMELITE

a division of Textron Inc.

4808 RIVERDALE AVE. PORT CHESTER, NEW YORK

Canadian Distributors:
Terry Machinery Co., Ltd., Toronto • Montreal • Vancouver • Ottawa • Edmonton • Moncton

modulated in a common i-f channel.

In Fig. 4 a simplified block diagram illustrates how this inventor proposes to employ his system.

Two tuning systems are involved. One provides a-m or f-m signals. The other provides the tv signals.

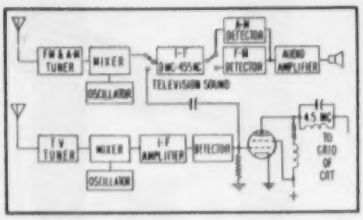

FIG. 4—Combined tuner for audio programs

The sound channel of the tv receiver at 4.5 mc is applied to the audio portion of the audio-radio receiver at 9 mc. This can probably be done by a frequency doubling diode system.

When used as an f-m receiver—the i-f is 9 mc and the i-f for broadcast is the standard 455 kc. A switch selects a-m or f-m detectors.

Patent Examiners

The U. S. Patent Office has advised that there are a number of openings for recent engineering graduates in the Patent Examining Corps.

Patent examiners after a short training period review patent applications submitted to the U. S. Patent Office to determine the novelty of the invention in relation to the prior art.

Engineers whose interests and abilities are especially directed towards electronics and even more particularly to electronic computers are urged to consider joining the corps.

The starting salary for a graduate with a B. S. degree is GS-5 ($4,480) or for a master's degree or six months experience is GS-7 ($5,335). Rapid promotions to $7,570 in 4½ or 5 years are possible and depend only upon ability and initiative.

Requests for further information about the openings and applications should be directed to The Commissioner of Patents, Washington 25, D. C.

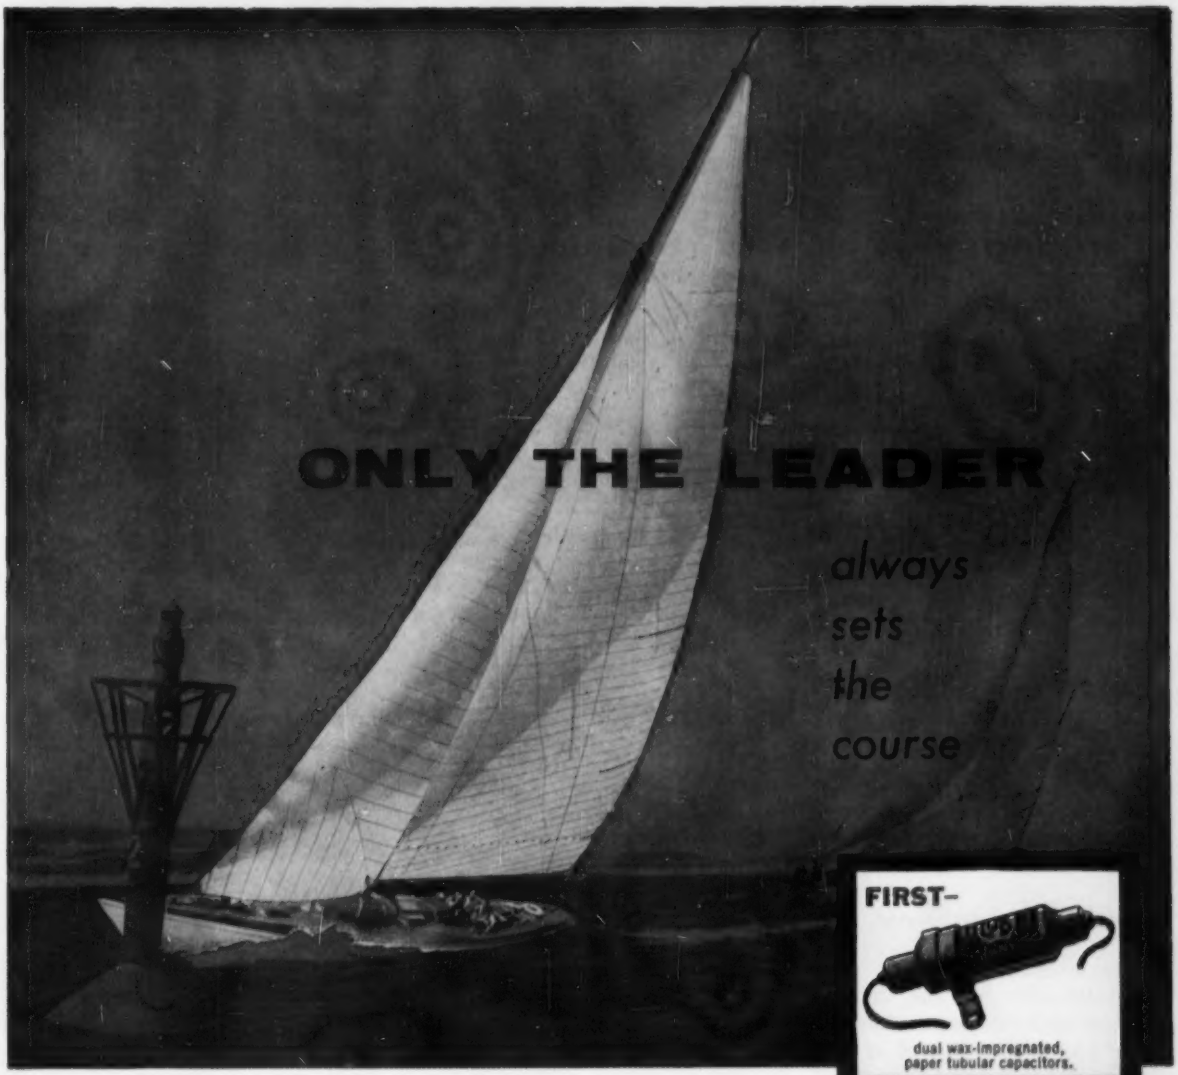

FIRST–

dual wax-impregnated, paper tubular capacitors.

Charting the course of the future in the manufacture of capacitors has always been the practice at Cornell-Dubilier. Proof of this leadership is that capacitor developments originated at C-D invariably become the standards of comparison for the entire industry.

FIRST–

low voltage dry electrolytic capacitors.

C·D...45 YEARS OF FAMOUS FIRSTS

Typical of these "famous firsts" are the three examples shown here . . . proof that whatever your capacitor requirements may be, your needs can be filled by C-D. Write to Cornell-Dubilier Electric Corp., Dept. K-86, South Plainfields, N. J.

FIRST–

capacitor used in proximity fuse.

ONSISTENTLY EPENDABLE

CORNELL-DUBILIER CAPACITORS

PLANTS IN SO. PLAINFIELD, N. J.; NEW BEDFORD, WORCESTER AND CAMBRIDGE, MASS.; PROVIDENCE AND HOPE VALLEY, R. I.; INDIANAPOLIS, IND.; SANFORD AND FUQUAY SPRINGS, N. C.; SUBSIDIARY, RADIART CORP., CLEVELAND, OHIO.

THERE ARE MORE C-D CAPACITORS IN USE TODAY THAN ANY OTHER MAKE

Production Techniques

Edited by JOHN MARKUS

Production Control Chart Uses Golf Tees in Peg-Board

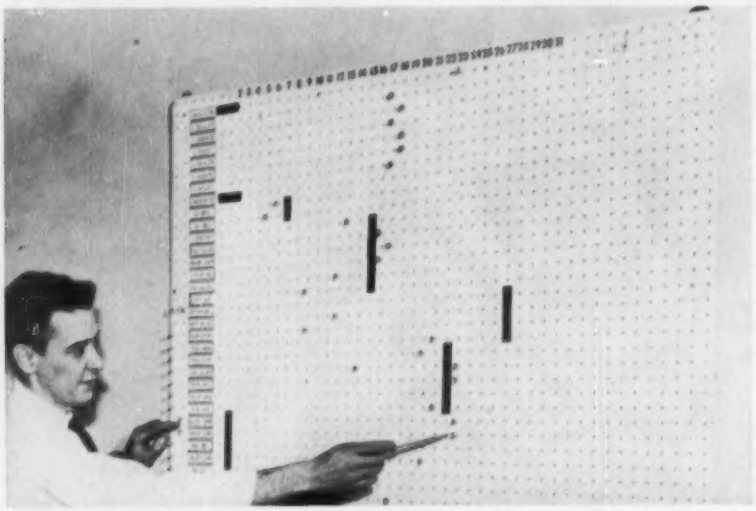

Supervisor points to golf tee inserted in board to indicate completion of project on 23rd of month. Different colors of tees can provide additional information

THE FACT THAT molded plastic golf tees fit snugly into the holes of Masonite Peg-Board panels makes it possible to set up a variety of production control boards quickly on plant floors with these materials.

Numerals for the days of the month can be cut out from any convenient calendar and pasted over vertical rows of holes across the top of the board. Gummed or pressure-sensitive labels can be used at the left side of the board for horizontal rows representing jobs in production. Vertical strips of red Scotch tape can be used to represent delivery dates of jobs. Other colors of tape can be used for various intermediate stages of a contract. The tees can be inserted to indicate completion dates.

Filed-Edge Test Clips Cut Enamel Insulation

KNIFE-EDGED BRASS test clips (a modification of the Rapid test clips made by Rapid Specialties Co., Chicago, Ill.) are used by Lenkurt Electric Co., San Carlos, Calif., to cut through heavy enamel insulation on lead wires. This obviates a separate lead-stripping operation in the testing of certain components.

▶ **Modification**—Normal brass test clips were modified by turning the tips of one of the blades at right angles to the bases of the blades, then filing the inside edges. When enameled lead wires are slid into the modified clips, the sharp and roughened inside edges of the

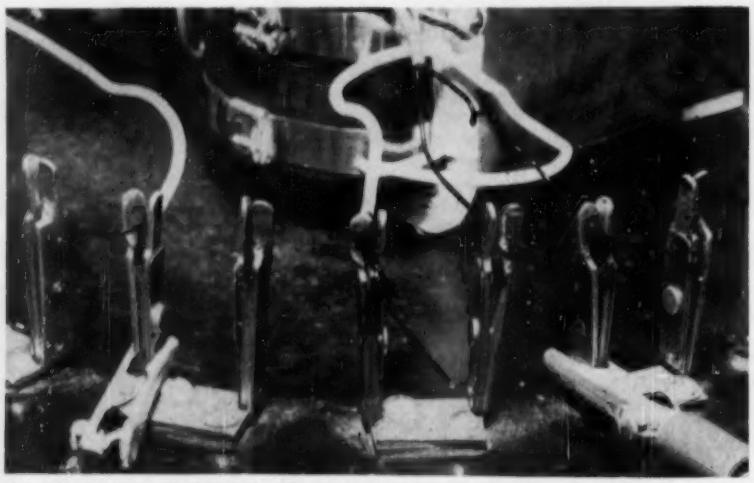

Brass test clips modified to eliminate lead-stripping operation. One blade of each clip is twisted at right angles to the other and the inside edge is sharpened and roughened by filing. When insulated lead is inserted, teeth cut through enamel

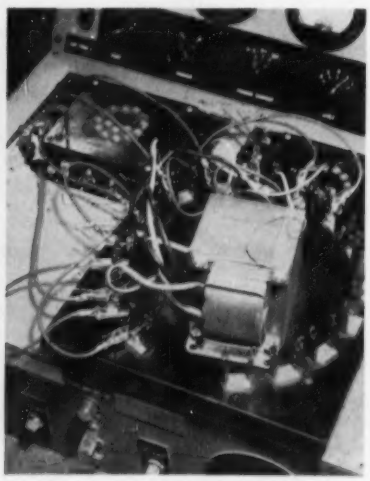

Testing of power transformer, using modified test clips for convenient lead connections without stripping insulation

going...

going...

gone!

KESTER "44" RESIN, PLASTIC ROSIN AND "RESIN-FIVE" FLUX-CORE SOLDERS owe their production line popularity to the simple fact that they provide the exactly right solder for every soldering application. It's not difficult to realize why Kester is consumed so rapidly . . . because of its great adaptability to so many different soldering operations.

***SEND TODAY** for Kester's new 78-page informative textbook "SOLDER . . . Its Fundamentals and Usage."*

KESTER SOLDER

COMPANY **4204 Wrightwood Avenue, Chicago 39, Illinois; Newark 5, N. J.; Brantford, Canada**

right-angle blades cut through the enamel insulation and make contact.

▶ **Application**—In the transformer department the clips are mounted on a board in a ring large enough to enclose reactors and power transformers, which are tested prior to canning and mounting of header boards. Before development of the modified test clips, the department relied on an acid bath to strip enameled leads for this test operation.

Steel Pails Replace Spools for Shipping Magnet Wire

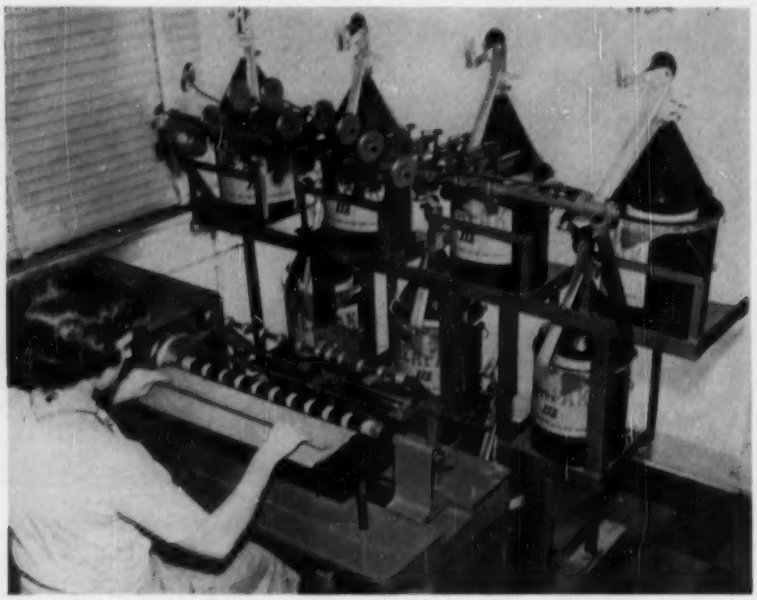

Coil-winding machine pulls wire directly out of steel pails, each holding as much wire as ten 6-inch spools. Only modification needed on machine was mounting of plastic guide cone over each pail

New pail holds 100 lb of magnet wire, random wound around 7-inch fiber core fitting over raised part of bottom

STEEL PAILS solve the problems of packaging, shipping and dereeling magnet wire. Use of the pail as a wire container results in manufacturing economies, simplifies material handling, eliminates a complete bookkeeping phase and minimizes transit and storage damage for the wire itself.

The steel pail was developed cooperatively by Jones & Laughlin Steel Corp. (Container Division, 405 Lexington, New York, N. Y.) and the Rea Magnet Wire Company, Inc., of Fort Wayne, Indiana.

▶ **Advantages**—The wire pail reduces down-time of winding machines tremendously. A 6-inch spool holds 9 to 10 pounds of magnet wire, whereas the steel pail holds 90 to 100 pounds. Use of the wire pail gives a 90-percent reduction in down-time for reloading wire. Since many winding machines use several hundred pounds of wire in an eight-hour shift, the time-saving and economy are considerable.

The wire pail also eliminates the need for expensive, highly polished cast spools and the complicated bookkeeping associated with the handling of these spools. These spools require a deposit by the customer which is refunded when they are returned. After being returned, they must be inspected and reworked if damaged.

In contrast, the 26-gage steel pail is in itself an extremely rugged shipping container, yet its cost is

Pails are readily palletized for handling by fork truck and for trailer shipment

Setup for crimping covers on pails in one speedy operation at magnet wire plant

PROGRESS REPORT

After Thirty-Four Months...

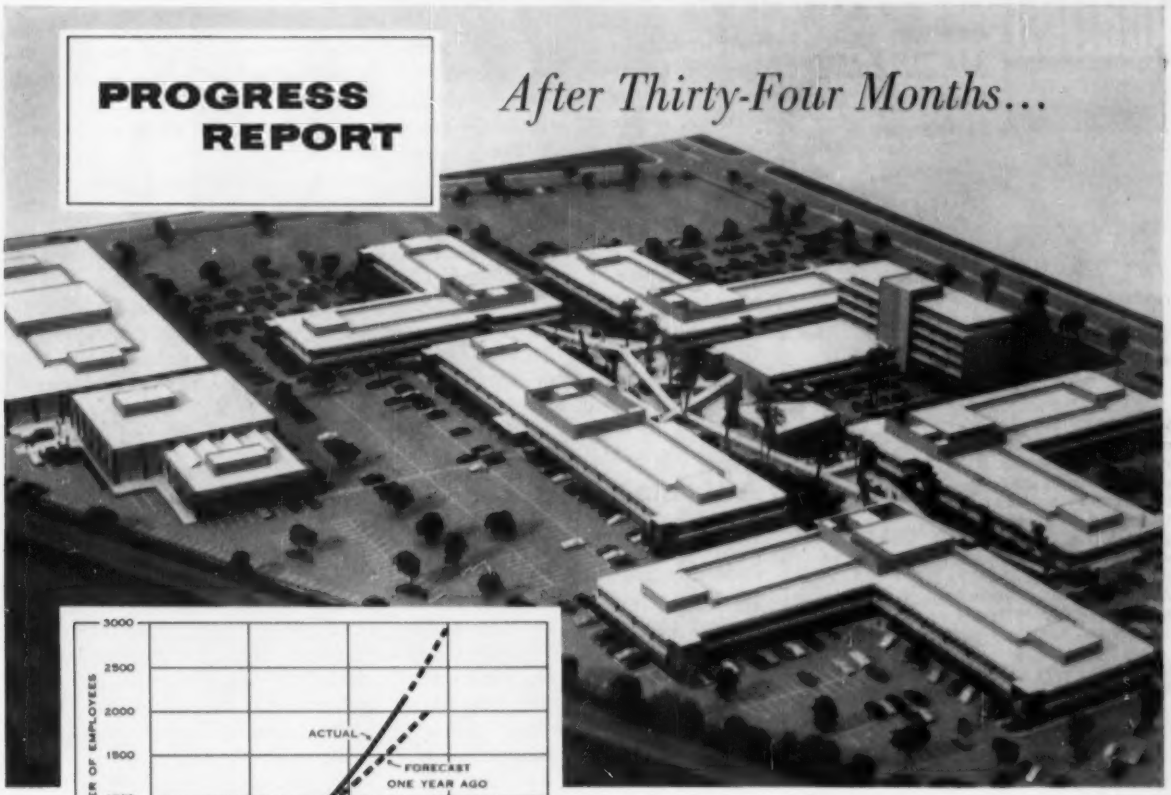

RESEARCH AND DEVELOPMENT PERSONNEL The above curve shows the growth in Ramo-Wooldridge personnel which has taken place since our Progress Report one year ago. A significant aspect of this growth is the increase in our professional staff which today is made up of 135 Ph.D.'s, 200 M.S.'s and 265 B.S.'s or B.A.'s. Members of the staff average approximately ten years' experience.

FACILITIES Within the past few months, construction has been completed at our Arbor Vitae complex, which now consists of eight modern buildings of 350,000 square feet, four of which are illustrated at the bottom of the page. Nearby is the R-W flight test facility, including hangar, shop, and laboratories, located on a 7-acre plot at International Airport.

To provide additional space for our continuing growth, construction has been started on an entirely new 40-acre Research and Development Center, located three miles from the Arbor Vitae buildings. The photograph above is of a model of the Center, which we believe will be one of the finest research and development facilities in the country. The first three buildings, now under construction, will total 250,000 square feet.

A second major construction program is underway on a manufacturing plant for quantity production of electronic systems. The initial unit of the plant, located on a 640-acre site in suburban Denver, Colorado, will be completed next spring and will contain approximately 150,000 square feet.

PROJECTS Our current military contracts support a broad range of advanced work in the fields of modern communications, digital computing and data-processing, fire control systems, instrumentation and test equipment. In the guided missile field, Ramo-Wooldridge has technical direction and systems engineering responsibility for the Air Force Intercontinental and Intermediate Range Ballistic Missiles. Our commercial contracts are in the fields of operations research, automation, and data processing. All this development work is strengthened by a supporting program of basic electronic and aeronautical research.

THE FUTURE *As we look back on our first three years of corporate history, we find much to be grateful for. A wide variety of technically challenging contracts have come to us from the military services and from business and industry. We have been fortunate in the men and women who have chosen to join us in the adventure of building a company. We are especially happy about the six hundred scientists and engineers who have associated themselves with R-W. Their talents constitute the really essential ingredient of our operations. We plan to keep firmly in mind the fact that the continued success of The Ramo-Wooldridge Corporation depends on our maintaining an organizational pattern, a professional environment, and methods of operating the company that are unusually well suited to the special needs of the professional scientist and engineer.*

The Ramo-Wooldridge Corporation

5730 ARBOR VITAE ST. • LOS ANGELES 45, CALIF.

marion
advancement in instrument design

new MEDALIST* null indicator



readable
wide range sensitivity

Modern MEDALIST design provides far greater readability and modern styling in minimum space. Unique core and magnet structure provides expanded sensitivity at null point and sharp attenuation of sensitivity as pointer departs from null point. Interchangeable with ASA/JAN 2½" sizes. Standard and special colors. Engineering data on request.

*T.M. Reg. U.S. Pat. Off. U.S. & Foreign Patents

marion meters
marion electrical instrument company
GRENIER FIELD—Manchester, N. H., U.S.A.
Copyright ©1956 Marion

Visit MARION at Booth 738 at Wescon Show, Los Angeles, August 21-24

Earn Extra Income in MOBILE-RADIO MAINTENANCE!

It's now a big business (650,000 installations) . . . fast-growing (70% increase just last year) . . . specialized . . . and high-paying!

Learn how to turn this opportunity into cash—write today for free booklet "HOW TO MAKE MONEY IN MOBILE-RADIO MAINTENANCE!" It's published as a service to radio engineers by Lampkin Laboratories, Inc., manufacturers of the well-known 105-B Micrometer Frequency Meter and 205-A FM Modulation Meter.

LAMPKIN LABORATORIES, INC.
Instruments Div., Bradenton, Fla.

At no obligation to me please send "HOW TO MAKE MONEY IN MOBILE-RADIO MAINTENANCE."
Name
Address
City State

Want more information? Use post card on last page.

low enough to permit use as a no-deposit, no-return item. The welded seams of the pail are perfectly smooth, providing an inner surface which cannot injure the delicate insulation.

▶ **Dereeling**—The heavier sizes of magnet wire down to No. 14 have been dereeled from the pails at speeds up to 5,000 feet a minute, by pulling directly out of the top of the pail. To facilitate dereeling at speeds in excess of 2,000 feet a minute, a metal or plastic cone with a nylon guide is placed over a pail after loading on a winding machine.

A deep-drawn bottom on the pail accomodates a fibre core around which the wire is coiled. Metal bails and wooden grips facilitate handling. The design permits safe staking and palletizing. Pallets of 18 pails, totaling 1,800 pounds, are strapped together and efficiently loaded by fork truck into trailers. The pallets are unloaded in the same manner at the customers' plants.

Automatic Grinder for Ferrite Yokes

FOUR-SEGMENT FERRITE cores for deflection yokes of color television picture tubes are automatically ground to desired dimensions, finish and flatness in an RCA plant at a production rate of one piece every 3 seconds, on a special automatic three-section precision segment grinder built for the purpose by The DoALL Co. of Des Plaines, Ill.

The deflection yoke is made of four coils, used with a core molded in four segments to provide the desired electrical characteristics. These segments are molded from a special ferrite mix, then sintered by firing at high temperature, after which they are hard enough to cut glass.

To get maximum efficiency from

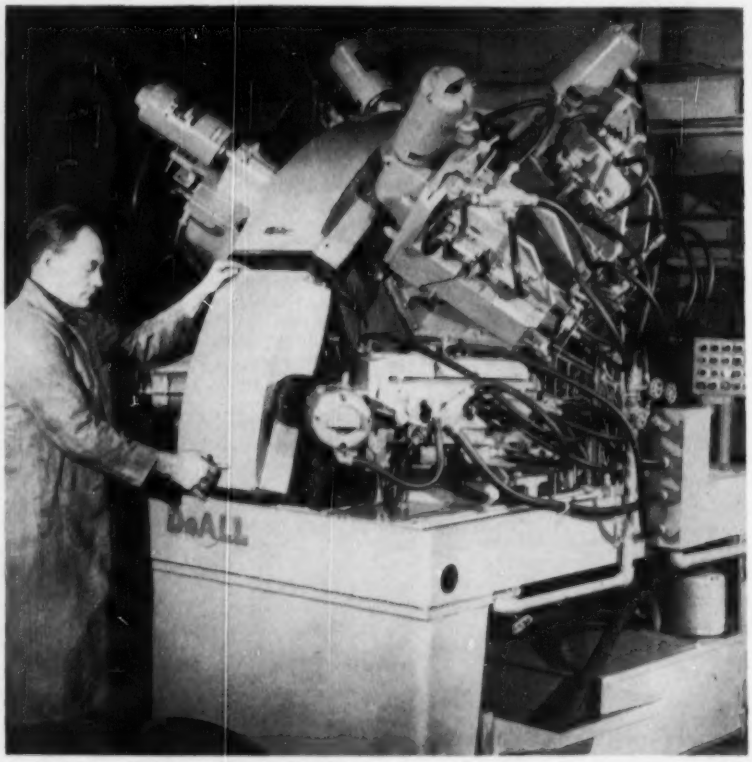

Special twin-spindle, three-station grinder for color tv deflection yoke segments. Turntable with holding fixtures passes vertically between pairs of motor-driven grinders, first pair of which are between arms of operator here

FREE

CHASE BRASS & COPPER CO. Dept. E-856
Waterbury 20, Conn.

Gentlemen:

Please send me your free 192-page Buyers Stock Book and Catalog No. 56.

NAME_____

FIRM_____

ADDRESS_____

CITY_____ STATE_____

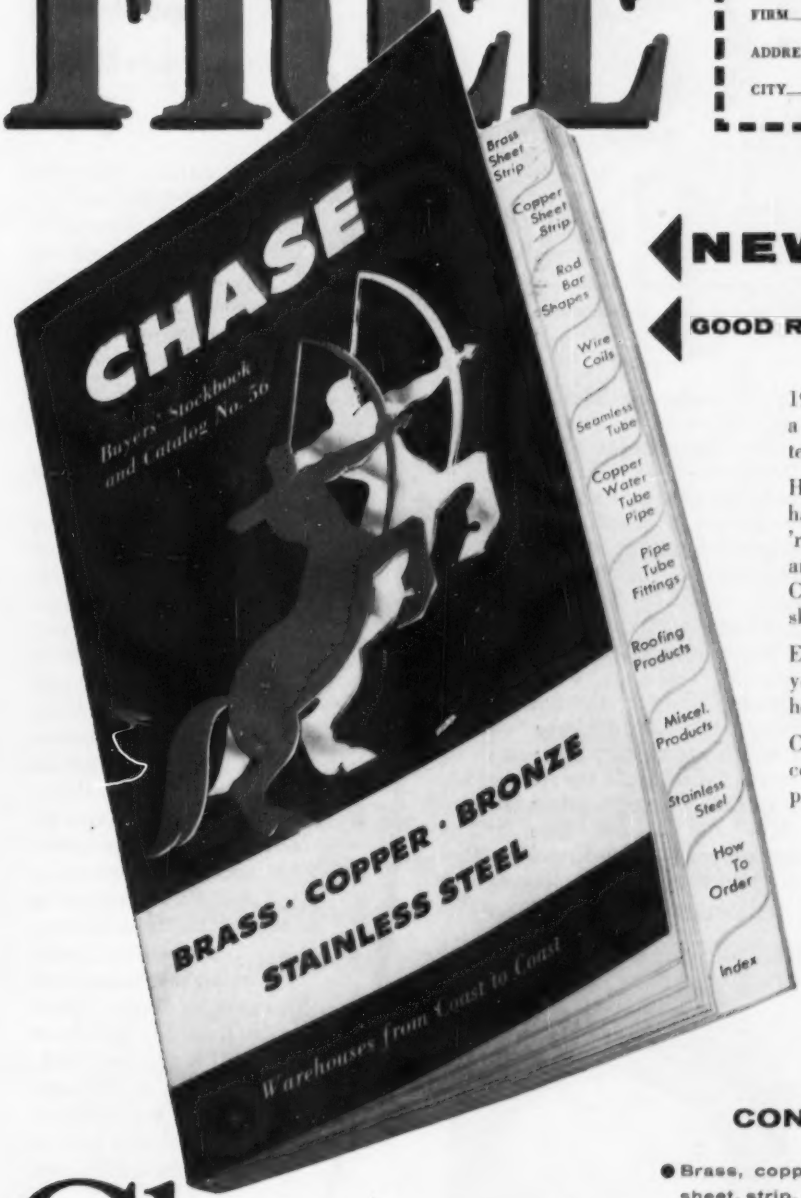

NEW EDITION!

GOOD READING FOR METAL MEN!

192 pages of illustrations and listings of a variety of products...sizes...weights...tempers...shapes!

Here's the latest enlarged edition of a handy desk-sized book you'll use all year 'round! It lists the brass, copper, bronze and stainless steel mill forms carried in Chase warehouse stocks—ready for quick shipment to you!

Everything about it is designed to save you time, from its thumb-indexing to a headache-saving *how-to-order* section.

Comes to you *free* from Chase. Get your copy by filling out and mailing the coupon above. Do it today!

CONTENTS INCLUDE:

- Brass, copper, bronze, stainless steel rod, bar, sheet, strip, wire, tube, pipe, angles, channels.
- MISCELLANEOUS ITEMS, TOO—bolts, nuts, washers, rivets, burs, nails, tacks, screws, cotter pins, bearing bronze, copper roofing products, wire cloth, insect wire screening, etc.

Chase

BRASS & COPPER CO.

WATERBURY 20, CONNECTICUT • SUBSIDIARY OF KENNECOTT COPPER CORPORATION

The Nation's Headquarters for Brass, Copper and Stainless Steel

Atlanta Baltimore Boston Charlotte Chicago Cincinnati Cleveland Dallas Denver Detroit Grand Rapids Houston Indianapolis Kansas City, Mo. Los Angeles Milwaukee Minneapolis Newark New Orleans New York Philadelphia Pittsburgh Providence Rochester St. Louis San Francisco Seattle Waterbury

Want more information? Use post card on last page.

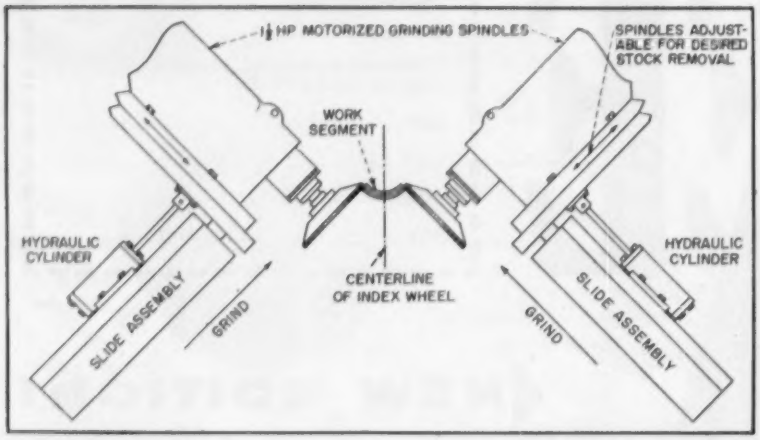

Travel paths of grinding heads with respect to loaded core segment on turntable, for grinding both surfaces of segment simultaneously

these cores it is necessary to grind the eight mating surfaces between the four segments accurately to produce an exact cylinder. The machine grinds both ends of the segment simultaneously, taking them down to the desired dimensions, finish and flatness in three fast, successive grinds. The finish is 16 microinches rms, and flatness is within 20 millionths across the entire surface. Planes of the ground ends are at 90 degrees to each other within 50 microinches over the ¼-inch end width.

▶**How It Works**—Molded ferrite segments are stacked in a vertical hopper, ends facing out from the machine. A hydraulic loader at the base of the hopper pushes the bottommost segment into a fixture, one of 36 mounted on the periphery of a 48-inch-diameter vertical motorized wheel called the index wheel. Upon seating the segment, the loader also pushes a lever that causes the fixture to clamp the segment securely in place.

When a part has been loaded, the wheel vertical indexes 10 degrees, moving the loaded fixture up toward the first pair of grinding spindles and moving the next empty fixture up to the loader. The work pieces are carried through three grinding stations. At each station, the index wheel stops and is accurately positioned by a hydraulically actuated locking pin. After the index wheel is securely locked, twin grinding spindles, moving hydraulically on hand-scraped ways, carry diamond-cup grinding wheels across the segment faces. At the first station, all but 0.035 inch is removed and at the second, 0.025 inch more. At the third station, the final 0.010 inch of stock is removed to bring the piece to size and generate an extremely smooth surface flat and square to 20 millionths.

After completing their pass, the grinding spindles withdraw to starting position, the index wheel rotates through 10 degrees and the loader seats another segment in an empty fixture while the spindles advance again on a grinding pass toward the adjacent fixture. The work piece is carried past the final position where an automatic ejector

End surfaces of four-segment core must be ground at 90 degrees to each other with 16-microinch finish and flatness within 20 millionths, to assure efficient magnetic circuit for deflection yoke

To the ENGINEER of high ability

AiResearch is looking for your kind of engineer. Through the efforts of engineers like yourself our company has become a leader in many outstanding aircraft accessory fields. Among them are: air-conditioning and pressurization, heat transfer, pneumatic valves and controls, electric and electronic controls, and the rapidly expanding field of small turbomachinery. AiResearch is also applying this engineering skill to the vitally important missile accessory field.

Our engineers work on the very frontiers of present day scientific knowledge. We need your creative talents and offer you the opportunity to progress by making full use of your scientific ability.

Positions are now open for aerodynamicists... mechanical engineers... physicists... specialists in engineering mechanics... electrical engineers ...electronics engineers.

For further information write today to Mr. Wayne Clifford, THE GARRETT CORPORATION 9851 S. Sepulveda Blvd., Los Angeles 45, California. Indicate your preference as to location between Los Angeles and Phoenix.

THE GARRETT CORPORATION
AiResearch Manufacturing Divisions

Want more information? Use post card on last page.

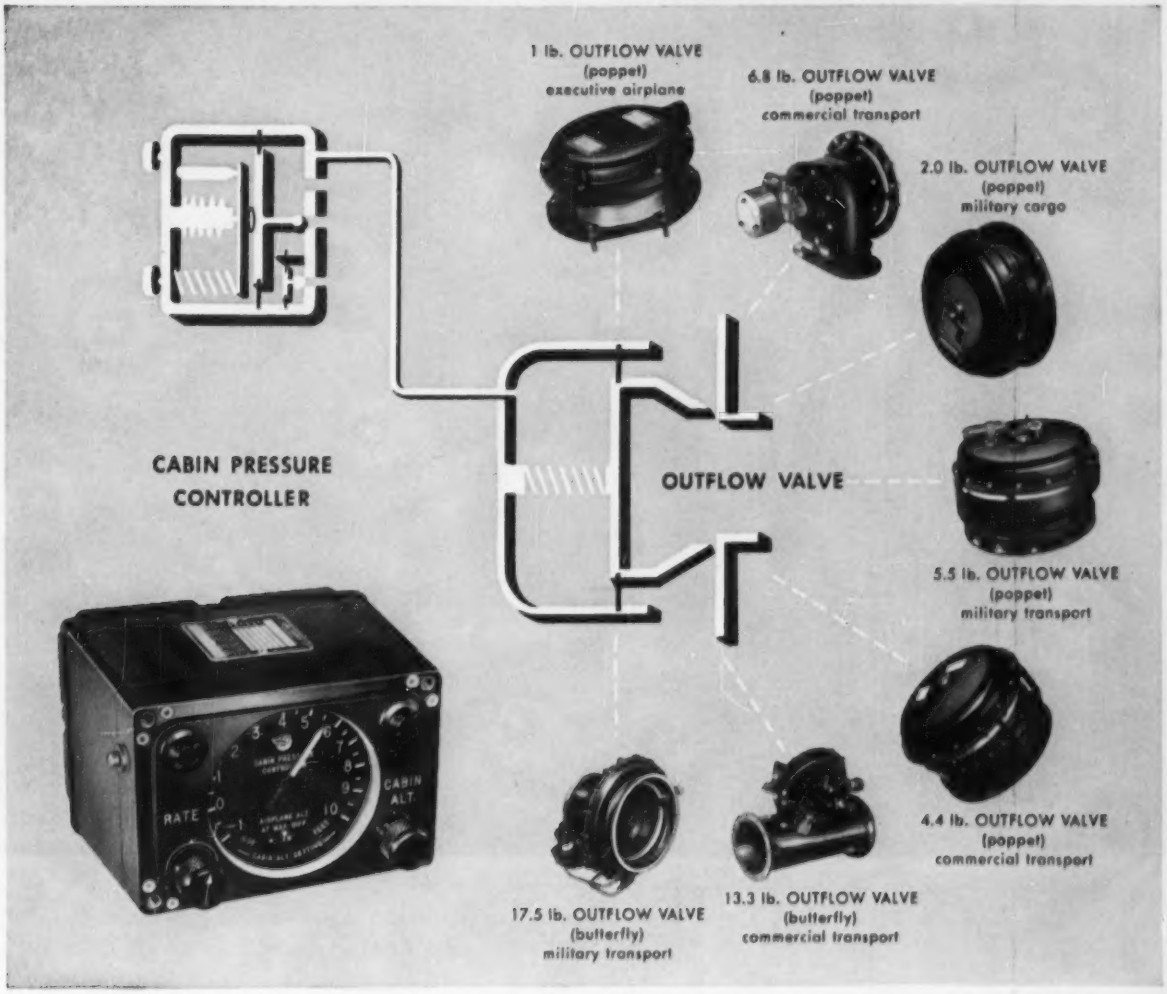

Two unit pressure control

FOR ALL SIZES OF AIRCRAFT CABINS

Simple, proved AiResearch pneumatic system operates independently...requires no outside power

The two elements of the complete AiResearch cabin pressure control system are a pneumatic controller and an associated outflow valve.

Only calibration is required to adapt the controller to various aircraft cabin pressure requirements. Minimum or no servicing is needed.

The outflow valve is a simple diaphragm and spring operated valve connected to the controller by a pneumatic line. It may also serve as a safety valve under emergency conditions.

An electrical or pneumatic override can be provided to give the pilot manual control whenever conditions warrant it.

This system is immediately available for all aircraft models. Your inquiry is invited.

Qualified engineers are needed now for unexcelled career opportunities. Write for information.

THE GARRETT CORPORATION

AiResearch Manufacturing Divisions

Los Angeles 45, California • Phoenix, Arizona

Designers and manufacturers of aircraft systems and components: REFRIGERATION SYSTEMS • PNEUMATIC VALVES AND CONTROLS • TEMPERATURE CONTROLS CABIN AIR COMPRESSORS • TURBINE MOTORS • GAS TURBINE ENGINES • CABIN PRESSURE CONTROLS • HEAT TRANSFER EQUIPMENT • ELECTRO-MECHANICAL EQUIPMENT • ELECTRONIC COMPUTERS AND CONTROLS

Want more information? Use post card on last page.

Dr. S. H. Browne (left), Assistant Director of Research, J. H. Carter, Associate Director of Research and Staff Scientists P. L. Taulbee and E. V. Stearns discuss weapon requirements for defense of continental United States.

SYSTEMS PLANNING

▲ ▲ ▲

the basic approach to missile development

The concept of systems planning has many degrees of interpretation and application. At Lockheed Missile Systems Division it is a primary field of endeavor that is emphasized as the optimum method of missile development.

As applied at Lockheed, it begins with operational requirements and covers every phase of the development of a complete system through preliminary design. Coordinated creative effort is required among scientists and engineers in virtually all fields.

A number of highly significant new activities will appeal to those possessing keen interest in systems planning. Inquiries are invited.

Lockheed **MISSILE SYSTEMS DIVISION**

research and engineering staff

LOCKHEED AIRCRAFT CORPORATION

VAN NUYS • PALO ALTO • SUNNYVALE • CALIFORNIA

WESCON SHOW

Los Angeles
August 21-24

A. A. Daush and senior members of the technical staff will be available for consultation at the convention hotel.
Phone DUnkirk 5-3286.

Significant developments at Lockheed Missile Systems Division have created new openings on our staff in the following fields:

- Instrumentation and telemetering
- Integration of ground and flight test data to evaluate dynamic performance
- RF propagation, microwave and antenna research and development
- Advanced electronics and radar systems
- Analytical systems analysis of guidance and control problems
- Design and packaging of electromechanical systems

NATIONAL TELEMETERING CONFERENCE

Los Angeles
August 20-21

L. A. G. ter Veen, R. B. Morgan and senior members of the technical staff will be available for consultation at the convention hotel.
Phone MIchigan 0442

Lockheed

MISSILE SYSTEMS DIVISION

drops it to a conveyor which carries it away from the machine.

▶ **Holding Fixtures**—In designing the 36 work-holding fixtures, several severe limitations were dealt with. The work piece of sintered powdered metal is extremely hard, brittle and rough. The pieces vary considerablly due to distortion that takes place during the sintering operation. The fixtures must withstand a bath of grit-laden coolant and be strong enough to support the work pieces under grinding loads. Their location on the periphery of a revolving wheel and the flood of grit-laden coolant makes either hydraulic or electrical actuation impractical.

The ultimate solution was a compact lever-actuated spring clamp. Locating pads in the fixture are made of hardened tool steel and are designed for easy removal and replacement. Sufficient adjustment has been provided to permit compensation for possible variation between runs of the sintered parts. The part is held in place by a leaf

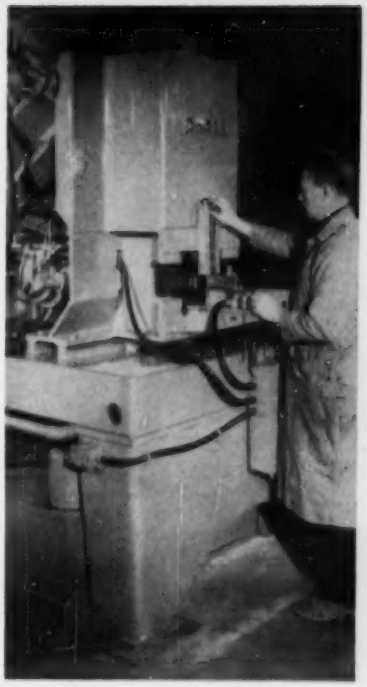

Loading core segments into hopper of automatic grinder. Completed segments drop into tote box on cart which can easily be rolled out from under grinder

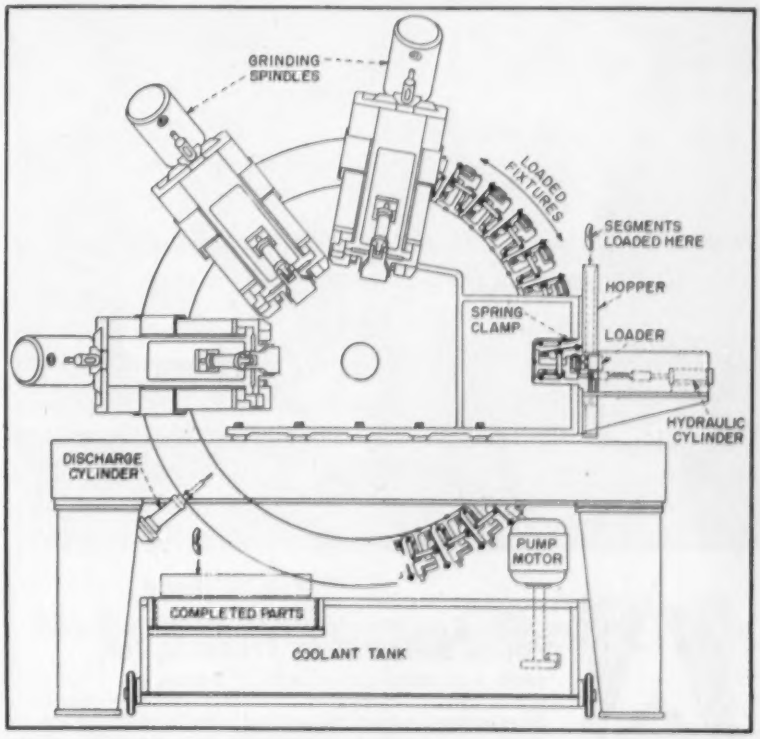

Side view of grinder, showing location of loading station at right, vertical turntable and discharge cylinder (left) that allows finished parts to drop into tote box on coolant tank cart under machine

ENGINEERED CABLE SYSTEMS BY *PACIFIC AUTOMATION* ARE RELIABLE SYSTEMS

SYSTEM DESIGN

In your own plant our engineers can specify and design cable and cable components to meet your exact SYSTEM requirements.

SYSTEM FABRICATION

At this modern cable plant we build custom-made cable with facilities for fabricating and molding multi break-out harnesses and attaching and "potting" connectors so that a complete SYSTEM hook-up is provided.

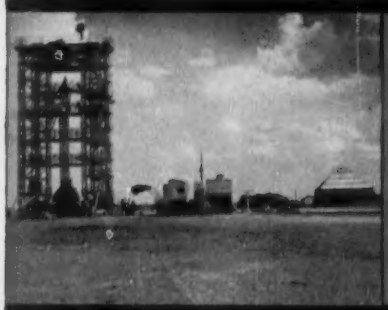

SYSTEM INSTALLATION

On-site installations in trailers and block houses of our custom-made cables and components are supervised by our field engineers to provide complete SYSTEM integration.

SYSTEM CHECK-OUT

Testing of on-site installations for circuitry by Pacific Automation Products engineers assures functional reliability of the electrical SYSTEM.

Write for Bulletin 158

Pacific Automation Products, Inc.
1000 AIR WAY, GLENDALE 1, CALIF.

Engineers and technicians will find a challenging and fascinating career with us. Your qualifications are welcomed.

spring to which are attached hardened fingers which contact the tapered lip of the segment. A simple link arm and wedge system, actuated by the hydraulic loader, locks the spring-mounted fingers against the piece. A second arm is actuated by the hydraulic discharge mechanism to push the locking wedge back, permitting the fingers to release their hold and drop the finished part upon a conveyor running through the hydraulic tank at the bottom of the machine.



Top view of holding fixture on turntable, showing position of loaded core segment. Lever protruding below is tripped by hydraulic piston at end of grinding cycle to release finished part

▶ **Index Wheel**—The wheel is indexed by a hydraulically actuated rack and pinion operating through a cone clutch which is also engaged hydraulically for the indexing stroke and disengaged to permit the rack to return.

As an indexing movement ceases, the locking locating pin moves under hydraulic action to engage the adjacent bushing in the index wheel. At the same time, another cylinder applies pressure against the opposite side of the wheel to support the wheel and thereby prevent any deflection that might be caused by the pressure of the locking pin against the wheel. The short taper of the pin and bushing makes these members self-centering.

Installing Pushbuttons on Auto Radio Tuners

FIVE BUTTONS at a time are pushed into position on the slides of an auto radio tuner with a special fixture developed by Radio Condenser Co., Camden, N. J. The operator places each button on the end of

In actual tests...

International Selenium Rectifiers

indicate life expectancy

of 100,000 hours!

RIQAP APPROVED

Manufactured under U.S. Army Signal Corps Reduced Inspection Quality Assurance Plan—RIQAP. International qualifies for this honor plan through years of constantly supplying products of high quality, equal to or better than the Accepted Quality Level established by the Government.


LIFE TEST REPORT CURVE
OPERATED AT: 28.75 V RMS PER CELL
208 MA/SQ. IN.
23 to 37°C AMBIENT TEMP.
13 to 24°C CELL TEMP. RISE
PERCENT OF INITIAL OUTPUT
HOURS OF OPERATION

PERFORMANCE CHART

The chart above graphically demonstrates the life expectancy of International selenium power rectifiers.

International manufactures a complete line of selenium and germanium power rectifiers, diodes, cartridges, photovoltaic cells—the widest range in the industry!

More than 40 individual tests conducted in International's Research Laboratories prove startling standards of life expectancy for your rectifier applications. International Selenium Rectifiers indicate continual operation for the equivalent of 12,500 working days—up to 100,000 hours!

This notable achievement is the result of creative imagination and productive skill used in International's Research and Development program. To assure the success of each project, all recognized methods of production have been incorporated in International's manufacturing facilities. In the production of selenium stacks, for example, *either* the pressed powder *or* the vacuum process can be used in accordance with the recommendations of the engineering department. Such versatility of production contributes to the most practical solution for your rectifier application.

76% of America's foremost rectifier users specify International. Under the U.S. Army Signal Corps Honor Inspection Program—RIQAP—countless thousands of rectifiers have been produced to provide answers to specific applications. If you have a rectification requirement or problem, write to the Application Advisory Dept. for an experienced and practical recommendation.

A WORLD OF DIFFERENCE ...THROUGH RESEARCH

International Rectifier

CORPORATION

EXECUTIVE OFFICES: EL SEGUNDO, CALIFORNIA · PHONE OREGON 8-6281

NEW YORK: 132 E. 70TH ST., TRAFALGAR 9-3330 · CHICAGO: 205 W. WACKER DR., FRANKLIN 2-3689

IN CANADA: ATLAS RADIO CORP., LTD., 50 WINGOLD AVE. W., TORONTO, ONTARIO, RU 1-6174

THE WORLD'S LARGEST SUPPLIER OF INDUSTRIAL METALLIC RECTIFIERS

For the laboratory
. . . shop . . . in the field

A PRECISION CALIBRATOR

provides accurate means for calibrating voltmeters, for oscillographs, and other voltage sensitive devices

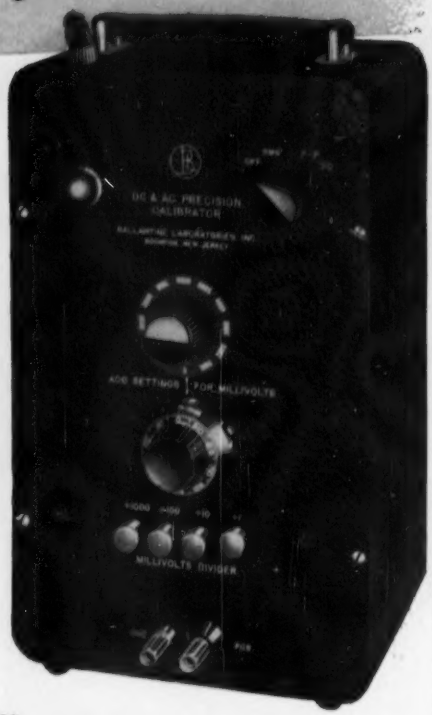

FEATURES

- 0-10V DC or 1000 cps RMS or Peak-to-Peak
- 0.5% long term accuracy 0.1% calibration accuracy
- No Meter to read
- Direct setting with high resolution
- Very rugged
- Simple to operate

PRECISION CALIBRATOR Model 420

Price: $325

The Model 420 Precision Calibrator is a variable DC or AC voltage source designed for calibration of voltage sensitive devices such as VTVMs, oscillographs, amplifiers, etc. Having high stability and accuracy of a secondary standard, the calibrator is rugged and simple to use even by shop personnel.

SPECIFICATIONS

OUTPUTS: 0 to 10 volts in 4 ranges. AC - 1000 cps ±1%, 0.25% distortion, 0.25% hum. Source impedance 4 to 18 ohms. DC - source impedance 0 - 4000 ohms.

ACCURACY: 0.5% over long time and any setting. Calibration data to 0.1% supplied.

STABILITY: 0.05% drift per hour after warm-up. ±10% line voltage variation affects output 0.15%; temperature effect 0.01%/°C.

Write for complete information

BALLANTINE LABORATORIES, INC.

100 FANNY ROAD, BOONTON, NEW JERSEY



Placing tuner in button-pushing fixture after setting a button loosely in position on each slide

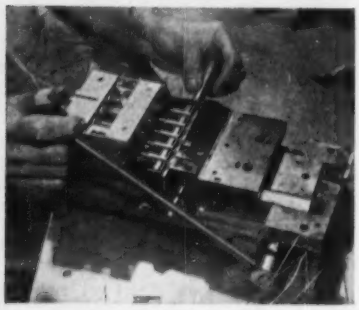

Operator inserts stiff metal rod through holes in fixtures and in slides of tuner to withstand thrust, then pulls lever forward with right hand to push buttons over slides

its slide with proper orientation, then drops the tuner into position on the fixture. Next, she inserts an icepick-like tool through matching holes in the five slides and the fixture to prevent transfer of pressure to the tuning mechanism. Pulling the operating lever of the fixture then brings forward a bar that pushes all five buttons firmly down on their slides in precise alignment.

▶ **Checking**—The tuner next goes to a checking position, where it is



Tuner in position on fixture used to detect bent slides

AMPEX TAPE RECORDERS FOR EVERY DATA RECORDING NEED

A complete line that works together with compatible characteristics and a consistent standard of excellence

VERSATILE



FR-100 – Overall performance specifications are the best of any magnetic tape recorder now in production. Modular design of the FR-100 provides broad scope that gives engineers and scientists a freedom to experiment and develop advanced data gathering techniques.

6 tape speeds 1⅞ to 60 in/sec; D-C to 100,000 cycle/sec. frequency response; choice of 3 recording methods on any track by plug-in interchangeable amplifiers.

MOBILE



800 – For airborne, shipboard or vehicular use, this recorder combines excellent performance specifications with ruggedness, compactness and light weight. It is also resistant to shock, vibration and environmental extremes. The 800's versatility is second only to the FR-100.

4 tape speeds; D-C to 30,000 cycle/sec. frequency response; choice of 3 recording methods on any track by plug-in interchangeable amplifiers.

DIGITAL



FR-200 – This magnetic tape transport fulfills the fast start-stop requirements of digital handling. It also provides a unique single loop threading feature which greatly simplifies tape change and minimizes chance for faulty threading by inexperienced personnel.

Tape attains full speed or full stop within less than 5 milliseconds; standard machine has 30 in/sec. tape speed and 7 tracks on ½-inch tape; other combinations on order.

REPEATABLE



S-359 – The endless tape loop handled by this transport serves a number of special needs: time delay, repeating signal for analysis, monitoring with "infinite" time limit, and various programming functions. Loop length is continuously variable from 3½ foot minimum to 25, 50 or 75 foot maximum.

Available for ¼, ½ or 1-inch tape; same tape speeds, heads and other characteristics as Ampex reel-to-reel recorders.

DEPENDABLE

300 SERIES – These are Ampex's long established line. For many applications where the great versatility and extremely high performance specifications of the newer FR-100 are not needed, a 300 series machine provides high quality performance and great reliability at less cost.

Available for various types of recording: 303 for pulse-width modulation; 306 for FM-carrier recording; 307 for direct recording; also combinations.

A mark of the Ampex leadership in magnetic tape recorders is the fact that every machine produced equals or exceeds all published performance specifications. A general tape instrumentation brochure and descriptive literature on various models are available on request. Write Dept. E-2788

District Offices: New York, Chicago, Atlanta, Redwood City, Dayton, Dallas, Silver Springs, Maryland (Washington D.C. Area)
Distributors: Technical Apparatus Co., Boston; Bing Crosby Enterprises, Los Angeles; Ampex-American in Canada

INSTRUMENTATION DIVISION
AMPEX CORPORATION

FIRST IN MAGNETIC TAPE INSTRUMENTATION

934 Charter Street • Redwood City, California

Kearfott FERRITE MICROWAVE COMPONENTS

KEARFOTT
FERRITE DUPLEXERS

Improvements in recovery time, reduction in insertion loss and excellent magnetron isolation are performance benefits offered by Kearfott Ferrite Duplexers – designed to meet specific radar space requirements.



A Faraday rotation type unit is illustrated. A type and configuration is available for your requirements.

KEARFOTT
FERRITE ISOLATORS

For superior performance KEARFOTT ISOLATORS *custom* designed to fit the exact combination of characteristics, available space and configuration for *your* radar system. For high or low power – for broad or narrow band use and with db ratios of isolation to insertion up to 150 to 1.

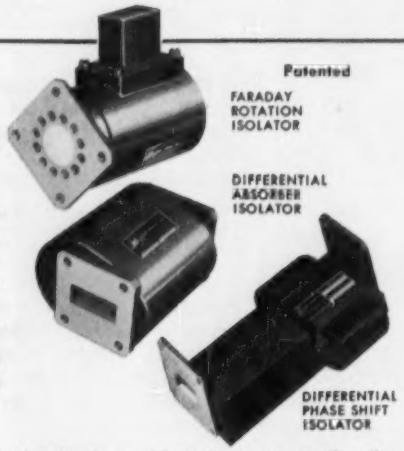

Kearfott offers 3 types of Ferrite Isolators to assure the optimum performance of all microwave applications.

KEARFOTT
FERRITE ATTENUATORS AND SWITCHES

Ferrites offer new circuit possibilities and product improvement for AGC and electronic switching of R.F. energy. Kearfott designs, precisely tailored to your most exacting requirements, assure maximum performance and reliability with minimum weight.



The 30 db variable attenuator illustrated, requires less than 3 watts control power.

WESCON
Booth #1416

Write for information on multi-purpose R.F. Test Sets. Available from stock – for X-Band, Ku Band and C Band

Kearfott's complete Microwave engineering and fabrication facilities are at your command. Inquiries on your Microwave problems will be treated in confidence.

Kearfott COMPANY, INC.
LITTLE FALLS, NEW JERSEY
WESTERN DIVISION
253 VINEDO AVE., PASADENA, CALIF.
A SUBSIDIARY OF GPC

SALES OFFICES

EASTERN OFFICE
1378 Main Ave.
Clifton, N. J.

MIDWEST OFFICE
188 W. Randolph St.
Chicago, Ill.

SOUTH CENTRAL OFFICE
6115 Denton Drive
Dallas, Texas

Window of sliding portion of fixture is here pushed over buttons. This slide must move freely over the buttons without touching them

loaded into a bench fixture having two locking clamps that insure precise positioning of the tuner body. The operator pushes a slide having an opening for each button over the buttons. If this slide can be moved back and forth freely over the buttons, the tuner will mount properly in the auto radio with the buttons moving freely through their escutcheon.

Induction Soldering on Conveyor Line

FEED-THROUGH terminals on the chassis of a vhf television tuner are automatically soldered into position in one passage down a slat-

Conveyorized induction soldering line for feed-through terminals. Conveyor is unloaded by operator at rear

AT THIS STEP . . . Specify

GE Textolite®

INDUSTRIAL LAMINATES

with superior properties and ease of fabrication they can be . .

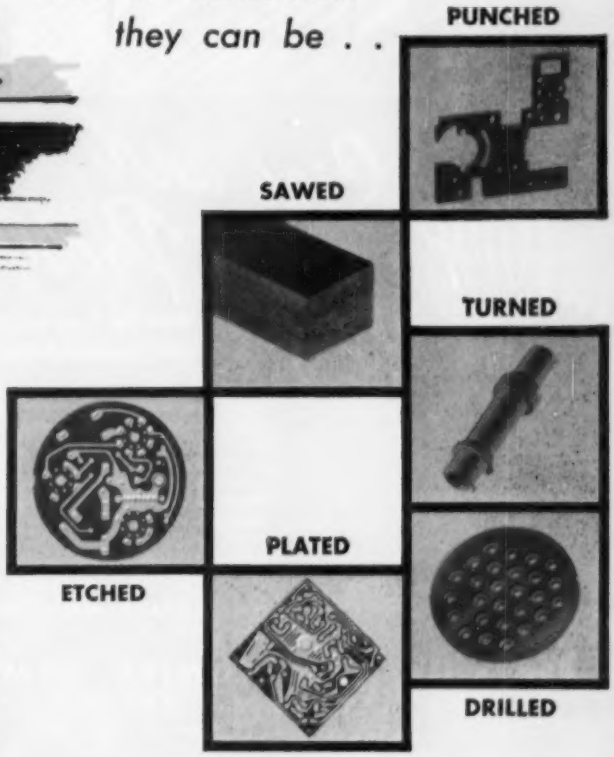

General Electric TEXTOLITE offers more than fifty grades of industrial laminates designed to meet the varied requirements of electrical and electronic manufacturers.

Available in the form of sheets, rods or tubes, G-E TEXTOLITE industrial laminates are uniform in color and appearance, and offer excellent electrical and mechanical properties. They consistently exceed NEMA standards.

In your present product, or a product on the drawing board today, there is no doubt an application for a versatile, economical G-E TEXTOLITE industrial laminate. A specialist from G-E Technical Service will be glad to help you select the proper laminate for your application. For complete technical data, send in the coupon today.

When the properties have to be right . . . Specify G-E Textolite®

Progress Is Our Most Important Product

GENERAL ELECTRIC

G-E Textolite® Laminated Sheets, Rods & Tubes
Irrathene® Irradiated Polyethylene • Silicone Insulation
Mica & Mica Mat Insulation • Insulating Varnishes
Varnished Cloth & Tapes • Sealing & Filling Compounds

General Electric Company
Laminated and Insulating Products Department
Section EL-86, Coshocton, Ohio

☐ Please send me complete technical data on G-E Textolite® industrial laminates for my reference file.

☐ Please have your representative call.

NAME .....

TITLE .....

STREET .....

CITY ..... ZONE ..... STATE .....

...Whip Size and Weight Problems

With No Loss of Stability and Dependability!

McCoy "McMite" lightweight quartz crystals extend the limits of electronic design. These little, hermetically sealed units pack regular size performance into minimum space. There is no sacrifice of stability or dependability. McCoy "McMites" are built-rugged to function at full efficiency even under extreme vibratory and shock conditions.

When weight and size are important, use McCoy "McMite" crystal units for lightness and compact size.

FREE ILLUSTRATED CATALOG. Write for your copy today.

mcCoy ELECTRONICS COMPANY
MT. HOLLY SPRINGS, PENNA.
Phone 376 and 377

SEE the "McMITE" and McCoy's complete line of quartz crystals and ovens at
BOOTH 1214
WESCON SHOW
AUG. 21-24



Fourteen McCoy "McMites" easily fit into a three-inch strip . . . ten of them are spaced on this two-inch diameter switch without crowding. Available in plug-in type (M-21) or with flexible wire leads (M-20) for frequencies from 3 mc. to 125 mc.

type conveyor line over which is mounted a two-turn oval work coil of a Lepel high-frequency induction heater. This conveyorized setup at Radio Condenser Co., Camden, N. J., gives a production rate of over 600 chassis units per hour, each having four feed-through terminals.

The units are loaded into slots cut into heat-resisting fiber fixtures bolted to the slats of the conveyor.

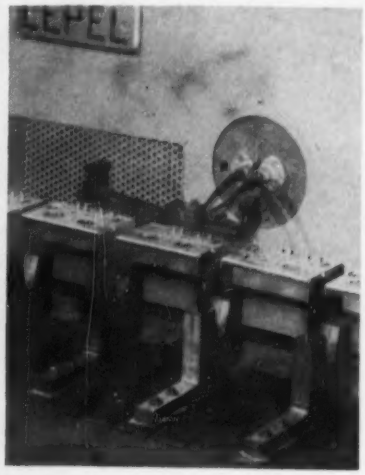

Method of mounting two-turn work coil for fusing solder preforms as conveyor moves feed-through terminals under coil

Operators standing alongside the conveyor, ahead of the work coil, load chassis units into the fixtures, then drop in the terminals and the doughnut-shaped solder preforms. One operator at the end of the conveyor takes care of unloading the soldered pieces. Control of conveyor speed is achieved by combining a gear box with a pulley and belt type of speed reducer driven by an electric motor.

Stapling Back Cover Hinge to Television Cabinet

A SINGLE operation of an air stapler attaches the hinge strap of the removable pressed wood back cover to the rear edge of each television cabinet on Emerson's assembly line in Jersey City, N. J. This strap is applied in accordance with underwriter requirements, to prevent

New Production Facilities for Tung-Sol Semiconductors

RESEARCH

Solid state devices for not-so-distant future applications command continuous study by Tung-Sol engineers. In this instance the purifying of silicon is under close scrutiny.

DESIGN

Efficiency and utility are among the foremost considerations of all Tung-Sol semiconductor blue-printing. Here the resistivity of single germanium crystals is being measured.



DEVELOPMENT

Ever alert to the intensified and varied demands made by transistorizing, Tung-Sol provides full-scale development of new semiconductor types. Here the latest techniques of germanium diffusion are explored.



PRODUCTION

A complete manufacturing division—with its own full-time engineering and management staffs—handles every phase of the critical production process from metal refining to finished product. Here germanium ingots are being sliced into 15/1000" blanks.



TESTING

100% testing—life, mechanical and electrical—characterizes the Tung-Sol manufacturing program. In this illustration, transistors are 100% checked for noise factor.

QUALITY CONTROL

Every step of Tung-Sol semiconductor manufacture is subjected to intensive quality control that permits no compromise with premium quality. Here transistors are life-tested under conditions in excess of their ratings.



TUNG-SOL®
SEMICONDUCTORS



For technical information write to Commercial Engineering Division

TUNG-SOL ELECTRIC INC., Newark 4, N. J.

SALES OFFICES: ATLANTA, COLUMBUS, CULVER CITY, DALLAS, DENVER, DETROIT, MELROSE PARK (ILL.), NEWARK, SEATTLE

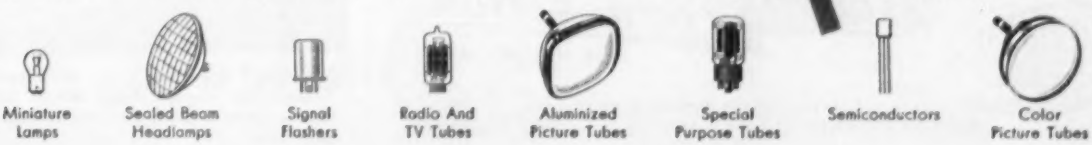

Miniature Lamps | Sealed Beam Headlamps | Signal Flashers | Radio And TV Tubes | Aluminized Picture Tubes | Special Purpose Tubes | Semiconductors | Color Picture Tubes

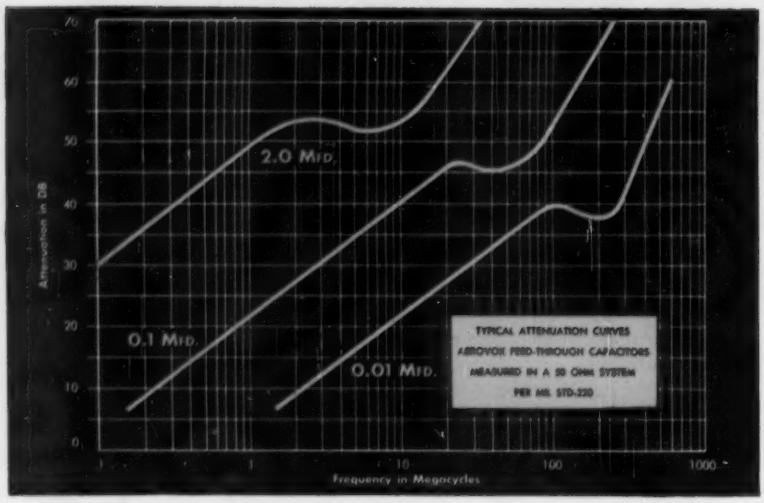

FEED-THRU INTERFERENCE SUPPRESSION

Capacitors

Designed as three-terminal feed-thru units in which the capacitor terminals, incorporated in the circuit, reduce to a minimum the inductance and resistance between capacitor element and system to be filtered.

These Aerovox Feed-Thru Interference Suppression Capacitors are especially useful as filters for power-supply and control-circuit conductors going to shielded high-frequency equipment. Maximum filtering effectiveness is achieved by minimizing mutual impedance between input interference sources and output terminal. Feed-thru units are mounted so that leads being filtered pass through shield, bulkhead or chassis, utilizing one of the several mounting styles for such purpose.

- Capacitor elements connected directly to line, and directly to ground through metal casing.
- Attenuation approaches theoretical ideal capacitor. (see curves above)
- Minimum inductance of connections through use of "plates" and "flat conductors" between capacitor and terminals.
- All types suitable for operating temperatures from −55°C. to +85°C.
- Specially designed terminals provide for use of keyed parts for maximum torque required for heavy conductors, eliminating dependence on friction.
- Wide selection of types and ratings.
- Hermetically-sealed tubular metal casing. Choice of mountings and terminals.
- Meet all requirements of Signal Corps Specifications MIL-C-11693

Write for further details. Let us collaborate and quote on these and other filtering or capacitor requirements.

AEROVOX CORPORATION
NEW BEDFORD, MASS.

In Canada: AEROVOX CANADA LTD., Hamilton, Ont.
Export: Ad. Auriema, Inc., 89 Broad St., New York, N. Y. • Cable: Auriema, N. Y.

Attaching cover hinging strap to back of television cabinet with air stapler. Below is new pressed cardboard type of cup for picture tube socket

servicing inside the set without first disconnecting the interlock. During servicing, the cover is swung upward to rest on top of the cabinet.

The woven cloth strap is threaded through a punched slot in the back cover at an earlier subassembly position and the strap ends are lightly stapled together to prevent the strap from falling out.

Simple Centrifuge Tests Missile Components

A SIMPLE CENTRIFUGE capable of testing electronic components under stresses up to 100 g, in the

Installing component on centrifuge. Transparent plastic hinged covers are closed before starting drive motor under centrifuge

ENGINEERS...
LOOK TEN YEARS AHEAD!

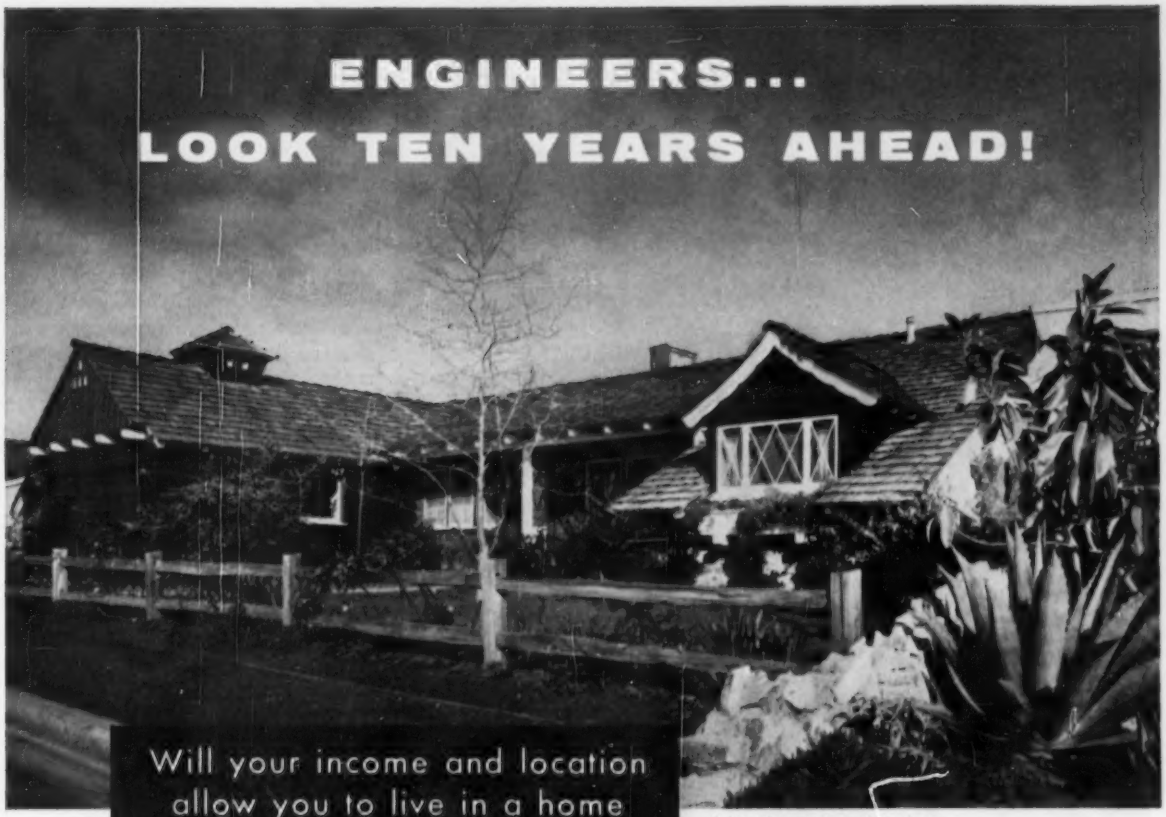

Will your income and location allow you to live in a home like this...spend your leisure time like this?

A Douglas engineer lives here

They can...if you start your Douglas career now!

Douglas has many things to offer the career-minded engineer!

...there's the stimulating daily contacts with men who have designed and built some of the world's finest aircraft and missiles!

...there's enough scope to the Douglas operation so a man can select the kind of work he likes best!

...there's security in the company's $2 Billion backlog of military and commercial contracts!

...and there's every prospect that in 10 years you'll be where you want to be professionally,

and you'll be in both the income level and geographical location to enjoy life to its full.

For further information about opportunities with Douglas in Santa Monica, El Segundo and Long Beach, California and Tulsa, Oklahoma, write today to:

DOUGLAS AIRCRAFT COMPANY, INC.
C. C. LaVene, 3000 Ocean Park Blvd.
Santa Monica, California

DOUGLAS **First in Aviation**

no need to over-tax your production facilities

Complex assemblies such as this Y-4 bombsight used in B-47 Stratojets are taken in stride at General Mills. This precision instrument has 3,433 parts, nearly 2,000 of them in this head-end assembly alone.

get precision production help in volume and on time

The critical shortage of competent technical men needn't handicap your operation. Right now our creative engineers and precision manufacturing facilities are at your service for subassemblies or complete units of:

- **precision electro-mechanical systems**
- **fine-pitch, instrument-type gear assemblies**
- **precision metal cutting, grinding, finishing**
- **industrial or military optical assemblies**

We can save you time, cut costs, eliminate scores of irksome production problems. Naturally you have the service of our full laboratory and environmental testing facilities.

Send for this Fact-Packed New Booklet — It describes and pictures our facilities, shows our products, names our customers. Write Mechanical Division, Dept. EL8, 1620 Central Ave., Minneapolis 13, Minn.

***MECHANICAL DIVISION OF* General Mills**

Hawthorne, Calif. guided-missile plant of Northrop Aircraft, Inc., is only 30 inches in diameter. Four components, each pair of equal weight, can be tested on the device at one time. Wires leading from test items go through slip rings to instruments which indicate functioning of the electronic devices under the extreme loads. Vernier scales beside the component mounts allow precise settings to determine the loads. The tests are made before parts are installed in the USAF Northrop SM-62 intercontinental Snark missile.

Tuning Capacitor Assembly Fixture

ROTOR plates for a four-gang tuning capacitor are swaged to the rotor shaft in a single operation of a large press in the Camden, N. J. plant of Radio Condenser Co. The required precision of positioning is achieved with the aid of a special fixture on which are four floating nests, each having individual machined recesses for rotor plates.

► **Loading**—The operator first inserts the serrated rotor plates in the appropriate end recesses of the nest, then fills the remaining recesses with plain plates. These drop in rapidly from a stack held in the hand.

The rotor shaft is next placed over the plates and tapped partly down into position, with a weighted soft fiber rod serving as a hammer,

Loading plates into fixture

Want more information? Use post card on last page.

Creative Electronics...

CHATHAM ELECTRONICS AT WORK



RADIAC DETECTOR CHARGER — extremely compact, requires no battery.

XENON RECTIFIER —75°C to +90°C.

AIRCRAFT CONVERTER — reduces space and wgt. requirements.

RUGGEDIZED RECTIFIER — withstands 980 G shock.

With new problems of unknown magnitude arising almost daily, creative efforts of the highest order are indicated. At Chatham your problems in the realm of electronic tubes, radar components, sonar equipment, nuclear instrumentation, infrared detection and related fields are in the hands of experienced research teams and production engineers. For full information on Chatham facilities, call or write. Bulletins on Chatham Tubes, Aircraft Conversion Equipment, Selenium Rectifiers and custom Equipment also available.

Chatham Electronics

DIVISION OF GERA CORPORATION

Livingston, New Jersey — Branch Offices in Principal Cities

DESIGNERS AND MANUFACTURERS OF ELECTRONIC TUBES, SELENIUM RECTIFIERS, AIRCRAFT CONVERSION EQUIPMENT AND CUSTOM COMPONENTS

COMPUTER POCKETSCOPE

by Waterman

MODEL S-14-C

EXTRAORDINARY STABILITY
HIGH LIGHT OUTPUT
TRACE EXPANSION

16 POUNDS

WESCON SHOW Booth No. 1003

ANOTHER EXAMPLE OF Waterman PIONEERING...

The Waterman Computer POCKETSCOPE Model S-14-C combines sound electrical performance, portability and operational simplicity. Designed primarily for computer field service in conjunction with a leading computer manufacturer, its applications to allied electronic fields are manifold. Operational simplicity with a minimum of inputs and controls greatly increases operational efficiency. Many improved electrical characteristics include high light output for viewing fast phenomena at low repetition rates; high trace stability for pulse position identification; and distortion-free trace expansion equivalent to 15" of sweep length with improved "parading" control. The oscilloscope incorporates practical frequency response (dc to beyond 700 kc) with a 70 millivolt per inch deflection sensitivity. Available accessory pre-amplifier probe increases signal sensitivity to 7 millivolts per inch. Fixed calibration voltage available. Amplifier design prevents visible image distortion eliminating all too common field error of misinterpreting distortion due to overload. Unique system of fixed calibrated, and variable uncalibrated, sweeps cover range from 20 microseconds to 2 seconds. Sweeps operative in trigger mode to meet requirements of typical computer and other electronic services. Synchronization from internal or external sources. Sync. lock out and clamping circuits maintain stable trace position for variations in sync. repetition rates. All 4 deflection plates and intensity grid are cathode ray tube accessible. All this high performance packaged in traditional POCKETSCOPE styling having case dimensions of 7" x 6" x 12" and weighing only 16 lbs. Consumes 85 watts at 117 volts, 60 cycles.

WATERMAN PRODUCTS CO., INC.

PHILADELPHIA 25, PA.
CABLE ADDRESS: POKETSCOPE

MEMO... Write for details today!

WATERMAN PRODUCTS

MANUFACTURERS OF

PANELSCOPE®
S-4-C SAR PULSESCOPE®
S-5-C LAB PULSESCOPE®
S-11-A INDUSTRIAL POCKETSCOPE®
S-12-B JANized RAKSCOPE®
S-12-C SYSTEMS RAKSCOPE®
S-14-A HIGH GAIN POCKETSCOPE®
S-14-B WIDE BAND POCKETSCOPE®
S-14-C COMPUTER POCKETSCOPE®
S-15-A TWIN TUBE POCKETSCOPE®
RAYONIC® Cathode Ray Tubes and Other Associated Equipment

®T. M. REG.

Tapping shaft down into position over loaded fixture

to insure that each plate is properly started into its groove on the shaft. The blanking die used for stamping out the individual plates is designed to provide a starting taper; this is required because the plates are thicker than the grooves in the rotor shaft. The result is an interference fit of from 2 to 5 ten-thousandths of an inch, as required to hold the plates rigidly in position.

▶ **Pressing**—With the fixture loaded, the operator grasps its handle and pushes it into position under the head of the press. Guide bars bolted to the bed of the press aid in positioning the fixture accurately for the final operation. Operation of the press first serves to bring down heavy rubber pressure pads that hold the plates firmly

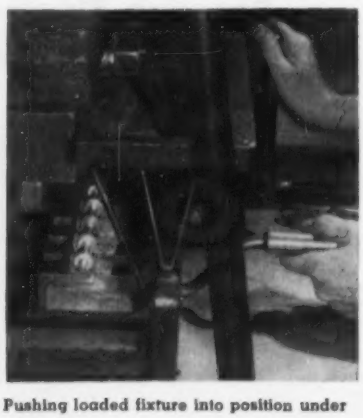

Pushing loaded fixture into position under press

Styroflex Coaxial Cable

Goes to Sea With the U. S. Navy!

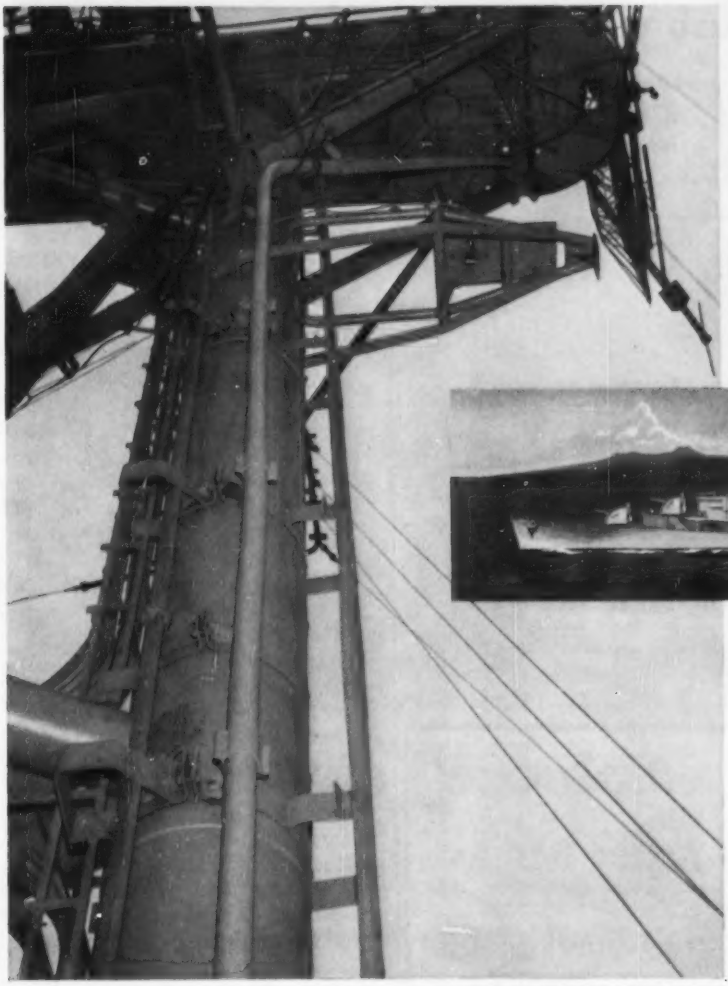

PHOTO COURTESY OF U. S. NAVY

During the overhauling of the U. S. S. Hank, the Navy Department installed 3⅛" 50 ohm Styroflex coaxial cable as the transmission line in the ship's SRa air search radar system.

Since this installation, results show that positive identification of air targets has been made at *twice the distance* possible before Styroflex was put into service on the ship.

Other Styroflex qualities which helped determine its selection by the Navy include its ease of installation, resistance to shock from gunfire and stable electrical characteristics.

Perhaps Styroflex can answer your particular transmission problem, too. Inquiries are invited by our engineering staff. See us in Booth 406 at the WESCON Show

PHELPS DODGE COPPER PRODUCTS CORPORATION

300 PARK AVENUE, NEW YORK 22, N. Y.

now available from STANCOR

STOCK SELENIUM RECTIFIER TRANSFORMERS

for use with popular brands of

STOCK selenium rectifiers

These new Stancor Transformers were specifically designed to operate in Full-Wave Center-Tapped or Bridge Type power supply circuits, with the most popular size stock selenium rectifiers.

Designed for 117V 50-60 cycle operation, the transformers may be satisfactorily operated at 400 cycles.

They are recommended for all high current—low voltage applications. Variable tap arrangements permit an almost unlimited choice of voltages from 3.3V DC to 63.0V DC, up to 22.5 Amperes, DC, depending on the particular transformer the user selects.

These transformers may be used to heat tube filaments where filaments are not subject to any high voltage stresses.

Stancor selenium rectifier transformers are in stock for immediate delivery from your Stancor distributor.

WRITE FOR FREE BULLETIN 518 listing detailed information on the complete line of Selenium Rectifier Transformers.

TYPICAL OUTPUT VOLTAGES (Stancor Transformer RT-201)



FULL-WAVE C.T.



FULL-WAVE BRIDGE

RT-201		Output 2.0 A. D.C.				Output 1.25 A. D.C.			
		Resistive Load		Capacitive Load*		Resistive Load		Capacitive Load**	
Input 117vac Term. No.	Connect Term. No.	Secondary Volts AC	Output Volts DC	Secondary Volts AC	Output Volts DC	Secondary Volts AC	Output Volts DC	Secondary Volts AC	Output Volts DC
1–2		29.4	11.2	28.8	13.8	28.5	23.0	27.9	30.0
1–7	2–6	26.0	9.8	25.7	11.7	25.4	20.0	25.1	26.4
1–6	2–5	23.0	8.4	22.7	9.9	22.3	17.3	21.8	22.2
1–7	2–5	20.9	7.4	20.8	8.6	20.2	15.4	19.8	19.7
1–3		19.4	6.7	19.1	7.6	18.6	13.9	18.2	17.6
1–7	3–6	17.8	6.1	17.6	6.7	17.2	12.8	16.8	15.7
1–6	3–5	16.3	5.3	16.1	6.0	15.7	11.2	15.2	13.8
1–7	3–5	14.9	4.7	14.8	5.3	14.3	10.3	14.1	12.4
1–4		14.2	4.4	14.2	5.0	13.7	9.7	13.5	11.6
1–7	4–6	13.4	4.0	13.3	4.4	12.7	8.8	12.5	10.4
1–6	4–5	12.4	3.6	12.4	3.9	11.7	7.9	11.7	9.5
1–7	4–5	11.7	3.3	11.7	3.5	11.1	7.4	11.1	8.7

*1000 MFD. ** 500 MFD.

Export Sales: Reburn Agencies, Inc. 431 Greenwich Street, New York 13, N. Y.

CHICAGO STANDARD TRANSFORMER CORPORATION

3501 WEST ADDISON STREET CHICAGO 18, ILLINOIS

Checking assembled rotor with special feeler gage

down in the recesses of the fixture. Next, a die with semicircular recesses comes down over the rotor shaft and drives the shaft home.

As the press retracts, it brings up a bar under the press table, which in turn pushes steel pins up through the fixture so that they bear against the rotor shaft and thereby serve to push the finished assembly out of the fixture. Portions of the head of the press are still holding down the fixture during this ejecting operation.

When the press is all the way up, the operator pulls out the fixture, lifts out the assembled rotor by hand and reloads.

A special gage is used to check for proper positioning of the rotor shaft. This gage has a U-shaped channel, with the ends of the U resting on the rotor plates and with the sensing rod of the gage resting on the top of the rotor shaft. The gage is easily calibrated by setting it on a steel block machined for the purpose, having a raised central portion corresponding in height to the desired projection of the rotor shaft above the plates. Rotor swage depth must be within 0.002 inch of specifications and alignment of rotor sections within 0.005 inch.

Transistor Can Welder

PROTECTIVE METAL CANS are welded over tiny transistor assemblies with a few cycles of 60-cps power in a simple yet precise resistance welder

"Bellows Action"* gives you 100% printed circuit board contact

Actual photograph of single and dual "Bellows Contact."*

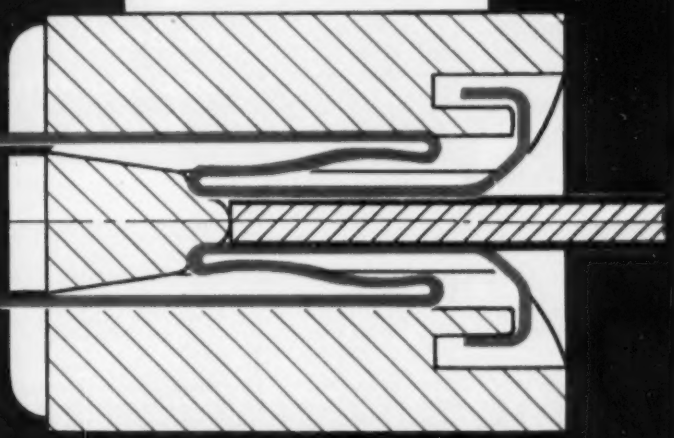

"Bellows Action Contact" cross-section shows printed circuit board inserted in contact.

Continental Connector "Bellows Action Contact"*

"Bellows" spring action grip clasps board firmly over 100% of printed circuit contact area. Gold-plated phosphor bronze spring retains tension, adjusts to oversized or undersized board while maintaining low contact resistance—less than 20 millivolts at 5 amps! On ⅛" board, for example, "Bellows Action" Contact grips .115" board as well as .135" board.

*Patent Pending

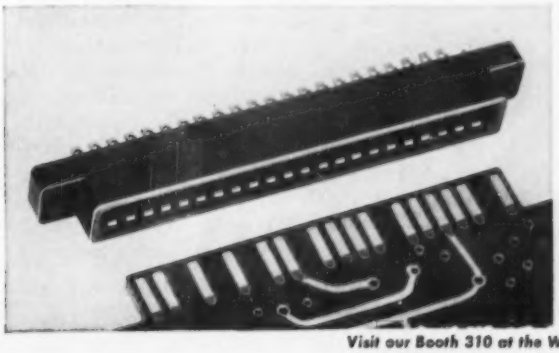

Printed Circuit connectors are available for ⅛", 3⁄32" and 1⁄16" boards . . . various molding compounds . . . 3 wiring styles . . . and 6 to 28 contacts.

Photo shows typical Continental Connector receptacles utilizing "Bellows Action Contacts." CONTACTS: 6, 10, 15, 18, 22, 28 contacts in single or double rows. WIRING STYLES: eyelet lug for soldering, wire wrap lugs, or 90° angle dip soldering direct to board. MOLDINGS: Mineral-filled Melamine and Plaskon reinforced (glass) Alkyd 440A. Other molding compounds on request.

Write for catalog to DeJUR-Amsco Corporation, 45-01 Northern Boulevard, Long Island City 1, New York

SPECIAL DESIGNS . . . OUR SPECIALTY

electronic sales division **DeJUR**

Visit our Booth 310 at the Wescon I.R.E. Show in Los Angeles

NEW! Microwave Development Laboratories

X-Band Ferrite Circulator

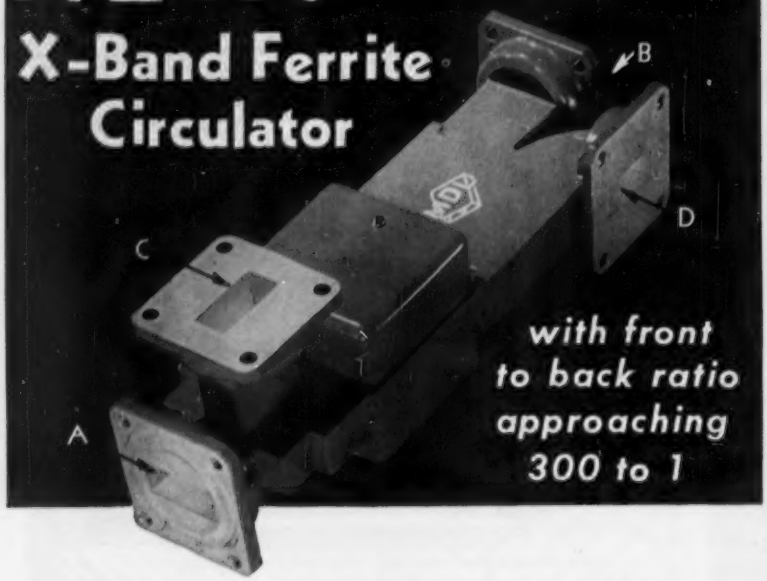

with front to back ratio approaching 300 to 1

This new Ferrite Circulator is a medium power, broad band microwave component developed around the non-reciprocal differential phase shift principle as outlined by Kales, Chait and Cakiotis. It is a high performance component with a front to back ratio approaching 300 to 1 and is ideal for such uses as a low-loss, broad band isolator, or in passive duplexing applications.

Power entering the Circulator is transmitted in sequence from one terminal to another. That is, power entering at "A" leaves at "B", while power entering at "B" leaves at "C". Power entering at "C" leaves at "D", while that entering at "D" returns to "A".

In addition to Model 601 illustrated, other configurations will soon be available.

Typical Characteristics

Frequency Range—8500-9600 mc
Isolation—30 db minimum
Insertion Loss—less than 0.2 db
Return Loss—30 db minimum
Input VSWR—1.2 maximum
Waveguide—RG-52/U-RG67/U
Flanges—UG/39U, 135/U at B, C, D
Input Terminal—UG-40A/U, UG-136A/U

Dimensions



Microwave Development Laboratories makes available a wide variety of standard and custom designed waveguide circuit components including Hybrid Junctions, Balanced Mixers, Balanced Duplexers, Compensated Invar Reference Cavities, Rotary Joints, Precision Cast E and H Bends, Waveguide Filters, Couplers, and Waveguide Assemblies.

Complete development and manufacturing facilities assure you of best results. Phone or write for complete details on the new Ferrite Circulator . . . or on other Microwave Components.

MICROWAVE DEVELOPMENT LABORATORIES, INC.
92 BROAD ST., BABSON PK., WELLESLEY 57, MASS.
telephone — WEllesley 5-6252 - 6253
DESIGN + DEVELOPMENT + PRODUCTION

See the latest developments at the WESCON Show, Booth 123.

Squeezing potting compound from lead-foil tube into transistor can. Filled cans are stored in self-stacking metal trays as at upper left

Placing transistor assembly in lower electrode of welder with tweezers. Welder output is indicated by counter, actuating arm of which is linked by string to moveable upper electrode of welder

setup used in the Lansdale and Spring City, Pa. plants of Philco Corp.

▶ **Potting**—To achieve the equivalent of a hermetic seal without actually evacuating the housing, a special potting compound is put into each can before assembly. This jelly-like material is purchased in toothpaste-type foil tubes having special nozzles for squeezing the material directly in to each tiny can in turn. Filled cans are set into holes drilled partly through metal trays, to prevent spillage when transferring the cans to the assembly position and to handle them through a vacuum bake process.

▶ **Assembly**—The filled metal can is pushed over the stem of a finished transistor and the assembly

Engineered to meet your specifications . . .

Stupakoff CERAMIC PARTS

The best way to get ceramic parts exactly as you want them, is to utilize Stupakoff's facilities for research, engineering and manufacture.

You can use our laboratory facilities to determine the best material for your application; our engineering staff to design components that will be most economical to produce, and that will assemble best in your equipment; our modern manufacturing plant to produce the items you need in the quantities you want; our inspection and testing facilities to assure the highest degree of uniformity and quality.

We are thoroughly familiar with various grades of Alumina, Cordierite, Forsterite, Magnesia, Steatite, Stupalith and Zircon. Parts may be plain, ground, metallized, or assembled. For electrical and electronic applications, we make ceramic parts for all voltages, frequencies and temperatures. We specialize in large production runs of ceramic parts made to close dimensional tolerances.

Use Stupakoff's facilities to make your products better, more dependable and more economically.

A few of literally thousands of designs of ceramic parts produced by Stupakoff for assembly into electrical or electronic devices.

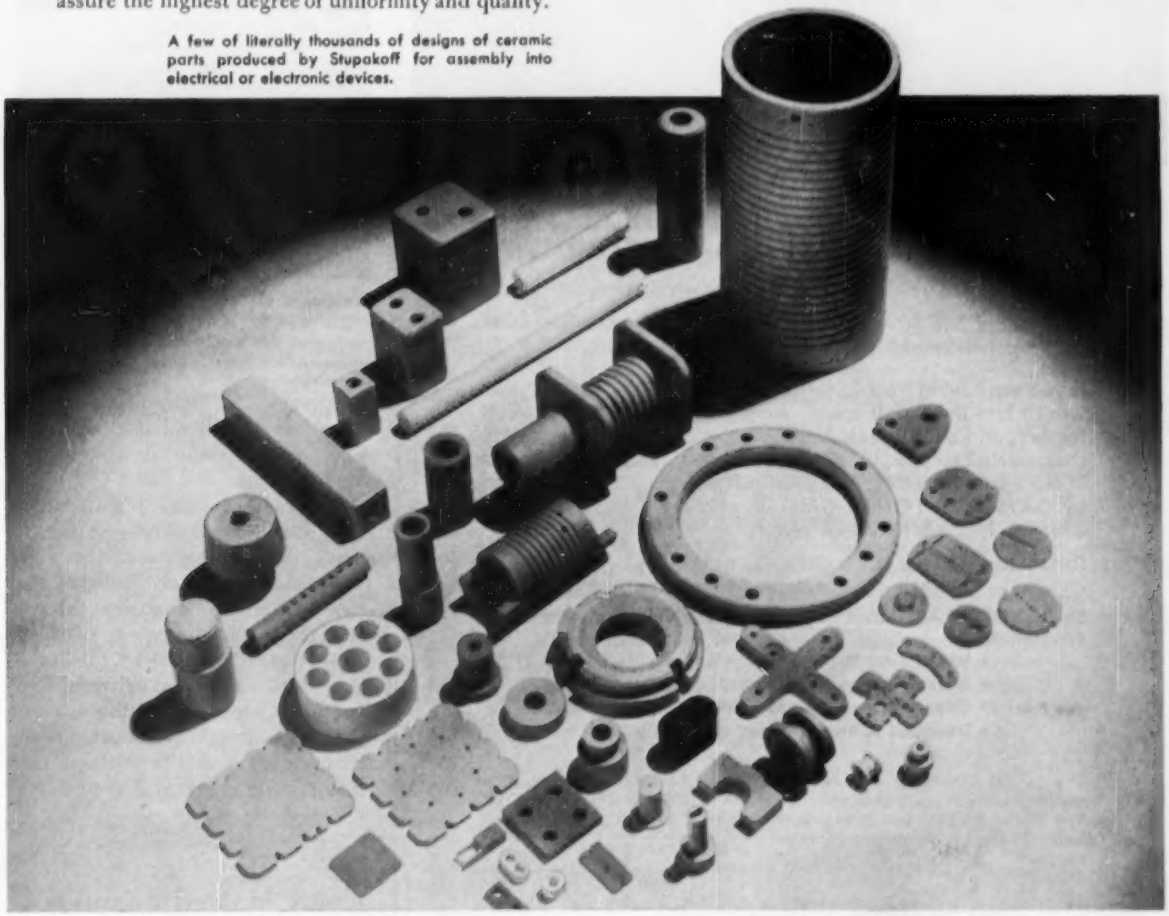

Stupakoff
DIVISION OF
The CARBORUNDUM Company

Write Dept. E
LATROBE,
PENNSYLVANIA

Want more information? Use post card on last page.

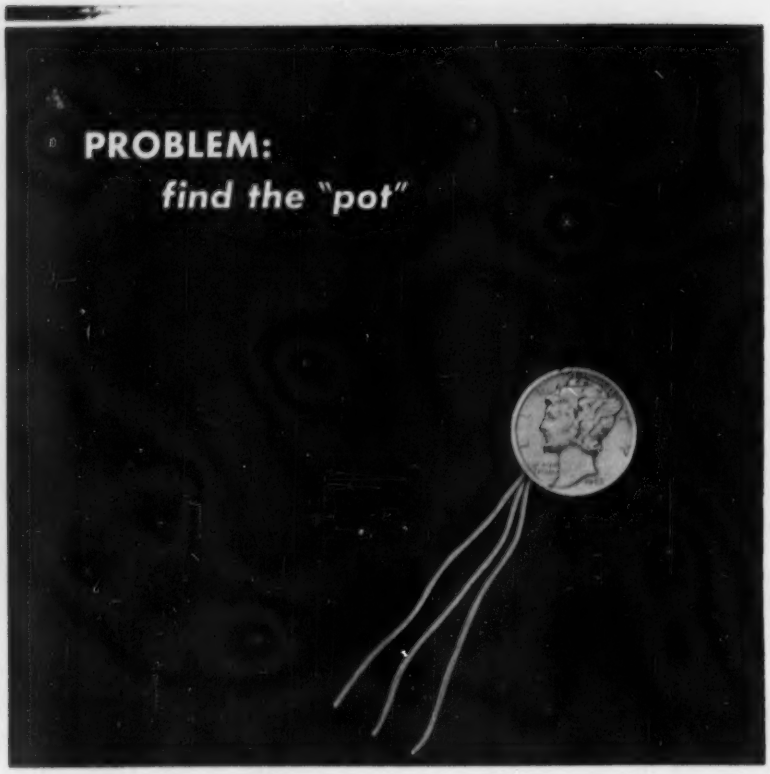

This is the "Tail" of A DAYSTROM "POT"

The Model 300-00—smallest, most ruggedly-accurate wire-wound potentiometer on the market!

If you are having trouble finding the right "pot," a "pot" that will fit into the tiniest space, weigh less than an overstuffed feather, and still provide unexcelled accuracy and resolution characteristics, you will want to know about the Model 300-00 sub-miniature, wire-wound potentiometer produced by DAYSTROM POTENTIOMETER, and now improved even over the high-performance original.

So **SMALL** and **COMPACT** it can easily be covered by a dime (3/16 inch thick). One half as large as its nearest competitor.

So **RUGGEDLY ACCURATE** it can be used for the most exacting applications.

- **High Power Rating**
- **Extremely Fine Resolution**
- **Operable Over Extreme Temperature Ranges**
- **Designed to stack (21 per cubic inch)**

The Model 300-00 is just one of the many production or custom-made potentiometers available from DAYSTROM POTENTIOMETER. The Model 300-00 and its big brother-the 303-00 (higher resistance values)—are available out of stock.

Openings exist for highly qualified engineers.

POTENTIOMETER DIVISION

Daystrom PACIFIC CORPORATION

11150 La Grange Ave. West Los Angeles 25, Calif.

A Subsidiary of Daystrom, Inc.

is inserted in a hole on a circular tote tray with the leads projecting down through the hole.

A loaded tray is brought to the welding position, where the operator picks up an assembly with tweezers and drops it into the tubular lower electrode of the welder. Pressing a foot pedal then brings down the upper tubular electrode and automatically initiates the welding cycle.

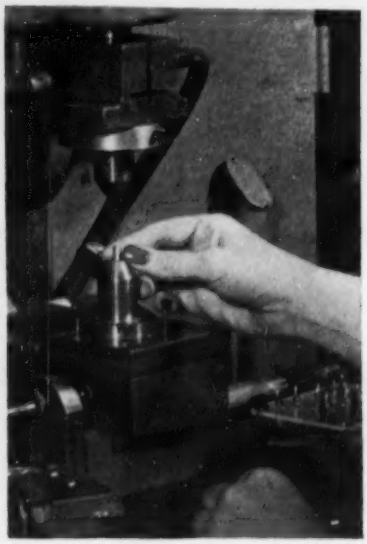

Closeup of electrodes on another welder being used for same purpose. Welding electrodes are easily changed to accommodate other sizes of transistors

Electrode pressure is maintained for a few seconds after welding, to conduct heat away from the weld. The weld is produced between the outward-flaring flanges of the can and the transistor stem. Perfect centering is achieved by maintaining close tolerances between base and can diameters and the holes in the electrodes. Copper-alloy electrodes give long life without corrosion while maintaining uniformity of welds.

Easily Molded Adapters Extend Test Bench Use

A SIMPLE adapter plug, consisting of two different standard Cannon disconnect plugs and a molded Plexiglas body, makes possible quick and efficient connection of

JUDGE FOR YOURSELF...

the merits of Kinney® compound high vacuum pumps . . . the most extensive line in the world!!

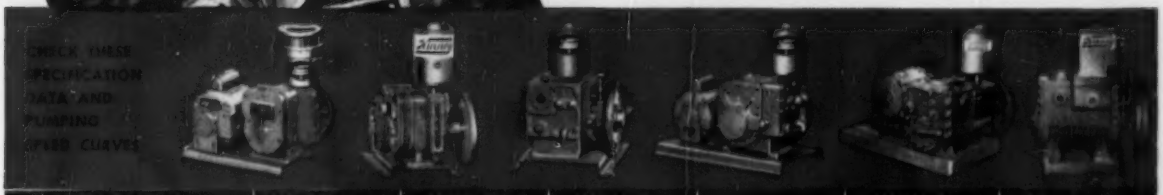

SPECIFICATIONS	MODEL KC-2	MODEL KC-3	MODEL KC-5	MODEL KC-8	MODEL KC-15	MODEL KC-46
Free Air Displacement . . .	2.0 CFM	3.0 CFM	5.1 CFM	8.2 CFM	15.2 CFM	46.0 CFM
Free Air Displacement . . .	56.5 Liters/min.	85.0 Liters/min.	144. Liters/min.	232. Liters/min.	430 Liters/min.	1300 Liters/min.
Free Air Displacement . . .	.95 Liters/sec.	1.41 Liters/sec.	2.4 Liters/sec.	3.9 Liters/sec.	7.2 Liters/sec.	21.7 Liters/sec.
RPM	755	1135	630	1000	525	500
Motor H.P.	⅛	⅓	⅓	½	1	3
Motor RPM (syn.)	1800	1800	1800	1800	1800	1800
Oil Capacity	6 oz.	6 oz.	1½ pt.	1½ pt.	2 qt.	1 gal.
Shaft Diam.	⅜"	⅜"	⅜"	⅜"	⅜"	1⅛"
Inlet Connection	¼" Screwed	¼" Screwed	1" Screwed	1" Screwed	2" Screwed	3" Screwed
Outlet Connection	None	¼" Screwed	1" Screwed	1" Screwed	1¼" Screwed	1½" Screwed
Net Weight, Complete . . .	70 lb.	78 lb.	140 lb.	148 lb.	300 lb.	585 lb.

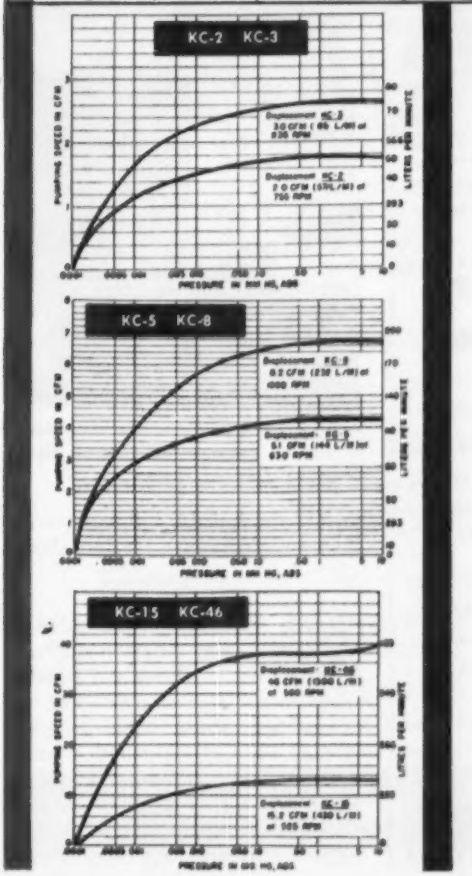

REVIEW THESE DESIGN FEATURES:

- Reliable High Vacuum (Cam and piston displacement)
- Rapid Recovery of Vacuum • Simple to Maintain
- Dynamically Balanced • Standard Small Motors
- Gas Ballasted (optional) • Economical
- Dependable • Compact, Proven Design

EVALUATE THE FACTS AND ACT TODAY!

There's a Kinney Vacuum Pump available for every purpose . . . in sizes from the 2 cu. ft. per min., ¼ HP unit to the 780 cu. ft. per min., 40 HP model . . . and constant research keeps adding to this line. Our engineers will gladly send recommendations on your particular vacuum equipment needs. Request Bulletin 403 for additional data or contact one of our competently staffed district offices . . . in Baltimore, Charleston, W. Va., Charlotte, Chicago (La Grange), Cleveland, Detroit, Houston, Los Angeles, New Orleans, New York, Philadelphia, Pittsburgh, San Francisco, St. Louis . . . or The International Sales Office, 90 West St., New York 6, N. Y.

KINNEY MFG. DIVISION
THE NEW YORK AIR BRAKE COMPANY
3565 WASHINGTON STREET • BOSTON 30 • MASS.
INTERNATIONAL SALES OFFICE, 90 WEST ST., NEW YORK 6, N.Y.

● Please send Bulletin 403 giving additional data on Kinney Compound Pumps

Name .....
Title .....
Company .....
Street .....
City ..... State .....

Want more information? Use post card on last page.

EIMAC HIGH VACUUM RECTIFIERS AND CLIPPER DIODES

TYPE	Plate Average Current MA	Plate Dissipation Watts	Plate Inverse Voltage	Filament Volts	Filament Amps
2-25A	50	15	25,000	6.3	3.0
2-50A	75	30	30,000	5.0	4.0
8020	100	60	40,000	5.0	6.5
2-150D	250	90	30,000	5.0	13.0
250R	250	150	60,000	5.0	10.5
253	350	100	15,000	5.0	10.0
2-240A	500	150	40,000	7.5	12.0
2-2000A	750	1200	75,000	10.0	25.0
2X3000F	3000	3000	25,000	7.5	51.0
*2X1000A	1250	1000	25,000	26.5	2.25

*For Clipper Diode Service only

If your specifications call for mercury vapor rectifier tubes, Eimac manufactures both half wave and full wave types.

Eimac's High Vacuum Rectifiers Handle Peak Inverse Voltages from 15,000 to 75,000 Volts

Used in standard rectifiers and special applications involving extreme ambient temperatures, high operating frequencies, high peak inverse voltages or production of high frequency transients, Eimac's broad line of high vacuum rectifiers and clipper diodes is the finest in the industry, both electronically and physically.

Superior exhausting techniques, high quality materials, clean electrode design and absence of internal insulators minimize chances of contamination and arc-over. These, and other production and design features, are assured by Eimac's high standards of quality control.

For additional information, contact our Technical Services Department.

Eimac

EITEL-McCULLOUGH, INC.
SAN BRUNO CALIFORNIA
The World's Largest Manufacturer of Transmitting Tubes

Assembled adapter plugs before molding, showing how two Cannon plugs are connected together with wires soldered to plug-ins



Molding setup, showing two-piece aluminum mold with mating pins and pouring hole. Liquid Plexiglas is poured from beaker into mold. Bracket and adjustable screw on right-hand mold hold plug firmly in machined recess of mold to prevent leakage of liquid Plexiglas

Pouring liquid Plexiglas into mold held in vise, while screw-on bracket holds plug tightly in end of mold

production control equipment to an electronic test bench for final checkout.

► **Bench Designed** — The adapter was developed by a liaison engineer in the Anaheim Division of Robertshaw-Fulton Controls Co. for use on its test bench, which consists of four rows of eight outlets each. All outlets in one row are identical, providing for multiple testing of production items. The four rows contain four different types of con-

RESERVE YOUR

FREE

COPY NOW!

GET THIS

NEW

Technical Reference Manual and Catalog on

MICRO BEARINGS

SMALL INSTRUMENT BALL BEARINGS

This brand new concept in bearing catalogs will help solve your design problems!

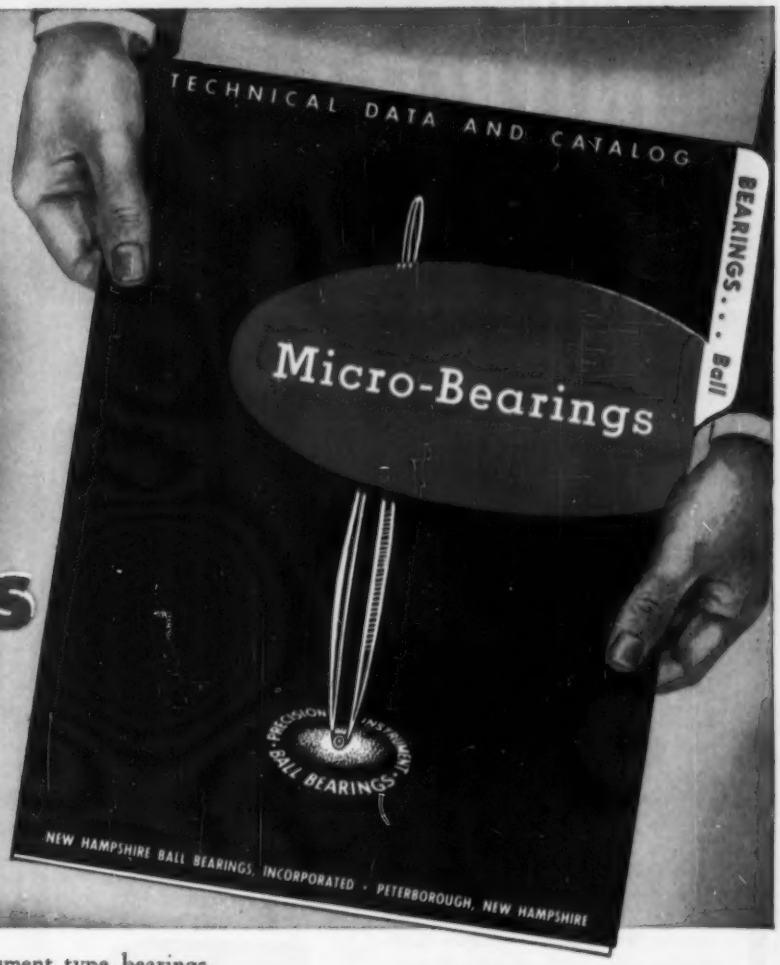
TECHNICAL DATA AND CATALOG
BEARINGS . . . Ball
Micro-Bearings
PRECISION INSTRUMENT BALL BEARINGS
NEW HAMPSHIRE BALL BEARINGS, INCORPORATED · PETERBOROUGH, NEW HAMPSHIRE

If you work with small instrument type bearings you'll find this new, authoritative publication an extremely valuable and handy source of engineering data arranged in convenient form for practical reference.

LOOK AT THESE FEATURES . . .

- A helpful survey article: "FACTORS TO CONSIDER IN SELECTING SMALL INSTRUMENT BALL BEARINGS."
- A complete, practical presentation of bearing facts:

Types of bearings
Materials
Components
Engineering standards
Tolerances
Dynamic and static loads
Lubrication
Radial and Axial play
Torque
Mounting practice etc.

- Large, clear illustrations.
- Big, easy to follow charts.
- Convenient nomographs and conversion charts.
- Simple bearing designations make ordering easy.

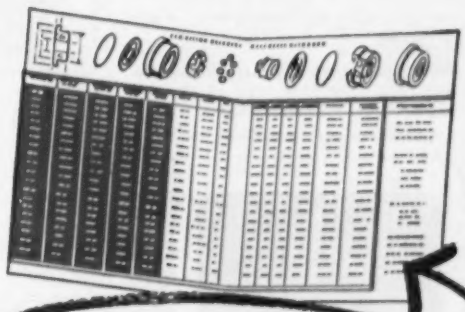

WRITE TODAY . . . GET YOUR NAME ON OUR PRIME DISTRIBUTION LIST FOR MAILING

NEW HAMPSHIRE BALL BEARINGS, INC., *Peterborough, New Hampshire*

RADIO INTERFERENCE AND FIELD INTENSITY *measuring equipment*

Stoddart equipments are suitable for making interference measurements to one or more of the following specifications:

AIR FORCE—MIL-I-6181B
150 kc to 1000 mc
BuAer—MIL-I-6181B
150 kc to 1000 mc
BuShips—MIL-I-16910A (Ships)
14 kc to 1000 mc
SIGNAL CORPS—MIL-I-11683A
150 kc to 1000 mc
SIGNAL CORPS—MIL-S-10379A
150 kc to 1000 mc

The equipments shown cover the frequency range of 14 kilocycles to 1000 megacycles.

Measurements may be made with peak, quasi-peak and average (field intensity) detector functions.

F.C.C. PART 15—Now in effect, the revised F.C.C. Part 15 places stringent requirements upon radiation from incidental and restricted radiation devices. Stoddart equipment is suitable for measuring the radiation from any device capable of generating interference or c-w signal within the frequency range of 14 kc to 1000 mc.

Write Stoddart Aircraft Radio Co., Inc., for your free copy of the new revised F.C.C. Part 15.



NM-10A (AN/URM-6B)
14 kcs to 250 kcs



NM-20B (AN/PRM-1A)
150 kcs to 25 mcs

NM-30A (AN/URM-47)
20 mcs to 400 mcs

NM-50A (AN/URM-17)
375 mcs to 1000 mcs



The **Stoddart NM-40A** is an entirely new radio interference-field intensity measuring equipment. It is the commercial equivalent of the Navy type AN/URM-41 and is tunable over the audio and radio frequency range of **30 CPS to 15 kc.** It performs vital functions never before available in a tunable equipment covering this frequency range. Electric and magnetic fields may be measured independently over this range using newly developed pick-up devices. Measurements can be made with a 3 db bandwidth variable from 10 CPS to 60 CPS and with a 15 kc wide broadband characteristic.

STODDART *Aircraft Radio Co., Inc.*
6644-A SANTA MONICA BLVD., HOLLYWOOD 38, CALIFORNIA · Hollywood 4-9294

See us in Booth 111 at the Wescon Show

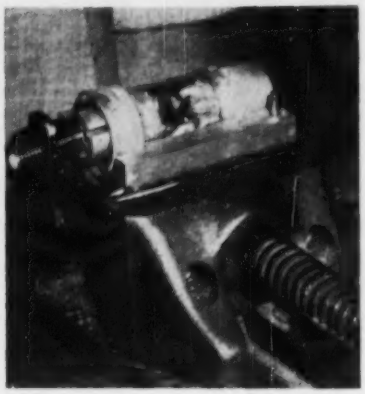

Removing top half of mold after Plexiglas has set

nectors. This means that the test bench, without the adapter, can be used for testing equipment having only four different pole arrangements or connector sizes.

▶ **Versatility**—With the proper adapter plug, production items with any arrangement of poles in their connector plugs, or with any connector size, may be checked out. Adapter plugs have been made up with a wide variety of pole arrangements and sizes of upper connector. The lower connector is a standard size for mating with the test bench plug.

As many or as few poles as desired may be utilized in either the top or bottom connector of the adapter. The number used is determined by the number of components that are to be tested at one time.

▶ **Molding Technique** — Adapters are fabricated with a simple mold-

Completed adapter

Q: *Where can I get* **CUSTOM-ENGINEERED** *resistors for my circuit...* **IN A HURRY?**

A: **GLOBAR®** *Ceramic Resistors*

Thermistors • Varistors • Fixed Non-Inductive Resistors

by **CARBORUNDUM**

REGISTERED TRADE MARK

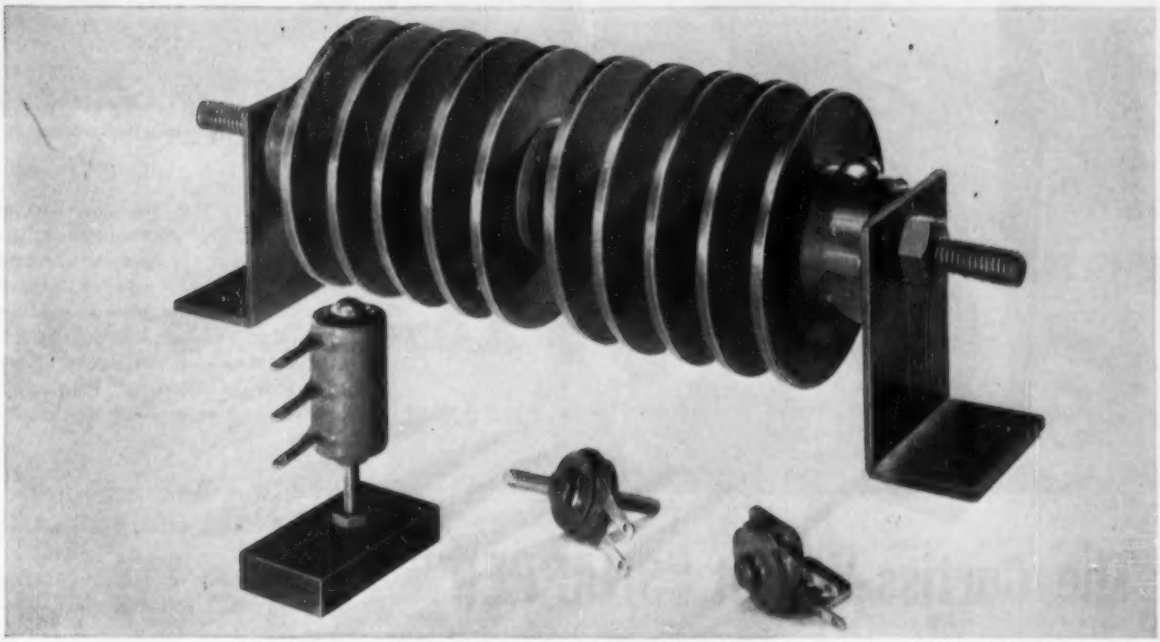

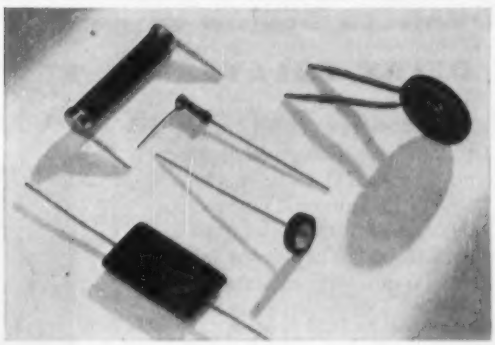

COMPLETE ASSEMBLIES . . . like these recent designs . . . are engineered by Globar resistor specialists to meet the particular electrical, thermal and packaging requirements of *your* circuit.

SPECIAL TERMINATIONS can be designed for Globar Thermistors and Varistors of any size and shape.

GIVE US YOUR PROBLEM . . . whenever you require single or multiple resistor assemblies, or special resistor terminations. You'll get prompt attention from competent, experienced engineers, plus Globar's flexible manufacturing facilities to meet your tightest delivery schedules for *production quantities.*

A GLOBAR DIVISION Sales Engineer will be glad to discuss your application. Or send details of your problem direct. Write Globar Division, The Carborundum Company Dept. E 87-629, Niagara Falls, N. Y.

Globar® *Ceramic Resistors*

by **CARBORUNDUM**

REGISTERED TRADE MARK

The Curtiss-Wright "SNAPPER"

NEW CONCEPT . . . ADVANCED DESIGN IN THERMAL TIME DELAY RELAYS

Designed for high performance and long life, the Curtiss-Wright "SNAPPER" Thermal Time Delay Relay is proving itself in countless applications involving time delay in electrical circuits. Such applications include circuits to provide definite on-off time intervals to delay the application of high voltage until after warm-up period and for over and under voltage protection with simultaneous fault indication.

These relays have single-pole double-throw contact action, high ambient temperature range, freedom from chatter and arcing, and are small in size. The "SNAPPER" thermal time delay relays are factory pre-set from 3 to 120 seconds. They are available in metal envelope, miniature (7 and 9 pin) or octal (8 pin) and in a glass envelope in 9 pin only.

Curtiss-Wright manufactures the High-Low "SNAPPER" Differential Thermostat with high precision characteristics. Write to Thermal Devices for complete information.

ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION · CARLSTADT, N. J.

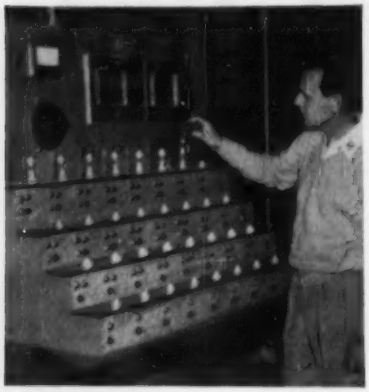

Plugging actuator motor into adapter on test bench

ing jig in which top and bottom connectors are positioned as the liquid plastic is poured around them. Almost any combination of connectors may be joined together in the jig. The adapter plugs eliminate all strain on connecting wires and provide foolproof insulation, rigidity and permanent bonding.

Precision Wire-Stripper Cuts Teflon Insulation

A NEW tool developed by Martin for aircraft electronic work successfully strips the insulation from a special wire composed of strands too fine for commercial wire strippers. The tool contains a recess into which the wire is placed. The stripping blade is set to cut the

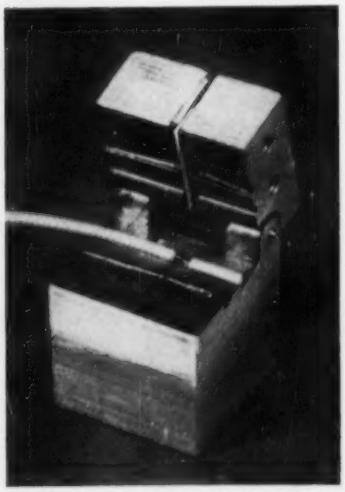

Construction of wire-stripper, showing wire after cutting and partial stripping

Want more information? Use post card on last page.

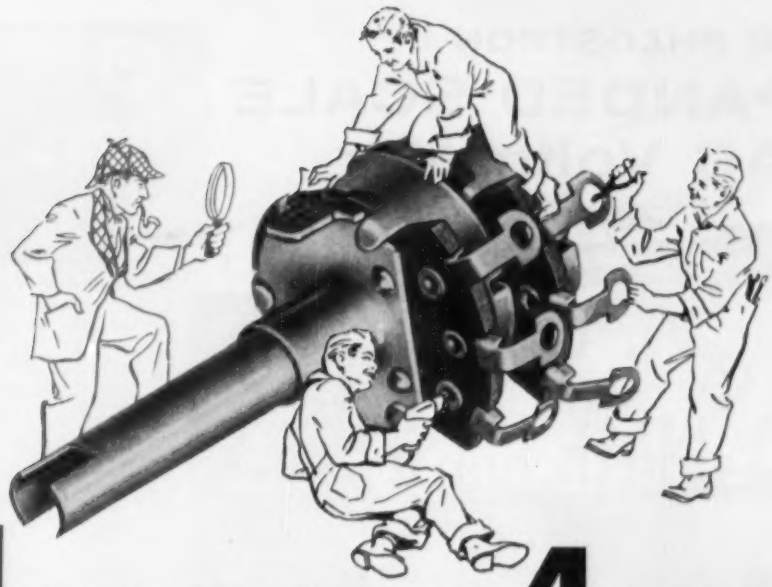

1 OUT OF EVERY 4 WORKERS ON STACKPOLE CONTROLS IS AN *Inspector!*

Few components call for greater manufacturing care and precision than variable resistors.

That is why approximately every fourth worker on Stackpole tone and volume controls is an inspector.

This, in turn, is why leading users report that Stackpole Controls not only minimize their incoming inspection problems but reduce subsequent field service as well. Full quality control from raw materials through every step of manufacture, is a feature of *all* Stackpole electronic components.

A COMPLETE SELECTION OF VARIABLE RESISTOR TYPES

write for your copy of this latest QUICK GUIDE to Stackpole variable composition types and adaptations. Provides essential data in handy condensed form for wall, desk or file use.

Electronic Components Division
STACKPOLE CARBON COMPANY
St. Marys, Pa.

STACKPOLE

FIXED AND VARIABLE COMPOSITION RESISTORS • MOLDED IRON CORES • CERAMAG® FERROMAGNETIC CORES • MOLDED COIL FORMS • LOW VALUE GA CAPACITORS LINE SWITCHES • SLIDE SWITCHES • CERAMAGNET® CERAMIC PERMANENT MAGNETS

Want more information? Use post card on last page.

NEW PHAOSTRON

EXPANDED SCALE AC Voltmeter

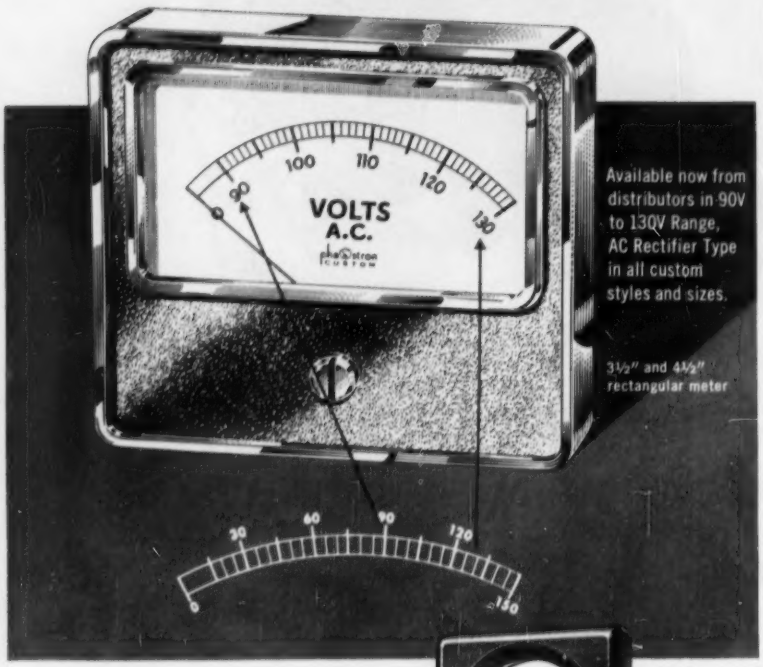

Available now from distributors in 90V to 130V Range, AC Rectifier Type in all custom styles and sizes.

3½" and 4½" rectangular meter



2½" or 3½" square meter



6" rectangular meter

2½" or 3½" round meter

NOW!... all the time-tested proven Phaostron features... PLUS UP TO TEN TIMES GREATER READABILITY for greatly increased accuracy!

Phaostron has squeezed down that under 90V portion of the scale, where you don't need it, and expanded the section where you need it most—between 90 and 130V. Precisely calibrated 1 volt scale increments provide greater reading accuracy. Wide frequency range—linearity—true rms reading and Phaostron craftsman construction.

Phaostron Custom Panel Meters, with expanded scale, 90V to 130V AC rms, are available in nine types at your Parts Distributor. For special requirements, write to the Product Development Department for practical recommendations.

PHAOSTRON

PHAOSTRON INSTRUMENT & ELECTRONIC CO., 151 PASADENA AVE., SOUTH PASADENA, CALIF.



Finished terminal, showing how end is stripped by tool without damaging fine strands

Teflon insulation close to the wires, without nicking or damaging them. When the tool is closed, the wire rotated and pulled through, the end of the wire is stripped and the gossamer strands are left intact, ready for use.

Capacitor-Discharge Welder Uses Offset Electrode

VISIBILITY is achieved for critical welding operations in difficult locations by using a uniquely curved rod as an electrode on a Unitek welder in Fairchild's Hicksville, N. Y. plant. The arrangement permits consistent high-quality welding during assembly of resistance elements in the housings of precision potentiometers.

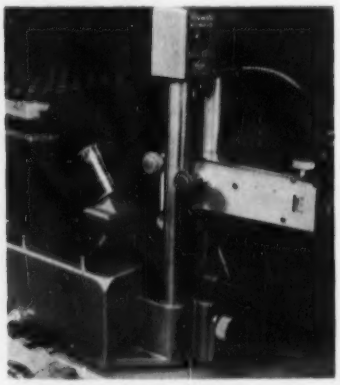

Offset electrode on 500-watt capacitor-discharge welder used in assembling potentiometers

Closeup of welding electrode

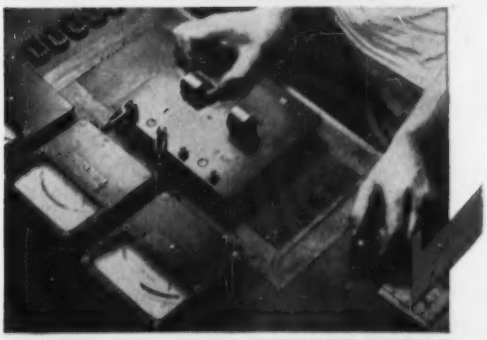

MOLONEY HyperCore ELECTRONIC CORES

Check and double Check

HyperCore Electronic Cores measure up to the highest standards of quality and performance. One check is not enough . . . each core undergoes at least two rigid inspections. The first makes certain that it is of the specified size . . . and the second determines that finished cores have the desired electrical qualities. All HyperCore electronic cores *must* test well within industry tolerances. Special tests for specific operating conditions can be made also if desired.

These tests are the real proof of the superior fabrication which combines the finest materials with superior "know how". Result; electronic cores that give better performance . . . have greater flux carrying capacity and lower losses. And since Moloney HyperCore Electronic Cores are wound cores of cold-rolled oriented silicon steel, they are smaller and lighter.

M250-17



Specify HyperCore Cores for smaller, low loss transformers



Write for Catalog SR 206 "HyperCores for Magnetic Components" and Catalog ST 3506 "Magnetic Components for Electronic Applications."

MOLONEY ELECTRIC COMPANY

Plate and Filament Transformers • Chokes • Unit Rectifiers • Modulation Transformers and Reactors • Pulse Transformers and Charging Chokes • HyperCores for Magnetic Components Developmental Magnetic Components • Power and Distribution Transformers

SALES OFFICES IN ALL PRINCIPAL CITIES • FACTORIES AT ST. LOUIS 20, MO. AND TORONTO, ONT., CANADA

New Products

Edited by WILLIAM P. O'BRIEN

80 New Products and 63 Manufacturers' Bulletins Are Reviewed . . . Control, Testing and Measuring Equipment Described and Illustrated . . . Recent Tubes and Components Are Covered

POWER TRANSISTOR

for automobile radios

CBS-HYTRON, A Division of Columbia Broadcasting System, Inc., Danvers, Mass., is manufacturing the 2N155, a power transistor designed especially for the audio output stage of automobile radio receivers.

Designed to operate from a 12-v battery, this *pnp* germanium-alloy junction transistor features high power gain, uniformity and exceptional reliability. It is plug-in for easy installation.

Highly efficient heat dissipation is characteristic of the unit. Its heavy copper flange mounting permits the flow of heat from the power transistor to the chassis, thus providing a large radiating area.

Engineering bulletin E-259 giving additional data may be obtained by writing the company.

MOLDED RESISTORS

in 5 different ratings



INTERNATIONAL RESISTANCE CO., 401 N. Broad St., Philadelphia 8, Pa. Type MD and MB molded deposited carbon and molded baron carbon resistors are now available in ratings of ½, ¼, ½, 1 and 2 w. Double protection is provided by the addition of a molded plastic housing which protects the unit against mechanical damage and the effects of environmental and atmospheric conditions.

▶ **Uses**—The resistors are particularly suited for applications where unmolded units cannot be used due to the risk of mechanical damage to their coating, insulation breakdown or moisture change. They are recommended for computer and amplifier circuits requiring superior resistance-temperature characteristics and stability, voltmeter multipliers, decades, divider circuits and bridge circuits and other applications where precision wire-wound resistors are too expensive, too heavy or too large.

DIGITAL OHMMETER

measures to 5 digits

ELECTRO INSTRUMENTS, INC., 3794 Rosecrans St., San Diego 10, Calif. A new digital ohmmeter automatically measures and digitally displays resistance measurements to 5 digits. Model D050 has a range of 0.1 ohm to 10 megohms, and is accurate up to 0.01 percent ±1 digit, depending upon the range.

Measurements are made automatically and are presented on a digital in-line readout with 1-in. numerals. No interpretation is required. Average reading time is 1 second. Range switching is automatic.

▶ **Application**—The instrument can be used with the company's input scanner (IS100) and machine print-out to sequentially scan and record 100 resistance values, providing a complete automation system.

OSCILLOGRAPH TUBES

two 5-in. types

RADIO CORP. OF AMERICA, Harrison, N. J. Two new 5-in. magnetic-de-

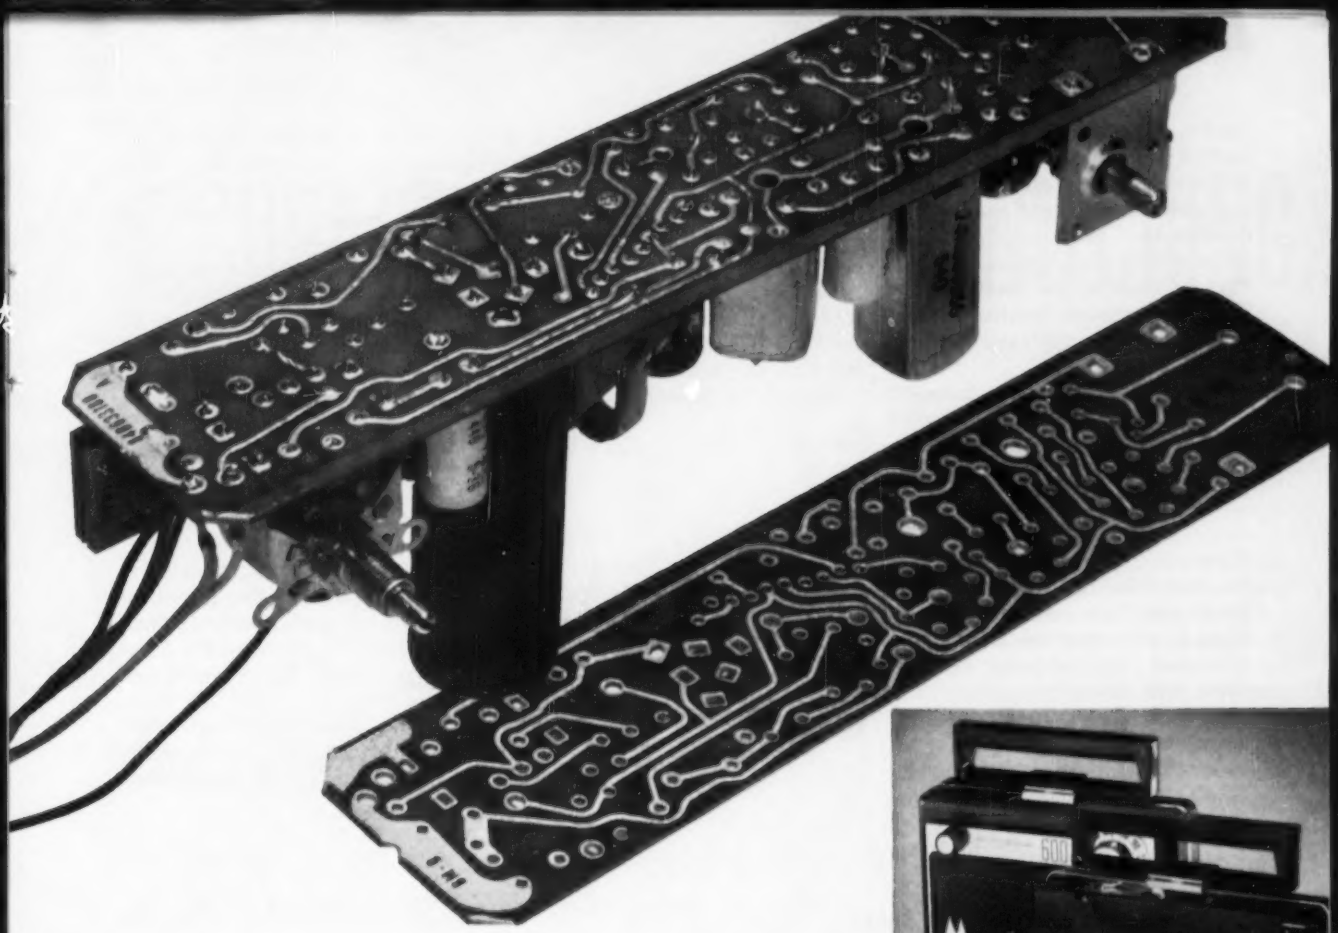

The Motorola "Ranger" achieves compact, sturdy construction and fast assembly with plated circuits on laminated stock produced by **Farley & Loetscher Mfg. Co.**, Dubuque, Iowa, using BAKELITE Laminating Varnishes.

What this resin does for Motorola's plated circuits

- **. . . gives a good base for bonding of copper firmly to the laminate**
- **. . . provides high insulation resistance and low dielectric loss**
- **. . . forms a translucent laminate permitting easy checking of reverse side circuit alignment**
- **. . . withstands 500° F. heat of dip-soldering**
- **. . . results in a lamination that exceeds U. S. Government standards and NEMA specifications.**

All these advantages are found in BAKELITE Brand Phenolic Resin CLSA-3914, a superior hot punch laminating varnish used in the Motorola "Ranger" portable radio shown here. When high surface resistance is needed, CLSA-3914 is used on paper stock pre-treated with 12 to 16 per cent of a water-miscible resin, such as BAKELITE Phenolic Resin BLL-3913. Both XXXP and XXXP-1R grade laminates are produced by this method.

Technical information on BAKELITE Laminating Varnishes made especially for printed circuits is available by writing Dept. SO-50.

BAKELITE BRAND PHENOLIC RESINS

BAKELITE COMPANY, *A Division of Union Carbide and Carbon Corporation* UCC 30 East 42nd Street, New York 17, N.Y.

The term BAKELITE and the Trefoil Symbol are registered trade-marks of UCC

flection oscillograph tubes (RCA-5AHP7 and 5AHP7-A) have been introduced. Both feature low-voltage electrostatic focus and a long-persistence characteristic, and differ only in the aluminized screen that is used in the 5AHP7-A to provide increased brightness and improved image contrast.

▶ **Uses**—The tubes are intended particularly for pulse-modulated applications, such as radar indicator service, but are also useful in general oscillographic applications where a temporary record of electrical phenomena is desired.

The low-voltage electrostatic focus gun featured in the tubes facilitates use of these types in lightweight equipment; assures uniformity of focus over the entire screen; and permits focus to be maintained automatically with variations of line voltage and over a wide range of adjustment of image brightness.

Each tube type has a maximum overall length of 11⅞ in., a minimum useful screen diameter of 4¼ in., and a deflection angle of 53 deg.

Literature is available.

DEVIATION METER

a wide-range unit

MARCONI INSTRUMENTS, 44 New St., New York 4, N. Y. Extended range and high stability are features of a new f-m deviation meter developed for telemetering and other wide deviation systems. Carrier frequency is 20 to 500 mc; deviation is measured to an accuracy of 3 percent in the range of ±2 to ±400 kc, and crystal standardization is built in. The instrument accepts modulation frequencies from 50 cps to 120 kc.



A counter type discriminator is used since this has the advantage of linearity and freedom from drift. There is provision for aural or visual monitoring of the carrier modulation.

Design of the instrument is extremely rugged. The steel case is waterproof and the chassis is shock mounted.

SOLDERING IRON

small and light



WALL MFG. CO., Grove City, Pa., has announced a new industrial soldering iron. In spite of its midget size—(the iron weighs only an oz., and has a ⅛-in. tip)—the new pencil model is designed and built to survive production line punishment. It also features thermostatic action, without fragile thermostats, which controls heat so perfectly that fusing and tip-burning are eliminated.

▶ **Uses**—The iron is designed for delicate precision work on regular radio and tv circuits, printed circuits and any intricate electrical work. It cause no interference with radio, tv or radar, and reaches production heat four times faster than any soldering iron of equal tip size. The handle is kept cool with the company's chimney feature.

Overall length is 7½ in., with either copper or special Walloy tip. A free catalog is available on request to the company.

DELAY LINE

with infinite settings

DELTIME, INC., 608 Fayette Ave., Mamaroneck, N. Y. Continuously variable settings, rather than usual step-by-step taps, set apart the magnetostrictive delay line units recently developed. Applications include high access rate temporary storage for computers, replacing drum-type storage; time or frequency determining elements of passive nature; digital circuitry and registers.

Infinite time-delay settings are provided by individual pickup coils positioned and locked in place along the slotted and calibrated microsecond delay scale. Model 103 has a 40 μsec delay range and four adjustable pickup coils. Extra pickup, even to a maximum of 20, can be added without noticeable reduction of output due to loading.



▶ **Operation**—The delay line operates on well-known properties of nickel and other substances to short in length when placed in magnetic field. Construction is equivalent to shock wave which propagates along magnetostrictive medium with time delay equivalent to 5.25 μsec per in. of path length. Pickup coils are placed at any position along path to receive pulse. Pulses of 0.05 μsec have been gen-

For ACCURATE HIGH SPEED SWITCHING..

Specify

ELECTRO TEC

miniature ultra-low torque

Precision Selector Switch

- Withstands Shock and Vibration
- Offers High Accuracy Measurement
- Operates at High Speeds

This new Electro Tec Precision Selector Switch is ideal where miniature size, low friction torque, high accuracy, and low electrical noise at high speeds are requirements. Simplified circuits and long service life recommend it for a wide variety of uses including sampling, pulse generation for precision measurement, telemetering and strain gage applications, in aircraft, missiles, servos, computors, etc. Switch design incorporates many exclusive features that have gained industry-wide acclaim for Electro Tec precision slip rings, commutators and brush blocks.

CALL OR WRITE FOR ILLUSTRATED BROCHURE

8 or 10 position switches in standard size 10 synchro housings are available for immediate delivery; other circuit combinations supplied to specifications.

ACTUAL SIZE

Electro Tec Corp.
SO. HACKENSACK
NEW JERSEY
Tel.: Hubbard 7-4940

HOLD IT!

You can etch Soldered Circuits FASTER in HUNT S.C.E.

(Solder Circuit Etch)

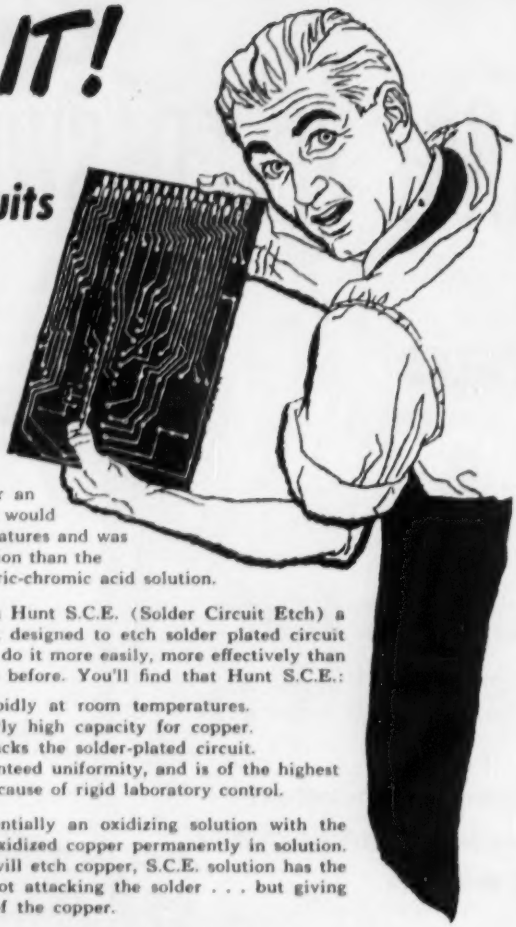

Hunt saw the need for an etchant that was faster, would work at normal temperatures and was more reliable in its action than the commonly used sulphuric-chromic acid solution.

Hunt now offers you Hunt S.C.E. (Solder Circuit Etch) a ready-prepared product designed to etch solder plated circuit boards . . . designed to do it more easily, more effectively than it has ever been done before. You'll find that Hunt S.C.E.:

1. Etches rapidly at room temperatures.
2. Has a fairly high capacity for copper.
3. Never attacks the solder-plated circuit.
4. Has guaranteed uniformity, and is of the highest quality because of rigid laboratory control.

Hunt S.C.E. is essentially an oxidizing solution with the capacity to keep the oxidized copper permanently in solution. Although many acids will etch copper, S.C.E. solution has the peculiar property of not attacking the solder . . . but giving fast, odorless etching of the copper.

HUNT R.C.E. (RAPID CIRCUIT ETCH) FOR PRINTED CIRCUITS

Hunt R.C.E. is a proprietary etchant, formulated to etch printed circuits fast and to speed up production.

It offers these 6 big advantages:

1. 15% increase in etching speed.
2. Immediate action over entire circuit.
3. Uniformly smooth etching.
4. Easily removed by washing.
5. Substantial increase in capacity.
6. Freedom from fumes.

A temperature between 100°F and 120°F is recommended as optimum etching temperature. With splash etching and 110°F temperature, a printed circuit board should etch in 2½ minutes in fresh R.C.E. solution.

Both etchants are described in Technical Bulletins No's 1 & 3 available from your nearest Hunt branch or Palisades Park, N. J.

Manufacturing Chemists — HUNT — *Established 1909*

Hunt S.C.E. solution is supplied in 125 lb. carboys; Hunt R.C.E. solution in 145 lb. rubber drums.



PHILIP A. HUNT COMPANY

PALISADES PARK, N. J.

Chicago • Cleveland • Cambridge • Brooklyn • Atlanta • Dallas • Los Angeles • San Francisco

erated and propagated down the line for a total of 200 μsec.

CONNECTOR
for miniature equipment

SCINTILLA DIVISION, Bendix Aviation Corp., Sidney, N. Y. The Pygmy electrical connector has been developed especially for application to miniaturized electronic equipment. It is available in both the A and E styles; in a series for potting; with jam nut receptacles; and with hermetically sealed receptacles. Both a double-stub quick action thread and a three-point bayonet lock are offered for the convenience of users.

Either cadmium plate or alumilite finishes are available. Resilient Scinflex inserts are being used to resist vibration effects.

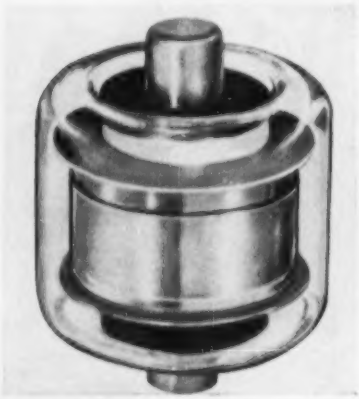

VACUUM CAPACITORS
rated at 500 μμf

DOLINKO & WILKENS, INC., 1907 Summit Ave., Union City, N. J., offers a new addition to their line of fixed vacuum capacitors. Type

KAY LAB
CALIFORNIA

DC DECADE AMPLIFIER

AMPLIFY MICROVOLTS with STABILITY

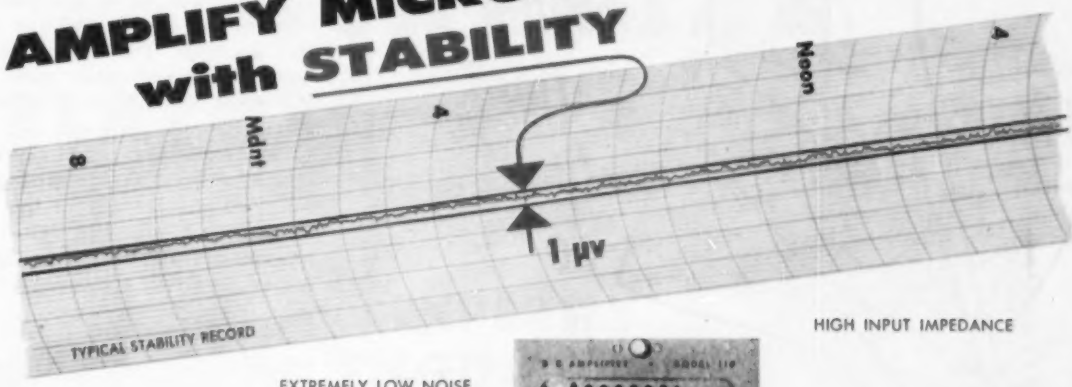

EXTREMELY LOW NOISE

10 ACCURATE GAIN RANGES

INSENSITIVE TO OUTPUT LOAD IMPEDANCE CHANGES

HIGH LEVEL OUTPUT LEVEL ± 25 VOLTS



HIGH INPUT IMPEDANCE

± 2 μV DRIFT

PLUG-IN MODULE DESIGN

The new KAY LAB Model 110 Amplifier is a low drift, high gain, chopper stabilized, broad band DC amplifier incorporating proven KAY LAB chopper amplifier circuitry. Small modular plug-in construction makes it ideally suited for group rack mounting as a part of permanent instrumentation facilities or as a general laboratory instrument in a portable cabinet. Ten precise feedback controlled gain ranges are provided. Low noise allows accurate amplification of microvolt signals. A completely new and unique output circuit provides unsurpassed linearity and dynamic performance — unaffected by output load impedance variations over a wide frequency range.

APPLICATIONS: Ideal strain gage amplifier . . . vibration studies . . . transducer amplifier . . . scope preamplifier . . . single or multiple channel recorder driver . . . impedance matching "DC transformer" . . . general laboratory instrument wherever precise gain is required for amplification of microvolt signals.

SPECIFICATIONS

Gain	0, 20, 30, 50, 70, 100, 200, 300, 500, 700, 1000 ± 1% DC
Input Impedance	100,000 Ω
Frequency Response	± 3% DC to 10 kc, less than 3 db down at 30 kc
Phase Shift	Less than 5° to 2 kc
Equivalent Input Drift (over 40-hour period)	± 2 μv when used with regulated line voltage ± 10% change in AC input causes less than ± 5 μv change after 10-minute warm-up
Equivalent Input Noise	0 to 3 cps, less than 5 μv peak to peak 0 to 750 cps, less than 5 μv RMS 0 to 50 kc, less than 12 μv RMS
Chopper Intermodulation	Less than 0.1%
Linearity	Better than 0.1% to 2 kc
Output Impedance	Less than 1 Ω in series with 25 μh
Output Capability DC	0 to ± 25 volts with load impedance greater than 1000 Ω 0 to ± 25 ma with load impedance from 10 to 1000 Ω

POWER REQUIRED	0.9 watt each unit plus 0.6 watt each adaptor
Dimensions: Amplifier unit	5" wide, 7¼" high, 14¼" deep
Unit in cabinet	6" wide, 9⅛" high, 18⅜" deep
Rack adaptor for 3 units	19" wide, 8¾" high, 18¼" deep
Net Weight	15 lbs.
Shipping Weight	30 lbs.

PRICE: Amplifier Unit	$500.00
Cabinet (with fan and connector)	50.00
Rack Adaptor (with fans & connectors)	150.00

Kay Lab reserves the right to change specifications and prices without notice.

. . . the Standard in chopper-stabilized instruments

KAY LAB

STABILITY *locked in!*
WITH CHOPPER AMPLIFIERS

Representatives in all major cities.

5725 KEARNEY VILLA ROAD • SAN DIEGO 12, CALIFORNIA • BROWNING 7-6700

Want more information? Use post card on last page.

you can't afford to "do it yourself"

Where custom systems are involved, it just doesn't pay to do the work yourself. Not when EECO can do it for you—expertly, efficiently—without disrupting the normal productive activities of your engineering staff. Major EECO installations in operation in all parts of the country are proof of Electronic Engineering Company's ability to design and produce anything from single-rack recording systems to the most complex multi-console master installations. And EECO design techniques, perfected through years of systems work, are now ready to be put to work for you in an EECO engineered system to meet your exact requirements.

One wing of the EECO Central Dual Timing System at Patrick Air Force Base, Florida. This system is a master time signal generating installation for the base and ties in with all instrumentation operations for guided missile testing.

PLUG-IN CIRCUITS

...your key to lower design and production costs. These EECO plug-ins have proven themselves in scores of major installations...the one above contains more than 2,500 units. Originally designed for EECO systems, these packaged circuits are now available to you. Complete data on standard and custom circuits in catalog H-2.

ELECTRONIC ENGINEERS AND PHYSICISTS — EECO offers unusual career opportunities for advancement and professional growth in the creative field of systems and related electronic projects. Send resume to the attention of R. F. Lander.

Electronic Engineering Company
of California

and its subsidiary EECO Production Company
180 South Alvarado Street • Los Angeles 57, California

VC500-10 is rated at 500 $\mu\mu$f capacitance, 10 kv peak, and 42 rms amperes. Dimensions are: 4 in. overall length, 4¼ in. diameter, 3½ in. mounting centers, and ⅞ in. contact diameter. This type features reversed copper-to-glass seals for maximum voltage path in minimum space.

Low inductance, practically loss-free characteristics, and rugged construction result from this design which is especially suited for medium and high power oscillators and transmitting equipments.

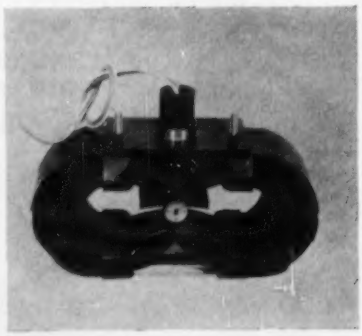

MAGNETRON
for radar applications

SYLVANIA ELECTRIC PRODUCTS INC., 1710 Broadway, New York 19, N. Y. A high-power, pulsed fixed-frequency magnetron, designated as type 6799, has been announced.

The new tube, a power-producing component for radar applications, operates in the 34,512 to 35,208 mc range. Its minimum peak power output is 100 kw. With this output, the type 6799 provides high performance over long distances for radar equipment operating in its frequency range.

COAX CONNECTOR
Teflon h-v uhf type

THE COAXIAL CONNECTOR CO., 37 N. 2nd Ave., Mt. Vernon, N. Y., is producing Teflon h-v uhf type coaxial connectors.

Types 259 and 239 are designed expressly for h-v application where

for Improved Electronic Control...

GUARDIAN®

RELAYS SOLENOIDS

EXPERTLY ENGINEERED... the well-rounded line!

• Units here typify the wide range of Guardian Products available to meet the control requirements of every industry. We welcome an opportunity to consult with you on your circuitry control for product *improvement* or development.

write for literature today!

STEPPERS SWITCHES

A.C. INDUSTRIAL SOLENOIDS D.C.

INTERMITTENT AND CONTINUOUS

A Complete Line for Every Industrial Application



Available in both intermittent and continuous duty types. Intermittent types should not be energized for more than 5 consecutive minutes, or be permitted to rise more than 85° C. above 24° C. ambient rating without giving sufficient time to cool between operation cycles. Continuous duty types are designed so they will not rise more than 85° C. above the 24° C. ambient temperature rating when operated at rated load. Plunger has slotted end with ⅛" diameter hole for coupling.

WRITE for SOLENOID BULLETIN "SOL-8"

GUARDIAN'S 25th YEAR

GUARDIAN ELECTRIC

1625-J W. WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF CONTROLS SERVING AMERICAN INDUSTRY

Engineer's CONTACT SWITCH KIT

DI-FORMED PAPER TUBES IMPROVE YOUR COILS ...SAVE MONEY AND PRODUCTION HEADACHES

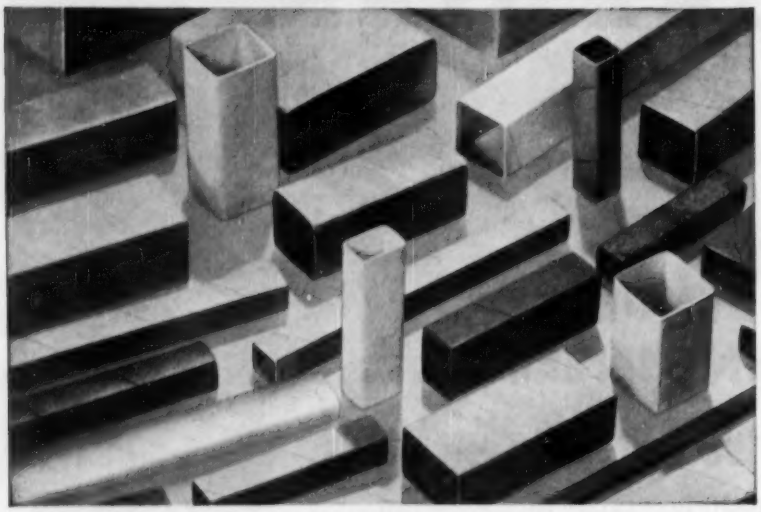

HERE ARE THE FACTS

Di-Formed Tubes feature a special patented Precision Paper Tube construction which produces a completely ridgeless surface, thus eliminating wire pile up and resultant coil shorts.

Side walls are straightened under pressure during the winding operation. The bow being thus controlled permits a perfect fit between mandril and tube as provided by Precision's low-cost Related Mandril Service.

Under the Related Mandril Service, Precision supplies the coil manufacturer with accurately ground steel or aluminum mandrils at a price comparable to commonly used unsatisfactory wood or undersized steel mandrils. *This is not a profit-making service.* Its sole purpose is to give the coil manufacturer these advantages:

1. *Provide proper tube support.*
2. *Facilitate stacking operations.*
3. *Prevent coil collapse.*
4. *Save machine and operator fatigue.*
5. *Permit smaller core, thus decreasing coil size and eliminating pressing.*

Get full details on Precision Di-Formed Tubes and Related Mandril Service. Write, wire or phone today.

Sales Representatives in:

Illinois; Indiana; Iowa; Wisconsin; Missouri; Minnesota: Chicago, Illinois, ARmitage 6-5200.
Indiana; Southern Ohio: Logansport, Indiana, Logansport 2555.
Northern Ohio: Cleveland, Ohio, Atlantic 1-1060.
New England: Framingham, Massachusetts, TRinity 3-7091.
Delaware; Washington, D. C.; Maryland; New Jersey; Metropolitan New York; Eastern Pennsylvania; Virginia: Jersey City, New Jersey, Swarthmore 5-2480.
Upper New York: Syracuse, New York, Syracuse 4-2141.
CANADA: Montreal, Quebec, Canada, Walnut 0337.
MEXICO: Mexico 6, D. F., Telephone 35-06-18.

PRECISION

PRECISION PAPER TUBE CO.

2041 W. CHARLESTON ST. CHICAGO 47, ILL.

Plant No. 2: 1 Flower St., Hartford, Conn.

RG cable is used in conjunction with power supplies. These connectors are rated for 5,000 v d-c.

Assembly of the cable to the connector employs the same techniques as the conventional UG, uhf type connectors. These connectors are not impedance matches but may be used in the same circuitry where the S0239 and PL259 are employed.

DIGITAL VOLTMETER
with automatic calibration

ELECTRO INSTRUMENTS, INC., 3794 Rosecrans St., San Diego 10, Calif., has announced a new 4-digit digital voltmeter with 1-digit accuracy, automatic calibration and 0.01 percent stability. Model 1040 has a voltage range of 0.001 to 999.9 v. Input impedance is 1,000 megohms on 9.999 scale and 11 megohms on other scales. Calibration is continuous and automatic, as are polarity and range switching.

The instrument features the digital, in-line read-out common to the company's other equipment. The read-out may be remoted or miniaturized, if desired.

Model 1040 measures 7 in. by 19 in. for rack mounting. It operates on 115 v, 60 cps, 80 w. Warmup time for 0.01-percent stability is 30 seconds.

DECADE CAPACITORS
available in four ranges

FILM CAPACITORS, INC., 3400 Park Ave., New York, N. Y. A new line of Polystyrene and Teflon decade capacitors with accuracies down to 0.5 percent and a rating of 400 vwdc has been announced.

The special electrical characteristics of these capacitors make

GLENNITE® HIGH-TEMP. (500°F) ACCELEROMETER AHT-2

ceiling unlimited

...FOR ACCURATE MEASUREMENTS AT HIGH-TEMPERATURES

THE PROBLEM: *The fabulous heat barrier . . .* awesome enemy of supersonic flight. It lies in wait for trespassers, today's experimental aircraft which spearhead the attack on ultra-fast motion. Their metallic "skin" glows red hot at these extremely high speeds . . . internal temperatures skyrocket, too . . . stresses multiply, *both* man and machine are strained to their endurance limits. And accurate measurements of structural vibrations due to these increasingly damaging environments can spell the difference between success and failure . . . but conventional shock and vibration instruments can't operate under these conditions.

THE SOLUTION: The GLENNITE Piezoelectric Accelerometer System KAHT-310, one of a completely new series of high-temperature units that give dependable measurements up to 500°F — *more than 250° higher than ordinary instruments — without any cooling!*

Special design techniques, housing materials and miniaturized GLENNITE Components make it *extra-compact*, extremely lightweight . . . Completely self-generating, the precision built KAHT-310 measures up to 300 g's and from 10 to 2000 cps. Other GLENNITE high-temperature types weigh as little as 3 grams and measure up to 20,000 cps! More examples of why Gulton Mfg. Corp. is one of the leading manufacturers of shock and vibration measuring equipment, calibrating instruments, systems.

Pioneering efforts have also been made in self-recording, self-amplifying, differential transformer and potentiometer accelerometers. In addition, Gulton offers a complete line of standard units for every conceivable application . . . send for engineering information . . . today.

West Coast Representatives:

Perlmuth Electronic Assoc.
2419 So. Grand Ave.
Los Angeles 7, California

Harry Levinson Co.
1117 Second Avenue
Seattle, Washington

GULTON INDUSTRIES, INC

GULTON MFG. CORP.

associated with GULTON INDUSTRIES, INC. Metuchen, New Jersey

PIONEERS IN MATERIALS RESEARCH, ELECTRONIC COMPONENTS, PRECISION INSTRUMENTS AND SYSTEMS ENGINEERING

New!

Miniature *Precision*

Rotary Selector Switch

Here's the exceptionally positive action only a multi-leaf wiper, button-contact switch can offer—now in the smallest sizes consistent with the quality and dependability required for today's compact, precision equipment:

- Features solid silver alloy button-type contacts, collector rings, and spring suspension leaf-type wiper arms for low contact resistance—0.002 ohms.
- Integral lugs and contacts staked in glass-fibre Silicone-laminate stators. Lugs cannot turn or loosen. Stator material will not carbonize even if severely overheated. Terminations can be made mechanically secure *before* soldering.
- Molded Melamine rotor covering entire contact circle provides high voltage breakdown between decks.
- Outstanding moisture, humidity, and salt-spray resistance through use of passivated stainless steel, nickel-plated brass, Steatite, Nylon, molded Melamine, and Silicone-base glass-fibre laminate parts.
- Adjustable stainless steel stops—easily positioned.
- Uniformly high quality—cost-reducing mechanized production and assembly.
- Small size—only 1¾" square. 1" deep for first deck, only ⅝" deep for additional decks.

CONDENSED SPECIFICATIONS

Shallcross "Miniature Series"

POLES PER DECK—1 to 4.
INDEXING (detent)—11¼°, 15°, 22½°, 30°.
MOUNTING—Single or 2-hole, with non-turn tang.
OPERATING VOLTAGE—to 1500 volts.
BREAKDOWN VOLTAGE—to 4000 volts.
BREAKING CURRENT—5 amp @ 125 V. ac.
CARRYING CURRENT—15 amp.

Shallcross

SHALLCROSS MANUFACTURING COMPANY, 522 Pusey Avenue, Collingdale, Pa.

them ideal for use in test equipment, experimental layouts, and as standards for bridge set-ups. All units are stabilized to remain within 0.1 percent of their original values for exceptionally long periods, on the order of 12 to 24 months. They are furnished in hermetically sealed cases with metal-glass hermetic terminals.

The polystyrene units may be operated at ambients up to 80 C, while the Teflon units may be operated at ambients up to 200 C. Four ranges are available: 0.001 μf per step, 0.01 μf per step, 0.1 μf per step and 1.0 μf per step.



SELENIUM RECTIFIERS
for magnetic devices

INTERNATIONAL RECTIFIER CORP., 1521 E. Grand Ave., El Segundo, Calif., has developed type 61-2020, a single-phase full-wave bridge rectifier, to fill the need for additional small compact and inexpensive selenium rectifiers for operating magnetic devices. This unit is designed to deliver 90 v d-c at 175 ma for an rms voltage input of 130 v maximum. The rectifier occupies only 1 in. by 1 13/32 in. by 1¼ in. overall volume and can be mounted with a No. 8 (0.164 in.) machine screw, through the hollow brass eyelet.

This type combined with types

HE CAN CHECK VIDEO ANYWHERE

HE HAS A NEW VIDEO TRANSMISSION TEST SET

The Original Full Rack and the Portable Unit Produce the same Precise Test Signals.

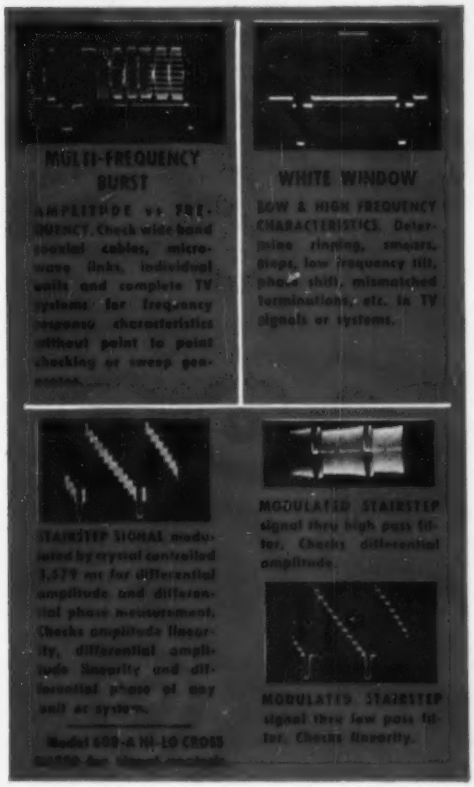
MULTI-FREQUENCY BURST
AMPLITUDE vs FREQUENCY. Check wide band coaxial cables, microwave links, individual units and complete TV systems for frequency response characteristics without point to point checking or sweep generator.
WHITE WINDOW
LOW & HIGH FREQUENCY CHARACTERISTICS. Determine ringing, smears, steps, low frequency tilt, phase shift, mismatched terminations, etc. in TV signals or systems.
STAIRSTEP SIGNAL modulated by crystal controlled 3.579 mc for differential amplitude and differential phase measurement. Checks amplitude linearity, differential amplitude linearity and differential phase of any unit or system.
MODULATED STAIRSTEP signal thru high pass filter. Checks differential amplitude.
MODULATED STAIRSTEP signal thru low pass filter. Checks linearity.

TELECHROME **Model 1003-A**

Video Transmission Test Signal Generator

*** Completely self contained * Portable * Multi-frequency burst * Stair-step * Modulated stairstep * White window * Composite sync * Regulated power supply.**

Now, Telechrome Video Transmission Test Equipment is available as *a completely portable* 12¼" standard rack mounting unit.

Everyday these Test Signals generated by Telechrome equipment, are transmitted Coast-to-Coast by NBC, CBS, ABC, the Bell System, Canadian Bell and leading independent TV stations throughout the U. S. and Canada. Hundreds of network affiliated TV stations and telephone TV centers thus check incoming video signals.

The compact, inexpensive, portable Model 1003-A is all that is required to generate signals for local and remote performance checking of your entire video, cable, or micro-wave facilities.

1521-A OSCILLOSCOPE CAMERA —Polaroid type for instantaneous 1 to 1 ratio photo-recording from any 5" oscilloscope.



DELIVERY 30 DAYS

Literature on these and more than 150 additional instruments for color TV by TELECHROME are available on request.

TELECHROME INCORPORATED

The Nation's Leading Supplier of Color TV Equipment
88 Merrick Road Amityville, N. Y.
AMityville 4-4446

WORKING WITH
ELECTRONIC CIRCUITS?

Investigate the **Berkeley**

FERRISTOR*



FERRISTOR* is encapsulated in 9/16" cube, has 4 pigtail leads.

performs most vacuum tube functions

costs less than comparable vacuum tube

offers continuous-duty reliability

withstands extreme overload, shock, vibration, humidity, high or low temperatures

generates little or no heat

DESCRIPTION: Berkeley FERRISTORS* consist of a simple wirewound coil on a ferro-magnetic core, encapsulated in epoxy resin. They are compact (9/16" cube), light in weight (only ½ oz.) and extremely rugged.

FERRISTORS* offer outstanding advantages over vacuum tubes or transistors wherever reliability, ruggedness, size, weight or cost are important factors, or where difficult environmental conditions are encountered. Associated circuitry is simple and inexpensive.

Ten-stage FERRISTORIZED* subassembly is less than ½ the size, ½ the weight of vacuum tube version. All components shown; none underneath panel.



TYPICAL APPLICATIONS

FERRISTORS* are now used in amplifier (dc to high frequency), coincidence amplifier, bi-table stages, gating amplifier, one-shot and similar circuits for counting, computing, control and general-purpose electronic applications.

← TYPICAL AMPLIFIER CIRCUIT... 30 v 10 mc control current is supplied by inexpensive rf power supply (available from Berkeley if desired).

Let Us Work With You On New Applications

Specifications and technical data on FERRISTORS*, typical FERRISTOR* circuitry, and suitable rf (control circuit) power supplies are yours for the asking. If you'd like the benefit of our considerable experience with these promising little components, we will gladly investigate your proposed application and offer our suggestions. There's no obligation, of course, so why not drop us a line now? Please address Dept. G-8

Berkeley *division*

BECKMAN INSTRUMENTS INC.

Phone: LAndscape 6-7730 • Richmond 3, Calif.

101 *Trademark

D-3575F and 60-9150 gives the electronic design engineer a wider range of single-phase full-wave bridge rectifiers with output voltages of 90 v to 180 v d-c at currents of 100 ma to 175 ma.

Some applications include solenoids, counters, relays, variable speed controls and field supplies for small d-c motors. Bulletin SR-134 gives further information.

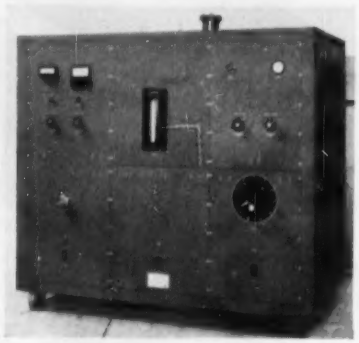

R-F DUMMY LOAD
and calorimeter

LEVINTHAL ELECTRONIC PRODUCTS, INC., 2760 Fair Oaks Ave., Redwood City, Calif. A completely self-contained r-f dummy load and calorimeter is designed for applications to high peak powers or high power installations. As an r-f dummy load, the unit is capable of handling in excess of two mw of peak power. The closed-circuit cooling system with its pump and heat exchanger permits satisfactory cooling at greater than 10 kw of average power.

For calorimetry, the unit uses a substitution method for greatest accuracy. A completely separate L-band waveguide, with a waterload tube containing a 60-cycle Nichrome heater wire is used as a calibrating load. A controllable amount, of 60-cycle power, metered by a 1-percent wattmeter, can be fed to this calibrating load by means of an externally operated Powerstat.

Flow rate is controlled by a flow regulator and metered by a flowmeter. Thermopiles across the input and output water measure temperature differential and actuate a millivoltmeter which is calibrated to read directly in r-f watts. Temperature differential for 10-kw in-

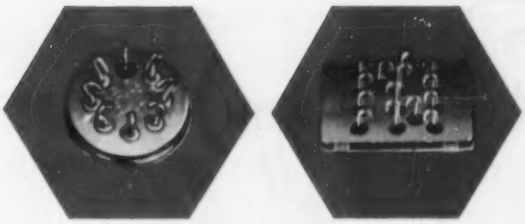

Constantin
ENGINEERED GLASS-TO-METAL SEALS

seal failure out . . .
seal reliability in

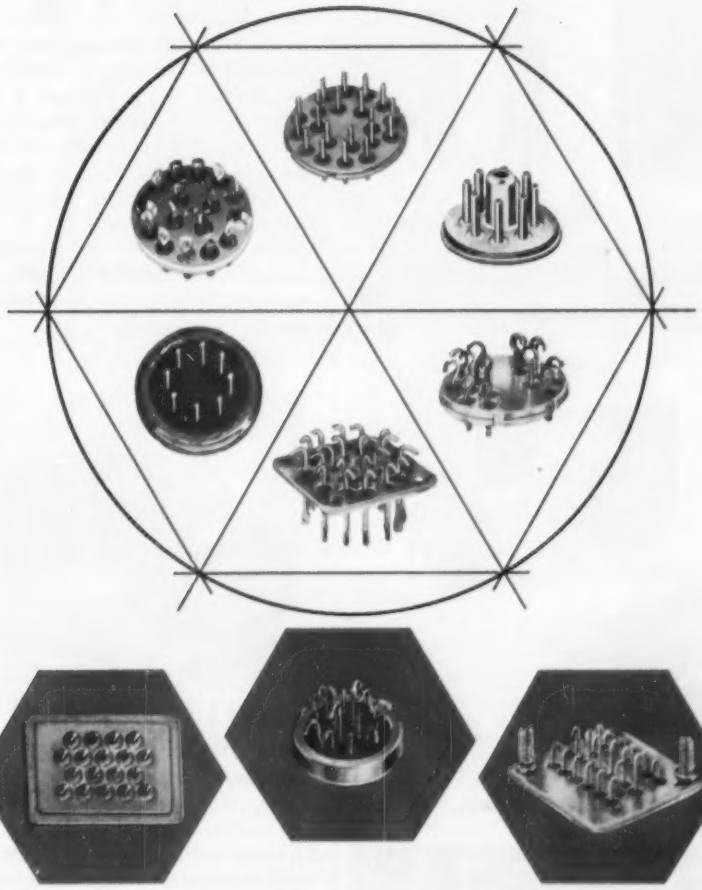

Constantin glass-to-metal seals improve component performance because they are impervious to sub-zero conditions, high pressure, oils, swamp test, compounds, most chemicals, corrosion, salt water immersion, and spray . . . withstand temperature cycling and vibration conditions . . . assure superior performance because of meticulous engineering.

Constantin has available for you a complete, quality line of precision multi-headers — transistor mounts and covers — end seals — single headers — crystal holders — connectors — terminals — electro-mechanical assemblies. Where a standard item cannot be used, Constantin will custom-engineer an exact unit for your particular requirement.

Write today for complete technical data about *all* Constantin products.

"QUALITY WITH CONFIDENCE"

L. L. Constantin & Co. MANUFACTURING ENGINEERS

Route 46, Lodi, N. J. • 187 Sargeant Ave., Clifton, N. J.

TRANSISTOR MOUNTS • SINGLE TERMINALS • COMPRESSION HEADERS • END SEALS • CRYSTAL BASES • CONNECTORS • MINIATURIZATION

West Coast Representative: Heim and Scheer, 11168 Santa Monica Blvd., Los Angeles 25, Calif. — GRanite 7-3208

Looking for dependable microwave test equipment?

NARDA'S NOTED FOR IT!

The most complete line of UHF and microwave test equipment including such instruments as:

WAVEGUIDE COUPLERS
COAXIAL COUPLERS
WAVEGUIDE TERMINATIONS
COAXIAL TERMINATIONS
FREQUENCY METERS
HORNS
TUNERS
ECHO BOXES
MIXERS
SLOTTED LINES
BENDS
ATTENUATORS
STANDARD REFLECTIONS

From L Band (1120-1700mc) to KA Band (26,500-39,500mc)









◀ **Ask for catalog**

Narda also makes a complete line of bolometers and thermistors, available for same-day delivery

the narda corporation

160 HERRICKS ROAD, MINEOLA, N. Y., PIONEER 6-4650

COMPLETE INSTRUMENTATION FOR MICROWAVE AND UHF

put is about 12 F and power indicated by the meter differs from that calculated by about 1 percent.

MULTIPLIER PHOTOTUBE
for geophysical work

ALLEN B. DU MONT LABORATORIES, INC., 750 Bloomfield Ave., Clifton, N. J. The ¾-in., ten stage multiplier phototube, type K1382, will make available subterranean areas hitherto unreached in geophysical exploratory work. It has a rated average gain of 300,000 at 105 v per stage. At the same potential, maximum dark current measures 0.1 μa, photo-cathode sensitvity is 40 μa per lumen, and the average anode sensitvity is 12 amperes per lumen. It is designed with potted base and jacketed leads to eliminate moisture leakage.

VANEAXIAL FAN
designed for missile use

ROTRON MFG. Co., Schoonmaker Lane, Woodstock, N. Y., has announced the AXIMAX II, a miniaturized cooling fan for missile use. The vaneaxial design is novel in that the motor is of the inside-out construction whereby the electrical rotor and the air moving impeller are integrally cast in one piece.

► **Specifications**—Only 2 in. in diameter and 1½ in. long, this fan moves 58 cfm at free delivery and

A NEW DESIGN APPROACH . . .

WESCON SHOW
BOOTHS 508 & 509

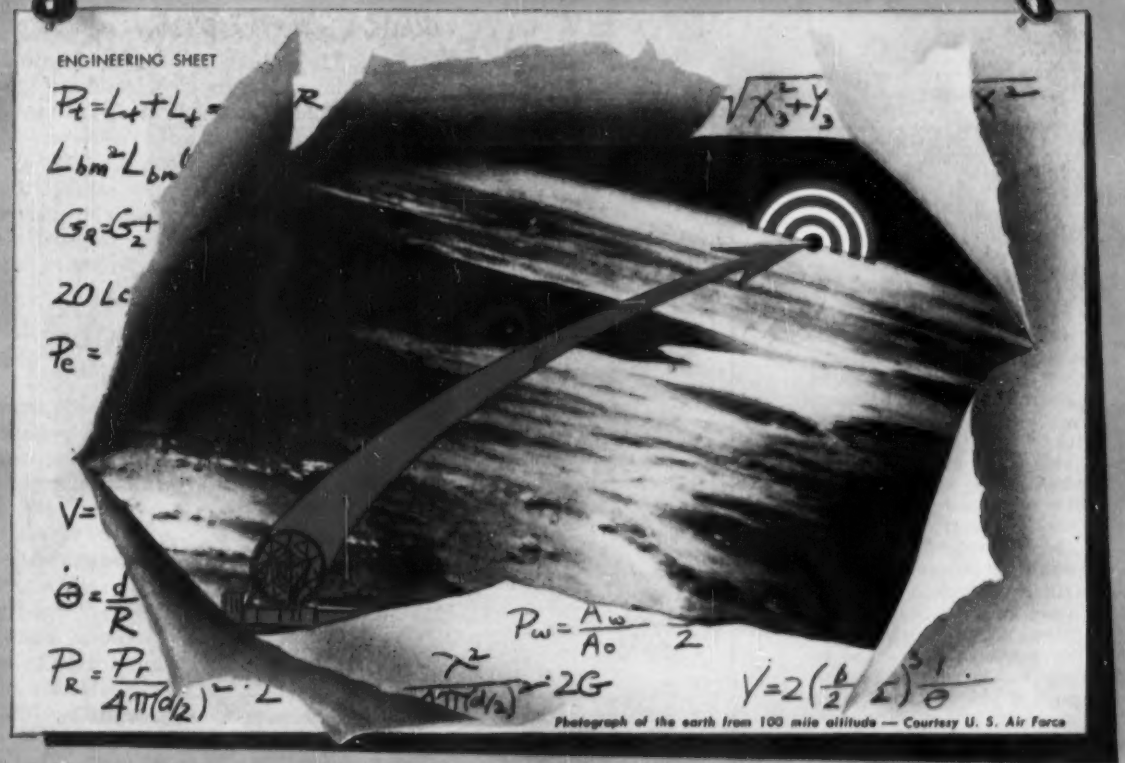

. . . BEYOND-THE-HORIZON TRANSMISSION

BEYOND-THE-HORIZON TRANSMISSION

The newest military and commercial long-range communications systems are turning towards the advantages of "scatter" transmission. By transmitting *directly* to stations well beyond the horizon, scatter transmission systems eliminate the construction and maintenance of intermediate microwave stations and avoid cables and repeaters of wire systems, while retaining the wide bandwidths available at high frequencies. This *direct* transmission can span water or inaccessible terrain while giving predictably high signal reliability and freedom from interference.

A NEW APPROACH . . . CONTROLLED SYSTEM DESIGN

A complete analysis including the effects of climate, multipaths, modulation, diversity and prolonged equipment operation combined with an exclusive experimental method of simulating every proposed link enables Hycon Eastern, Inc. to *hit the performance target more precisely*. We can reduce the expense of a large margin for error and eliminate the possibility of costly site relocations by careful assessment of each customer's needs and operating conditions that will provide him with an optimum design.

HYCON EASTERN OFFERS AN INTEGRATED SERVICE

Within the areas of Hycon Eastern, Inc. and its associated companies can be found complete facilities not only to design, engineer and specify equipment for Beyond-the-Horizon Transmission Systems, but to design Central Offices, Connecting Wire Networks, perform Communication Traffic Density Surveys, Aerial Surveys and Mapping to determine the most efficient routes for land lines and for various radio links such as UHF/SHF line of sight. After the necessary facts have been gathered there further exists the experience to evaluate them and to specify practical equipment with complete independence of judgment necessary to create a complete communications system that will fulfill present and projected needs.

H E

H Y C O N E A S T E R N , I N C .

75 CAMBRIDGE PARKWAY • DEPT. A-8 • CAMBRIDGE 42, MASSACHUSETTS

Affiliated with HYCON MFG. COMPANY, Pasadena, California

Want more information? Use post card on last page.

SYSTEMS ENGINEERS

Electronic–Electro-Mechanical...for computers ..fire control designs

Librascope has openings for career men to be assigned to the Special Devices Department–one of the four autonomous engineering development divisions, where each individual works closely with management–stays with his project from start to finish. Categories include: analog and digital fire control systems engineers, transistor specialists, servomechanisms engineers, and many others.

Military projects in the Special Devices Division cover all phases of applied technology–mechanical, electronic and optical, starting with basic devices such as photo-reconnaissance cameras, photo-transistors, rocket and gun sights...and extending to complete systems involving analog and digital computers.

Join a company that has the "young man's" viewpoint–pays well, assists in relocation – provides subsidiary benefits and professional advancement. Contact Don Webster, Chief Engineer.

The Douglas A4D atom bomber is equipped with gun and rocket sights designed and produced by Librascope.

Tanks...land navigation and fire control systems are long range Librascope projects.

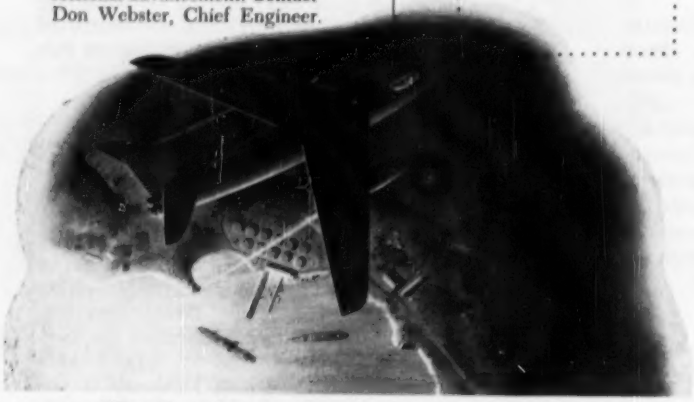

When a Navy photo-reconnaissance plane makes a jet-propelled "camera strike," the payoff is assured by Librascope viewfinder equipment.

LIBRASCOPE

A SUBSIDIARY OF GENERAL PRECISION EQUIPMENT CORPORATION

LIBRASCOPE, INC. · 808 WESTERN AVE. GLENDALE, CALIFORNIA

35 cfm at 2-in. static pressure. The unit weighs only 4 oz. It runs at 20,000 rpm and is wound for 400 cps, only either 200 v, 3 phase or 115 v, 1 phase. Both types have an input of only 35 w resulting from a high mechanical fan efficiency and electrical motor efficiency.

The fan is fitted with solder-type hermetic terminals rather than lead wire, a feature which allows the little unit to be inserted air-tightly in a closed piping system.

ACOUSTIC CALIBRATOR
accuracy less than 1db

ALTEC LANSING CORP., 9356 Santa Monica Blvd., Beverly Hills, Calif., now offers the 12185 acoustic calibrator to pressure calibrate 21-BR type microphones used for measuring high intensity sounds in the jet engine and missile fields. It consists of the L1 pressure unit mounted so as to provide a cavity of 1CC. A sound pressure level of 140 db can be obtained with 1v input. Maximum safe input is 5 v and maximum sound pressure level, 155 db.

The unit provides rapid check on overall sensitivity of systems using all 21-BR microphones so the microphone can be standardized on the recording apparatus before and after each measurement in field or laboratory. Accuracy of measurement obtained is less than 1 db. Temperature coefficient is 0.02 db per deg F.

CONTACT SOCKETS
color-coded, press-fit

SEALECTRO CORP., 186 Union Ave., New Rochelle, N. Y., has announced color-coded, space-saving press-fit miniature contact sockets to take 0.080 in. test probes. They are available in three different probe sizes—0.040 in., 0.050 in. and 0.080 in. Bushing or insulator body measures only 0.185 in. diameter with 0.218 in. diameter front face which means spacing as close as $\frac{1}{4}$ in. between centers if desired.

Despite miniaturization, these contact receptacles are rugged and positive, due to beryllium-copper silver-plated-with-gold-flash contact members. For color-coding pur-

. . . and cuts the size and weight of cable

Federal's miniature coaxial cables—about ¼ the size of comparable RG types—save critical space and weight in aircraft and instrument uses.

Challenged by the high temperature and minimum weight requirements of jet aircraft and guided missiles, Federal has designed RG cables that perform perfectly at a blistering 500° F.! New Federal miniature coaxials have a top temperature rating of 150° C. . . . up to 200° C. with an impregnated fiber glass jacket!

The key to these new cable developments lies in advanced designs.

Based on utilization of "Teflon," this superior dielectric maintains its excellent low loss and high voltage characteristics through a temperature range of 500° F. to −100° F. "Teflon" has no measurable water absorption; it is chemically inert . . . unaffected by alkalies, acids, aromatic fuels, aromatic organic solvents, and highly corrosive aviation hydraulic fluids.

If your cable problems involve heat, space or weight, it will pay you to consider Federal's new "Teflon" insulated cables. For information, write Dept. D-913B.

"TEFLON" HIGH TEMPERATURE CABLES

RG-87A/U 50 ohms; 69.5% V.P.; 29.5 mmfd/ft. Cap; 4,000 operating volts.

RG-140/U 75 ohms; 69.5% V.P.; 29.5 mmfd/ft. Cap; 1,700 operating volts.

RG-141/U 50 ohms; 69.5% V.P.; 29.0 mmfd/ft. Cap; 1,500 operating volts.

"TEFLON" MINIATURE COAXIAL CABLES

K-256 50 ohms; 29 mmf/ft. Cap; 72% V.P.; 850 V rms Corona; 13 db/100 ft. Atten. at 400 mc; 0.095 O.D. dielectric; 7/30 silver-plated Copperweld conductor; 0.135 O.D. jacket.

K-257 70 ohms; 21 mmf/ft. Cap; 72% V.P.; 850 V rms Corona; 14 db/100 ft. Atten. at 400 mc; 0.095 O.D. dielectric; 7/34 silver-plated Copperweld conductor; 0.135 O.D. jacket.

K-258 93 ohms; 16 mmf/ft. Cap; 72% V.P.; 850 V rms Corona; 15 db/100 ft. Atten. at 400 mc; 7/38 silver-plated Copperweld conductor; 0.135 O.D. jacket.

"TEFLON" HOOK-UP WIRE—Type E, EE and FF Hook-Up Wires meet MIL-W-16878A. Available in all standard colors.

Federal

A DIVISION OF I T & T

FEDERAL TELEPHONE & RADIO — FTR

Federal Telephone and Radio Company

A Division of INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION

COMPONENTS DIVISION • 100 KINGSLAND ROAD • CLIFTON, N. J.

In Canada: Standard Telephones and Cables Mfg. Co. (Canada) Ltd., Montreal, P. Q.
Export Distributors: International Standard Electric Corp., 67 Broad St., New York

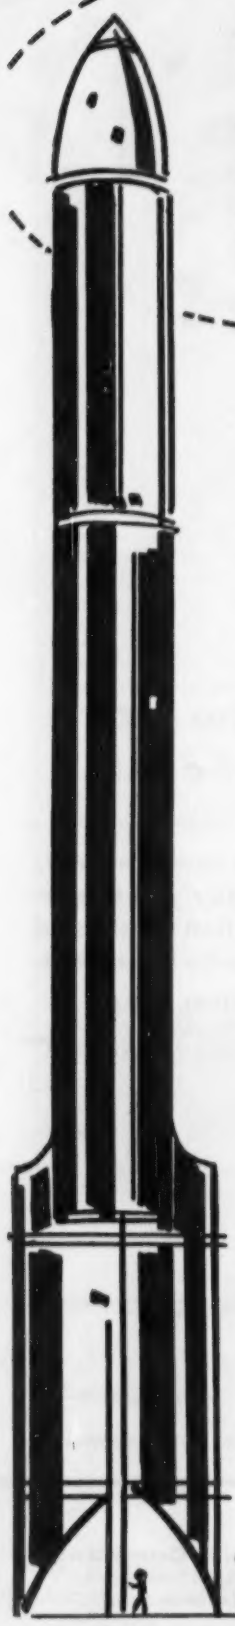

Even for the special "out of this world" wiring problem . . . a down-to-earth solution — Continental Wire

Whether it's a rocket to the moon or a radio for a room—chances are you'll find Continental ready to serve your wiring needs exactly—with both speed and efficiency.

With many quality insulations of Asbestos . . . Glass . . . Nylon . . . Varnished Cambric . . . Polyethylene . . . Polyvinyl . . . Teflon . . . Zytel, among others, Continental also offers a wide range of wire sizes—in stock and on special order. For instance, Continental's ELECTRONIC HOOK-UP WIRE. This nylon-insulated, hook-up wire saves TIME . . . LABOR . . . and GUESS-WORK in assembly. Resistance to abrasion, acids, alkalis and petroleum solvents—and temperatures ranging from —50° C to +125° C —assures dependability plus versatility. Available in AWG SIZES 18 to 32.

One source for your many wiring requirements —Continental. Write today for Continental's complete catalog of heat-resistant, moisture-resistant wires, cables and cords. Serving 600-5000 volts. Sizes, 18 AWG—2,000,000 CM.

Continental's industrial wire and cable specialists are available to serve you at any time.

Contact: Continental Sales, Box 363, Dept. C
Wallingford, Conn., Phone COlony 9-7718

Continental
WIRE CORPORATION
WALLINGFORD, CONNECTICUT • YORK, PENNSYLVANIA

poses, the contact sockets come in 8 RETMA colors—white, brown, yellow, blue, red, orange, green and gray, with coloring throughout Teflon body.

IMPULSE GENERATOR
operates at high temperatures

MINATRON CORP., 14 Cliveden Place, Belle Mead 14, N. J. The midget impulse generator, as a smaller companion to the model 50-A, likewise provides a self-generated output frequency proportional to the velocity of any ferromagnetic material passing the sensitive end of the pickup. It is designed to be used where space is at a premium and output requirements are moderate. The device provides an accurate means of measuring, counting or detecting movement, vibration or speed of a shaft or other part.

Stock units, enclosed in a stainless steel and Teflon housing, are only ⅜ in. in diameter and 1 in. long. Construction is such that it will stand operating temperatures to 500 F. Units may also be had with sensitive end contoured for maximum sensitivity.

PHOTOTRANSISTOR
pnp three-lead type

GENERAL TRANSISTOR CORP., 130-11 90th Ave., Richmond Hill 18, N. Y., announces production of a new germanium *pnp* alloyed junction three-lead phototransistor. Known as type GT-66, it is a miniature, light-sensitive photocell intended for use in circuits employing a-c amplification for modulated light. It may also be used as a two-lead device with d-c (unmodulated) light. It

let RHEEM

RIGID BARRIER* PACKAGING

reduce your shipping, packaging and handling costs ...and keep your product safe

Rheem's complete and specialized Rigid Barrier Packaging Department is staffed with creative and expert packaging engineers. They have had many years of experience in designing all types of hermetically sealed containers for all kinds of products, as well as in selecting the best dunnage material for shock and vibration isolation. And these men, who are equipped to take over all or part of *your* packaging program, are proving that Rheem Rigid Barrier Containers are the safest, and most economic way to ship even the most intricate and delicate products.

Rheem's vast facilities are also utilized in producing Rigid Barrier "AN" Containers under military specification MIL-C-6054, meeting the requirements of MIL-P-116B specifications. "AN" Containers are available in a range from 1½ to 55 gallons, including multiple lengths and capacities. In other words, Rheem can solve any packaging problem from small engine parts to complicated electronic gear.

Rheem also has a complete line of light gauge Rigid Barrier Containers for industrial use—electronic tubes, automotive and diesel parts, precision instruments, or any other product requiring special packaging protection. And for pennies extra, Rheem will lithograph a container with your trademark, or design, and in any number of colors.

Whatever your product, chances are that Rheem engineers have already found a way (or can quickly find one) to package it safely in steel. And probably more economically than before, whether the container is for re-use or one-time shipment. Why not write today for details!

*Trade-Mark of Rheem Manufacturing Co.

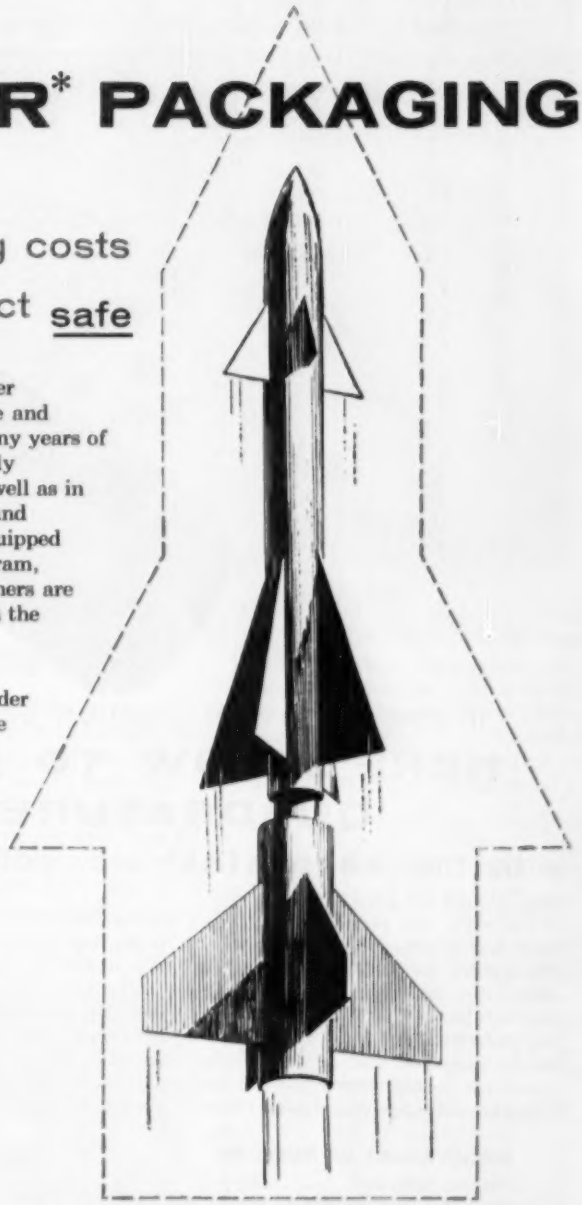

Rheem designs and produces Rigid Barrier Containers for Guided Missiles, Electronic Tubes, Telephone Equipment, Precision Instruments, Aircraft Engines, Torpedoes, Auto and Diesel Parts, and other hard-to-ship products.

YOU CAN RELY ON Rheem

WORLD'S LARGEST MANUFACTURER OF STEEL SHIPPING CONTAINERS

RICHMOND AND SOUTH GATE, CALIF., HOUSTON, CHICAGO, NEW YORK, NEW ORLEANS, LINDEN, N.J., AND SPARROWS POINT, MD.

RHEEM MANUFACTURING COMPANY — RIGID BARRIER PACKAGING DEPARTMENT
1701 W. Edgar Road, Linden, New Jersey

Please send me information on the RIGID BARRIER

PACKAGING OF_____

NAME_____

POSITION_____

COMPANY_____

ADDRESS_____

CITY_____ STATE_____

E-8

Want more information? Use post card on last page.

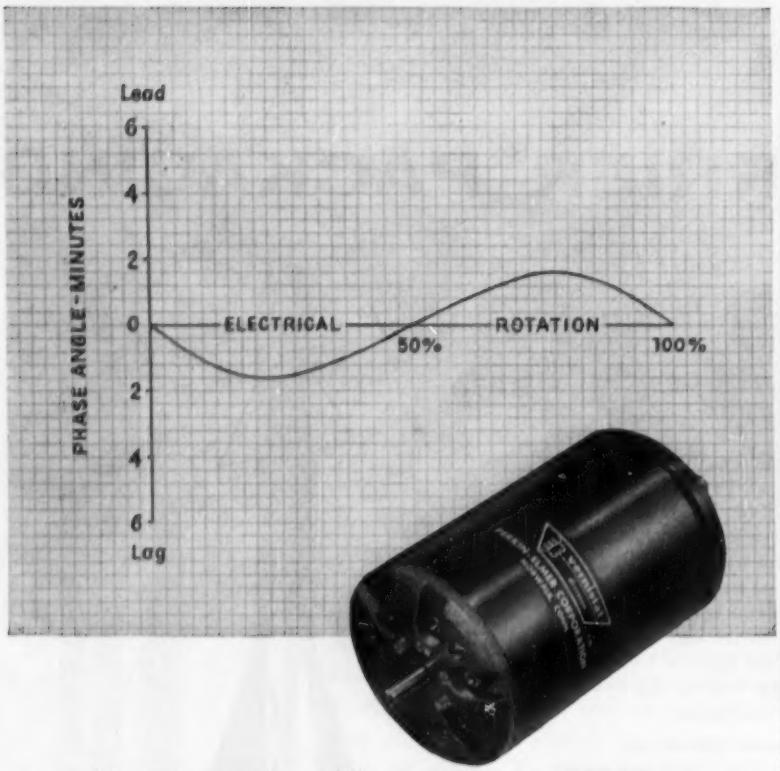

if you work with position servos...

HERE'S HOW TO LICK QUADRATURE

with the **vernistat*** a.c. potentiometer

If you work with position servos, you have had problems with quadrature. The tighter the servo loop, the more serious unwanted voltage due to phase shift can be.

Quadrature problems are tremendously simplified and more accurate servos are possible when you use the Vernistat. Although it contains a transformer, the Vernistat has extremely low phase shift. Phase angle is less than 1.6 min. at 400 c.p.s. in most systems.

The Vernistat is an a.c. potentiometer that combines *high* linearity and *low* output impedance. Size and mounting dimensions are designed to the BuOrd specification for a size 18 synchro.

SPECIFICATIONS OF MODEL 2B

Linearity Tolerance	± 0.05%
Minimum Output Voltage Increment	0.01%
Electrical Rotation	3494°
Mechanical Overtravel (each end)	45° approximately
Phase Angle (at 400 c.p.s.)	1.6 minutes, maximum
Excitation Frequency	20 to 3000 c.p.s.
Output Impedance	less than 130 ohms
Input Impedance	65,000 ohms, minimum
Maximum Input Voltage	130 V. at 400 c.p.s. or 20 V. at 60 c.p.s.

*TRADEMARK

vernistat division

PERKIN-ELMER CORPORATION

Norwalk, Connecticut

is capable of performance at a level sufficient to operate a relay.

▶**Uses**—Some possible applications include: tape and punch card reading, optical sound playback, liquid level control, tv receiver automatic brilliance control and industrial safety devices. It is also sensitive to relative position of the light source making it useful in positioning controls.

PANEL METER
with 0.5-μa sensitivity

GREIBACH INSTRUMENTS CORP., Metuchen, N. J., has developed an edgewise panel meter with full-scale meter sensitivity of ½ μa. Model 700 is the first of a complete series of edgewise panel instruments for voltage, current and resistance measurements.

All Greibach edgewise meters incorporate the bifilar suspension movement which minimizes friction losses and prevents damage even under high external stress. The units are characterized by features such as high overload capacity, relatively small energy input, and accuracies up to 0.25 percent.

PULSE CIRCUITS
transistorized plug-ins

TRIPL-T CO., Box 352E, Pasadena, Calif. Transistorized plug-in pulse circuits are now available. Multivibrators, binary counters, one-shot multivibrators, triggers, gated integrators, buffers, pulse inverters, blocking oscillators, crystal oscillators, and relay drivers in compatible circuitry are mounted with standard noval plugs.

▶**Specifications**—Units are ¾ in. in diameter by 2 5/16 in. high, weighing about 20 grams. Circuits will

★ Control Components Digest ★

News and notes on resistors, rheostats, relays, motor controls, dimmers and other control components

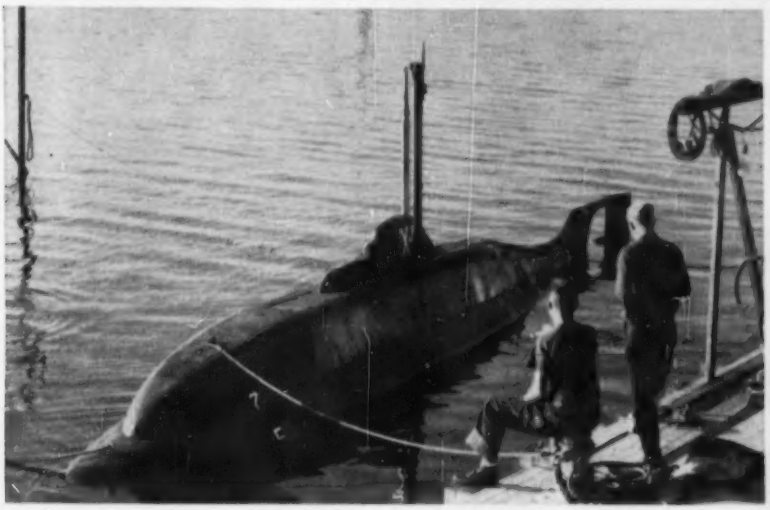

FIRST TEST DIVE, on a leash, for new midget sub. Fairchild engineers stand by. She passed this and other tests and was turned over to Navy.

New 4-man midget sub joins Navy

Only 50 feet long, but packing a mighty wallop, the USS X-1, a new midget submarine has just been preliminarily accepted by the U. S. Navy from the builders, Fairchild Engine Division of Fairchild Engine and Airplane Corporation, Deer Park, Long Island.

The 25-ton X-1 carries a 4-man crew, can dive under or cut through steel nets protecting harbors, and sneak up rivers and canals to attack power plants, bridges and dams.

And, among the many design features contributing to the striking power of this new Naval weapon, you'll find reliable Ward Leonard controls for the electric drive—just one of the ways Ward Leonard products are aiding national defense.

75-ton shield door gets fingertip control

Centralized Ward Leonard motor controls slide the massive shield door for this modern cyclotron into place for research experiments at Brookhaven National Laboratory, Upton, Long Island, N. Y.

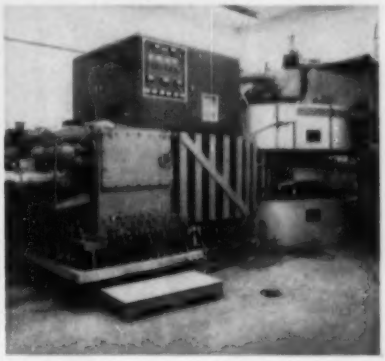

Made of concrete with steel support, and weighing 75 tons, the 5- by 8- by 12-foot door protects personnel from effects of radiation when deuterons (the nuclei of heavy hydrogen) are accelerated to an energy of 20 million electron volts.

Easy derating for group-mounted resistors

This family of curves will help the designer allow for mutual heating of resistors mounted in close proximity. It's typical of the practical design data you'll find in Ward Leonard's 65-page Catalog 15. Write for your free copy today. 4.8

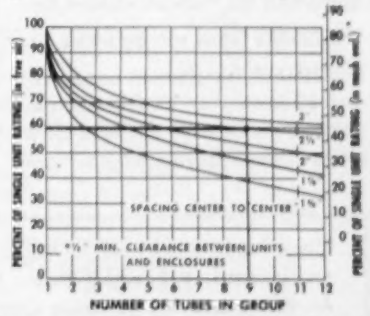
PERCENT OF SINGLE UNIT RATING (in free air)
SPACING CENTER TO CENTER
⅛" MIN. CLEARANCE BETWEEN UNITS AND ENCLOSURES
NUMBER OF TUBES IN GROUP

100% inspection here!

No statistics, no probability theory in this 100% check! She's measuring OD and concentricity of ceramic resistor cores—just two details in Ward Leonard's rigorous and continuous quality control. But, it's checking details like these on every single unit that gives Ward Leonard products their reputation for accuracy, stability and long life.



BASIC COMPONENTS for new dimming system.

New 500-to-1 dimmer for fluorescents

A new Ward Leonard dimming system for hot-cathode 40-watt T-12 fluorescent lamps handles up to 140 lamps with a dimming range of 500 to 1. Simple and non-electronic, the new dimmer is designed for control of cove lighting, luminous ceilings and multiple lamp fixtures in theatres, auditoriums, churches, offices, restaurants, and night clubs. Dimmer circuit output is unaffected by change in connected lamp load. For complete data, write for bulletin 76F.

WARD LEONARD ELECTRIC COMPANY
31 SOUTH ST., MOUNT VERNON, N. Y.
Recent-Engineered Controls Since 1892
RESISTORS · RHEOSTATS · RELAYS · CONTROLS · DIMMERS

another... CUSTOM-BUILT

Nothelfer TRANSFORMER

NWL

250 KVA
Single Phase

The transformer shown here is 250 KVA Single Phase, Double Wound 4160/600 Volts, with ten reduced voltage taps.

The flexible leads can be wired directly to a tap changing switch.

NOTHELFER Transformers are superior as they are vacuum-pressure impregnated, and all joints over 10 amperes are silver-plated, conservative copper and steel. Laminations, oriented and most silicon steels are annealed in accurately controlled nitrogen atmosphere electric furnaces.

Other transformers from 10 VA to 300 KVA Dry-Type only. Both open and encased. 1, 2, and 3 Phase. 15 to 400 Cycles. Also Iron Core and Air Reactors. Large Saturable Core Reactors.

Nothelfer

WHEN YOU NEED SPECIAL ELECTROMAGNETIC EQUIPMENT CONSULT NOTHELFER WINDING LABORATORIES, INC.

Established 1920

WINDING LABORATORIES, INC.

P. O. Box 455, Dept. 102, Trenton, N. J.

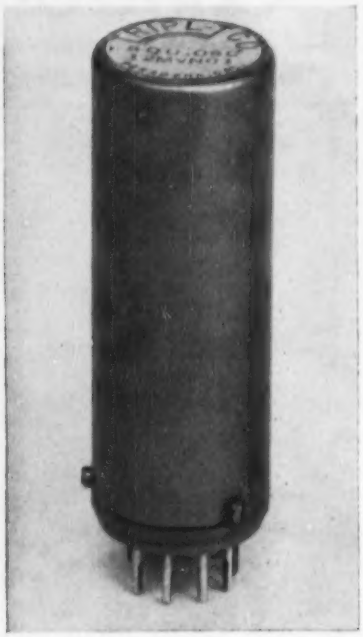

operate from 3 to 12 v with a maximum prf of 40 kc.

These economical complete units are ideal for evaluating performance of transistorized logical systems. Prices for the different types range from $17.50 for the multivibrator to $26 for the blocking oscillator.



PAPER TUBULAR
is ceramic-encased

UNITED CONDENSER CORP., 3400 Park Ave., New York 56, N. Y., has introduced a new type of ceramic-encased paper tubular capacitor. Incorporating a newly developed thermosetting plastic end seal, the capacitor will pass humidity tests at 90 to 95 percent humidity over a period of 750 hr at 40 C; 500 hr at 50 C; and 300 hr at 60 C. It will also pass a combination humidity and life test at 90 to 95 percent humidity and 60 C at rated volt-

NEW 10 STAGE 3/4" multiplier phototube

Actual Size

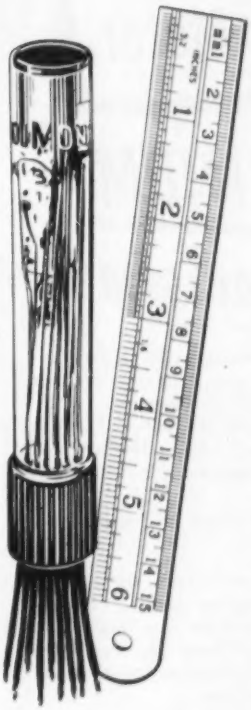

DU MONT Type K1382

In the new Type K1382, Du Mont offers the first ¾" multiplier phototube with the ruggedness of field equipment combined with the performance of a laboratory tube.

The average gain of the Type K1382 of 300,000 at 105 volts/stage exceeds that of many laboratory tubes, with no sacrifice in long-term stability for which Du Mont multiplier phototubes are noted.

In addition to its small size and superb operating characteristics, the Type K1382 is unusually rugged. This tube has been designed for the roughest service under the worst climatic conditions. The tube base is potted and all leads jacketed to permit operation under severest humidity without leakage between leads. **Laboratory performance** can be obtained from this tube even when it is being dropped as a probe into a drill hole far underground.

As in other Du Mont multiplier phototubes, the linear box-type dynode structure is used. This means optimum electron collection greatly improving signal-to-noise ratio. Also, long leakage paths minimize noise and dark current. Dark current is only 0.1 ua at 105 v/stage and 25°C.

The small size and excellent performance of the new Type 1382 mean an extra bonus to users in the geological surveying field where, for example, its extra gain permits much longer signal transmission from underground locations before signal level becomes too low to be useful. It should be exceptionally useful in medical physiological probing. Batteries of these tubes may be used for speedier diagnostic procedure. In addition, the small size will help greatly in the miniature and portable designs that can function at least as well as laboratory equipment.

CONDENSED SPECIFICATIONS

Average gain:	300,000 at 105 v/stage
Maximum dark current:	0.1 ua max. at 105 v/stage and 25°C
Photocathode sensitivity:	40 ua/ lumen
Average anode sensitivity:	12 a/lumen
Maximum outside diameter:	no greater than ¾"
Physical Characteristics:	potted base, jacketed leads

DU MONT®

For complete information write to:

Industrial Tube Sales Dept.

ALLEN B. DU MONT LABORATORIES, INC.

2 Main Ave., Clifton, New Jersey

DON'T MISS THE DUMONT TUBE EXHIBIT AT WESCON BOOTHS 929-930

NEW

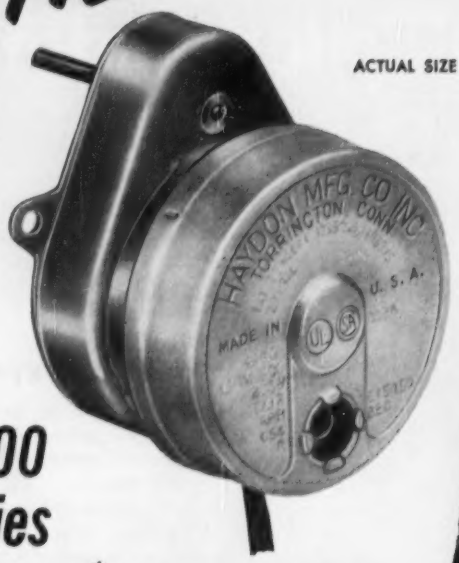

2300 Series HAYDON* Timing Motor

Packed with PREMIUM Power and Performance!

Here is a new, more powerful timing motor with the extra torque and gear train stamina you need for today's appliance timers and dozens of other timing jobs. And this bonus in power is combined with the usual HAYDON hysterisis motor advantages; small size, quiet operation, dependability, total enclosure and all-position synchronous operation.

Speeds — 1, 2, 4, 6, 8 and 10 rpm; torque -10 ounce-inches at 1 rpm; 115 and 230 volt, 60 cycle.

HAYDON MOTORS — *A product of sound engineering and precision manufacturing . . . highest quality always. Write today for engineering data sheets on this new 2300 Series Motor . . . and for catalogs describing the complete line of HAYDON Timing Motors and Devices. Or contact the HAYDON Field Engineer nearest you.*

* Trademark Reg. U.S. Patent Office

HAYDON AT TORRINGTON
HEADQUARTERS FOR TIMING

A SUBSIDIARY OF GENERAL TIME CORPORATION

HAYDON Manufacturing Company, Inc.
2432 ELM STREET, TORRINGTON, CONN.

ages, as well as a boiling water test consisting of alternate 10 minute immersions in boiling water and water of room temperature for a total of 5 cycles.

Rated operating temperature range is —40 C to 85 C. Available capacitance values cover the full range for tubular papers. The capacitor is impregnated with mineral oil and has high insulation resistance as well as low power factor and temperature coefficient.

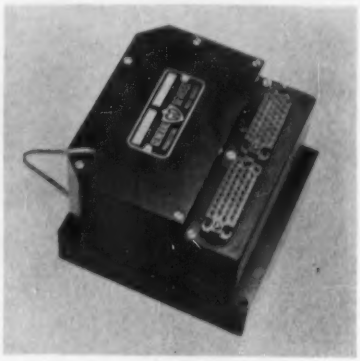

SAMPLING SWITCHES
5-min. brush replacement

GENERAL DEVICES INC., Princeton, N. J., has available sampling switches that provide exclusive constant force brushes, precision phasing, one to three poles, up to 60 shorting or 30 non-shorting channels per pole, complete with 6, 12, or 28 v d-c motor, shielded r-f filter, special precision spur gear reduction. They are also available with speed governor and with plugs recessed and mounted into housing.

Approximate dimensions are 3.625 in. sq by 2.687 in. high. They are also available hermetically sealed or with 400 cycle a-c motor with slightly changed dimensions.

Current models include single or multiple pole, stacked, concentric, opposed, raised contact, segmented or printed circuit designs.

POWER SUPPLY
and demodulator unit

DOELCAM, A Division of Minneapolis-Honeywell, 1400 Soldiers Field Road, Boston 35, Mass., has developed model DV-1 regulated power supply-demodulator unit for

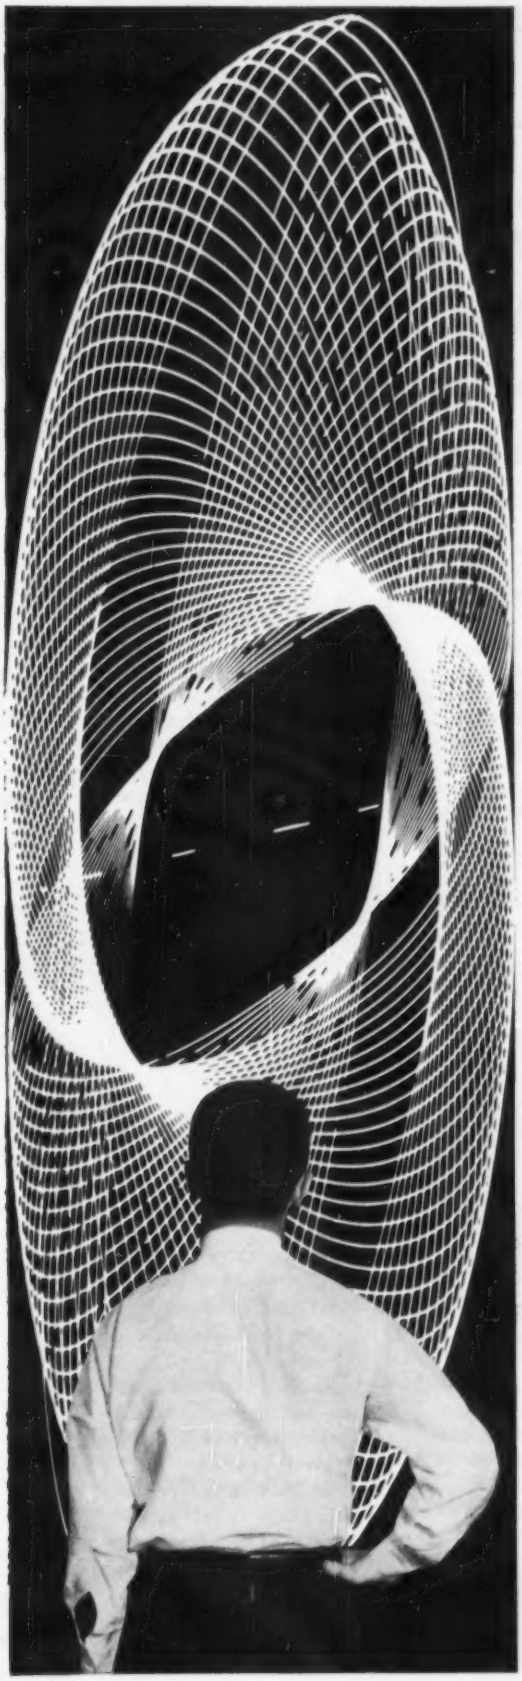

as an Autonetics Engineer... you can achieve science-fact far stranger than science-fiction

Today at AUTONETICS there are elaborate automatic control systems actually being developed, designed and *produced* in quantity that make the mechanics of the wildest space fantasies look ordinary.

For example, where in the pages of science-fiction is there a robot that compares with AUTONETICS' new airborne digital computer? This 3-cubic-foot brain can solve mathematical problems in one second that would take a math whiz with pencil and paper 9 hours, or require a clothes closet full of ordinary computer equipment. It can continuously integrate 93 quantities simultaneously . . . through 51 removable panels of etched, transistorized circuitry.

This is only one example of AUTONETICS' far-reaching electro-mechanical technology. There are hundreds of other areas of equally advanced opportunity in missile guidance, flight control, fire control and special automatic controls. Among your tools are the latest data processing equipment, plus modern and complete environmental and flight test facilities. AUTONETICS' scientific leadership is setting the pace in this field with its unique 10-year backlog of know-how.

OPPORTUNITIES FOR:

Computer Specialists
Electro-Mechanical Designers
Environmental Test Engineers
Electronic Component Evaluators
Instrumentation Engineers
Fire Control Systems Engineers
Flight Control Systems Engineers
Electronics Research Specialists
Computer Programmers
Computer Application Engineers
Automatic Controls Engineers
Electronic Engineering Writers
Inertial Instrument Development Engineers
Preliminary Analysis and Design Engineers
Also Openings for Draftsmen and Technicians

CONTACT: Mr. R. C. Smith, AUTONETICS Engineering Personnel Office, Dept. 991-20EL, P. O. Box AN, Bellflower, California

Autonetics

A DIVISION OF NORTH AMERICAN AVIATION, INC.

AUTOMATIC CONTROLS MAN HAS NEVER BUILT BEFORE

MORE FOR YOUR INSTRUMENT DOLLAR!

New SHASTA Model 301A Wide-Range Oscillator

NEW

Shasta

WIDE-RANGE OSCILLATOR

FOR DESIGN & TEST USE

FEATURES

★ Internal impedance less than 55 ohms

★ 10 cps to 1 mc range

★ ± 1 db over entire range

★ Drives 600 ohm load @ 10 v. over entire range

★ Distortion less than 1%, hum level less than 0.1%

★ Drift less than ± 2%

DESCRIPTION — SHASTA's Model 301A fills the need for a compact, rugged and reliable general-purpose wide-range oscillator for laboratory or production test use. Simple, dependable circuitry provides top stability, low distortion. Its wide frequency range and low-impedance 160-milliwatt power output meets a wide range of test requirements. Built-in electronically-regulated power supply reduces waveform distortion, improves frequency stability, and minimizes effects of line voltage variations.



ACCESSIBILITY is "tops," thanks to SHASTA's exclusive chassis design!

BRIEF SPECIFICATIONS

Frequency Range: 10 cps to 1 mc, 5 steps
Max. Amplitude Variation: ± 1 db, 10 cps to 1 mc
Power Output: Max. 10 v. into 600 ohm load
Distortion: Less than 1%
Min. Load Imp.: 600 ohms
Hum Level: Less than 0.1% of rated max. output
Dimensions, Weight: 9¾"H x 8"W x 9"D; 14 lbs.
Price: $140.00 f.o.b. factory.

SHASTA "designed for the user" instruments offer more usable features per dollar. Write today for Technical Bulletin 301A; please address Dept. S6-8.

S-19

OTHER SHASTA QUALITY INSTRUMENTS — Expanded Scale Frequency Meters and Voltmeters • Oscillators • AC Voltmeters • Power Supplies • Wide Band Amplifiers • Bridges • WWV Receivers • Decade Inductors

Shasta division

BECKMAN INSTRUMENTS INC.

Phone: LAndscape 6-7730 • Richmond 3, Calif.

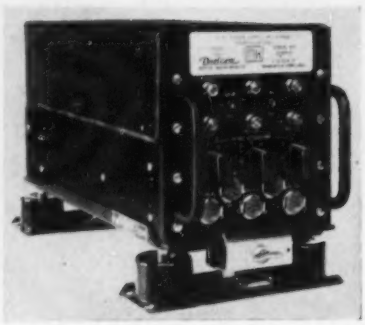

use with gyros in flight test applications where 115-v 400-cycle single-phase primary power is available. Measurements are 6 1/16 in. wide by 7⅞ in. high by 12¾ in. long. Weight is 13 lb.

▶ **Application**—It was designed for use with 1 to 3 Doelcam model K rate measuring gyroscopes to comprise a complete rate measuring system.

The unit properly energizes the motor and pickoff of each gyro and converts the a-c output signal of each pickoff to d-c for use with oscillograph galvanometers. Free literature is available.



DELAY LINES
for printed circuits

PCA ELECTRONICS INC., 2180 Colorado Ave., Santa Monica, Calif., has available delay lines packaged in 0.4 maximum square plastic tubing. These units are provided with No. 20 tinned copper wire for use in printed circuits, and are available either 3¾ in. or 4⅞ in. long.

Designs are available in each impedance level and delay time. Length of the delay line will vary with the delay and impedance.

▶ **Uses**—All designs are miniaturized and are commonly used for delaying video pulses, pulse shap-

DOW CORNING CORPORATION

Silicone News

FOR DESIGN ENGINEERS

SILICONE INSULATED COILS UP ROLLING MILL PRODUCTION 30%

By using coils insulated with Dow Corning Silicones in their induction heating furnaces, Vancouver Rolling Mills of Canada has cut steel ingot heating time 75%; reduced fuel costs $200 per day. And even more important to a steel-hungry economy, production has been increased 30%.

Designed and constructed by General Engineering Ltd., Toronto, this is the largest induction heating installation in the world. Indications are that the design techniques including the silicone insulated coils may well revolutionize the reheating of steel ingots or billets wherever electric power is in good supply.

Two coil "tunnels" are divided into two stages. In the first stage almost half of the required 7000 KW is applied at 60 cycles, heating cold ingots to 1400 F. The second stage, at 540 cycles, brings ingot temperature up to 2300 F. To demonstrate the efficiency of the system, a cold ingot can become bar stock within 10 minutes after entering the furnace. Rated production is 20 tons an hour.

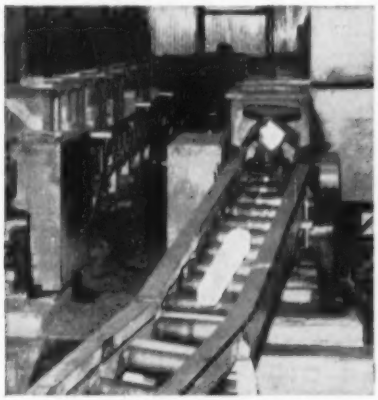

Insulated with Dow Corning Silicones, the coils are frequently within inches of the white-hot ingots. On occasions when sections of the refractory material serving as thermal insulation have been broken away, the silicone insulation has been exposed to greatly elevated temperatures without failure. The unit has been in operation since July, 1954. *No. 95*

Seal And Spring In Toroidal Inductor Made From Silastic

Superior resistance to compression set, even after prolonged exposure to high or low temperatures, has made Silastic*, Dow Corning's silicone rubber, increasingly popular among designers once hampered by the temperature limitations of organic rubber. Here, for example, is how Burnell & Co., Inc., uses Silastic to make a new variable toroidal inductor more efficient and dependable at temperatures ranging from —100 to over 500 F.

The "Rotoroid" inductor comprises a toroid coil and two permanent magnets. One of the magnets is rotatable to produce a continuously adjustable biasing field for electronic circuitry. To provide a positive seal where the controlling shaft enters the unit's hermetically sealed housing, the shaft is fitted with a "Hexseal" locknut that has a heavy Silastic cover, molded by APM Co.

To permit the shaft to turn freely, and yet maintain a tight seal, a very small amount of Dow Corning 200 Fluid, 1,000,000 centistokes, is applied to the well of the locknut.

Silastic also serves as a thrust and centering spring inside the "Rotoroid." Here a

high durometer Silastic is used. In service this silicone rubber spring has proved to have excellent service life, retaining its original resiliency over a much wider temperature span than any metal spring.

In many electronic applications, such as guided missile telemetering systems, the thermal stability made possible through the use of Silastic parts, is vital to the "Rotoroid's" accurate performance. *No. 97*

*T.M. REG. U.S. PAT. OFF.

Speed And Range of Vacuum Pump Increased With Silicone Fluid

A series of tests conducted by the F. J. Stokes Machine Company, Philadelphia, world's largest producer of high vacuum equipment, prove that Dow Corning 702 Diffusion Pump Fluid helps to attain higher vacuum in less time than possible with organic fluids.

The silicone fluid provides faster evacuation in the 1 to 10 micron range and at the same time assures lower ultimate pressures in the range between .01 and .001 microns.

The tests were performed in connection with development of Stokes' new line of Ring-Jet Diffusion Pump Series 160, and Ring-Jet Booster Pumps Series 150. Remarkably effective for rapid-cycle work, these pumps are available in 5 sizes from 4 to 16 inches.

The test results, since confirmed by experience in other Ring-Jet Pump models, have led Stokes to advise its representatives "since the organic fluid is almost the same in price as the silicone, the silicone fluid (Dow Corning 702) would be preferable, especially considering that it will not oxidize when subjected to the atmosphere at high temperatures." *No. 96*

Design Edition 23

DOW CORNING CORPORATION · Dept. 4808
Midland, Michigan

Please send me 95 96 97

NAME _____

TITLE _____

COMPANY _____

STREET _____

CITY _____ ZONE _____ STATE _____

ATLANTA · BOSTON · CHICAGO · CLEVELAND · DALLAS · DETROIT · LOS ANGELES · NEW YORK · WASHINGTON, D. C. (Silver Spring, Md.)

Canada: Dow Corning Silicones Ltd., Toronto; **Great Britain:** Midland Silicones Ltd., London; **France:** St. Gobain, Paris

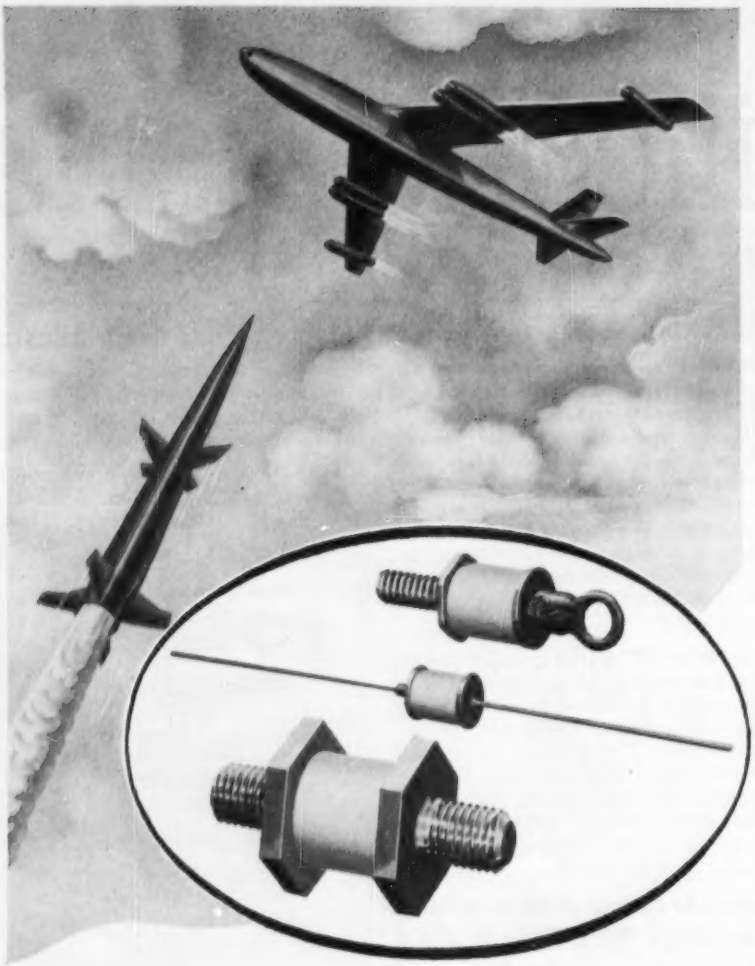

"We use them—

in our electronic controls because of light weight and dependability. They are also used in commercial applications.

Why don't you write regarding your application?"

Sarkes Tarzian

SILICON POWER RECTIFIERS

Sarkes Tarzian, Inc., RECTIFIER DIVISION
DEPT. D-2, 415 N. COLLEGE AVENUE, BLOOMINGTON, INDIANA
IN CANADA: 700 WESTON RD., TORONTO 9, TEL. MURRAY 7535
EXPORT: AD AURIEMA, INC., NEW YORK CITY
Look us up at the Wescon Show for further information.

ing, gating, storage of information in computers, time standards in count-down circuits, synchronization of waveforms, time-modulation, generation of waveforms and high impedance connecting cables.



ERROR COMPUTER
for time-saving evaluations

ALLEGANY INSTRUMENT CO., 1091 Wills Mountain, Cumberland, Md. The K-7 error computer is a new time-saving device for use with wire strain transducer systems which are widely employed in measuring strain, force, torque, pressure and the like. These systems are subject to small but cumulative errors caused by elusive factors within the system, and a realistic solution involves 14 variables and 9 simultaneous equations requiring approximately 80 hours of a mathematician's time to solve for just one variable.

Type K-7 isolates this error in 5 minutes using a semiskilled operator. It simulates all the system components and presents the error in percent of correct magnitude. Literature is available.

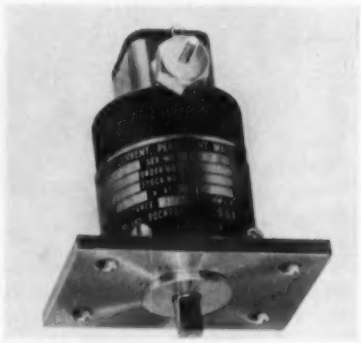

P-M GENERATORS
three frame sizes

BARBER-COLMAN CO., 1400 Rock St., Rockford, Ill., announces a line of p-m tachometer generators. Three different frame sizes are available with maximum rated outputs of

TRANSISTORS—first family of electronics

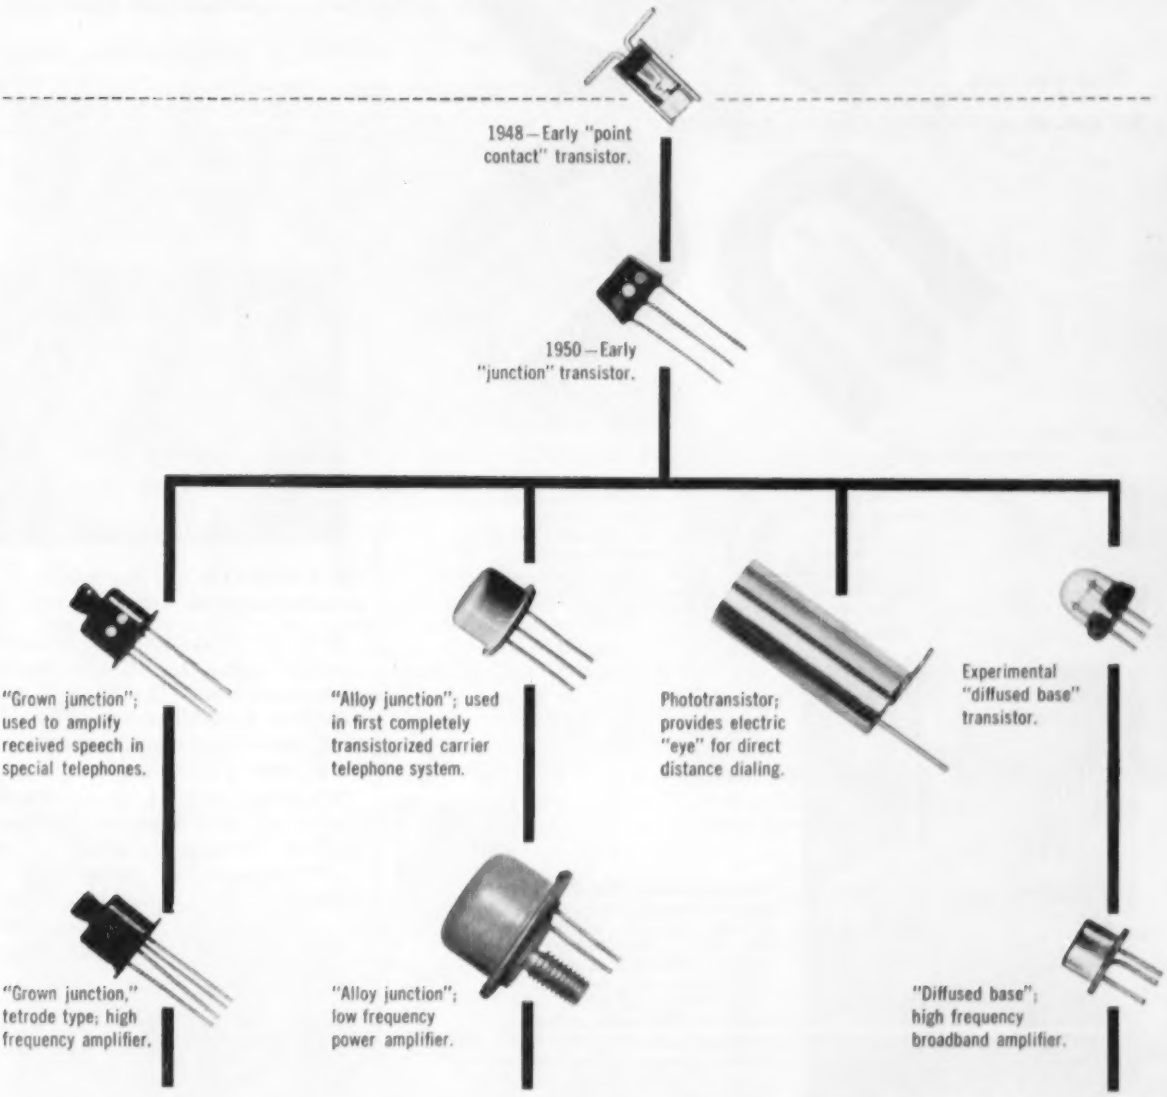
1948—Early "point contact" transistor.
1950—Early "junction" transistor.
"Grown junction"; used to amplify received speech in special telephones.
"Alloy junction"; used in first completely transistorized carrier telephone system.
Phototransistor; provides electric "eye" for direct distance dialing.
Experimental "diffused base" transistor.
"Grown junction," tetrode type; high frequency amplifier.
"Alloy junction"; low frequency power amplifier.
"Diffused base"; high frequency broadband amplifier.

In 1948 Bell scientists announced their invention of the transistor—a tiny device able to amplify signals a hundred thousand times using a small fraction of the power of an electron tube.

From this original "point contact" transistor has grown a distinguished family of immense usefulness to electronics. Some of its leading members are shown here, in approximate actual size, with their scientific type names.

For telephony the transistor has opened the way for notable advances in instruments, transmission and switching. Elsewhere it has opened the way to advances in hearing aids, television, computers, portable radios and numerous military applications.

Bell's transistor family is typical of the Bell Laboratories research that helps keep your telephone service the world's best—and at the same time contributes importantly to other fields of technology.

BELL TELEPHONE LABORATORIES

WORLD CENTER OF COMMUNICATIONS RESEARCH AND DEVELOPMENT

Want more information? Use post card on last page.

Now you can
WELD *almost any electronic assembly*

Ultra-fine whiskers in semi-conductor devices, shunts and header pins in relays, slit and filament assemblies for isotron and mass spectrometer guns, and electronic sub-assemblies of wide variation are now reliably and precisely joined at greatly increased production rates by the WELDMATIC Model 1015

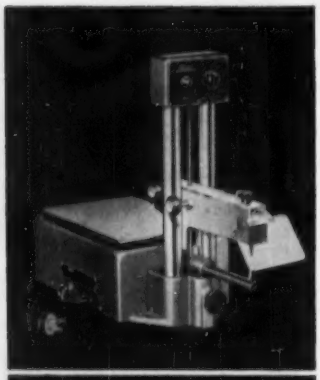

Unitek WELDMATIC

The WELDMATIC Model 1015 is a bench-mounted precision resistance welder, compactly self-contained. Weldmatic's stored-energy principle permits welding of copper, silver, high-carbon steel, tungsten, molybdenum, and other "difficult" materials. Weldmatic millisecond weld-time insures reliable welds without discoloration, excessive deformation, or metallurgical change. Dissimilar metals and parts of widely different thicknesses are joined with ease. The Model 1015 performs outstandingly in both laboratory and production line operation

Write for Complete Technical Information on Stored Energy Welding

UNITEK CORPORATION
269 North Halstead • Pasadena 8, California

VISIT OUR BOOTHS 1223 AND 1224 WESCON SHOW

7,000 rpm or 100 v, whichever occurs first. They are capable of supplying output voltages up to 40 v per 1,000 rpm within ±0.5 percent linearity over the operating range with low slot and commutator ripple.

These generators are readily adaptable for speed readings when coupled with a voltmeter graduated in rpm rather than in volts, or for special applications, such as in surface control systems of guided missiles.



A-C RELAYS
operate up to 140 C

HI-G, INC., Bradley Field, Windsor Locks, Conn. The HG-2SM-R subminiature relay will operate at frequencies from d-c up to and including 10,000 cps. Operating voltages are from 6 to 115 v a-c or d-c. Measuring only 1½ in. in length by 41/64 in. in diameter and capable of operation up to 140 C, the unit surpasses all paragraphs of MIL-R-5757C. Contact ratings are 3 amperes resistive and 1 ampere inductive at 28 v d-c or 115 v a-c.

MIXER DIODE
point-contact silicon type

MICROWAVE ASSOCIATES, INC., 22 Cummington St., Boston, Mass.,

BRC RX Meter combines all necessary RF Bridge Test functions

Completely self contained . . . quick, easy broad band measurements, on components or coaxially connected elements

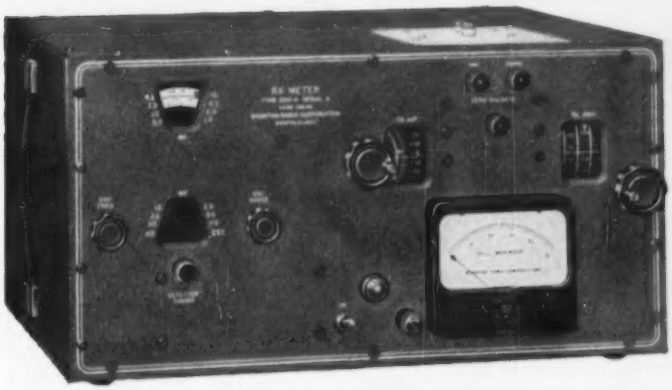



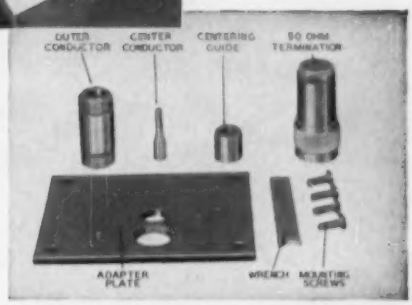

Co-ax Adapter Kit Type 515-A adapts RX Meter for coaxial connections.

TYPE 250-A FREQUENCY RANGE 500 kc to 250 mc

The RX Meter Type 250-A is a completely engineered measuring instrument including a broad band RF oscillator, RF bridge and null detector. The parallel resistance and parallel capacitance or inductance of the unknown is indicated on precise, easily-read dials. Components such as resistors, capacitors or coils, are connected across two unbalanced binding post connections on top of the instrument. The Co-ax Adapter Type 515-A, shown above, replaces the binding posts in a few seconds with a Type N Connector for measurement of coaxially connected devices. No corrections are necessary over the entire frequency range for most measurements.

Dynamic measurement of a junction transistor under conditions of variable bias and applied RF. Similar procedures can be used with vacuum tubes.

The RX Meter measures the characteristic impedance, attenuation and propagation velocity of RG-58/U Cable.

The RX Meter provides a simple, accurate means of measuring, independently, the RF resistance and reactance of a wide variety of materials, components and circuits. It is also useful in making other types of measurement.

Dynamic measurements of the parameters of transistors and vacuum tubes can be made. D.C. current up to 50 ma can flow through the bridge terminals permitting simple direct biasing of the unknown element. By a simple procedure, the RF voltage across the unknown can also be varied, permitting measurement of input and output impedance under a wide variety of conditions.

Cable characteristics can be measured on the RX Meter using a very short cable sample. A simple measurement will yield the characteristic impedance, attenuation and propagation constant. By the use of a balun the same characteristics can be measured for balanced cables.

SPECIFICATIONS

FREQUENCY RANGE: 500 KC to 250 MC in eight ranges.
FREQUENCY ACCURACY: ±1%.
RESISTANCE RANGE (Rp): 15 to 100,000 ohms.
CAPACITANCE RANGE (Cp): −100 mmf to +20 mmf (may be extended).
INDUCTANCE RANGE (Lp): 0.001 uh to 100 mh.
TEST VOLTAGE: 0 volts D.C. (Up to 50 ma may be passed through unknown terminals). 0.1–0.5 volts R.F. (may be conveniently reduced to 20 mv).
POWER REQUIREMENTS: 105-125 volts, 50/60 cps, 60 watts (internally regulated).

Type 250-A Price: $1250.00 F.O.B. Boonton, N. J.
Type 515-A Price: $32.50 F.O.B. Boonton, N. J.

BOONTON RADIO Corporation
BOONTON · N·J · U·S·A ·

Want more information? Use post card on last page.

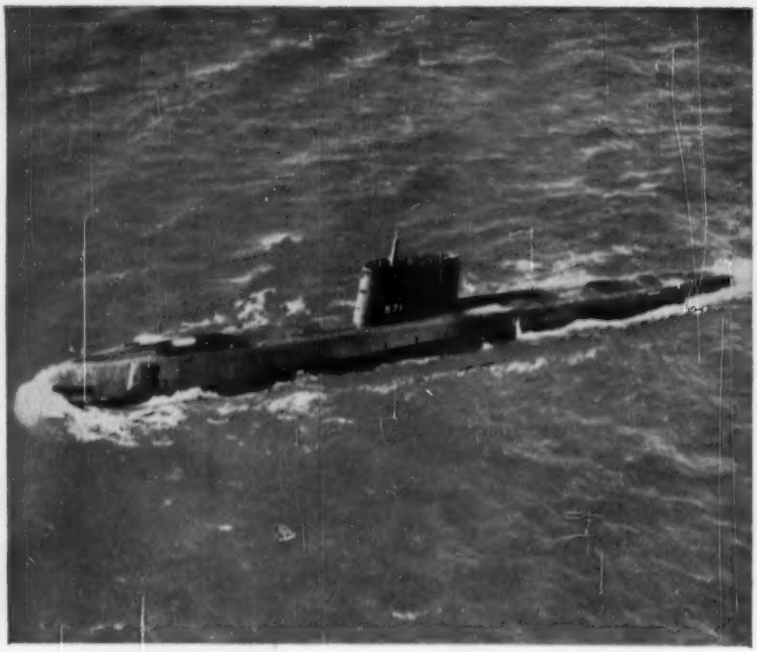

Official U. S. Navy Photograph

'Diamond H' Aircraft-type Relays Go to Sea in the Nautilus

Their reliability proven in such critical land and air applications as guided missiles, jet engine controls and fire control systems, "Diamond H" miniature, hermetically-sealed, aircraft-type relays were chosen by Westinghouse for an important role in the world's first atomic-powered submarine. They're used in the reactor control system of the Nautilus.

Possible performance characteristics of "Diamond H" Series R 4 PDT relays span such broad ranges that the modifications which can be arranged to meet particular sets of requirements are almost endless. They're fully described in Bulletin R250, a copy of which is yours for the asking. Our engineers will gladly work with you to develop a variation for your specific need.



THE HART MANUFACTURING COMPANY

202 Bartholomew Avenue, Hartford 1, Conn.

has developed a new point contact silicon diode type 1N53A for microwave mixer applications in the 35 kmc millimeter region. It is intended to replace the 1N53 in application requiring superior burnout resistance and/or broad r-f bandwidth coverage.

▶ **Other Features**—While its nominal noise figure is identical to that of the type 1N53, the 1N53A is rated at 3 times the burnout and covers a 12-percent bandwidth with maximum vswr at band edges of 2.5. Design center frequency is 34,860 mc.

TANTALUM CAPACITOR
high ratings, small size

P. R. MALLORY & CO., INC., Indianapolis 6, Ind. has introduced the new type TNT subminiature tantalum electrolytic capacitors. These metal-encased capacitors, only 0.145 in. in diameter by ⅜ in. long, fit readily into miniaturized transistor circuits.

Five different ratings are available: 80 μf at 3 v; 50 μf at 6 v; 25 μf at 15 v; 15 μf at 30 v; and 8 μf at 50 v.

H-V POWER SUPPLIES
small in size, low in cost

NEUTRONIC ASSOCIATES, 87-16 116th St., Richmond Hill 18, N. Y.,

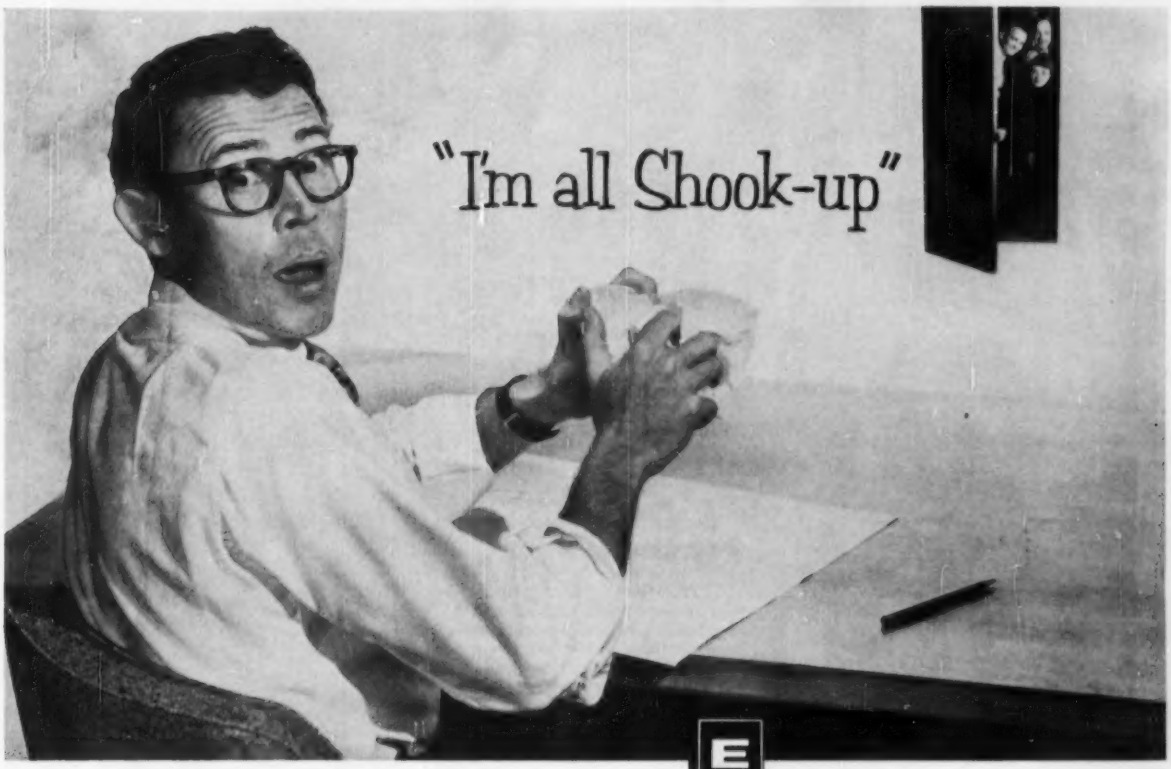

"I thought I had a problem but has my automation job done for me!"

Engineers designing precision, automatic, "fool proof" systems for measuring DC and AC voltages, DC and AC ratios, resistance, frequency—requiring both absolute and Go/No Go values—often find that combinations of standard E-I instruments give them the exact system they need—at a fraction of the cost of custom systems, to say nothing of valuable engineering time saved.

Combining E-I DC and AC Digital Voltmeters, DC and AC Digital Ratiometers, Digital Ohmmeters, Digital In-Line Frequency Counters, and Go/No Go Bridges with Input Scanners, Programmers and machine print outs provides complete systems from input to output data for automatically measuring AC and DC voltages and ratios within 0.01%, resistances to 0.01%, and frequency within ±1 digit. Reading time averages one second.

FEATURES OF E-I SYSTEMS

VERSATILITY—Combining standard, modular units provides systems that give absolute plus Go/No Go values. Changing requirements does not require equipment redesign. Operates all machine print outs.

AUTOMATIC OPERATION—Designed to eliminate hand operations from input to output data.

SIMPLICITY OF READ OUT—Combining visual, in-line read out with print out gives unmistakable results.

PRECISION PLUS SPEED—Measurements made quickly, accurately and reliably with E-I designs.

PROVEN RELIABILITY—Hundreds of rigid applications of E-I instruments and systems now in the field.

Call your E-I field representative for complete information on the variations possible with E-I instruments. He will be happy to answer questions about your specific applications.

The Complete Line of Digital Instruments

ELECTRO INSTRUMENTS INC.

3794 Rosecrans Avenue San Diego, California

Engineering field offices in major U. S. and Canadian cities.



GO/NO GO SYSTEMS—Systems for checking AC, DC, Ω, *f* to desired limits are available for a variety of applications. The system above measures resistance differences between a number of resistors, presenting these differences as percentage.



AUTOMATIC SCANNING AND PRINT-OUT—This E-I system combines an E-I Digital Voltmeter and Input Scanner. 99 inputs are sequentially scanned automatically and values printed on a Clary printer.

TELEMETRY—E-I digital instruments are now used for precision monitoring by all major telemetry and airframe manufacturers in the United States and Canada. This system uses E-I Digital Voltmeters to operate an IBM Punch for providing data in real time.

New X-500 Sub-Miniature ACEPOT* rated to 150° C.

ACEPOT*-ACETRIM* sub-miniature, precision wire-wound potentiometers and trimmers are shooting to new highs!

X-500 "Hotpot" operates from —55° C. to 150° C.
½" size
up to 250K
± .3% linearity
proved in use

ACEPOTS and ACETRIMS meet unusually rigid functional and physical requirements and are setting new standards for dependability in sub-miniaturization. The designs are the result of 4 years' development and over a year of *successful* use by leading electronic and aircraft equipment manufacturers.

Condensed Engineering Data

	ACEPOT (potentiometer)	ACETRIM (trimmer)
Resistance Range	200 ~ to 250K ± 2%	10 ~ to 150K ± 3%
Size	½ x ½"	½ x ½"
Linearity	±.3%	±3%
Resolution	extremely high	excellent
Ambient Temperature	—55° C to 150° C	—55° C to 125° C
Torque	low or high	low or high

The above specifications are standard — other values on special order.

All units sealed, moistureproofed, and anti-fungus treated. Meet applicable portions of JAN specs and MIL-E-5272A standards.

Ace also offers larger size precision potentiometers, to RETMA specifications, manufactured to highest standards to meet your most rigid requirements. Expedited delivery from special order section.

For applications where you must be positive, answer your potentiometer and trimmer needs with space and weight saving, highly accurate and dependable ACEPOTS and ACETRIMS.



Available in threaded bushing, servo, flush tapped hole or flange mounts, and ganged units. Special shaft lock is self-contained. Internal stops and taps as required. Indexing pin provides non-rotational mounting.

Expedited delivery on prototypes; prompt servicing of production orders. Write for Fact File and application data sheets.

*trademarks applied for

ACEPOT* ACETRIM*

ACE ELECTRONICS ASSOCIATES

Dept E, 101 Dover St. • Somerville 44, Massachusetts

See the newest and latest at WESCON SHOW, Booth 1364

has added two new models to its line of low cost h-v r-f power supplies. Featured are small size, metered and regulated output, and serviceability.

► **Specifications**—Model 15BR has a voltage range of 2-15 kv d-c; current output, 1 ma at 10 kv; regulation, better than 1 percent; input, 117 v, 60 cycles; and size 7¼ in. by 10 in. by 8 in. Model 30 BR has a voltage range of 5-30 kv d-c; current output, 1 ma at 20 kv; regulation, better than 1 percent; input, 117 v, 60 cps; and size, 7¼ in. by 14 in. by 8 in.

Standard units are equipped with 3-in. kilovoltmeter, variable output control, on/off switch, pilot light and grounding post.

Net price of model 15 BR is $149.50; model 30 BR $199.50.

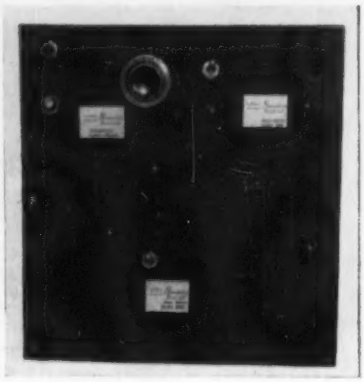

SUBSYSTEMS
for d-c analog computers

SERVONICS, INC., 834 North Henry St., Alexandria, Va. The multipliers, resolvers, integrators and course generators represent a group of high speed d-c analog computer subsystems which are completely self contained, requiring 60 cps line power only. The extended bandwidth and high speed are the result of using a 400-ohm converter to drive the servo motor reference and the chopper. A wide choice of readout pots are available.

► **Multiplier Servo**—Three basic models give accuracy as high as 0.01 percent and bandwidth to 48 cps. Up to 7 single turn pot may be ganged on the unit.

► **Resolver Servo**—This trans-

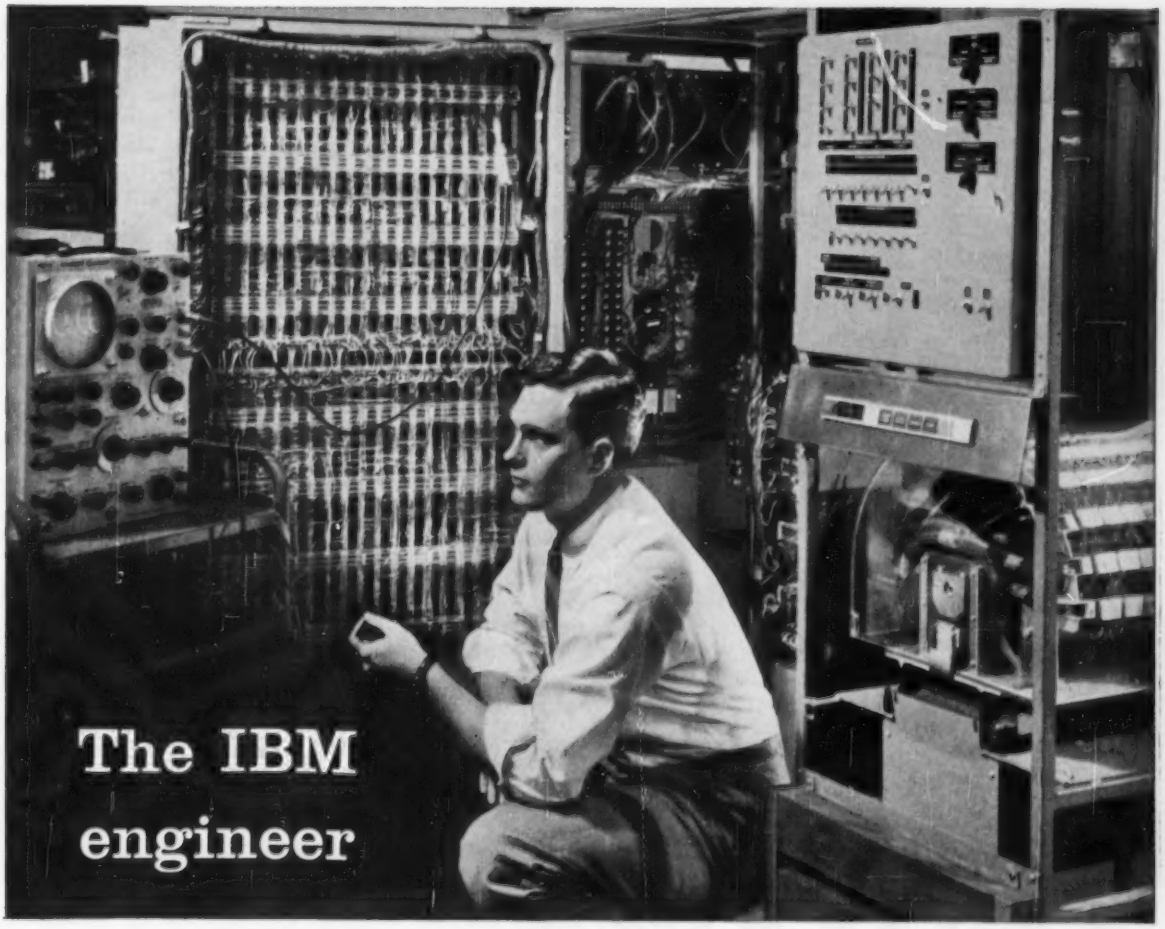

...creates electronic giants

Some men spend their working lives filling in the details of other men's ideas—and never know the satisfaction of doing something no one else has ever done before.

The IBM engineer, however, originates new ideas, new concepts, new applications, for he operates on the frontier of a field that is still in its infancy. Last year, for example, engineers enabled IBM to announce a major data processing improvement on the average of once every two weeks. It is this creative energy, we feel, that explains IBM's acknowledged leadership in the computer field . . . and accounts for the dramatic personal progress enjoyed by engineers at IBM.

Today, there is more room than ever at IBM for engineers who have the ability and the desire to be leaders, rather than followers, in their profession.

See the IBM Exhibit during the Wescon Show.

For all the details that we can't possibly include here, **write,** giving details of your background and interests, to: W. M. Hoyt, IBM, Dept. 408, 590 Madison Avenue, New York 22, N. Y.

Plants and laboratories located at **Endicott, Owego, Poughkeepsie and Kingston, N. Y.; and San Jose, Calif. Moving expenses paid.**

IBM INTERNATIONAL BUSINESS MACHINES CORPORATION

DATA PROCESSING • ELECTRIC TYPEWRITERS • TIME EQUIPMENT • MILITARY PRODUCTS

Want more information? Use post card on last page.

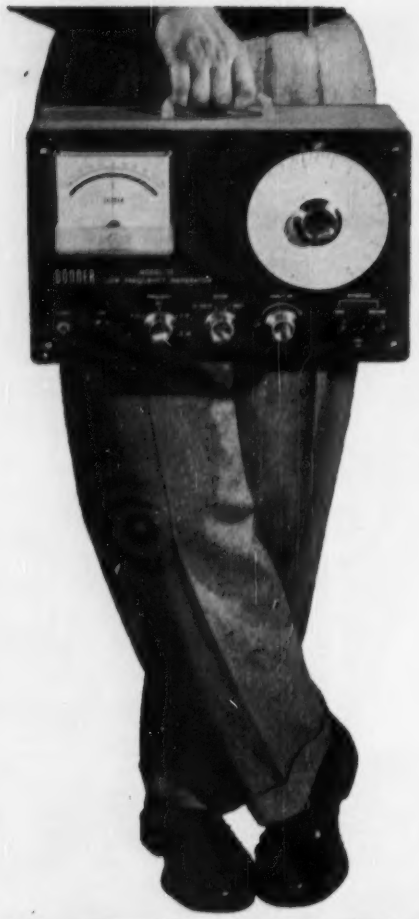

True sine and square waves for servo, geophysical, and computer work. 0.01 to 1000 cps in 5 decades. High stability, low distortion. Accurate frequency calibration and precisely metered output.

DONNER MODEL 16
LOW FREQUENCY GENERATOR

$365, F.O.B. Berkeley

ADVANCED INSTRUMENTATION

Versatile engineering tool solves both differential equations and transfer functions. Detachable problem boards, plug-in components. Function generator, multiplier, other accessories available. High accuracy with operating simplicity.

DONNER MODEL 30
ANALOG COMPUTER

$995, F.O.B. Berkeley

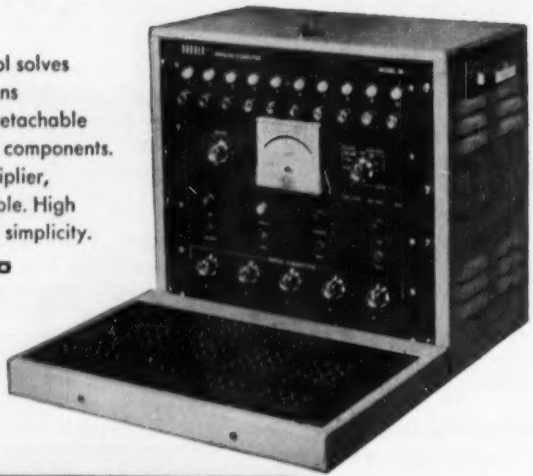

DONNER SCIENTIFIC COMPANY

2814 Seventh St.
Berkeley 10, Calif.

Complete Data on Request

Booths 855-856 at the Wescon Show.

forms rectangular (X-Y) to polar rho-theta coordinates. The unit is completely compensated to give a wide range change. The readout of both range and angle is from a servo. The bandwidth is to 38 cps.

▶ **Electromechanical Integrator**—This makes use of a high linearity d-c tachometer to give a long time base integrator. With both electrical and mechanical scaling the unit is flexible.

▶ **Course Generator**—Two models of these motion analyzers give either absolute or relative position readout from rate inputs.

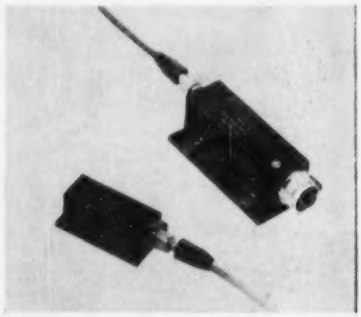

ACCELEROMETER
for environmental testing

GULTON MFG. CORP., Metuchen, N. J,. has developed a high temperature accelerometer system that will open new avenues in the field of environmental testing. GLENNITE KAHT-310 system is comprised of an accelerometer and external cathode follower which will measure shock and vibration phenomena at temperature up to 300 F without external cooling.

This subminiature system has a frequency response from 10 to 2,000 cps and acceleration range up to 300 g. Sensitivity is 20 μv per g, output impedance 200 ohms, while accuracy is 5 percent.



VOLTAGE DIVIDER
encapsulated, subminiature

EASTERN PRECISION RESISTOR CORP., 675 Barbey St., Brooklyn,

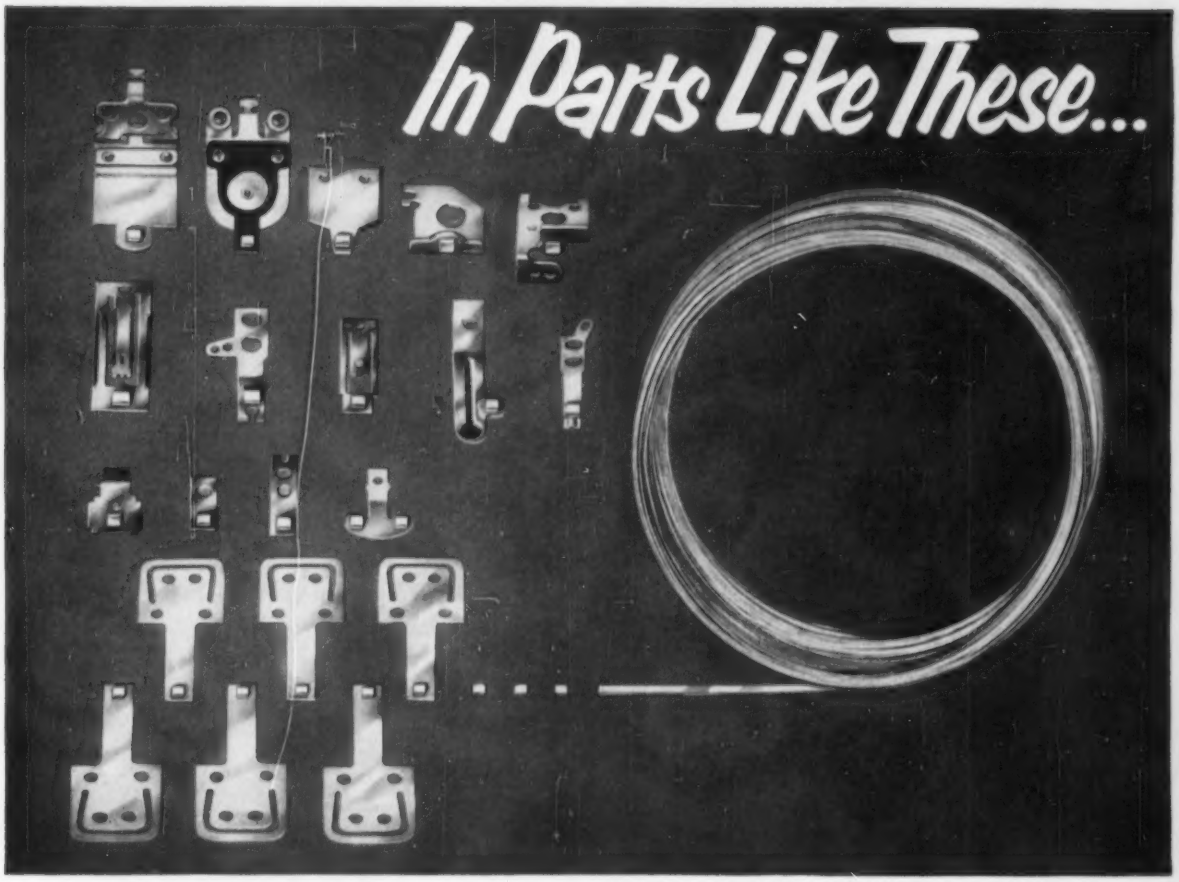

GENERAL PLATE...

Clad Electrical Contact Tapes

Reduce Costs, Minimize Assembly Operations, Permit Miniaturization and Improve Performance

Included among the many advantages offered by the use of General Plate Clad Electrical Contact Tapes are assembly accuracy, change-over ease, design freedom, *plus* immediate and substantial cost reductions, performance improvements, miniaturization and standardization.

Basically, electrical contact tape consists of an electrical contacting face of desirable composition and contour plus an elevated or serrated backing of readily electro-weldable material. The serrated back makes possible a larger weld area assuring much greater thermal and electrical conductivity from the contact to backing member assuring exceptional performance.

The contact face is available in practically any ductile contact material either as a single metal or clad to another metal. Contact backing or supporting materials are available in steel, brass, copper, phosphor bronze, beryllium copper, nickel or monel, and aluminum.

Why not find out how you can benefit with General Plate Clad Electrical Contact Tapes? Write for complete information, or better still, ask for a General Plate Engineer, who will gladly help you with your contact problems.

You can profit by using General Plate Composite Metals!

METALS & CONTROLS CORPORATION
GENERAL PLATE DIVISION
1308 FOREST STREET, ATTLEBORO, MASSACHUSETTS

Want more information? Use post card on last page.

electrical
engineers

who are interested in working on new, exploratory technical developments are reading the Lincoln Laboratory folder. It describes some of our activities in:

SAGE
semi-automatic ground environment

AEW
air-borne early warning

SCATTER
COMMUNICATIONS

WHIRLWIND COMPUTER

TRANSISTORIZED
DIGITAL COMPUTERS

MEMORY DEVICES

HEAVY RADARS

SOLID STATE

If you would like a copy for yourself, or perhaps for some young man with a degree and little experience, let us know. Write:

RESEARCH AND DEVELOPMENT

MIT LINCOLN LABORATORY
BOX 7, LEXINGTON, MASSACHUSETTS

N. Y. Designed for use where space is at a premium, these disk resistors can replace two or more precision resistors employed as voltage dividers in circuitry. They are available with temperature coefficients of ppm per deg C, or better matched ratios over wide temperature ranges are possible with the selection of resistance wire matched to within 5 ppm per deg C.

▶**Uses**—Suitable for application where humidity and temperature of 125 C are prevalent, this subminiature voltage divider (0.100 by ½ in. diameter) allows for as many as three sections of 125,000 ohms each with 4 output terminals. Each section can be matched to within 0.1 percent of each other and maintain said match over a temperature range of 100 C.

SERVICE CHANNEL TERMINAL
weighs only two pounds

PHILCO CORP., 4700 Wissahickon Ave., Philadelphia 44, Pa. Model SC-1 service channel termination unit is designed to provide full talking and signaling facilities on the baseband of Philco CLR-6 or CLR-7 microwave terminal and repeater equipments. The portable unit plugs directly into the front panel jacks of the CLR equipment and provides a means of monitoring and inserting voice frequencies into the baseband of the system at a response of 200 to 2,000 cps. It may also be operated over a standard derived telephone channel.

▶**Particulars**—The unit includes an a-c power cord which connects directly to the utility outlet on the

World premiere—starring Transistors



The Department of the Navy, Bureau of Ships, receives the world's first completely transistorized dial telephone switchboard . . . designed for minimum space, weight and maintenance.

In this compact switchboard cabinet (72" x 30" x 24") all line finding, circuit switching, tone signal generating, and in fact, virtually all functions of conventional dial telephone switching are performed by transistors and diodes.

Capacity of this prototype electronic switchboard is 100 lines, with fifteen connecting links. The officers and men use their telephones just as if the switching system were the conventional type. And when the ship on which this telephone system is installed docks in port, ship-to-shore trunk connections are added as easily as an extension telephone in your home.

And for those interested in production details, it's noteworthy that this compact, lightweight system is manufactured with plug-in printed circuits—providing shockproof, lifetime accuracy.

We take great pride in being a team partner with the Navy in this outstanding technological development.

P.S. Engineers . . . excellent career opportunities in electronics and telecommunications. Write today

STROMBERG-CARLSON COMPANY

A DIVISION OF GENERAL DYNAMICS CORPORATION

General Offices at ROCHESTER 3, N. Y.

NEW
HI-PERFORMANCE!

in a new hi-quality miniature potentiometer

Diameter	⅜"
Weight	1 oz.
Standard Linearity	±0.3%*
Standard Resistance Tolerance	±3%*
Standard Resistance Range	25Ω to 120 KΩ

*Special Resistance and Linearity Tolerances available on request.

price—$15.00 (Bushing Mount. Single Lot) Quantity Discounts.

SPECTROL

HI-PRECISION 10-TURN MODEL 500

Spectrol's highly specialized experience in potentiometer design has produced a sturdy and dependable 10-turn precision miniature potentiometer with outstanding new performance advantages.

Lower starting torque, lower running torque, higher resolution and closer linearity are achieved with new and improved construction, inside and out. Superior design guarantees low-noise performance and consistently reliable operation. Machined aluminum lids, dimensionally stable laminated phenolic housings, precision-ground shafts with ball bearings at both ends are typical Spectrol hi-quality features.

The new Spectrol Model "500" can be tailored to fit your exact needs over a wide range of variations.

Write or call for full details about the new Model 500—and other Spectrol potentiometers—today.

SPECTROL **Electronics Division of Carrier Corporation**
1704 South Del Mar Avenue, San Gabriel, California

ALBUQUERQUE, N. M. Gerald B. Miller Co.
BELMONT, CALIF. Gerald B. Miller Co.
BOSTON Gerber Sales Co.
CEDAR RAPIDS Jerry Vrbik
CHICAGO Knoblock & Malone
DAYTON Robt. B. Burtner Co.
FT. WORTH Thomson Eng. Service
HOLLYWOOD Gerald B. Miller Co.
MINNEAPOLIS Fred B. Hill Co.
NEW YORK D. R. Bittan Co.
PHILADELPHIA Samuel K. MacDonald, Inc.
PITTSBURGH Samuel K MacDonald, Inc.
SAN DIEGO Gerald B. Miller Co.
SEATTLE, WASH. Seatronics
ST. LOUIS Thomson Eng. Service
SYRACUSE Wally B. Swank
WASHINGTON, D.C. Samuel K. MacDonald, Inc.

CLR rack. Three type L-5021 transistors and a miniature loudspeaker are used for transmission and reception. Front panel switches are provided for transmit-receiver selection and for outbound signaling, accomplished by a built-in audio tone oscillator. For inbound signaling, a similar tone is amplified and applied directly to the loudspeaker.



HALOGEN TUBE
has long shelf life

ELECTRONIC ASSOCIATES LTD., 4616 Yonge St., Willowdale, Ontario, Canada, announces production of a new halogen G-M tube. The DH-1 tube has a radium source gamma sensitivity of 20,000 counts per minute in a 50 mr/hr field. When shielded with an appropriate amount of lead, the tube is flat within 20 percent from 80kv to over 2 mv.

▶ **Operating Characteristics**—Operating voltage is 480 v; plateau length, 400 v; plateau slope, 10 percent; shielded background, 3 counts per minute; temperature coefficient, 0.3 v per deg C; operating temperature, —50 to +60 C; and useful life, 10^9 counts.

Particularly useful in applications involving high flux, the DH-1 exhibits very little change in characteristics with shelf life, which is relatively long.

TEFLON COAX CABLES
for aircraft, guided missiles

FEDERAL TELEPHONE AND RADIO CO., 100 Kingsland Road, Clifton, N. J., has available a complete line of miniature Teflon coaxial cables for use where it is important to conserve space or where the cables must withstand extremes of tem-

An Installation of Leesona Coil Winders in the Lenkurt Electric Company plant, San Carlos, Calif. Inset shows, left to right: a Lenkurt miniaturized high frequency transformer fully assembled; the transformer casing; and the transformer coil, precision-wound to extremely close tolerances on a fast Leesona No. 108 Hand Feed Coil Winder.

LENKURT selects Leesona No. 108 Coil Winders for high-precision accuracy

As a leading designer and manufacturer of carrier equipment, the Lenkurt Electric Company of San Carlos, California, supplies the complex electronic apparatus used throughout the world by telephone companies in adding long-distance circuits. For winding the close-tolerance coils that go into this multi-channel communications equipment, Lenkurt depends on Leesona No. 108 Coil Winders. Chester Scarce, Factory Manager of Lenkurt, reports:

"Our transformers call for coils of the finest quality to meet the high-precision standards of modern carrier equipment. We find that Leesona No. 108 Hand Feed Coil Winders give us not only the high degree of accuracy we must have, but worthwhile economy as well."

Leesona No. 108 Machines are the easiest to operate, most accurate and flexible hand feed coil winders ever developed. Winding four to thirty paper-insulated coils in stick form simultaneously, they reduce set-up time and speed production on long or short runs.

Get the Facts

on how you can improve and economize your own operations. Use the coupon for further facts on Leesona No. 108 Hand Feed Coil Winders, and for other helpful coil winding information.

238.57



FOR WINDING COILS
IN QUANTITY...
ACCURATELY...USE
LEESONA WINDING MACHINES

UNIVERSAL WINDING COMPANY

P. O. BOX 1605, PROVIDENCE 1, RHODE ISLAND, Dept. 128

Please send me

- ☐ Bulletin on the Leesona No. 108 Hand-Feed Coil Winder.
- ☐ Condensed catalog of Leesona Winders.
- ☐ Bulletin on the new Leesona *Pay-As-You-Profit Plans* for purchasing or leasing modern coil winding machinery.

Name.....*Title*.....

Company.....

City.....*Zone*....*State*.....

Want more information? Use post card on last page.

ADCOLA
(Regd. Trade Mark)

ELECTRIC SOLDERING INSTRUMENTS & EQUIPMENT

ILLUSTRATED

3/16" Detachable Bit Type (List No. 64).
For Factory Bench Line Assembly.

TYPES AVAILABLE

⅛" Bit (Subminiature Work Electronics).
3/16" Bit (General Assembly Telecommunications Etc.).
¼" Bit (Heavy Tagging).

MANUFACTURED IN ALL VOLTAGES

American, Canadian, British
Foreign Patents
&
Registered Designs.

C. S. A. Approved

Write for Catalogues & Information:

CANADA L. J. Lamb, Box 103, Weston, Ontario

ENGLAND Sole Proprietors:
ADCOLA Products Ltd.
Gauden Road
Clapham High Street
London, S. W. 4

TELEPHONES
MAcaulay 4272
MAcaulay 3101



perature, or corrosive or abrasive action.

Types K-256, K-257 and K-258 are ideally suited for use in aircraft and guided missile applications.

▶ **Cable Data**—They are manufactured in three impedance ranges, 50, 70 and 90 ohms. They exhibit extremely stable characteristics when operated at temperatures up to 150 C.

The miniature coax cables are insulated with Teflon dielectric. When supplied with impregnated fiber glass jackets they will withstand temperatures up to 200 C.

To simplify installation, the maximum o.d. of all three types is 0.135 in. ±0.005 and the cables are color coded by impedance: 50 ohms, white; 70 ohms, green; 93 ohms, gray. The same size connector may be used for each of the three impedance ranges.



ELECTRONIC SWITCH
implements 1-channel scope

BURROUGHS CORP., Detroit 32, Mich. The Beamplexer, a fast electronic switch used to sample up to 10 separate signal sources and put them out in sequence on a single line, has been thoroughly redesigned to meet testing requirements found in the field.

▶ **Application**—An important use of the unit is as an accessory to the conventional single-channel oscilloscope. By enabling this in-

Production testing Armco TRAN-COR A-6 to meet high permeability standards.

Want Unusually High Permeability at Low Inductions?

TRY ARMCO TRAN-COR A-6

If you are looking for an electrical steel with exceptionally high permeability at low and moderate inductions, Armco TRAN-COR A-6 is your answer.

This unusual hot-rolled silicon steel is processed to develop high permeability and production-tested by the latest methods to meet permeability requirements at 100 gausses rather than core loss.

These typical magnetic properties of TRAN-COR A-6 indicate its possibilities as an economical material for severe service requirements:

Induction (gausses)	Permeability (gausses/oersted)
100	2300
1000	6000
4000	12000
6000	13000

Added Advantages

Besides excellent permeability, Armco TRAN-COR A-6 has reasonably uniform properties in all directions, low core loss and adequate ductility for fabrication by punching. This unique combination of properties makes the material especially useful for audio and TV transformers, high impedence devices, servo mechanisms and similar units.

Armco TRAN-COR A-6 is available in welded coils or cut lengths in both 26 and 29 gage, with or without standard or special Armco insulations.

Write for complete information on this special Armco Electrical Steel.

ARMCO STEEL CORPORATION

1936 Curtis Street, Middletown, Ohio

Sheffield Steel Division, Armco Drainage & Metal Products, Inc., The Armco International Corporation

Have you seen our...

ETCHINGS?

By etchings we mean *etched circuits*

Once you see them, we think you'll agree they're *unusually* good. "Wrap-Around," "Plated-Thru" and "Flush" etched circuits as developed by USECO, give you:

- *correct plating* • *extreme accuracy*
- *excellent pattern definition* • *better contact*
- *easier unplugging* • *longer service life*

These are advantages which guarantee unsurpassed performance. For information, please address Dept. 16.

Complete line of electronic hardware, including standard and special terminal boards. World's largest stock of silver plated terminal lugs—over 21 million pieces.

See our complete display at WESCON Show, Booth No. 239

U. S. ENGINEERING CO., INC.
A Division of Litton Industries, Inc.
521 COMMERCIAL ST., GLENDALE 3, CALIF.

strument to display up to 10 separate channels of information simultaneously, it provides the user with the advantages of multichannel oscillography at a fraction of the cost of a multichannel scope. Individual position and amplitude controls for each of the 10 input channels allow vertical positioning of all the signals on the face of the oscilloscope so that they may be superimposed or placed in any desired relationship. This simplifies studies and measurements of wave shapes, phase relationships, amplitude and frequency, and generally increases the application and effectiveness of the oscilloscope.

CHOPPERS
are rigidly mounted

AIRPAX PRODUCTS CO., Middle River, Baltimore 20, Md., has available types 175 and 300 miniature choppers with several mounting adapters. The illustration shows two of the more popular adapters: one for horizontal, and the other for vertical mounting. When ordered with either of these adapters, the choppers are supplied with solder lugs as shown.

▶ **Advantages**—Choppers with solder connections have two important advantages. First, they eliminate stray leakage and capacitance of the chassis socket, providing better electrical performance, especially in null seeking servomechanisms and similar threshold signal circuits. Second, because they are rigidly mounted to the chassis, they are well able to withstand shock and vibration.

The choppers are rated for a drive of 6.3 v rms. Series 175 choppers are for operation at 60 cps; series 300 operates at 400 cps. They are hermetically sealed spdt

Notable Achievements at JPL

SECURE COMMUNICATIONS SYSTEMS... JPL scientists and engineers have made outstanding contributions to the research and development of communications systems designed to operate in the presence of severe interference.

Protection of a communication system from deterioration by extraneous interference is of paramount importance to the ultimate utility of that system. At the Jet Propulsion Laboratory this pressing practical challenge has been met with concrete achievement in basic and applied communications research, paired with sound development engineering.

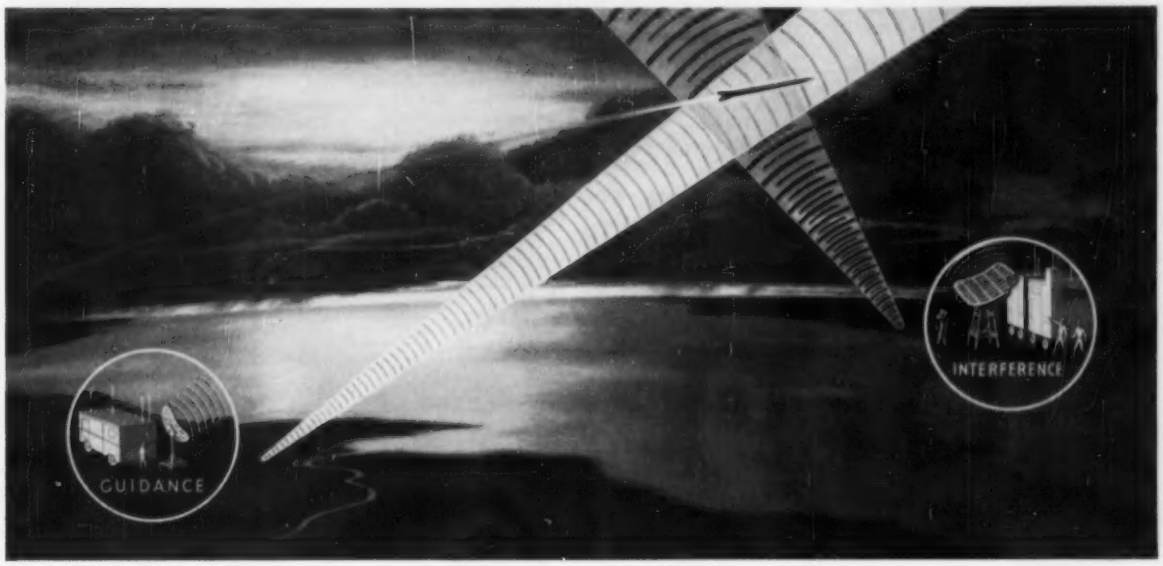

Pioneers in Guided Missiles

JPL JOB OPPORTUNITIES ARE WAITING FOR YOU TODAY
in these fields

RADIO GUIDANCE
MICROWAVES
ELECTRONIC RESEARCH
SYSTEMS ANALYSIS
GUIDANCE ANALYSIS
ELECTRO MECHANICAL
INSTRUMENTATION
INERTIAL GUIDANCE
TELEMETERING
PACKAGING
MECHANICAL ENGINEERING

The Jet Propulsion Laboratory is an organization devoted to scientific research and development. Its prime objective is obtaining basic information in the various sciences related to missile systems development, including all phases of jet propulsion. The Laboratory maintains as its basic foundation, a major uninterrupted program of fundamental research in most of the physical sciences.

The Laboratory occupies an 80-acre plot in an otherwise residential area in the San Gabriel mountain foothills North of Pasadena. Its staff of approximately 1,250 persons are all employed by the California Institute of Technology, and it conducts its several projects under continuing contracts with the U.S. Government.

In its missile system and jet propulsion undertakings, the Laboratory maintains a broad technical responsibility, from basic research to prototype engineering. By virtue of the Laboratory's broad area of responsibility and the integrated nature of the JPL technical staff an individual scientist or engineer is brought into satisfyingly close contact with the general field to which his technical speciality contributes.

If you are interested in knowing more about the Jet Propulsion Laboratory and its specific employment offerings, please write.

CALTECH jpl **JET PROPULSION LABORATORY**
A DIVISION OF CALIFORNIA INSTITUTE OF TECHNOLOGY
PASADENA, CALIFORNIA

Want more information? Use post card on last page.

CASCADE RESEARCH CORPORATION

MICROWAVE *Circulators*



Cascade Research Ferrite Circulators are now—or soon to be—available in several waveguide sizes, for operation in the frequency ranges between 5.9 and 36 kmc.

Circulators are the modern means for separating transmitted and received signals when a single antenna is used.

Please write for detailed information.

Advanced Microwave Test Equipment

R-SCOPE . . new automatic impedance plotter with Smith Chart presentation

Vacuum Tubes

X-521, X band, backward wave oscillator tube. All metal-ceramic, rugged, small, light weight, economical.

CASCADE RESEARCH CORPORATION

53 Victory Lane, Los Gatos, Calif.



CASCADE RESEARCH CORPORATION

MICROWAVE *Vacuum tubes*

BACKWARD WAVE OSCILLATOR

Model X-521 is the first tube to be announced in a new series. This new tube is all metal and ceramic and uses a folded line rather than a helix thereby improving mechanical characteristics and appreciably reducing both size and weight. Output level is one-half-watt, nominal. Waveguide output covers the X band.

Please write for detailed information.

Advanced Microwave Test Equipment

R-SCOPE . . new automatic impedance plotter with Smith Chart presentation

Advanced Ferrite Devices

Load isolators.

Circulators.

Amplitude modulators.

CASCADE RESEARCH CORPORATION

53 Victory Lane, Los Gatos, Calif.

break-before-make units of low noise and long life.



SOLDER TERMINALS
in kit form

CAMBRIDGE THERMIONIC CORP., 445 Concord Ave., Cambridge, Mass. A one-package unit complete with solder terminals and proper tools suitable for making prototypes and sample terminal boards for laboratory work has been announced.

Each kit contains 100 each of 10 popular types of CTC solder terminals along with anvils and punches for assembly. All terminals are supplied for $\frac{1}{16}$ in. thick boards and are standard CTC grade with silver plating and water dip lacquer.

Terminals available in the kit are designated X1558, X2027, X1785, X2040, X2041, X2042, X2043, X2044, X1548 and 1724. Prices and more information are available from the company for the asking.



LEAD FORMER
boosts production speed

DESIGN TOOL CORP., 80 Washington St., New York, N. Y. Completely automatic cutting and forming of coaxial leads (pigtails) of resistors, capacitors, diodes, coils and similar components is now possible in one, simple machine. The lead former combines both speed and accuracy in cutting leads to any desired length and forming them to any

HERE'S WHY DU PONT MYLAR® IS GOOD NEWS AT WESTINGHOUSE!

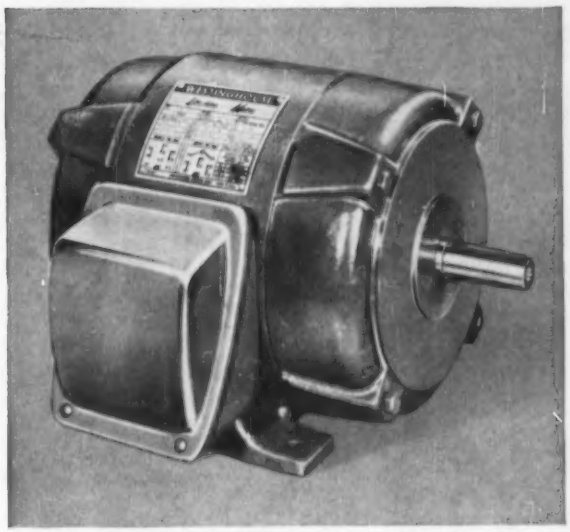

SMALLER, MORE DURABLE MOTORS. "Slot liners and phase separators made with 'Mylar' are thinner yet stronger . . . contribute to motor-size reductions," reports Westinghouse. "'Mylar' makes possible insulation with 7 times the physical strength and no reduction in dielectric strength when compared with conventional insulation—helps us obtain smaller, lighter motors that last up to 50% longer."

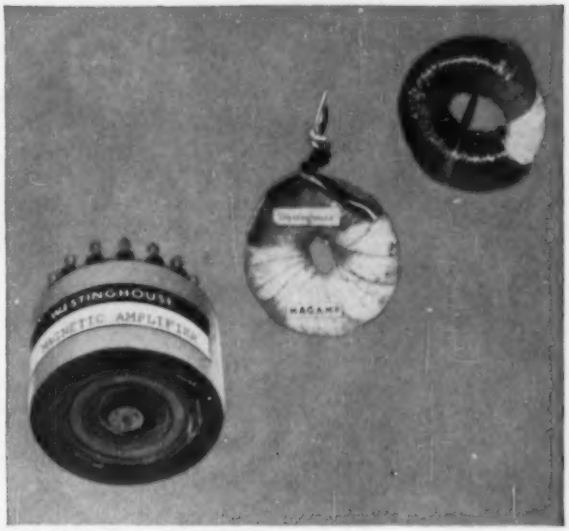

ELIMINATES REJECT PROBLEM. "When testing our 'Magamp' magnetic amplifiers under humid conditions, a high reject rate occurred. But when we started using 'Mylar' as the insulating material," Westinghouse engineers report, "the reject problem was completely eliminated. That's because 'Mylar' combines moisture insensitivity with high dielectric strength."

Can "MYLAR" help you develop new products . . . improve established ones?

These successful Westinghouse applications of "Mylar"* are only two examples of the way industry is taking advantage of the unique balance of properties in this tough, flexible, transparent film. Besides its contribution to the electrical-electronics field, Du Pont "Mylar" is making possible better products for manufacturers in the automotive, construction, chemical, textile, sound recording, printing, and other major industries.

Whether you make guided missiles or ladies' handbags, "Mylar" may be able to help improve performance . . . increase the over-all value of your product. For more information on properties, applications and types of "Mylar" available, send in the coupon below. Be sure to specify the application you have in mind.

"Mylar" is Du Pont's registered trademark for its brand of polyester film.

DU PONT
REG. U.S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*

In Canada, "Mylar" is sold by Du Pont Company of Canada Limited, Films Division, P. O. Box 660, Montreal, Quebec.

DU PONT
MYLAR®
POLYESTER FILM

E. I. du Pont de Nemours & Co. (Inc.)
Film Dept., Room E-8, Nemours Bldg., Wilmington 98, Del.

Please send your booklet (MB-4) on properties, applications, and types of "Mylar" polyester film available.

Application_____

Name_____

Firm_____

Address_____ City_____ State_____

electronic counter

CAT. NO. — NE — 14-20 FM

ACCURATE • DIRECT READING
INSTANTANEOUS • SIMPLE
RELIABLE

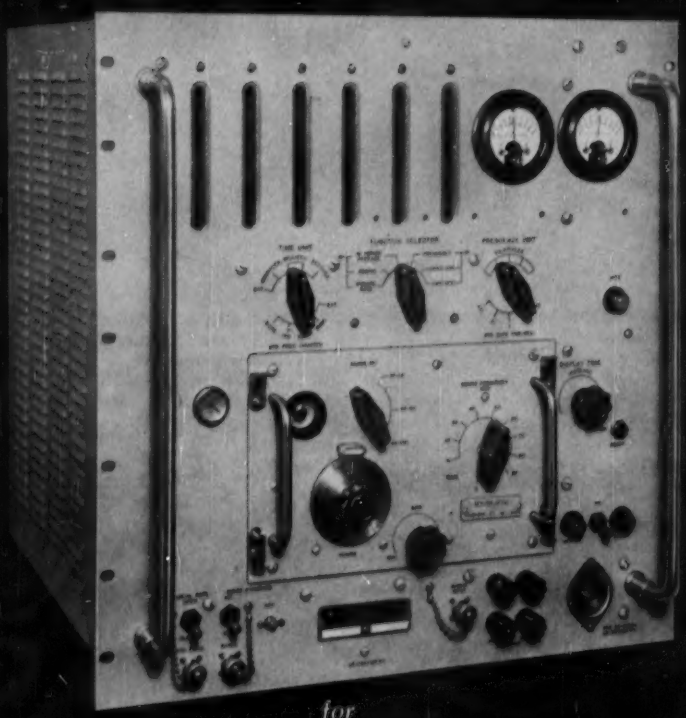

for

FREQUENCY MEASUREMENTS
10 CPS TO 220 MC;
TIME INTERVAL 1 MS TO
100 DAYS; PULSE LENGTH,
REP. RATES, FREQUENCY DRIFT

northeastern engineering

Manchester New Hampshire

desired shape. It is available in 3 models of 2, 4 or 6 slides depending on final lead shape desired.

Components are fed to the machine down a zig-zag chute from which they are released individually to a clamp which holds them securely during the cutting and forming operation. Chute feed is normally manual but optional card, roll or hopper feeds are available for increased production needs. With a production capacity of 5,000 or more parts per hr, it eliminates time-consuming hand shaping and cutting.

The pneumatically operated, electrically controlled machine measures 25 in. by 30 in. and weighs 89 lb.

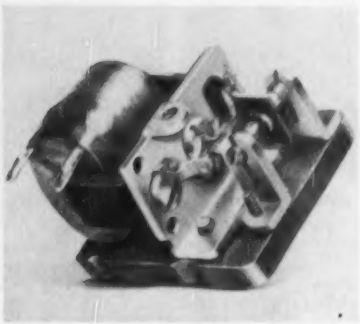

SENSITIVE RELAY
meets MIL specs

RADAR RELAY, INC., 2120 Pontius Ave., Los Angeles 25, Calif., has announced a series R sensitive relay intended to meet the applicable requirements of MIL-R-5757B. The relays are designed to operate on as low as ½ w coil power with transit times as low as 3.5 milliseconds.

▶ **Other Specifications**—Contact capacity is 1.5 amperes inductive at 200 v a-c or d-c. Adjustable contacts are normally set for pull-in current of 7.2 ma maximum and drop-out current of 4.8 ma minimum. It may be adjusted for other values either by manufacturer or user.

The unit pictured is spst open type, but is also available in dpdt or in a tandem arrangement consisting of two relays on the same base. It is also available hermetically sealed. Coil value is 5,000 ohms for nominal 30-v d-c operation. Minimum life of the unit is

Career Opportunities in

RADAR DEVELOPMENT AND DESIGN

at WESTINGHOUSE *in* BALTIMORE

The following openings in Radar Development Design are typical of the many outstanding career opportunities open to qualified Electrical Engineers or Physicists at the Baltimore Divisions of Westinghouse.

A major expansion program now in progress offers you opportunity for unlimited professional growth and recognition with a career company

You will work as part of an engineering team responsible for the research, design, development, testing and field engineering of airborne, ground, and shipboard electronic systems. While working, you may continue your graduate studies toward M.S. or Ph.D. Degrees, and Westinghouse will pay your tuition expenses.

RADAR RANGE TRACKING

Design of airborne fire control radar range tracking circuitry for Fixed Fire Control Systems. Must be familiar with design and use of d.c. amplifiers and have a working knowledge of servo-mechanism analysis.

HIGH POWER RADAR TRANSMITTERS

Development and application of very high power klystrons, tetrodes and travelling wave tubes for fixed station and portable equipment in the U.H.F. and microwave frequency range.

SPECIAL RADAR DEVICES

Advanced development of a pulse doppler tail warning radar with particular concentration on receiver portion of unit. Includes establishment and review of block diagram of receiving section, design of circuitry, analysis of any problems that develop and confirmation that design is satisfactory. The latter requires devising special tests.

HIGH POWER RADAR MODULATORS

Design and development of very high power pulse circuitry; power control; power regulation, equipment and personnel safety devices.

RADAR SYSTEMS

Technical project administration involving complete radar and weapons systems design, development and evaluation.

PULSE CIRCUITS FOR SURVEILLANCE RADAR

Develop and test pulse circuits and wide band video amplifiers for airborne radar systems. Engineering responsibility required for production to military specifications.

RADAR RECEIVERS

Applied research, development, and design of receivers for airborne and shipboard radar equipment in the field of IF strips, low noise front-ends, crystal mixers, stable local oscillators, plumbing. Coordination of the packaging design may also be required.

Many other outstanding opportunities exist at the Baltimore Divisions. If you are a qualified engineer, contact us at once.

TO APPLY:

Send resume of education and experience to:
Technical Director
Dept. 367
Westinghouse Electric Corporation
Friendship Airport • Baltimore 27, Maryland

WESTINGHOUSE
BALTIMORE DIVISIONS

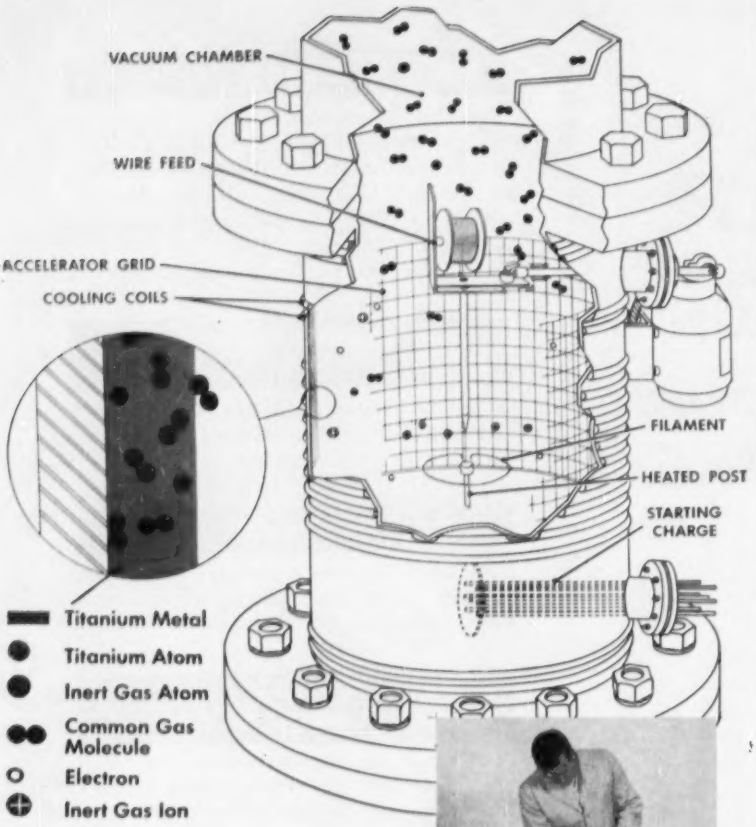

A *dry* high vacuum *electronically*

With this new electronic vacuum pump—the Evapor-Ion—you can produce a vacuum of 10^{-4} to 10^{-9}mm Hg completely free of contaminating vapors.

How the Evapor-Ion pump works

The new CEC Evapor-Ion pump uses no liquids.

The filament bombards the post with electrons. Titanium wire, periodically fed onto this hot post, evaporates. Common gas molecules form stable compounds with the titanium layer condensed on the cooled wall of the pump.

At the same time other electrons emitted by the same filament ionize the *inert* gas atoms. The electrical field of the accelerator grid violently repulses these positive ions and drives them into the titanium layer where they are held and later buried under new layers of titanium.

The gettering action of the deposited titanium plus ion entrapment produce high pumping speeds and low ultimate pressures. Vapor-free operation makes the Evapor-Ion ideal for numerous electronic applications.

For further information on this unique pump, write to the Rochester Division for Bulletin 6140-Z-3.

Consolidated Electrodynamics
CORPORATION
Rochester Division, *formerly Consolidated Vacuum*
Rochester 3, N. Y.

Sales Offices: Albuquerque • Atlanta • Boston • Buffalo • Chicago • Dallas • Detroit New York • Pasadena • Philadelphia • San Francisco • Seattle • Washington, D. C.

220 million operations.

Overall dimensions are approximately 1 in. by 1½ in. by 1½ in.

MOTOR-TACHOMETER
features low null voltage

BASLER ELECTRONICS, INC., Highland, Ill., is manufacturing a size 15 tachometer servo motor combination featuring an accurate and stable tachometer section. The unit passes all military qualification tests without deviation.

▶**Null Voltage**—The drag-cup type tachometer has a maximum null voltage of 0.008 v a-c fundamental and 0.013 v a-c rpm. Output voltage is 3.2 v a-c per 1,000 rpm.

Input is 115 v a-c 400 cps on phase 1 and 115 or 230 v a-c on the control phase. Torque is 1.5 in. oz at stall. No load speed is 4,500 rpm.



STANDARD RESISTORS
±0.01 percent accurate

PHYSICS RESEARCH LABORATORIES INC., 507 Hempstead Turnpike, West Hempstead, N. Y. All of the company's standard resistors have an accuracy of ±0.01 per cent. Models N100, N85 and N220 are

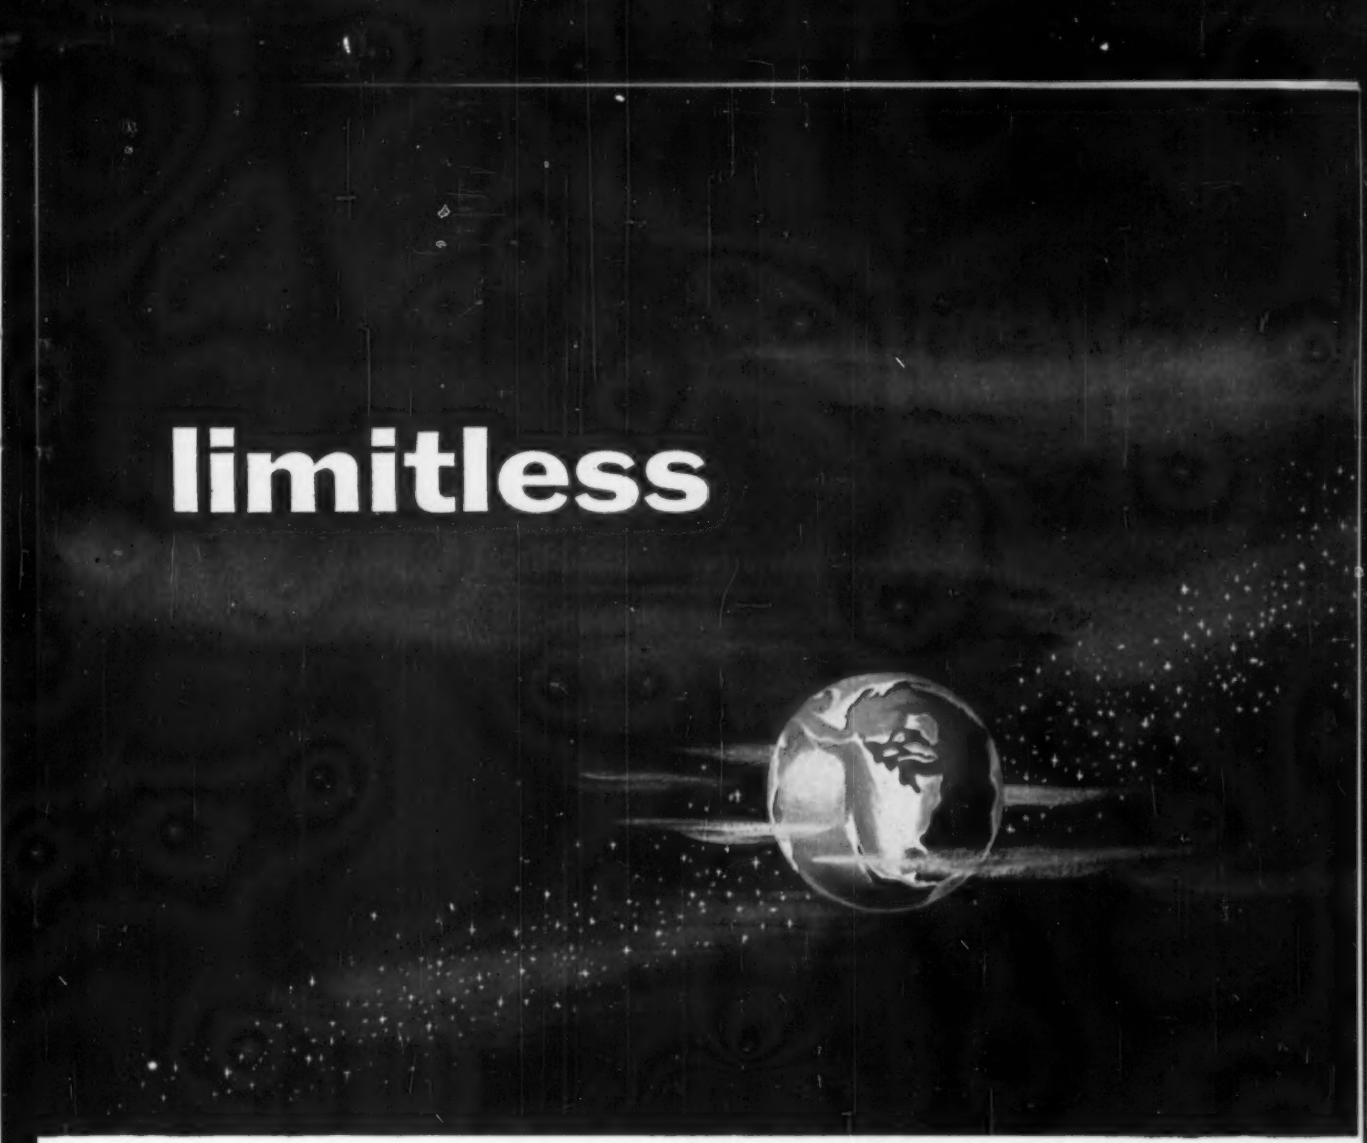

as the future of UNIVAC®

When planning your future, it is necessary to choose that company which presents the most complete program for you. The opportunity at Remington Rand Univac can only be limited by the individual. Excellent salaries, benefits and educational programs are yours to guarantee this limitless future.

At UNIVAC you will be working with men who developed much of the basic knowledge of computers—who designed and produced components being used by the manufacturers in the field—*who set the standards that the others follow.*

Now is the time to come to Univac where ambition and professional skill find their reward in limitless opportunities in an expanding organization.

Immediate openings for:

• Computer Sales Engineers • Product Planning Engineers • Technical Liaison Engineers • Proposal and Quotation Experts • Metallurgists • Contract Administration Engineers • Field Location Engineers • Instrumentation and Component Sales Engineers • Electronic Engineers • Mathematicians • Physicists • Mechanical Engineers • Programmers • Logical Designers • Production Engineers

Send complete resumé to

Remington Rand Univac

DIVISION OF SPERRY RAND CORPORATION

® Registered in U. S. Patent Office

AT ANY OF THESE THREE PLANT LOCATIONS

MR. D. A. BOWDOIN	MR. E. K. PATTERSON	MR. FRANK KING
Dept. JP-2	Dept. JS-2	Dept. JN-2
2300 W. Allegheny Ave.	1902 W. Minnehaha Ave.	Wilson Avenue
Philadelphia, Pa.	St. Paul W4, Minn.	South Norwalk, Conn.

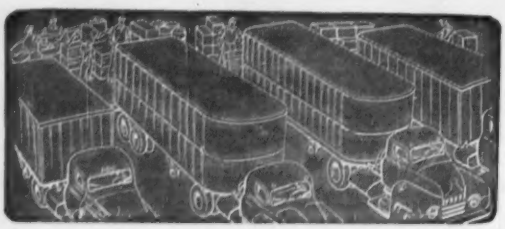

No limit on sales, if—

Many up-and-coming companies, with great growth potential but limited capital, have had their growth snagged and profits curtailed for lack of money to finance expanding sales.

This makes it tough on management and stock holders, who want, and are entitled to, more profits—and tough also on salesmen, who want and need more commissions—and could earn them if sales were not arbitrarily curbed.

There would be no such limit on sales, if a company used our Working Money Plan. It puts sales on a cash basis as far as the user is concerned, but gives customers the regular payment terms. Moreover, it protects the user against credit losses and eliminates much of the clerical cost of doing business—thus cutting overhead and adding to profits.

If you are a manufacturer or wholesaler, with annual sales volume of $1,000,000 or more, we can show you how to increase your working capital without borrowing or incurring new debt—without diluting earnings or interfering with management.

Do you have any financing problems? We would be glad to have one of our officers confer with you confidentially and perhaps show you a solution. Just drop us a note.

Textile Banking Co., Inc.

Providing operational financing for manufacturers and distributors of furniture, apparel, electronics, plastics and textiles.

55 Madison Avenue, New York 10, N.Y.

air-cooled and offer wattage ratings of 10, 1 and 25 w respectively. Model N85, in different catalog numbers, has a resistance range from 0.001 ohm to 100,000 ohms, a current range from 0.003 ampere to 30 amperes, and a price range from $43.50 to $57.50.

Other standard resistors are available for power ratings up to 1,000 w using air or water cooling depending on wattage. Standard resistors for a-c are also available at slightly higher cost.

COUNTER-CHRONOGRAPH
is ultra compact

THE JACOBS INSTRUMENT CO., Bethesda 14, Md., has available a tiny instrument combining a high-speed, high-capacity counter and a precision chronograph which measures time intervals up to 1 sec in length in steps of 1 μsec. The instrument contains a complete power supply and forced-air cooling system; still its volume is only 0.11 cu ft and weight is 8½ lb.

▶ **Uses**—The instrument should find wide application in field and airborne use, and in laboratory and industrial application where compactness and portability are of prime importance.

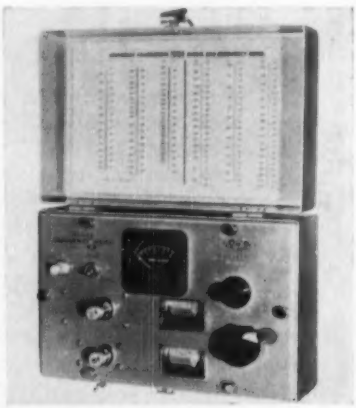

FREQUENCY METER
for 2,400-10,200 mc band

THE NARDA CORP., Mineola, L. I., N. Y. Model 802 covers the 2,400 to 10,200-mc range. Over the entire band covered, the loaded Q is in excess of 750 from 2,400 to 6,500 mc, and in excess of 1,500 from 6,500 to 10,200 mc. It features high

AUTOMATIC STANDING WAVE INDICATOR Type OA 1081

8,500 - 9,500 mc

V.S.W.R. MEASUREMENTS WITH SPEED CONVENIENCE AND ACCURACY

By giving a direct visual presentation of standing-wave pattern, the OA 1081 speeds the adjustment and test of a wide variety of 3-cm microwave components. Basically, the apparatus comprises a directly-calibrated display unit and a waveguide assembly which incorporates a traveling-probe detector. It represents an important advance in standing-wave measurement technique because the probe-detector is motor-driven to oscillate continually in its waveguide slot, and because its output is displayed on a cathode ray tube with electro-mechanically synchronized time base.

FREQUENCY RANGE : 8,500 to 9,500 mc.
MINIMUM V.S.W.R. DISCERNIBLE : 1.005
ACCURACY OF V.S.W.R. MEASUREMENT : ±0·5%

MARCONI INSTRUMENTS

Marconi - since 1897

44 NEW STREET · NEW YORK 4

CANADIAN MARCONI COMPANY
6035, COTE DE LIESSE,
MONTREAL 9, CANADA

HEAD OFFICE: MARCONI INSTRUMENTS LTD., ST. ALBANS, HERTS., ENGLAND

TC 84

Want more information? Use post card on last page.

RADAR ANTENNA DEVICES

by Bendix

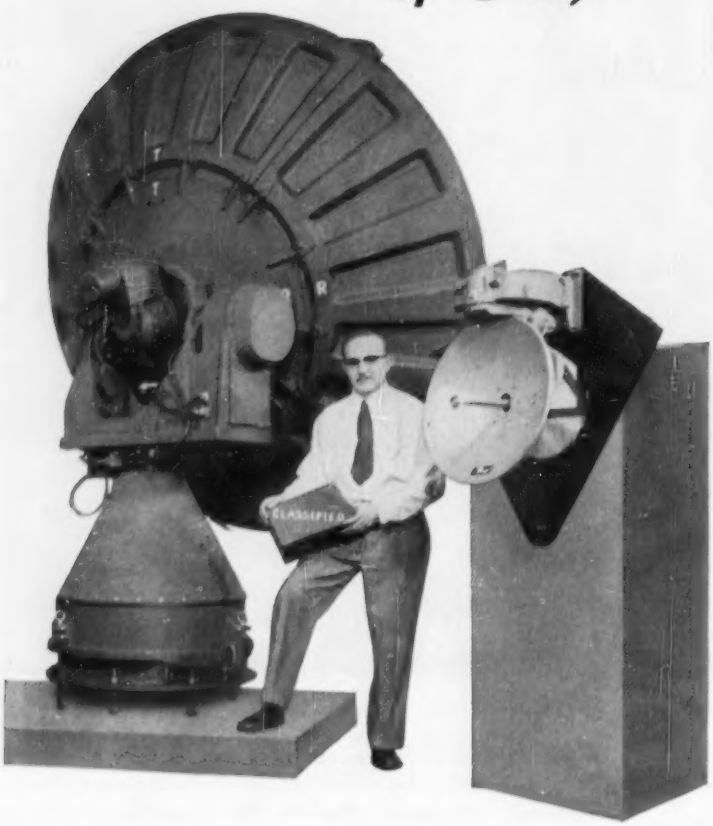

Advanced Design and Packaging Techniques Cut Down on Size and Weight

As you can see, we make a wide range of radar antenna devices, including an extremely small one that's classified. And, because of our vast experience in servo-mechanisms . . . and in latest packaging techniques . . . Bendix Radar Antenna Devices are *smaller* and *lighter*.

THE GROUND ANTENNA PEDESTAL (left) is air transportable. Total unit weight is *about half* that of previous models. Segmented parabolic reflector can be *quickly dismantled for transit*. Accuracy is 1.5 minutes at normal temperature and loading. Operational requirements cover ambient temperature range of −65°F. to +150°F. and wind loading up to 50 mph.

THE AIRBORNE WEATHER RADAR ANTENNA (right) is designed for circular azimuth scanning at 15 rpm on all modern commercial aircraft. Available in both X-band and C-band. 22" X-band version weighs less than 25 lbs.

For complete details on our line of radar antenna devices, write Department C, ECLIPSE-PIONEER DIVISION, BENDIX AVIATION CORPORATION, TETERBORO, NEW JERSEY.

West Coast Offices: 117 E. Providencia Ave., Burbank, Calif.
Room 114, Administration Bldg., Boeing Field, Seattle 8, Washington
Export Sales and Service: Bendix International Division, 205 E. 42nd St., New York 17, N. Y.

Eclipse-Pioneer DIVISION

Bendix AVIATION CORPORATION

micrometer readability even under poor lighting conditions.

Higher loaded Q has also resulted in increased sensitivity and resolution when using the built-in indicator. A universal nomograph type calibration chart, laminated in plastic and incorporated in the instrument's lid, provides frequency data without calculations or written interpolation at any point in the entire frequency range to the rated accuracy of 0.2 percent.



AVC AMPLIFIER
constant output within ±1 db

AMPLIFIER CORP. OF AMERICA, 398 Broadway, New York, N. Y., has available an avc amplifier which maintains a constant output within ± 1 db with input changes of 30 db. Rapid automatic gain reduction prevents syllable clipping and slow automatic gain increase avoids automatic control at syllabic frequencies.

▶ **Construction**—The avc amplifier basically consists of a two-stage push-pull circuit. Operating conditions of the input stage have been carefully determined so as to provide optimum limiter action with minimum distortion. The input may be connected directly either to a balanced 600-ohm line (with either or neither side grounded) or it may be bridged across a 600-ohm line without upsetting line impedance.

▶ **Specifications** — Frequency response is rated at ±1 db from 20 to 20,000 cps. It has an overall gain of 35 to 38 db with a signal-to-noise ratio of 60 db. Its rated power output is 6 mw at 2-percent total distortion. Maximum distortion is less than 5 percent under conditions of full 30-db compression. It is equipped with a self-contained

Sensitive, Rugged, Fast . . .

the *ElectroniK* Null Indicator has easy readability

THIS completely electronic instrument has a big, clearly legible scale that reduces the chance of error. There's no need to shade the dial—it's easy to read in any light. And a handy leather grip makes it easy to carry from job to job.

It's sensitive enough for all electrical bridge measurements. And it's rugged enough for production line work. It's fast, simple, compact. It withstands vibration and shock . . . needs no special mounting, no leveling.

Heavy overloads won't damage it. There's no "loss of spot" when excessive signal is applied; you always know which direction to go for bridge correction.

The modern successor to the galvanometer, the *ElectroniK* Null Indicator is available for immediate delivery. The price is $175.00, f.o.b. Philadelphia. Order today—and put new convenience in your own test work!

MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division*, Wayne and Windrim Avenues, Philadelphia 44, Pa.—in Canada, Toronto 17, Ontario.

● **REFERENCE DATA: Write for Data Sheet 10.0-12.**

COMPARE THESE SPECIFICATIONS

Period—less than ½ second
Current Sensitivity—.001 microamp/mm.
Voltage Sensitivity—1 microvolt/mm.
Input Impedance—1000 ohms at max. sensitivity
Overload Rating—1 volt at max. sensitivity
Stability—less than 1 mm. zero shift/hour
Damping—critically damped; independent of external resistance
Terminals—input and ground; for spade, pin or banana plugs
Power—115 volts, 60 cycles
Scale Markings—−1 to +1 in mm. / −4 to +4 in cm. } over 2½" radius
Dimensions—17⅛" long x 5½" wide x 7¾" high
Weight—15 lbs.

MINNEAPOLIS
Honeywell
BROWN INSTRUMENTS
First in Controls

Want more information? Use post card on last page.

POLYPENCO® TEFLON* SHAPES

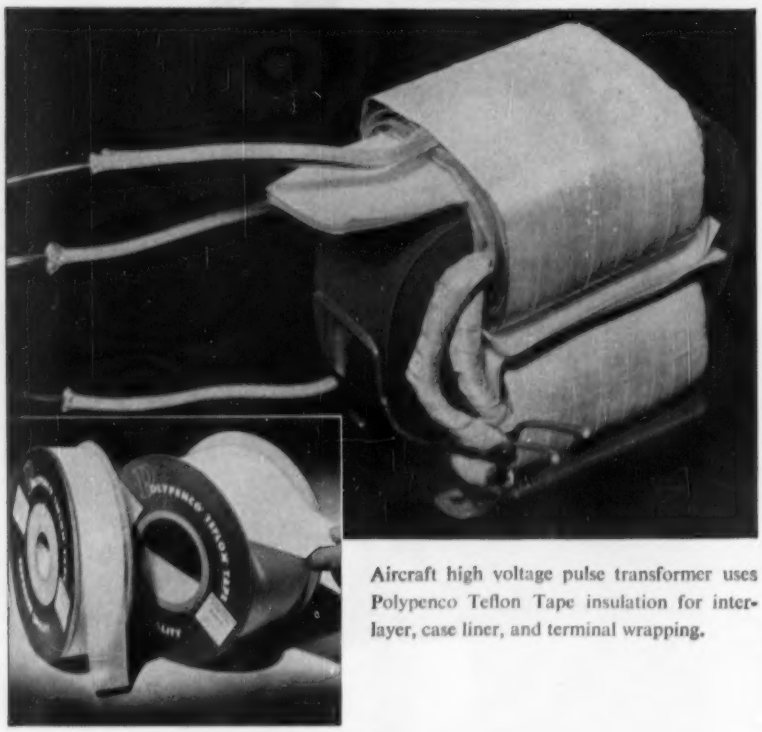

Aircraft high voltage pulse transformer uses Polypenco Teflon Tape insulation for interlayer, case liner, and terminal wrapping.

Change to POLYPENCO Teflon Tape Reduced Transformer Size, Weight

● To meet aircraft demands for smaller, lighter and more rugged transformers, a West Coast manufacturer turned to Polypenco Teflon Tape. The unexcelled electrical and physical properties permitted a reduction in weight of one small transformer from 11 lbs. to 3 lbs. Since smaller transformers have necessarily higher temperature rises, the heat stability of Polypenco Teflon Tape (can be continuously used up to 550°F.) was one of the important reasons for its choice. These other properties also made it desirable for this application:

Dielectric Constant	2.0
Power Factor	0.0005
Dissipation Factor	0.0002
Dielectric Strength, Volts/mil	400-500
Volume Resistivity	10^{13} ohm-cm
Surface Resistivity, 100% R.H.	10^{13} ohm
Water Absorption	Zero
Fungus Resistance	Excellent
Arc Resistance—Good, leaves no carbon path regardless of time of exposure	

Polypenco Teflon Tape is supplied from stock in thicknesses of .002" to 0.125" in widths up to 12". Polypenco Teflon is also available as rod, tubing, spaghetti tubing and slab. Write today for technical data or send us your application problem.

THE POLYMER CORPORATION OF PENNA. • Reading, Penna.
Export: Polypenco, Inc., Reading, Penna., U.S.A.

POLYPENCO® **Nylon, Teflon*, Q-200.5 and K-51**
Custom fabricating service available on request

*DU PONT TRADEMARK

power supply designed for 110/220 v, 50/60 cps with a power consumption of 30 w.

Direct factory net price is $195.

RECEIVER
measures tv reradiation

HAMMARLUND MFG. CO., INC., 460 W. 34th St., New York 1, N. Y. The SP-600-VLF communications receiver meets the requirements set forth by the FCC Docket No. 9288 on reradiation of radio receivers as it affects tv set manufacturers. Operating over a low range of 10 kc to 540 kc, it is ideally suited to the indication and measurement of l-f radiations common to tv flyback circuits, and other sources of spurious emissions.

Negligible drift, plus very accurate tuning, permit laboratory-quality tracing and measuring of vlf signals. In addition to the reradiation tests, the unit may be used as a laboratory-quality demodulating device in countless applications.



IMPULSE GENERATOR
produces short pulses

EMPIRE DEVICES PRODUCTS CORP., 38-15 Bell Blvd., Bayside 61, N. Y. Model IG-118 microwave impulse generator was designed to produce pulses of fractional millimicrosecond duration, obtained by discharg-

Another Computer FIRST

... by Reeves Instrument Corporation

Visit our Booth
No. 910-911
WESCON SHOW
Los Angeles Aug 21-24

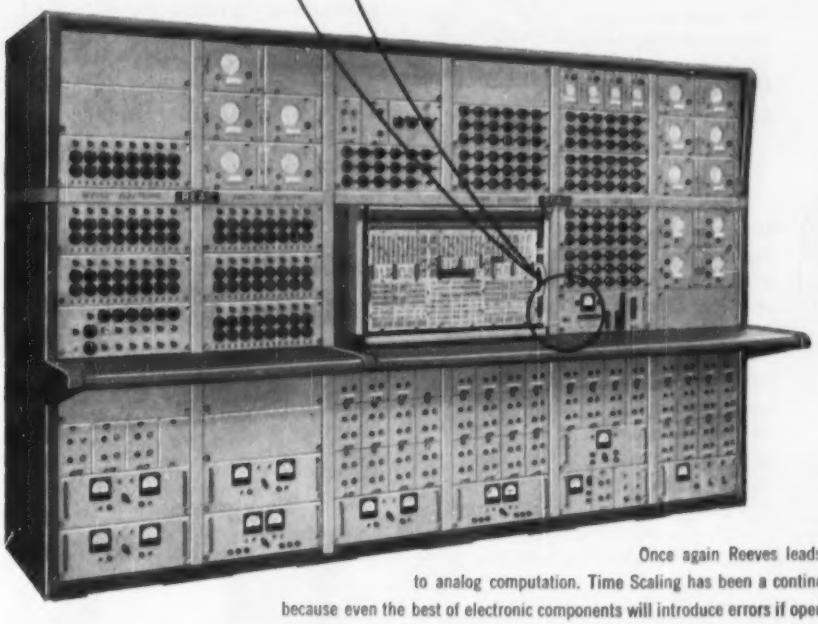

BUILT-IN TIME SCALE CHECK

Once again Reeves leads the field with a major contribution to analog computation. Time Scaling has been a continued source of difficulty in analog computation because even the best of electronic components will introduce errors if operated beyond their frequency range.

Now for the first time, Reeves offers as a built-in feature of the REAC® "400" computer a simple, positive "Time Scale Check" which determines, without disturbing the problem set-up in any way, if any computer component is operating beyond its frequency range. The new check is extremely simple and easy to perform, and requires little additional equipment in the computer.

"Time Scale Check" is another example of Reeves' pioneer engineering in the analog computer field. Reeves developed the first Electronic Analog Computer, and the list below gives some of the other important Reeves "firsts" since that time. Reeves is continually striving to improve its product and give you the very best in analog computers. Why not put this experience to work for you?

FIRST DC computing amplifier with capacitor to grid to eliminate the effect of grid current on integrator drift.

FIRST commercial chopper stabilized DC computing amplifier (based on an RCA invention).

FIRST commercial AGC for use with resolvers in polar mode.

FIRST commercial plotting board for analog computers.

FIRST diode electronic multiplier circuit requiring only three amplifiers with zero output for zero input.

FIRST commercial pre-patch system for analog computers.

FIRST commercial curve follower function generator.

FIRST absolute overload indicator system for computing amplifiers.

FIRST commercial use of cascode output computing amplifiers (for high power output with low quiescent drain).

FIRST commercial printed circuit DC computing amplifier.

FIRST commercial use of loaded tapped potentiometers for servo function generation.

FIRST commercial time division electronic multiplier.

FIRST diode function generator for function of two or more variables.

FIRST use of taper pin construction in analog computers for easy wiring and testing.

FIRST commercial wide-band, 400-cycle servo multiplier.

FIRST 6-channel recorder with automatic recording of calibration data.

FIRST commercial problem check system.

***REMEMBER*—ONLY REEVES MAKES REAC COMPUTERS!**

Reeves INSTRUMENT CORPORATION

REEVES INSTRUMENT CORPORATION
A Subsidiary of Dynamics Corporation of America
201 East 91st Street, New York 28, New York

REAC Analog Computers

Precision Floated GYROS



Precision RESOLVERS and PHASE SHIFTERS

SERVO MECHANICAL PARTS

7RV56

Origin, Observation and Present-Day Control of "Boinng!"*

This phenomenon probably began long before recorded time and, at present, gives every indication that it is here to stay. First recognition is almost universally credited to the Cro-Magnon man who attempted to describe the combined sound and tingling sensation in his palms after he had laid asunder an enemy skull with his club. His chiseled inscription, handed down to us through the ages and still used today, tells us with eloquent simplicity what he heard and felt — "Boinng!"

amorous; at others, with warnings of closeness-to-the-curberous. Without question, our children will enjoy a rich heritage of "Boinng!"someness.

And so, like the axe-wielder, like Sir Isaac, and like the fiend in olive drab, Sigma offers a small — but not unworthy — contribution to the cause of "Boinng!" vs. Relay Efficiency. We have watched it become a national worry, and have heard the voices crying out. Since our policy obviously could not be avoidal, we chose to make it sinusoidal, with 10 g's to 2,000 cycles our initial goal. The achievement is formally known as the Sigma Series 22 Relay, and basically offers the following: —



SERIES 22 ADJUSTMENTS

	G	HG	W
Vibration	10g to 300 cps 5g to 2,000 cps	15g to 500 cps	15g to 500 cps 10g to 2,000 cps
Contact Rating (28VDC. 115VAC resistive)	2 amp., 100,000 operations	1 amp., 100,000 operations (2 amp., 25,000 operations)	1 amp., 100,000 operations (2 amp., 25,000 operations)
Sensitivity SPDT ("C")	20 mw.	20 mw.	40 mw.
DPDT ("CC")	40 mw.	40 mw.	80 mw.

Scholarly minds since then, at odd intervals, have added to the body of scientific knowledge concerning "Boinng!". A Mr. Newton, in fact, added a rather loud, squashy one just prior to the evolving of The L. of G. (An identical, and somewhat more familiar observation, was made by the operatic team of W. Tell & Son.) It is interesting to note that "Boinng!" has been nearly all things to all men; sometimes with overtones

Those having applications in which "Boinng!" levels reach wrenching shudder proportions are welcome to printed data on the new 22's.

* Technical paper by Herr Doktor Ing. Helmut N. Greindloutten presented at the 1956 World Conference on the Forces of Ricoverbrigational Pingschafft in Hamburg.

22 KN

SIGMA

SIGMA INSTRUMENTS, INC.,
62 Pearl Street, So. Braintree, Boston 85, Massachusetts

ing a coaxial line into a load impedance through a pair of discharged contacts.

The output pulses produce a broad r-f spectrum: 100 to 1,000 mc, flat within $\pm\frac{1}{2}$ db. This known output level of broadband pulse energy can be used to: measure noise figure; determine bandwidth; study transient responses; as a calibrating standard for noise and field intensity meters; to test noise susceptibility of receivers; for receiver alignment; and as a signal source for broadband amplifiers or for evaluating spectrum analyzers.

Maximum peak power output is 9,000 μv per mc of bandwidth. Maximum average power output is 79.5 db above ktb. Output level is continuously adjustable over a 20 db range. Pulse polarity is automatically reversed once every 10 sec. Pulse width is 0.00005 μsec. Repetition rate is continuously adjustable from 2.5 cps to 2,500 cps. Output impedance is 50 ohms.

R-F VOLTMETER
two probes provided

BOONTON ELECTRONICS CORP., 738 Speedwell Ave., Morris Plains, N. J. Model 91-A r-f voltmeter provides measurements down to 0.001 v from 0.2 to 400 mc. Two probes, a high-impedance unit and a 50-ohm type with low vswr, are provided.

A full-wave crystal diode detector circuit gives rms response in the square law region up to 0.1 v, with high readings gradually changing from rms to peak response calibrated in rms for sine waves to 3 v

Ship fast

FASTER ON THE GROUND—United uses special equipment to handle your shipment swiftly, deftly!

FASTER IN THE AIR—United's "Big Lift" DC-6As with weather-mapping radar trim hours off coast-to-coast air time!

Ship sure

YOUR SHIPMENT can be preloaded on recessed-wheel aluminum pallets for protection and speed in handling!

MOTORIZED TUG BAR on "Big Lift" Cargoliners moves your heaviest shipments with care and precision!

Ship United

RESERVED AIR FREIGHT guarantees you space dependability on all Cargoliners—*and Mainliners!*

AIR FREIGHT SHIPMENT with passenger-plane speed and dependability—that's United's offer to you!

Examples of United's low Air Freight rates

*per 100 pounds**

CHICAGO to CLEVELAND	$4.78
DENVER to OMAHA	$6.42
NEW YORK to CHICAGO	$7.50
SEATTLE to LOS ANGELES	$12.02
PHILADELPHIA to PORTLAND	$24.15
SAN FRANCISCO to BOSTON	$27.00

*These are the rates for most commodities. They are often lower for larger shipments. Rates shown are for information only, are subject to change, and do not include the 3% federal tax on domestic shipments.

UNITED AIR LINES

For service or information, call the nearest United Air Lines Representative. Write for free Air Freight booklet, Cargo Sales Division, Dept. V-8, United Air Lines, 5959 S. Cicero Ave., Chicago 38.

when you need

Molded Originals...

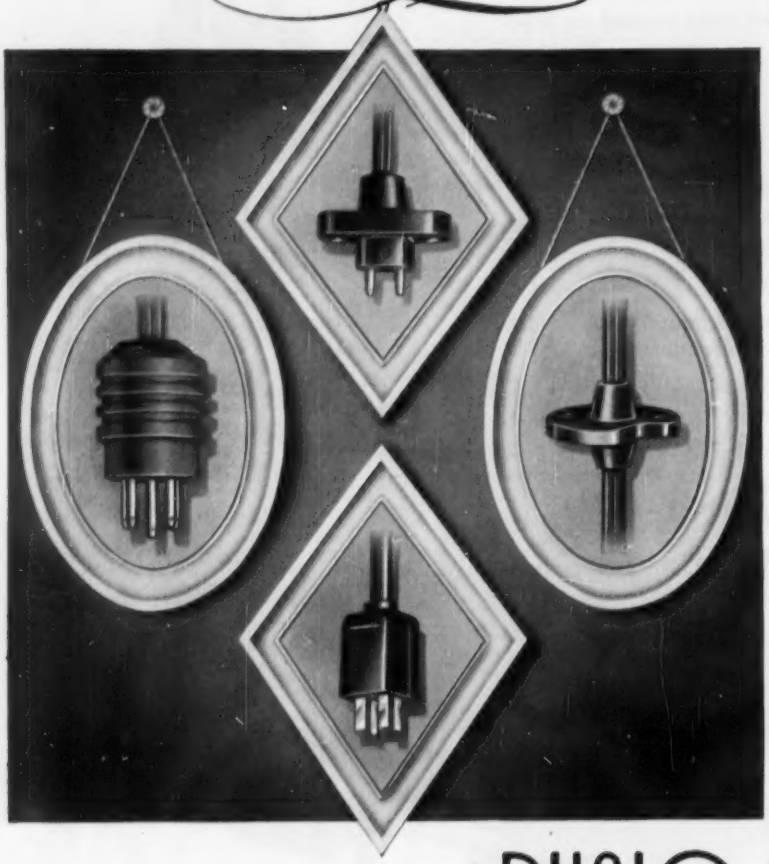

..... you need PHALO

You might compare an original PHALO molded plug to a special art commission. After all, it does take a very special talent to create originals in any business! Throughout the electronic and electrical industry, Phalo gets the first shot at some of the best plugs.

Get the PHALO catalog



PHALO

PLASTICS CORPORATION

The Custom Insulation House

CORNER COMMERCIAL STREET
WORCESTER, MASS.

Insulated Wires, Cables — Cord Set Assemblies

maximum. As a power meter with the 50-ohm probe, the instrument can measure down to 0.02 μw.

POWER SUPPLY
rugged and convenient

PRECISE MEASUREMENTS CO., 942 Kings Highway, Brooklyn 23, N. Y., announces a completely redesigned power supply. Input is regular 115 v 60-cycle line. Output voltages are adjustable with a convenient front panel control. Standard models are available with the following ranges: 5,000 v, 2,500 v, 10,000 v, and 15,000 v and 25,000 v. Output is well filtered direct current. Regulated models offer close output stabilization against line and load changes. Large 6-in. mirror scale, 1-percent kilovoltmeter shows exact output voltage.



SILICON RECTIFIERS
1,500-v, single junction

TEXAS INSTRUMENTS INC., 6000 Lemmon Ave., Dallas 9, Texas. Five production types of silicon rectifiers featuring a single grown junction element with 1,500-v breakdown voltage are announced. They are available with stable operation

Electron-Tube Transconductance (gm) Tester measures Electrode Currents as low as 0.0000001 ampere!

RCA WT-100A MicroMhoMeter enables equipment design engineers to measure electron-tube grid and interelectrode-leakage currents for critical circuit applications

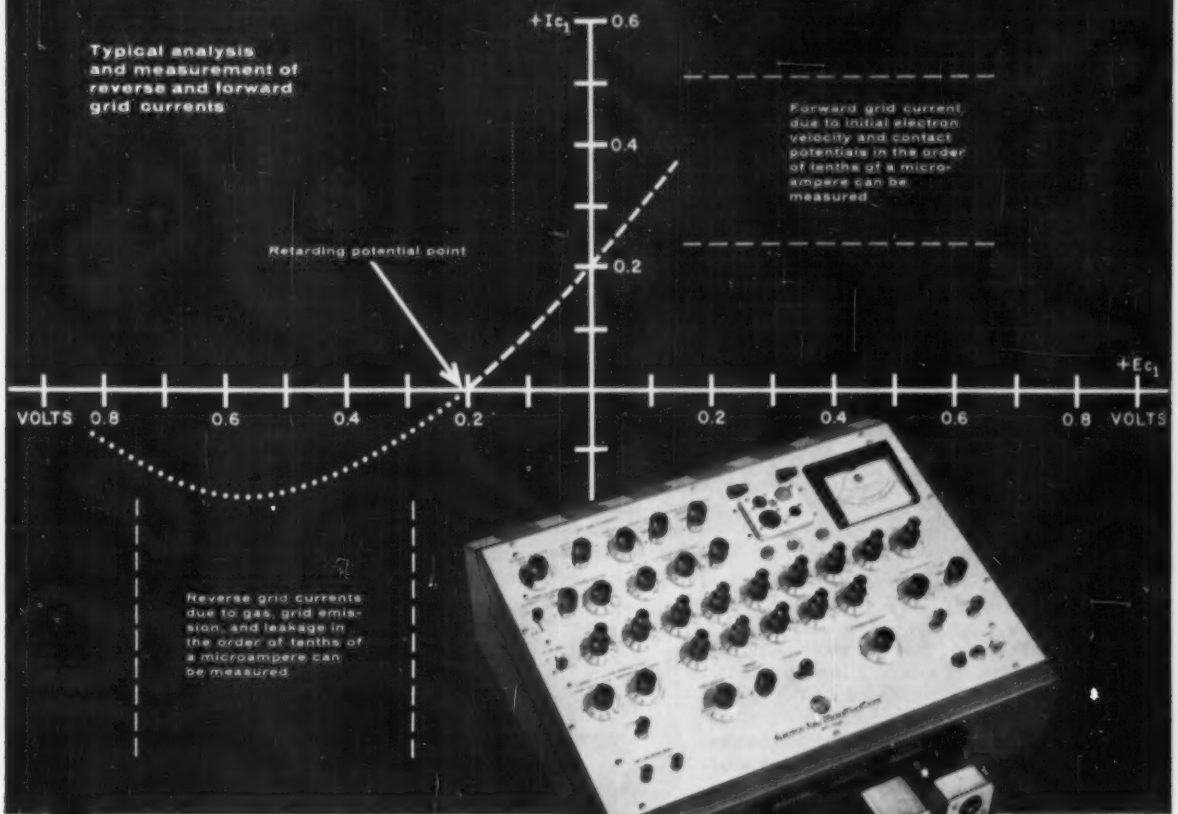
Typical analysis and measurement of reverse and forward grid currents
+Ic1
0.6
0.4
0.2
Forward grid current due to initial electron velocity and contact potentials in the order of tenths of a micro-ampere can be measured
Retarding potential point
+Ec1
VOLTS 0.8 0.6 0.4 0.2 0.2 0.4 0.6 0.8 VOLTS
Reverse grid currents due to gas, grid emission, and leakage in the order of tenths of a microampere can be measured

- measures reverse grid currents (gas, grid emission, and leakage currents)
- measures forward grid currents (initial electron velocity and work-function currents)
- measures heater-cathode leakage currents (internal power supplies provide −100 to +300 volts for test)
- measures interelectrode leakage currents between any combination of electrodes (internal power supplies provide −100 to +300 volts for test)

RCA WT-100A MICROMHOMETER . . . $785.00**

**User Price (optional)

RCA WT-100A Electron-Tube MicroMhoMeter is a laboratory-quality instrument which brings a reliable concept of tube-testing technique to users of tubes—on the production line, in the laboratory, and in circuit design. Uniquely designed, compact, and self-contained, the WT-100A offers versatility and accuracy comparable to that of more elaborate and complex laboratory equipment used for measuring transconductance and electrode currents. For detailed brochure, write RCA, Commercial Engineering, Section H19W, Harrison, N. J.

SPECIAL FEATURES OF THIS REMARKABLE INSTRUMENT

• Measures true transconductance with better than ±3% accuracy • Built-in shorts test for any combination of tube elements • Measures transconductance up to 100,000 μmhos—in 6 ranges • Measures transconductance of low-plate-resistance types and high-perveance types • Measures control-grid-to-plate, screen-grid-to-plate, and suppressor-grid-to-plate transconductances • Measures heater currents including 600-ma series-string TV types • Built-in calibrating circuit—no null meters or extra devices required • Has easy-to-read meter for all measurements • VoltOhmyst®-type circuit for current measurements—has full-scale reading of 3 μamps on lowest current range • Electronically protected burn-out-proof meter • Regulated power supplies for all dc voltages • 250-ma dc supply for filaments of battery operated tube types.

®Registered U.S. trademark

RCA TEST EQUIPMENT

Radio Corporation of America, Harrison, New Jersey

Want more information? Use post card on last page.

• Threshold voltage adjustment
• Fixed gain adjustments

THERE'S A

• Critical magnetic and electric bias

TIC TRIMMER POT

• Balancing adjustments

for every application

• Padding
• Adjusting scale factors
• Parameter compensation
• Fixed reference circuits

TIC manufactures in production quantities the most complete line of precision trimmer potentiometers in the industry. Common to all TIC trimmers is the unexcelled TIC quality construction and advanced design. The wide selection of sizes and shapes, in addition to the wide range of power and temperature capabilities, permit selection of units of maximum compatibility with a specific application.

The TIC Trimmer Potentiometer Line includes units from ½ inch to 1 inch in size . . . 50 to 100K ohms in resistance . . . . —55° C to +145° C temperature range . . . power ratings up to 4 watts. Advanced mechanical design provides extremely precise, stable adjustments under all forms of adverse environmental conditions.

TIC was the originator of the high stability subminiature trimmer pots. For example the original metal-film potentiometer, the TIC RFT Metlfilm, represents the outstanding advance high stability trimmer potentiometer design. The RFT contains a resistance element of metallic film that provides infinite resolution for ultra-fine trimming. Compactness of the RFT permits stacking 7 to the square inch. Latest addition to the TIC Trimmer Line is the new low cost RWT which, like the RFT, provides adjustment by use of a 25-turn lead screw.

Complete information on the TIC Trimmer Potentiometer Line is available upon request.

MANUFACTURER OF THE WORLD'S FINEST POTENTIOMETERS
PIONEER OF PRECISION WIRE-WOUND POTENTIOMETERS
FOREMOST IN THE DEVELOPMENT OF NEW DESIGNS
UNEQUALLED FOR PROMPT DELIVERY-PRODUCTION, PROTOTYPE

TECHNOLOGY INSTRUMENT CORP.

569 Main Street, Acton, Mass., COlonial 3-7711.
West Coast Mail Address, Box 3941, No. Hollywood, Calif., POplar 5-8620

up to 150 C and forward current ratings up to 100 ma.

► **Models**—Available in two types of axial and stud half-wave models and a full-wave plug-in model, these hermetically sealed rectifiers eliminate the need for filament power. The axial models, 1N543 and 1N543A, allow point-to-point wiring; types 1N544 and 1N544A are studmounted for maximum heat dissipation; the plug-in model TI/680, can be used in many applications to replace the JAN 6X4 rectifier tube.

All rectifiers are heat cycled from —55 to +75 C with 95 percent humidity four times and from —55 to +150 C for four additional cycles to insure maximum reliability, stability and long life under extreme environmental conditions. Bulletins containing complete design data, including characteristic curves, are available.

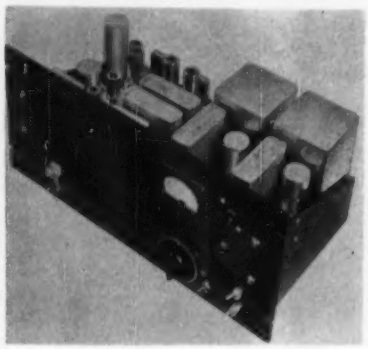

POWER CONVERTERS
for precision use

JAMES VIBRAPOWR CO., 4050 North Rockwell St., Chicago 18, Ill., announces a new line of precision power converters. They are designed to supply 117 v a-c at extremely accurate output frequencies. The converters are for instrumentation requiring a precision frequency time base. Geophysical recording and exploration is a typical application.

► **Specifications**—Models are available with either 12 or 24 v d-c input. Nominal voltage output is 117 v. Frequency outputs available are 50, 60 or 100 cps, all with an accuracy of 1 part in 1 million.

The power converters operate on a new principle of lock-in vibrators

ELECTRICAL ENGINEERS...
HERE'S A GATEWAY TO A BRIGHT FUTURE

This is LINK

THE POSITION: Link offers experienced electrical engineers excellent opportunities in Research and Development in transistor circuitry, servo-mechanisms, and digital computer techniques. Here you can develop your own potential – you'll work on interesting and diversified projects . . . your fellow-workers will include leaders in the field.

Excellent employee benefits include liberal moving allowances. Opportunities for advancement are as great as your engineering vision can make them.

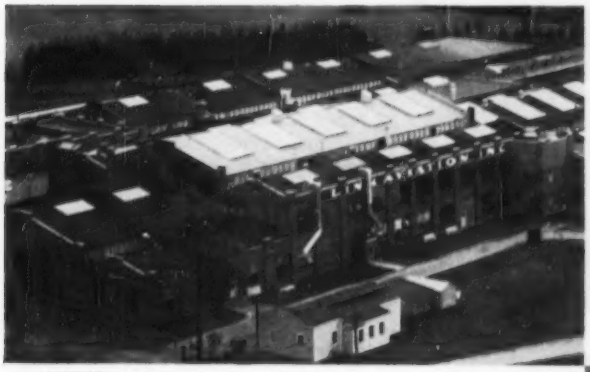

Plant No. 1

THE COMPANY, ITS PRODUCTS AND FACILITIES: Thousands of Link trainers, many hundreds of Link jet flight simulators were built in this plant. Other products manufactured here include computers and their components, servo-mechanisms, gear boxes, and many electronic measuring devices.

As today's flight simulators reach final assembly, research on the models to match tomorrow's flights goes on.

THE COMMUNITY: Binghamton offers all urban facilities, yet is close to the beautiful vacationland of upstate New York. Here's an ideal suburban environment for your family – and unlimited recreational facilities, too. There's plenty of fishing, swimming, and golfing opportunities – all within minutes from your future home.

Qualified electronic engineers please send your resumes to Manager of Employment

LINK AVIATION, INC.

A SUBSIDIARY OF GENERAL PRECISION EQUIPMENT CORPORATION

BINGHAMTON, NEW YORK

GPE

Want more information? Use post card on last page.

PRESENTS . . .

a VTVM operating to 700 MCS

the NEW 800B

FEATURING

- Frequency response to 700 MCS
- DC voltage ranges — .1v to 30kv.
- Wide resistance range — 0.02 ohm to 5000 megohm
- Wide current range — 0.001 microampere to 0.1 ampere
- AC voltage ranges — 0.1v to 300v

TRY THIS TOP NOTCH VOLTMETER in Your Laboratory on FREE TRIAL

Nothing compares with personal observation and inspection in evaluating the true merit of a precision test instrument. Compare the advantages of the versatile 800B — The Measurement Laboratory in One Compact Instrument. Use it in your work as a voltmeter, millivoltmeter, milliammeter, microammeter, millimicroammeter, ohmmeter, and megohmmeter. Put its precision construction and unique design to the acid test of your personal inspection.

Check the effect of the 800B's high feedback developed across a precision resistance (not across meter-coil resistance) on stability . . . elimination of tube-aging problem . . . and lower full-scale ranges. Also, you will be able to see insensitivity of the 800B to line-voltage fluctuations — a result of its special voltage regulated plate and filament supply.

Ask for your free trial at no obligation, today! Complete specifications also available upon request.

Acton Laboratories, Inc.

520 MAIN STREET ACTON, MASS.

Visit us at Booth 2258 at the ISA Instrument-Automation Conference and Exhibit

which result in overall efficiencies of up to 75 percent. Power output up to 150 w is available.

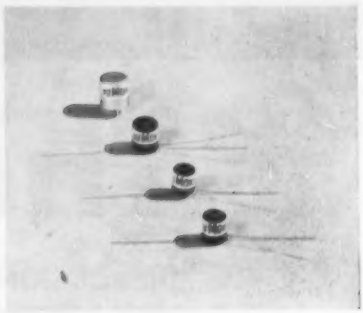

PULSE TRANSFORMERS
feature fast rise time

ALLEN B. DUMONT LABORATORIES, INC., 750 Bloomfield Ave., Clifton, N. J., has available a line of miniature and subminiature pulse transformers offering fast rise times and high duty cycles. Advanced design will extend the use of pulse transformers in blocking oscillator and coupling circuitry for high-speed digital computers—especially airborne types.

Some of these transformers have been operated at repetition rates of 5 to 6 mc, and it is possible to obtain up to 40 percent duty cycle without backswing.

The transformers are either molded in epoxy resin, wound in a ferrite pot-core, or encased in an aluminum can. Typical examples are the quarter-ounce type 22136 blocking oscillator and coupling transformer, and two coupling transformers; and types 22127 and 22128, each weighing ½ oz. The inductances, measured at 1,000 cps, 0.1 v, with no load conditions, are 1.2 mh, 1 mh and 1.3 mh respectively. All three transformers have a maximum voltage rating of 1,000 v d-c.

Further information is available from the company.

RECYCLING TIMER
a fully enclosed unit

FARMER ELECTRIC PRODUCTS CO., INC., 2300 Washington St., Newton Lower Falls, Mass. The new model 3CK electronic timer is a fully enclosed unit with independently adjustable time ranges for both ON

and OFF cycles of 1.5, 3, 6 and 12 seconds (standard). It can easily be converted to a single time-cycle operation by the removal of one tube from the unit, an ideal feature for laboratory use, as is the provision for back-of-panel or bench mounting. Fully enclosed terminals are easily accessible by removal of back cover.

▶ **Additional Data**—It also retains the important features of other Farmer timers, such as: instant starting cold-cathode tubes that require no warmup time; tube cut out during timed-out periods assuring long tube life; plug-in relays for easy servicing; 8-ampere, spdt load contacts for 115 v a-c operation, (25 to 400 cps). Model 3 timer is 5 in. high by 4¼ in. wide by 3¾ in. deep.

List price is $52. Quantity discounts are available.



H-V CONNECTORS
in two and three contacts

DEJUR-AMSCO CORP., 45-01 Northern Blvd., Long Island City 1, N. Y., has announced a new group of precision h-v pressurized connectors in two and three contacts designed for AN24 shell. They were developed for altitude applications where leads are required for pressure-tight instrumentation. Maximum air leakage between contacts and insert, and insert and shells is less

These FREE BOOKS give you much of tomorrow's Electronics news...TODAY

NEWS ABOUT: *Electronic control systems and components • Countermeasures equipment • Waveguide switches • Coaxial switches • Airborne alternators and actuators*

These brand-new books are your 1956 guides to the latest advancements to come from the expert electronic engineering and production staffs of Thompson, offering you the most modern facilities to help solve your every electronic problem.

FILL THIS OUT AND MAIL IT Today!

Electronics Division
Thompson Products
2196 CLARKWOOD ROAD
CLEVELAND 3, OHIO

ELECTRONICS DIVISION, DEPT. E-8
THOMPSON PRODUCTS
2196 Clarkwood Road
Cleveland 3, Ohio

Please send me a FREE copy of "Electronics Advancement".

Name _____ Title _____
Company _____
Address _____
City _____ Zone ___ State _____

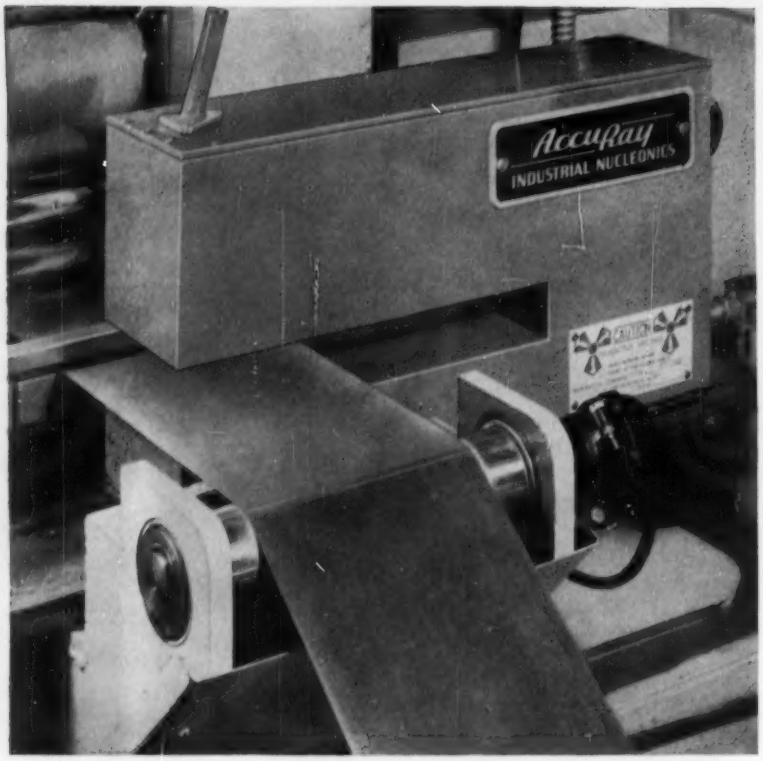

UNIFORM AS THE ATOM

Somers Thin Strip now Gauged by Nuclear Energy



Actual recording of clad steel being rolled to .0065″ within a tolerance of ±.0002″; virtually all the metal is within ±.0001″ (between the heavy vertical lines).

To meet the increasing demands of electronics and other industries for *uniform* closer tolerances, Somers Brass has taken advantage of one of the latest developments in the electronic field by installing the first Accu-Ray gauges in the non-ferrous industry. These units make it possible to check and control thickness from edge to edge throughout each coil to a degree of accuracy never before known.

Accu-Ray gauging is typical of the modern methods Somers combines with engineering experience to provide thin strip metal to your most rigid specifications. Nickel, Monel, and Nickel Alloys from .020″ to .00075″. Brass, Bronze, Copper and Alloys from .010″ to .00075″.

For Exacting Standards only

Somers THIN STRIP

SOMERS BRASS COMPANY, INC., 112 BALDWIN AVE., WATERBURY, CONNECTICUT

than 1 cu in. of air per hr at an ambient temperature of 25 C when the plug is subject to a pressure differential of 30 psi.

Sealing is accomplished by the use of individual O rings. Nonrotating contacts are removable for wiring. Inserts are mineral filled Melamine (MIL-P-14D, type MME).

For complete information, including outline drawings and specifications, write for bulletin 46C.

MERCURY SWITCH PULSER
for spectrometry circuits

HAMNER ELECTRONICS CO., INC., P. O. Box 531, Princeton, N. J., has produced the N-101 mercury switch pulser. The instrument is ideally suitable for calibration and stability measurements involving scintillation spectrometry circuits.

▶ **Highlights**—The unit features continuously adjustable rise time (0.03 to 0.5 sec); output delivers up to 10 ma (maximum 22 v) either polarity and is continuously variable with better than 0.1 percent linearity; battery pulse source; and stability better than 0.1 percent per day after initial warmup.

The N-101 is constructed for relay rack mounting or table top use. Power requirements are 115 v, 60 cps, 18 w. A descriptive brochure is available.

VERNIER CAPACITOR
for computer applications

BALCO RESEARCH LABORATORIES, 49-53 Edison Place, Newark, N. J. The V-Cap vernier capacitor is specifically designed for computer applications where a 0.1 to 1-μf capacitor must be adjusted to an accuracy of better than 0.05 percent and where high orders of stability are needed. It features an almost undetectable dielectric absorption

and insulation resistance of 10^{14} ohms. Dissipation factor is only 0.0005.

▶**Other Features**—Range of adjustment is ±1 percent on either side of the nominal capacitance and adjustment accuracy is limited only by the resolution of the measurement technique. High stability is attained by special treatment of the dielectric, by the use of extremely rugged mechanical design, and by a specially developed system for accomplishing the capacitance variation.

Hermetic sealing is maintained for the life of the unit by the use of soldered joints. The case is of one-piece construction with wall thickness averaging ¼ in. The movement necessary for the control of the capacitance is transmitted through a metal bellows. Adjustment is accomplished by rotation of the stainless steel screw at the top of the unit.

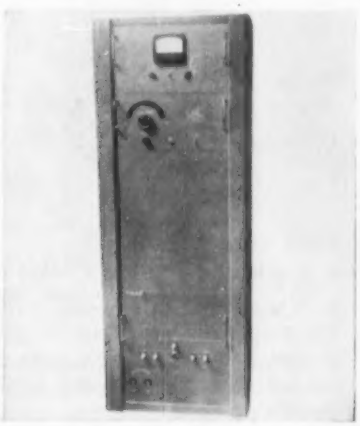

A-C POWER SOURCE
two new models

BEHLMAN ENGINEERING CO., 114 So. Hollywood Way, Burbank, Calif. New additions to the Invertron line of electronic a-c power sources are

FISHBOWLS THAT FLY!
You'll recognize these flying fishbowls as bombsight windows. Specifications require that these hyperhemisphere lenses be ground to precision tolerances of fractions of a wavelength of light. Bausch & Lomb optical competence made volume production possible . . . by new adaptation of diamond cutting wheels, ring-shaped laps, and induction-heat blocking. Find out how B&L advance technology can help expedite your contract plans.
WRITE FOR COMPLIMENTARY COPY OF LIMITED EDITION, "OPTICAL COMPETENCE"
(on official letterhead, please, indicating title). Bausch & Lomb Optical Co., 81208 St. Paul Street, Rochester 2, N. Y.
BAUSCH & LOMB

Get Precision at a New Low Price!

GAMEWELL'S

G-20 SERIES



PRECISION POTENTIOMETERS

The New G-20 gives you a truly precision potentiometer with many characteristics found only in pots costing twice as much. Here are the outstanding features . . .

- Linearity is 0.5 or better
- Radial or Rear Extension Turret Terminals
- Non-metallic housing uses material of high dimensional stability that is inherently fungus-proof and moisture resistant
- Servo, Threaded-Bushing or Flange Type Mountings
- Power rating 1.5 watts at 65°C (derated to 0 at 150°C)

Gamewell gives you this high quality at low cost by new design techniques and high production methods.

See how many applications can use this new G-20. It is ideal where you require *good* precision at a bargain price for industrial and commercial apparatus. Gamewell is ready to supply these in quantity now.

Technical Data

Resistance, Max. 63,000 ohms ±5%
Resistance, Min. 20 ohms ±5%
Linearity Std. ..... ±0.5
Electrical Angle .....340° ±3°
Max. No. of Turns 2100
Watts at 65°C 1.5
Torque Max. .....1 oz. — in.
Max. Temperature .....150°C
Weight .....1¼ oz.

4-40 NC-2B 3-Holes Equally Spaced on .500 R.



GA 6-2

THE GAMEWELL COMPANY
NEWTON UPPER FALLS 64, MASS.

GAMEWELL®

PRECISION POTENTIOMETERS

Manufacturers of Precision Electrical Equipment Since 1855

the 1.5 kva and 2 kva models, both featuring the accuracy, stability and regulation of previously available lower power units.

The model shown has a power output of 1.5 kva three phase, with output frequency continuously variable from 350 to 450 cps.

PICTURE TUBE
for portable tv receivers

RADIO CORP. OF AMERICA, Harrison, N. J., has developed a short, lightweight rectangular, glass tv picture tube having a diagonal dimension of 14 in. and a viewing area of 106 sq in., intended primarily for low-cost, portable tv receivers. The tube (type 14RP4A) is identical to the 14RP4 except that it has an aluminized screen.

Employing 90-deg deflection, the 14RP4A weighs only 8½ lb and is approximately 2 in. shorter than a type having the same size faceplate and 70-deg deflection. Other design features include an external conductive bulb coating which, with the internal conductive coating, forms a supplementary film capacitor, and an ion-trap gun requiring an external single-field magnet.

TINY RELAY
a 6 pdt unit

U. S. RELAY CO., Los Angeles, Calif. The S-308 series, a 6 pole, double-throw relay, offers the characteristics of the S-309 4-pole series. Contact ratings are 2 amperes, non-inductive, at 29 v d-c. Also available in 5 amperes at 29 v d-c, it will meet or exceed specification MIL-R-5757B with vibrational characteristics of 10 g through 2,000 cps.

The relays feature electronically measured contact pressures during

manufacture and testing. All final adjustments are made after the relay is sealed. There is no internal wiring, and nongaseous silicone materials are used throughout.

These units may be obtained for dry circuit or low-level operation, with mounting arrangements to customers' requirements and specifications.

ADHESIVE
improves printed circuits

HOUGHTON LABORATORIES, INC., Olean, N. Y. Uniform peel strengths of over 12 lb per in. of width for copper clad laminates are now available from several laminate manufacturers using Hysol 2217 in a new bonding process developed by Houghton Labs.

Twelve lb per in. of width is more than double the peel strength of most copper clad laminates used heretofore. The new process assures uniform strength from sheet to sheet.

Exhaustive outside laboratory tests have proven excellent solder dip resistance limited in temperature only by the base liminate itself. Higher temperature solder baths result not only in better reliability, but in shorter soldering cycles and increased production.

DIGITAL COMPUTER
for data processing

BYRON JACKSON ELECTRONIC DIV., Borg-Warner Corp., Los Angeles 54, Calif., has developed a digital computer designed for use with the frequency signals from Vibrotron electronic gages in advanced data processing systems. Known as the model 309 PTF digital computer, this frequency-counter type computer is small (14½ in. deep by 7 in. high by 19 in. wide for standard

There's a dependable

Bendix* AN

SCINFLEX CONNECTOR

for every electrical circuit

These electrical connectors are designed and built to provide maximum performance under the most rugged operating conditions.

Well recognized for outstanding characteristics of resistance to moisture and vibration, these connectors are provided in a variety of AN types.

Our Sales Department will be glad to furnish complete information on request. *Trademark

Bendix SCINTILLA DIVISION OF Bendix
SIDNEY, NEW YORK

Export Sales and Service: Bendix International Division, 205 East 42nd St., New York 17, N.Y.
Canadian Representatives: Aviation Electric Ltd., 200 Laurentien Blvd., St. Laurent, Montreal 9, Quebec

FACTORY BRANCH OFFICES:
117 E. Providencia Avenue, Burbank, California • 512 West Avenue, Jenkintown, Pennsylvania • Stephenson Building, 6560 Cass Avenue, Detroit 2, Michigan • 5906 North Port Washington Road, Milwaukee 17, Wisconsin • American Building, 4 S. Main Street, Dayton 2, Ohio • 9401 Cedar Springs Road, Dallas 19, Texas • Boeing Field, Seattle 8, Washington • 1701 "K" Street, N. W., Washington 6, D. C.

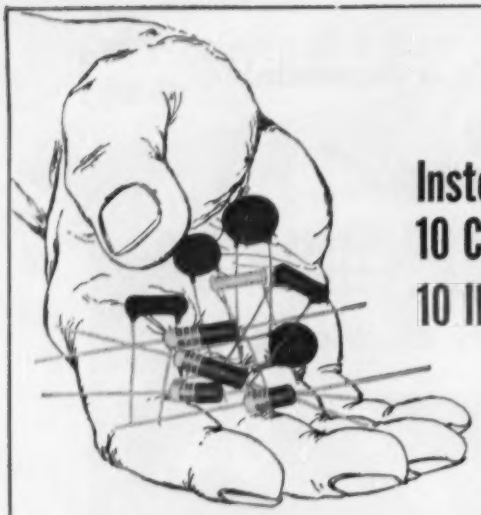

Instead of
10 Components...
10 INSERTIONS

SIMPLIFIED AUTOMATION
with ERIE PAC*

There are still
10 Components
BUT...
ONLY 1 INSERTION
Result: Reduced Costs

*"PAC" modules can contain up to 90 Resistor and Capacitor elements per unit.

WRITE FOR ENGINEERING BULLETIN 450-1 and
INFORMATION ON OUR "PAC" EXPERIMENTAL DESIGN KITS

ERIE electronics

ERIE ELECTRONICS DIVISION
ERIE RESISTOR CORPORATION
Main Offices and Factories, ERIE, PA.
Manufacturing Subsidiaries
HOLLY SPRINGS, MISSISSIPPI • LONDON, ENGLAND • TRENTON, ONTARIO

relay rack mount) and low-priced.

It indicates pressure, temperature and flow directly in numbers from the frequency signals of the sensing Vibrotron gages. This new PTF computer gives a visual read-out from 000 to 999 in steps of 1, thus providing a percentage type indication of maximum utilization of digits.

Performance is read instantly and no external translation is required. For example, as pressure goes up at the sensing point, the numerical read-out is shown as an exact percentage increase on the PTF computer face.

Digital output signals from the computer can be made available in either binary or decimal form. Additional information on the computer and other system components can be secured by requesting the technical file titled "Make Your Systems Count."

HIPOT TESTER
with 5-μa circuit breaker

PESCHEL ELECTRONICS INC., 17 Garden St., New Rochelle, N. Y., has announced a new improved line of sensitive HiPot testers which automatically deenergize high voltage when leakage current in samples reaches 5 μa.

Models are available from 2 kv up to 120 kv and special units can be custom built. The smaller units are adjustable up to 1,000 μa and larger units up to 5,000 μa.

Series H HiPot tester allows convenient and accurate dielectric testing of equipment, components and materials.

Standard features include both a-c and d-c outputs and continuously adjustable output voltage. Accurate hand-calibrated dual scale metering which is directly across the h-v output can be recalibrated at any

time by a simple screw-driver adjustment.

A self-holding primary contactor prevents the accidental reapplication of high voltage after a line failure. The unit is complete with full safety controls and dead-front panel controls; safety resistor in d-c output lead.



WIRE-WOUND CONTROLS
for printed wiring

CLAROSTAT MFG. CO., INC., Dover, N. H. For fast, efficient insertion in printed-wiring assemblies, a redesigned version of the space-saving series 39 Humdinger control is announced. Mounting is by two tabs for positive locking to printed-wiring board. Control is rated at 2 w. Resistance range is from 4 ohms to 5,000 ohms. The controls measure ¾ in. in diameter by ⅜ in. deep. Adjustment is by screwdriver slot. For further details, request Form No. 754303.

MICROWAVE DIODES
in reversible assemblies

MICROWAVE ASSOCIATES, INC., 22 Cummington St., Boston, Mass., has available mixer and video cartridge type silicon diodes in convenient reversible assemblies. Normal po-

ERIE
DISC
CERAMICONS®

FOR
Radios
TV's
Computer Assemblies
Instruments
Record Players
Military Equipment
Communication Equipment
Test Devices
Business Machines
Electronic Organs
Automatic Industrial Controls

The three types in which ERIE Disc Ceramicons are available are offered in a wide range of values. The capacitors have flat ceramic dielectrics with fired silver electrodes to which lead wires are firmly soldered. The completed units are given a protective coating of phenolic which is vacuum wax impregnated for excellent moisture seal. Disc Ceramicons are made in six sizes ranging from 5/16" max. to 3/4" max. diameter. Write for complete description and specifications.

AVAILABLE IN 3 TYPES

TEMPERATURE COMPENSATING
Disc Ceramicons offer a wide combination of temperature coefficient and capacitance values. They meet all requirements for RETMA REC-107A Class 1 ceramic capacitors. Available in capacity ranges from 1.5 to 2810 mmf at 500 V D.C.W. and temperature coefficients ranging from P120 through N5600.

GENERAL PURPOSE Disc Ceramicons have low series inductance which assures efficient high frequency operation. Values from 1.5 mmf to .02 mfd. Rated at 500 Volts D.C. Working.

HIGH VOLTAGE Disc Ceramicons employ the same basic diameters and design that have been standardized in 500 volt ceramic capacitors. Conservative voltage rating beginning at 1 KV D.C.W. are based on extensive life test data.

Style 831
Style 801
Style 851
Style 811
Style 841
Style 821

ERIE electronics
ERIE ELECTRONICS DIVISION
ERIE RESISTOR CORPORATION
Main Offices and Factories ERIE, PA.
Manufacturing Subsidiaries
HOLLY SPRINGS, MISSISSIPPI • LONDON, ENGLAND • ST. CATHARINES, ONTARIO

For additional information on all items on this page, use post card on last page.

Official U. S. Air Force Photograph

Where a miss is worse than a mile

Today's new airborne weapons demand new standards of reliability.

Failure of even one part, for example, in the complex fire control computer of a modern interceptor like the F-102A *(above)* could nullify all the engineering skill that went into its design and construction. Even worse, such failure could cause a collision with target debris or allow the escape of a target bearing nuclear or thermonuclear weapons.

Reliability is one good reason engineers picked Bristol's® Syncroverter® high-speed polar relays for the fire control equipment.

These high-speed relays have a normal life of billions of operations in dry circuit applications. They are available in SPDT and DPDT models. They're reliable in such equipment as air-to-ground telemetering, analog and digital computers, aircraft or missile control, carrier-current switching, as well as others.

Your application may require different specs from those listed below. But chances are you'll find what you need in Bristol's broad Syncroverter line. Write for complete data. The Bristol Company, 152 Bristol Road, Waterbury 20, Conn. 6.43

Bristol Syncroverter high-speed relay. Covered by patents.

TYPICAL CHARACTERISTICS

Temperature range: −55°C to 100°C
Operating shock: 30G; 11 milliseconds duration
Vibration (10-55 cps, see below, mounting): 10G
Contact ratings: up to 35v, 45 microamperes
Stray contact capacitance: less than 15 mmfd
Pull-in time (including bounce): as low as 200 microseconds
Drop-out time: 300 microseconds
Life: Billions of operations
Mounting: Octal tube socket; others available, including types for vibration to 2000 cps.

BRISTOL FINE PRECISION INSTRUMENTS FOR OVER 67 YEARS

larity is reversed by shifting the end cap assembly to the end marked reversed.

The new reversible cartridge diodes are electrically and mechanically equivalent to and are directly interchangeable with standard types and meet all requirements of MIL-E-1 specifications. The 1N415 and 1N416 series of reversible silicon diodes discussed are interchangeable with the 1N23 and 1N21 series of forward and reverse diodes, respectively.

WIDEBAND AMPLIFIER
priced at $399

INSTRUMENTS FOR INDUSTRY, INC., 150 Glen Cove Road, Mineola, N. Y. Model 380 wide-band amplifier combines a wide passband with high amplification, having 70 db of gain over the frequency range from 2 kc to 60 mc. Input and output impedances are 90 ohms, and the unit is supplied with self-contained power supply in an instrument case 8½ in. by 10½ in. by 12¾ in. A front panel gain control is provided.

► **Uses**—Applications include pulse amplification, preamplification for counters to increase their sensitivity, and use as a general laboratory amplifier within its frequency range.

Model 380 is priced at $399.

SNAP-ACTION SWITCH
tiny, rated at 10 amperes

MILLI-SWITCH CORP., 1742 Berkeley St., Santa Monica, Calif. Model B-1-H.A. switch is rated at 10 amperes at 30 v d-c resistive or 8 amperes at 30 v d-c inductive. It also features maximum movement



differential of 0.0015 in.; 0.008 in. pretravel; temperature range of —67 F to 300 F; and excellent operating force differential.

The patented one-piece spring construction plus rigid quality control and 100-percent inspection of critical dimensions and characteristics assures reliability and maintenance of definite operating characteristics. No dead-break is guaranteed as well as a guarantee of 1,000,000 mechanical cycles.

Housed in a plastic case ¼ in. wide by ⅞ in. high by ⅞ in. long, the terminals are 24 karat gold plated over silver plate. Switches are furnished spdt, with one circuit normally closed.



SILICON DIODES withstand high temperatures

INTERNATIONAL RECTIFIER CORP., El Segundo, Calif., has announced silicon power diodes designed for applications where reliability, high efficiency and miniaturization, together with the ability to withstand high ambient temperatures are prime requirements. These diodes are rated for 300 ma d-c rectified output current when mounted by leads in free air at ambient temperatures up to 100 C. When mounted on cooling fins, the diodes can be rated for 1.25 amperes rectified output current at a case temperature up to 150 C. Peak inverse voltage ratings range from 50 to 600 v.

The rectifying barrier of this

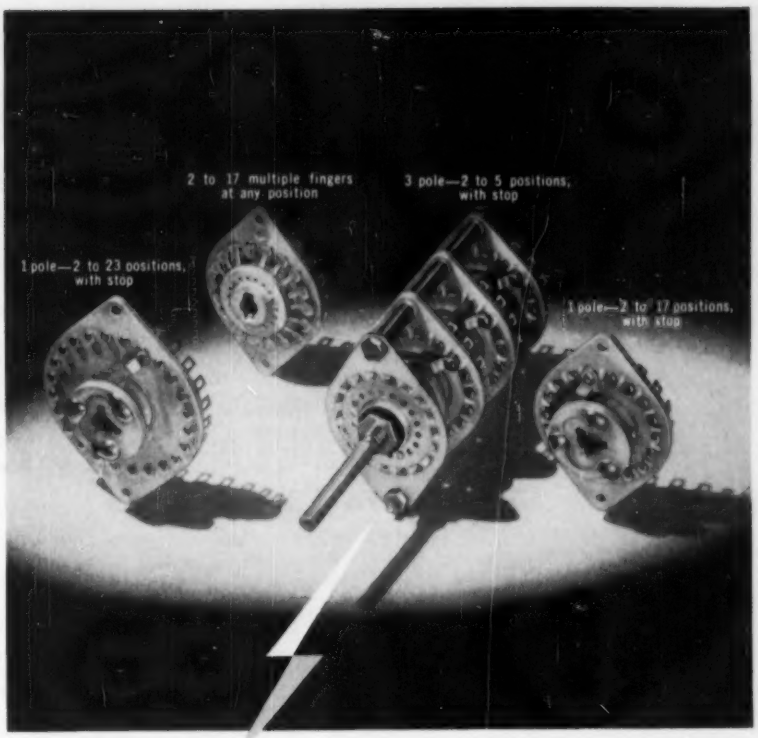
2 to 17 multiple fingers at any position
3 pole—2 to 5 positions, with stop
1 pole—2 to 23 positions, with stop
1 pole—2 to 17 positions, with stop

More contact combinations

within medium-duty power range

Meets the requirements of...
Transmitters
Industrial controls
Laboratory testing
Other military and commercial applications

See Centralab's new products in Booth 1225 at the WESCON Show

Centralab Series PA-230 Rotary Power Switch
(7½ amps. — 115 v.a.c.)

- Wafers can be stacked up to 20 sections per switch.
- Grade L-5A Steatite sections have low loss factor. Operating voltages up to 3000 volts R.M.S., 60 cps, between electrical circuits.
- Available in a number of switching configurations, shorting or non-shorting.
- Smooth-operating, roller-bearing index insures minimum of 25,000 operating cycles.
- Square rotor shaft prevents "play" in rotation — provides pin-point accuracy.
- Coined silver contacts, for better current-carrying characteristics.

Write for Technical Bulletin EP-74, for complete engineering data.

Centralab ®

P-1956 ®Trademark

A DIVISION OF GLOBE-UNION INC.
9141 East Keefe Avenue • Milwaukee 1, Wisconsin
In Canada: 804 Mt. Pleasant Road, Toronto, Ontario

True Hermetic Sealing assures Maximum Stability

in AMPERITE *RELAYS and REGULATORS*

Simplest • Most Compact • Most Economical

STANDARD

MINIATURE

Thermostatic DELAY RELAYS

2 to 180 Seconds

- Actuated by a heater, they operate on A.C., D.C., or Pulsating Current.
- *Hermetically sealed.* Not affected by altitude, moisture, or other climate changes.
- *SPST only* — normally open or normally closed.

Amperite Thermostatic Delay Relays are compensated for ambient temperature changes from −55° to +70° C. Heaters consume approximately 2 W. and may be operated continuously. The units are *most compact, rugged, explosion-proof, long-lived,* and — *inexpensive!*

TYPES: Standard Radio Octal, and 9-Pin Miniature

PROBLEM? Send for Bulletin No. TR-81

Also — **Amperite Differential Relays:** Used for *automatic overload, under-voltage or under-current protection.*

BALLAST REGULATORS

Amperite Regulators are designed to keep the current in a circuit ***automatically regulated*** at a definite value (for example, 0.5 amp.) . . . For currents of 60 ma. to 5 amps. Operate on A.C., D.C., Pulsating Current.





T9 BULB

Hermetically sealed, they are not affected by changes in altitude, ambient temperature (−55° to +90° C.), or humidity . . . Rugged, light, compact, most inexpensive.

Write for 4-page Technical Bulletin No. AB-51

AMPERITE CO., Inc.
561 Broadway, New York 12, N. Y.
Telephone: CAnal 6-1446
In Canada: Atlas Radio Corp., Ltd.
50 Wingold Ave., Toronto 10, Ontario.

Individual inspection and double-checking assures top quality of **Amperite** products.

silicon diode is formed by the fused junction principle which results in excellent electrical and mechanical stability. This junction is hermetically sealed in an all-welded, shock-proof housing with pigtail leads firmly and durably welded to the terminals. No solders or fluxes are used in sealing the diode, thus assuring complete absence of contamination.

The silicon power diodes are available in two styles—standard power supply types for industrial applications and magnetic amplifier types for special low leakage applications and in two current ratings for each style. They are also available in both the pigtail lead and stud mounted constructions.

THERMAL IGNITRON
for resistance welders

NATIONAL ELECTRONICS, INC., Geneva, Ill. The NL-1022 thermal ignitron is equivalent to the NL-5822 with the addition of the thermostat mounting plate. Its construction gives increased thermal mass, more efficient cooling, and a self-flushing water system to prevent sediment deposits.

One thermostat is used per tube. Thermostats are available for either protection of the ignitron or for water saving. Use of both types of thermostats in an installation permits utilization of both features.

▶ **Ratings**—The NL-1022 is rated: 1,500 amperes maximum peak current at 1,200 maximum peak inverse and forward volts or 1,200 maximum peak amperes at 1,500

maximum peak inverse or forward volts. Maximum averaging time is 6.25 sec.

TEFLON TAPE
only 0.0005 in. thick

ENFLO CORP., Route 38 at Airport Circle, Pennsauken, N. J. The 0.0005-in. tape provides for greater Teflon coverage at lower cost and finds wide use in capacitors, transformers, and for both wrapped and sintered wires and cables. The thinner tape gives adequate dielectric strength with less Teflon area. It is easier to handle in wrapping operations than thicker tapes, especially on small diameter wires.

The new tape is supplied in continuous rolls having an absolute minimum of splices. Widths from ¼ in. to 12 in. are wrapped to 6 in. o-d on 1¼ in. diameter spools. Samples of the tape and a copy of the complete Teflon catalog are available.

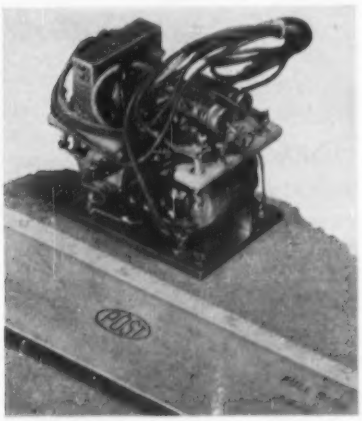

SERVO AMPLIFIER
a transistorized assembly

JOHN OSTER MFG. CO., Avionic Division, Racine, Wisc., offers a new smaller transistorized servo amplifier assembly measuring only 1½ in. by 1½ in. by 1 in. Its high power gain of 10^6 to 1 is achieved by a heat-sink design which rapidly dissipates heat. No output transformer is necessary because the amplifier works directly into a size 10 servo motor which has center tap control winding. Control phase impedance of the servo is 250 ohms effective resistance when tuned

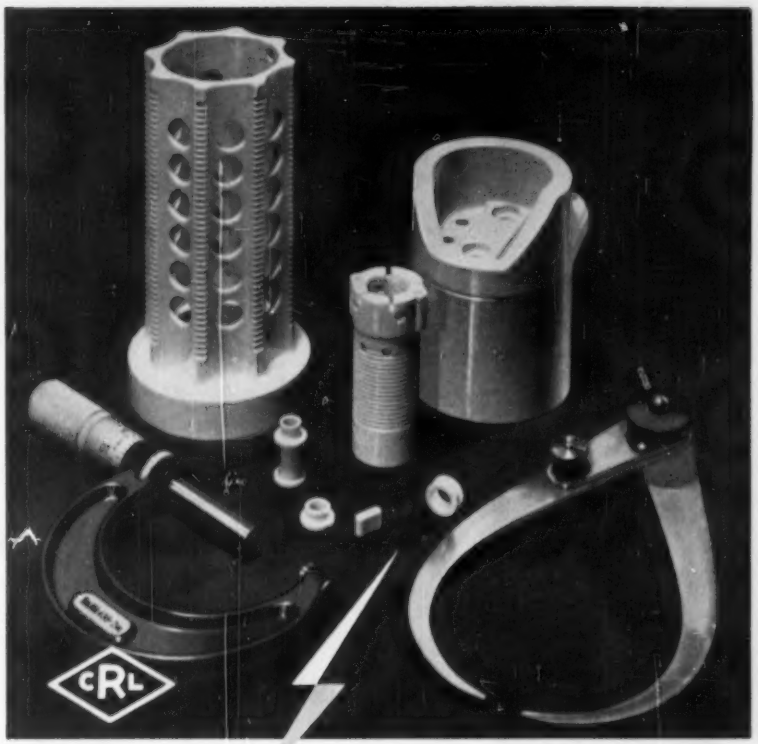

Grade L-6 (Body 306) Steatite Ceramics

Small and large parts held to extremely close tolerances by Centralab

Can be extruded or molded

Can be worked the same as metal—ground, drilled, threaded or tapped

Can be metallized with fired-on-silver

- High dimensional stability.
- Modulus of rupture, 20,000 psi.
- Water absorption less than 0.1%.
- Safe operating temperatures at continuous heat, 1500° F.
- Freedom from cold flow.
- Abrasion-resistant.
- Hardness greater than 7.5 Moh's scale.
- Loss factor only .00395 at 1 megacycle per second.
- Dissipation factor les than .002.
- Dielectric constant of 5.27 at 1 megacycle per second.
- Chemically inert.
- Freedom from carbonization.

See Centralab's new products in Booth 1225 at the WESCON Show

Refer to Centralab's Ceramic Buyer's Guide in Sweet's Product Design File—or write for your personal copy. Ask for Bulletin 42-221.

Centralab ®
X-2456 ®Trademark

A DIVISION OF GLOBE-UNION INC.
914H East Keefe Avenue • Milwaukee 1, Wisconsin
In Canada: 804 Mt. Pleasant Road, Toronto, Ontario

UNION

Miniature Relays *in Stock for quick shipment*







Need relays in a hurry? Call Union Switch & Signal. You can get any of the standard UNION DC or AC Miniature Relays shipped from stock. These are available with (1) Plug-in mount, (2) Single screw mount, (3) Center of gravity flange mount, (4) Double screw mount, (5) Top flange mount, (6) Clamp mount, (7) Bottom flange mount, (8) Flange mount.

OUTSTANDING FEATURES

GOLD ALLOY OR PALLADIUM CONTACTS are cleaned by a special process to assure a degree of contact reliability unsurpassed in this field. Gold alloy contacts are especially fitted for dry-circuitry use.

COIL RESISTANCES UP TO 9,500 OHMS for a wide variety of applications.

HIGH VIBRATION AND SHOCK RESISTANCE available with vibration resistance up to 2,000 cycles at 30 G's and shock in excess of 50 G's.

HIGH LIFE EXPECTANCY. Tested through 1,000,000 operations.

UNION Miniature Relays are precision made—assembly is quality controlled. All meet or exceed the requirements of MIL-R-5757. Write for a copy of Bulletin 1010.







75 Years 1881 1956

OF EQUIPMENT AND SYSTEMS ENGINEERING . . . . .

UNION SWITCH & SIGNAL

DIVISION OF WESTINGHOUSE AIR BRAKE COMPANY

PITTSBURGH 18, PENNSYLVANIA

with a 2-μf capacitor.

Amplifier rating is 1 w at 71 C ambient, operating temperature range —55 C to 71 C and voltage gain approximately 300 to 1. Output stage of the amplifier consists of two H-3 germanium transistors operating in class B push-pull. The amplifier assembly is encapsulated in an epoxy resin.

▶ **Applications**—Uses include computers, guided missiles and others where highly accurate servomechanisms are required. Variations in amplifier design can be made to meet many other specific requirements such as input or output transformers and power gain.

STORAGE TUBE
barrier-grid type

RADIO CORP. OF AMERICA, Harrison, N. J., has released a charge storage tube of the barrier grid type for use in a variety of information-processing systems. The 6499 storage tube may be operated so that (1) the output signal is linearly rotated in amplitude to the input signal, (2) the output signal is proportional to the duration of an input-signal pulse or several input-signal pulses occurring within a given time interval, or (3) the output signal is proportional to the difference between two successive input signals.

Design features include an electron gun capable of providing an electron beam having high current density and relatively small cross-sectional area at the focus plane, and a storage surface having uniform secondary emission to provide a uniform output signal.

Electrostatic deflection of the

beam is utilized to permit the design of deflection circuitry having relatively low power consumption and providing high speed of response.

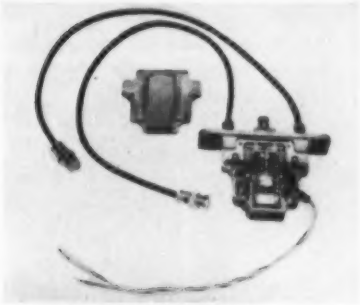

COAXIAL CHOPPERS
for military service

JAMES VIBRAPOWER Co., 4050 North Rockwell St., Chicago 18, Ill., announces availability of a new line of coaxial choppers for high speed switching of radio signals at no loss. Frequencies up to 440 mc can be switched with less than 2½ to 1 vswr.

Models are available in dpdt and spdt. Switch can be operated from d-c to 150 cps.

The unit is designed for military service and has wide application in direction finding equipment, test equipment and applications where high-speed switching or sampling is desired.

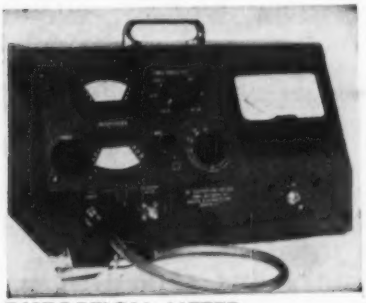

DISTORTION METER
measures from 1 to 100 mc

BOONTON ELECTRONICS CORP., 738 Speedwell Ave., Morris Plains, N. J. Model 85B distortion meter has been modified to permit its use either as a distortion meter or as a sensitive broadband r-f voltmeter.

The unit is capable of measuring total distortion of an r-f source

UNION

"Selenium Slim" Rectifiers
Quality First....TO LAST

5200 UNION Selenium Rectifiers
used without a single failure!

Here is what Mr. P. W. Aitkenhead, General Manager, Electro-Air Cleaner Company, Pittsburgh, Pa., says about UNION Selenium Rectifiers:

"We decided to use selenium rectifiers in our electronic air cleaners because, in the interest of building service-free equipment, we definitely did not want to use delicate high vacuum rectifier tubes.

Our experience in the use of selenium rectifiers has been one hundred per cent satisfactory. At the present time, we have some four thousand 3/16" rectifier pencils in service and about twelve hundred 3/8" rectifiers. Some of these selenium rectifiers are in the third year of operation and I am certain that continued satisfactory operation is assured. We have not had a single rectifier failure to date."

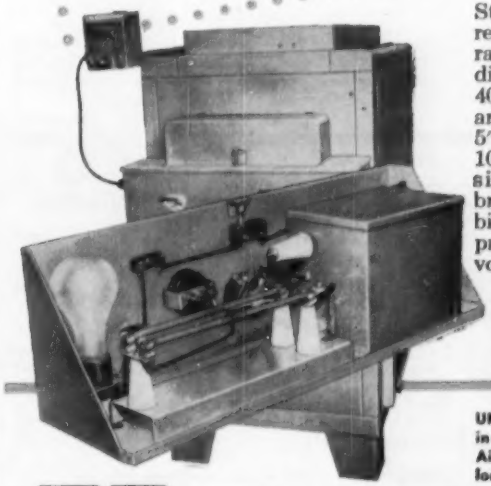

Standard UNION selenium rectifier cells, pencil type, range in size from 1/8" to 1/2" diameter, rated from 2.5 to 40.0 milliamperes per cell; and stack-type, 1" x 1" to 5" x 6", rated from .180 to 10.0 amperes per cell in a single-phase full-wave bridge basis. Special combinations can be made to fit practically any current and voltage conversion requirements in various housings and special shapes. Write for complete information.

UNION Selenium Rectifiers in place in the power pack of the "Electro-Air" electronic air cleaner assure long, trouble-free operation.

75 Years 1881 1956

OF EQUIPMENT AND SYSTEMS ENGINEERING . . . . .

UNION SWITCH & SIGNAL
DIVISION OF WESTINGHOUSE AIR BRAKE COMPANY
PITTSBURGH 18, PENNSYLVANIA

Custom Iron Cores to your Specifications

Regardless of your requirement, we can supply a full line of custom iron cores in a variety of sizes and shapes for many applications . . . designed for your needs. Send us your problems.

RADIO CORES, INC.

has Everything in Iron Cores

***The Original* Engineered Economy* Iron Cores**

We originated the ways and means of providing ENGINEERED ECONOMY*IRON CORES at money saving prices and from stock. Over 14 types are available to cover most insert and threaded applications.

* TRADEMARK

Complete Engineering Service

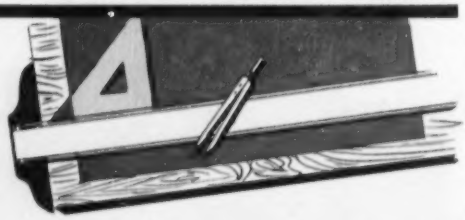

We are the world's largest producers of iron cores because we employ the largest, most experienced and most efficient engineering department to enable us to design, produce and suggest iron cores which will do the best job for you.

Write today . . . tell us your problems . . . you'll be glad you did.

Radio Cores, Inc.

MEMBER mpa METAL POWDER ASSOCIATION

9540 Tulley Avenue Oak Lawn, Illinois

from 1 to 100 mc. Used with a 50-ohm or a high-impedance probe, the voltmeter section has a range of 0.001 to 3 v from 0.2 to 400 mc. As an ultrasensitive wattmeter the device gives readings down to 0.02 μw.

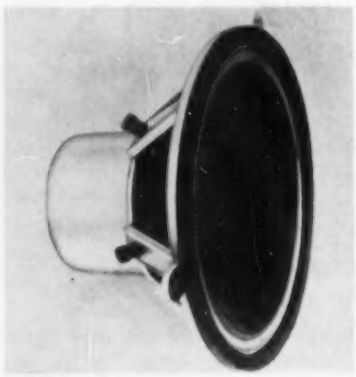

SPEAKERS
feature extended range

UNITED AUDIO PRODUCTS, 202 E. 19th St., New York 3, N. Y., has added a new line of extended range speakers to the Wigo series. Concentric rings, molded into the cone, produce additional compliance that complements the bass frequencies and produces a high efficiency within that audio spectrum. The impregnated cloth suspension adds to the mid-tonal registers, while the rubberized apex of the voice coil support affords wide dispersion of the higher frequencies. The ERD 12 speaker may be used as the basis for a future two-way system. When used with the Wigo cloth suspended cone tweeter TW500, perfect balance may be attained from 25 to 18,000 cps through the application of a crossover frequency at 4,000 cycles.

AUTOMATIC EQUIPMENT
for resin mix preparation

APPLIED ENGINEERING ASSOCIATES, 1952 Flushing Ave., Brooklyn 37, N. Y., has available several series of equipment designs for continuous proportional metering of resins (including abrasive fillers) and hardeners with component viscosities up to 1,000,000 cps at ambient temperatures, or for special appli-

cation at elevated temperatures. The designs are readily adjustable for a wide range of ratios and can be used with two or more components. Epoxies, polyesters, polyurethanes, polysulphides and polyamides are some of the reactive resin mixes being automatically handled by these multi-component proportional metering, mixing and metered dispensing systems.

ANALOG FILTERS
have wide variety of uses

SPECTRUM INSTRUMENTS, INC., 44-05 30th Ave., Long Island City, N. Y. For application at sonic, ultrasonic and subsonic frequencies, the BP-160 series analog filter features step-adjustable high and low end cutoff frequencies, with the relatively sharp cutoff rate of 160 db per octave. Since the voltage transfer of the L-C prototype is secured without use of coils, the customary l-f problems of inductance-capacitance classical filters and performance limitations are entirely avoided.

▶ **Advantages**—The filters afford greatly reduced weight and bulk, particularly in the lower frequency models; high dynamic signal range with low distortion; freedom from impedance matching as affecting the transfer characteristic; and, due to the absence of coils, insensitivity to hum inducing stray fields.

Literature

Tube Manufacturing Machinery. Eisler Engineering Co., Inc., 750 South 13th Street, Newark 3, New Jersey, announces that it has issued a new and comprehensive 28-page Catalog No. 88-57 entitled: "Indexing Turntables & Positioners."

Component Parts. Switchcraft, Inc., 1328 N. Halstead St., Chicago 22, Ill. Catalog S-57 contains 28 pages of concise information on the company's expanded line, including specifications, drawings,

for Random Vibration Testing:

CALIDYNE'S NEW

COMPLETE, MATCHED SYSTEMS

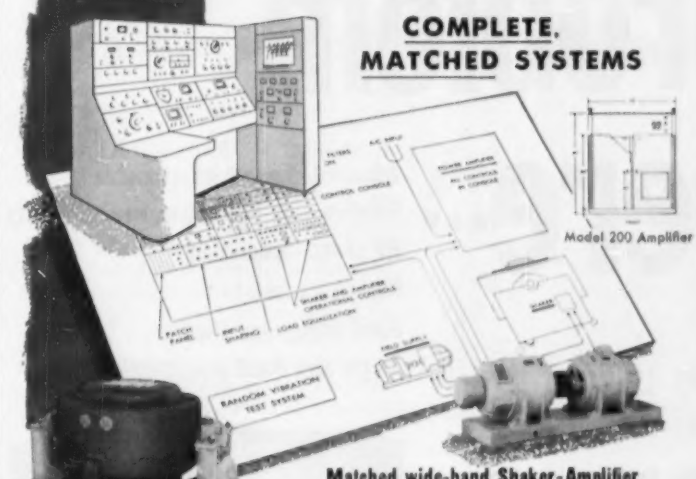

Matched wide-band Shaker-Amplifier combinations in 1500, 5,000 and 15,000 pound force ratings

When Calidyne first investigated the problem of building random vibration test systems, it recognized the necessity of over-all system engineering, if desired performance levels were to be achieved. That goal has now been met in what is probably the first *complete, integrated* system comprised of *matched* components.

"Wide-Band" *electrodynamic Shakers* operate at higher frequencies on lower input power, for a given armature weight and matched load rating. In random testing the load approximates the armature weight, and inherent armature rigidity maintains a high first resonance. The new *Random Noise Amplifiers* are matched power sources for the "wide band" Shakers. Made by Westinghouse to Calidyne specifications, they provide ample power for continuous duty operation at full performance. At the same time they are capable of supplying instantaneous power peaks for random noise tests.

The *Model 188 Console* is a typical control unit for any of several systems. It contains basic Shaker-Amplifier operating controls, input shaping and compensation circuits, plus monitoring and other control equipment. With these components, Field Power Supplies complete the over-all system.

Performance data and specifications available on request. Call Calidyne for complete application engineering assistance.

THE CALIDYNE COMPANY

SALES REPRESENTATIVES:

WALTHAM, MASS. Robert A. Waters, Inc. Waltham 5-2900
NEW HAVEN, CONN. Robert A. Waters, Inc. Fulton 7-6760
NEW YORK CITY AREA G. C. Engel & Associates Rector 2-0091
RIDGEWOOD, NEW JERSEY G. C. Engel & Associates Gilbert 4-0878
PHILADELPHIA, PA. G. C. Engel Chestnut Hill 8-0892
NORTHERN NEW YORK Technical Instruments, Inc. Waltham, Mass. Waltham 5-8445
CLEVELAND, OHIO M. P. Odell Co. Prospect 1-6171
DAYTON, OHIO M. P. Odell Co. Oregon 4461
DETROIT, MICHIGAN M. P. Odell Co. Superior 8-5114
DENVER, COLORADO Gerald B. Miller Co. Acoma 2-9276
WASHINGTON, D. C. F. B. Judan, Inc. Hobart 2-4300
SEATTLE, WASH. G. B. Miller Co. Lander 3220
CHICAGO, ILLINOIS Hugh Mardand & Co. Ambassador 2-1555
INDIANAPOLIS, INDIANA Hugh Mardand & Co. Glendale 3803
MINNEAPOLIS, MINN. Hugh Mardand & Co. Colfax 7949
DALLAS, TEXAS John A. Green Co. Riverside 3266
HOLLYWOOD, CALIFORNIA G. B. Miller Co. Hollywood 2-1195
SAN FRANCISCO, CALIF. G. B. Miller Co. Lytell 3-3438
SOUTHEAST Specialized Equipment Corp. P. O. Box 323 Cocoa Beach, Fla. Cocoa Beach 3328
ALBUQUERQUE, NEW MEXICO G. B. Miller Co. Albuquerque 5-8606
CANADA Measurement Engineering Ltd. Arnprior, Ont., Phone 400 Toronto, Ont., Mayfair 8860
EXPORT Burke International Corp. 13 East 40th St., N. Y. 16, N. Y. Murray Hill 9-0200

For additional information on all items on this page, use post card on last page.

is your problem here...

designed and perfected by PANORAMIC ...the leader:

- Adjacent channel interference
- Relative side band level measurements
- RF cross modulation
- Keying transients
- Band occupancy studies
- Single size band investigations

solve it **faster** with

PANORAMIC PANALYZOR

SB-12 type T-100



featuring 10 cps resolution

Provides lightning-fast solutions to all problems requiring extremely high resolution. Automatic frequency control on narrow sweeps. Designed by Panoramic, this highly versatile, highly accurate instrument assures complete accuracy and speed for limitless laboratory and production test uses.

SPECIFICATIONS

- Dynamic range: 40 db
- Sweep rates: 30,5,1, and 0.1 cps
- Frequency range: 500 kc to 400 mc usable to 1000 mc
- Amplitude scale: linear or logarithmic
- Sweep width: 100 kc maximum, continuously reducible to 0 kc
- Cathode ray tube: flat face with edge lit screen and camera mount bezel

Write for complete details

Panoramic — for proven performance in plants and laboratories



Resolution (in cps) vs sweep width (in kc)

Minimum frequency separation ΔF required to measure amplitude ratios E_2/E_1



PANORAMIC RADIO PRODUCTS, INC.

See us at WESCON: BOOTH 1261

10 South Second Avenue, Mount Vernon, N. Y.
Phone: MOunt Vernon 4-3970
Cables: Panoramic, Mount Vernon, N. Y. State.

schematic circuits and prices on component parts. Products include jacks, plugs, switches, connectors, shielded jacks, cable assemblies, jack covers, adapters, audio mixers, jack strips and high-fidelity jumper cables.

Write for a copy of the catalog on company letterhead.

Measuring and Test Equipment. General Radio Co., 275 Massachusetts Ave., Cambridge 39, Mass., has announced a 256 page catalog describing a complete line of electronic instruments and parts. Uses, chief features, illustrations, specifications and prices are included. Catalog O is available to engineers, scientists, purchasing offices and executives interested in the procurement of electronic measuring and test equipment. Requests should be on company or institution letterhead.

Magnetic Tapes and Films. Minnesota Mining and Mfg. Co., 900 Fauquier St., St. Paul 6, Minn. Important physical and magnetic properties of 12 "Scotch" brand magnetic tapes and films are covered in a new technical data booklet. The 12-page booklet covers such physical properties as backing thickness, ultimate tensile strength, yield strength, elongation at break, residual elongation, tear and impact strength and coefficient of expansions. Magnetic properties discussed include coercivity, retentivity, coating thickness, erasure characteristics, bias current requirements, relative low frequency output and relative high and low frequency sensitivity.

Facilities Bulletin. Technology Instrument Corp. of California, 7229 Atoll Ave., N. Hollywood, Calif. A recent bulletin describes the new larger plant and increased production facilities serving the eleven western state area.

Also described is the new 1¾ in. diameter switch potentiometer. Unique design combines three independent linear resistance elements and two make or break switches with currents up to 2

amperes, 115 v a-c. These may be phased to permit switching of external circuits at specific shaft rotation points. Specifications are included in the bulletin.

Teflon Products. Continental-Diamond Fibre, Division of the Budd Co. Inc., Newark, Delaware. Catalog T-55 covers such Teflon products as tapes, sheets, rods, tubes, gaskets and fabricated specialties. It contains illustrations, specifications, applications and other useful information.

Magnetic Servo Amplifiers. Norden-Ketay Corp., 99 Park Ave., New York, N. Y. Bulletin No. 382 gives specifications of 60-cycle and 400-cycle magnetic servo amplifiers. The bulletin contains application data and circuit diagrams. Available as standard stock items, the amplifiers described offer extreme flexibility, latest circuitry, dual input, rugged compact and simplified design.

Switches Catalog. Carling Electric Inc., 505 New Park Ave., West Hartford 10, Conn., has issued a 12-page catalog covering a complete line of switches. Included are illustrations, ratings, dimensions and all other specifications necessary for ordering any Carling switch or accessory.

Described are toggle, slide, rotary, push, grounding and special lever action switches as well as outlets, caps and pilot lights.

Reflex Klystron. Varian Associates, Inc., Palo Alto, Calif. A single-page bulletin contains specifications for the VA-203B low-power klystron. The unit described features stability under shock, vibration and temperature changes. Guaranteed specifications are included.

Electronic Components. Stackpole Carbon Co., St. Marys, Pa. Catalog RC-9 is a 54-page booklet describing a line of standard components including resistors, line switches,

"BRAIN-SHRINKING"

FOR ELECTRONIC SYSTEMS

made possible by Elgin's new

NEOMITE RELAYS

How can you shrink the size and weight of the complex electronic "brains" so necessary in modern industrial and defense equipment? Elgin provides the answer with new watch-precision NEOMITE Relays . . . the world's smallest, requiring only one-twentieth of a watt of power to open and close electrical circuits. Write today for complete information.

SPECIFICATIONS

Contacts: Arrangement: 1 Form "C" (SPDT) Rating: 28 v DC, at 250 ma. Resistive Load.

Contact Resistance: .03 ohms maximum, .05 ohms after 1,000,000 operations at Specified Load.

Coil Operating Specifications: Pull-In: 7 MA or less, Drop-Out: 30 to 60% of Pull-In. Coil Resistance: 2000 Ohms ± 10% at 20°C. Operating Voltage: 18 to 30 v DC.

Vibration Resistance: 10 G, up to 500 cps.

Shock: 50 G, without damage.

Temperature Range: —55°C. to +85°C.

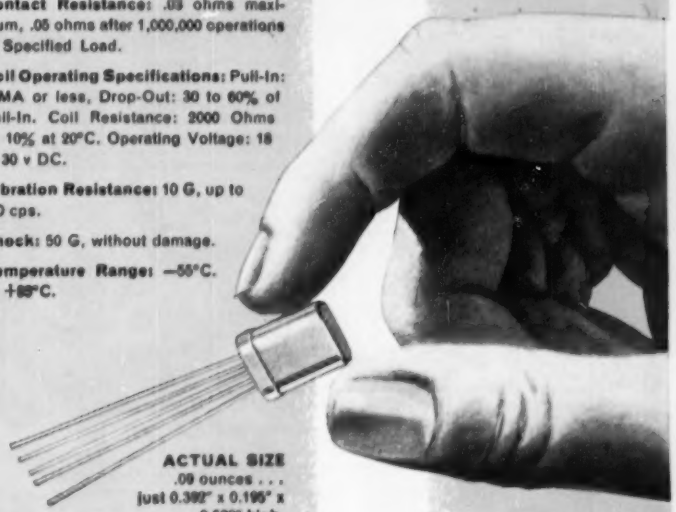

ACTUAL SIZE
.09 ounces . . .
just 0.392" x 0.195" x 0.530" high.

ELECTRONICS DIVISION

ELGIN NATIONAL WATCH COMPANY

Elgin, Illinois

Sales representatives in principal cities

New! And Outstanding!

Advance

LABORATORY-PRECISION

Electronic Instruments

ADVANCE supplies a variety of electronic equipment to the British Government and Armed Forces of the British Empire. All Advance instruments are precision-engineered and functionally designed to provide many years of accurate, trouble-free service, even under difficult conditions.

PROFESSIONAL INSTRUMENTS AT MODERATE COST



ADVANCE RF Q-Meter

■ Priced right, the Laboratory Q-Meter, Model T-1/E, incorporates an overload-proof VTVM indicator. Model T-1/E measures Q, Inductance, Capacitance, and Power Factor at frequencies between 100 Kc and 100 Mc, in six ranges. The frequency oscillator has an accuracy of ± 1%. OUTSTANDING SPECIFICATIONS: Tuning capacitor, calibrated in three scales, indicates Capacitance, 40 to 550 mmfd, ± 2%; Zf (ohms, Mc) 4,000 to 300, ± 2%; Lf² (uH, Mc) 600 to 50, ± 2%. Q is measured in two ranges, 10 to 100, and 40 to 400, with an accuracy of ± 5%. **Only $249.50**

ADVANCE VHF Generator

■ Highly versatile, the ADVANCE VHF Signal Generator, Model D-1/DNA, covers 10 to 300 Mc in six ranges with an accuracy of ± 1%, and offers both square and sine wave modulation, with *direct* calibration. Output voltage, obtained through 75-ohm transmission line, is continuously variable from 1 uv to 100 mv and is calibrated in both uv and db. Accuracy: 10 to 150 Mc. ± 3 db, ± 1 uv; 150 to 300 Mc. ± 4 db, ± 2 uv. Output is modulated 30% (± 3%) by a 1,000 cycles sine wave (± 100 cycles) or by a 1,000-cycle square wave (± 100 cycles.) **Only $395.00**



ADVANCE Audio Generator

■ Model J-2/NA meets the need for a highly accurate Audio Generator with low distortion. Covers the range from 15 to 50,000 cycles in three bands, with an accuracy of ± 2%, ± 1 cycle. The output is continuously variable into 600 ohms: 0.1 mw to 1.0 watt (0.25 to 25 volts) ± 2 db. Maximum into 5 ohms, better than 1 watt. Total harmonic distortion and hum content above 100 cycles is less than 2% at rated output, or less than 1% at 0.1 watt. **Only $149.50**

ADVANCE Precision Attenuators cover the frequency spectrum from audio to UHF. Model A-38 provides four 20 db steps of attenuation and is useful up to 300 Mc. Model A-55 is designed for extreme accuracy in its RF to VHF range. Model A-87 is an absolutely linear device for operation in UHP range.

WRITE TODAY FOR COMPLETE SPECIFICATIONS

Sole Agents for the United States

FISHER RADIO SALES CO., INC. · 21-39 44th Dr., L.I.C. 1, N. Y.

slide switches, fixed composition capacitors, powdered iron cores, ferromagnetic cores and molded coil forms. Illustrations, dimensional diagrams and specifications are included.

High-Sensitivity Oscilloscope. The Hewlett-Packard Co., 275 Page Mill Road, Palo Alto, Calif. A new DC-300 kc high-sensitivity oscilloscope with triggered sweep is announced in Vol. 7 No. 7 of the *Journal*. The 8-page booklet contains illustrations, complete description, specifications and price.

Printed Circuit Connectors. Microdot, Inc., 1826 Fremont Ave., South Pasadena, Calif. Bulletin No. 44 describes 12 different types of miniature-sized printed circuit receptacles and plugs; bulletin No. 42, for compatible microminiature coaxial cables; and bulletin No. 43, for mating microminiature coaxial cable connectors.

Miniature Precision Connectors. DeJUR-AMSCO Corp., 45-01 Northern Blvd., Long Island City 1, N. Y. Two-color, two-page bulletin 26A on series 18 miniature precision Continental connectors includes code number designations, actual size photographs, description, aluminum hoods, and illustrations of other interesting special design Continental connectors.

Silicon Brochure. Raybestos-Manhattan, Inc., Passaic, N. J., has released a new 8-page brochure featuring silicone rubber products and silicone coated cloths.

In addition to complete specifications on the various silicone compounds available, the bulletin provides complete data on the properties of silicone rubber, as well as resistance qualities of it against a wide variety of conditions.

Microwave Plumbing. PSC Applied Research Ltd., 1500 O'Connor Drive, Toronto, Canada. Release No. 20 tells how the company offers the Canadian electronics in-

dustry a comprehensive service for the manufacture of microwave plumbing and associated precision assemblies in the current wave lengths.

One technique employs dip brazing which permits fabrication in aluminum at greater savings than other previous methods of manufacture, even in conventional brass.

Germanium Silicon Crystals. Minneapolis-Honeywell Regulator Co., Wayne and Windrim Aves., Philadelphia 44, Pa. Bulletin SMEL No. 1, "Control Systems for Semi-Conductor Crystal Production" was prepared to assist those connected in any way with the development or production of germanium silicon crystals.

The first part of the bulletin outlines the crystal growing process and the function performed by the element of control systems. The second part describes the specific components of the control systems and the final part combines the components into control systems.

Although instrumentation for the seed crystal growing method is the primary concern of the bulletin, control systems applicable to the zone leveling method of producing crystals are also described.

Disk Record Timing Chart. Rek-O-Kut Co., 38-01 Queens Blvd., L. I. City, N. Y. Presented in easy to read time-table form, the new disk record timing chart gives the playing time in minutes for various diameters cut into 7, 10, 12 and 16 in. records, using either a standard 3 mil or microgroove one mil stylus. For standard stylus, the chart has readings for 33⅓ and 78.26 speeds cutting 120 or 150 lines per in.

The Rek-O-Kut recording time table is printed on 8½ in. by 9¾ in. varnished stock. It may be obtained by writing the company. There is a 20 cents charge to cover handling and postage.

Telesync Equipment. Nems-Clarke, Inc., 191 Jesup-Blair Drive, Silver Spring, Md. A single-sheet

KEARFOTT SERIES R900 SYNCHROS Have Everything!

SIZE 11
1.062" Diam. x 1-45/64 long, weight 4 oz.

HIGH ACCURACY
Probable error 7 mins. Maximum error 10 mins.

CORROSION RESISTANCE
Stainless steel housings, shafts, bearings and laminations.

NEW HIGH TEMPERATURE STABILITY

LOW IN PRICE—IMMEDIATE DELIVERY
Let us know your delivery requirements—write today.

KEARFOTT COMPONENTS INCLUDE:
Gyros, Servo Motors, Synchros, Servo and Magnetic Amplifiers, Tachometer Generators, Hermetic Rotary Seals, Aircraft Navigational Systems and other high accuracy mechanical, electrical and electronic components.

Send for bulletin giving data of components of interest to you.

Kearfott
A SUBSIDIARY OF GPE

KEARFOTT COMPANY, INC., LITTLE FALLS, N. J.
Sales and Engineering Offices: 1378 Main Avenue, Clifton, N. J.
Midwest Office: 188 W. Randolph Street, Chicago, Ill. South Central Office: 6115 Denton Drive, Dallas, Texas
West Coast Office: 253 N. Vinedo Avenue, Pasadena, Calif.

A mass-spectrometer leak detector...

If you've always wanted to test your product's leak tightness by the one sure, practical method known ... *mass spectrometry* ... here's good news! For less than $3000, you can buy CEC's new 24-210 Leak Detector, a practical, *proven* instrument, so simple to operate that you merely plug it in and start it. There is no extended pump-down period, no special training or experience needed. Original investment is low ... operation is inexpensive ... and it will soon pay for itself through the quick, positive quality control it makes possible. Get the whole story ... send today for Bulletin CEC 1830-X10.

Check these features ⟶

NO COLD TRAP, NO CHARCOAL TRAP ... requires no attention, no filling with refrigerants, no cooling water.

POSITIVE SAFETY INTERLOCKS ... to prevent instrument damage due to improper or out-of-sequence operation.

ECONOMICAL ... helium gas only operating-supply needed; uses little power.

HIGHLY SENSITIVE ... detects one part of helium probe gas in 300,000 parts air.

HIGHLY SIMPLIFIED ... etched circuits for compactness and reliability; only six tubes in entire chassis.

COMPACT AND PORTABLE ... measures only 18½" wide x 22" deep x 20½" high; weighs only 145 lbs. ... perfect for bench-top operation; plugs into standard 115-volt, 60-cycle line.

For even greater sensitivity... one part helium in 2,000,000 parts of air ... CEC offers the 24-110 Leak Detector, described in Bulletin CEC 1838-X3.

Consolidated Electrodynamics
CORPORATION
formerly Consolidated Engineering Corporation
ELECTRONIC INSTRUMENTS FOR MEASUREMENT AND CONTROL
300 North Sierra Madre Villa, Pasadena, California

Sales and Service Offices in: Albuquerque, Atlanta, Boston, Buffalo, Chicago, Dallas, Detroit, New York, Pasadena, Philadelphia, San Francisco, Seattle, Washington, D. C.

bulletin illustrates and describes the model TS-1 Telesync equipment which was designed to supply the necessary synchronizing signals to operate a camera or slide chain. A block diagram and specifications are included. Price of the equipment described is $650.

Beam Power Tube. Radio Corp. of America, Harrison, N. J. A 4-page folder deals with the 6CB5-A beam power tube designed for use in color tv receivers. Included in the bulletin are general data, horizontal deflection amplifier information, operating considerations, charts and drawings.

Electronic Test Instruments. Hewlett-Packard Co., 275 Page Mill Road, Palo Alto, Calif. A supplement to catalog 22-A contains advantages, uses, specifications and prices for a wide line of test instruments. Included are a l-f oscilloscope, h-f oscilloscope, audio oscillators, a vtvm, twt amplifiers, reflectometer accessories, an electronic counter, transfer oscillator, shf signal generators, shf swept frequency oscillators, and dual directional couplers.

Silicone Impregnating Varnish. Union Carbide and Carbon Corp., 30 E. 42nd St., New York 17, N. Y. A new, 8-page data sheet describing the uses, properties and application procedures of R-620 silicone impregnating varnish for high-temperature electrical insulation systems is now available. The cured varnish discussed meets or exceeds the requirements for high-temperature impregnating varnishes established by the U. S. Navy, the AIEE (Class H) and the NEMA standards (Group III). It features ease of application, bubble-free curing, and hard, tack-free cured surface, which remains free from dust accumulation and chemical attack.

Sweep Generator. Chadwick-Helmuth Co., 472 East Duarte Road, Monrovia, Calif. A new 2-page, 2-color brochure describes the

model 201 Sweep-Sync—an automatic sweep generator used with c-r oscilloscopes to eliminate manual adjustments and faulty displays when changing frequencies. Included are specifications and a hook-up drawing.

Thermistors. Fenwal Electronics, Inc., Mellon St., Framingham, Mass. The 12-page, 2-color catalog EMC-1 gives dimensional drawings, physical descriptions and complete electrical specifications for various forms of precision thermistors, including beads, rods, disks, washers and built-up assemblies. Three pages of typical applications, illustrated with schematic circuits, provide a convenient review of many recent industrial uses for thermistors and offer ideas for further applications.

Graphic Recorder. Varian Associates, Instrument Division, 611 Hansen Way, Palo Alto, Calif. A recent data sheet gives features and specifications for the model G-10 graphic recorder, an instrument for recording phenomena capable of representation by d-c signals in the millivolt range. Price of the basic recorder described is $295. A price list covering optional features, accessories and supplies is also available.

Instruments Catalog. Krohn-Hite Instrument Co., 580 Massachusetts Ave., Cambridge 39, Mass. Short form catalog B covers power supplies featuring ultra-high regulation over the entire operating range; variable electronic filters with wide frequency coverage and adjustable bandwidth; a power amplifier featuring ultra-fidelity; and a line of wide-range R-C oscillators. Specifications and prices are included.

Communications Antennas. Technical Appliance Mfg. Corp., Sherburne, N. Y. Detailed technical information on Taco industrial-type antennas and accessories is now available. The literature covers

NEW SHIELDING'S UNIVERSAL ENCLOSURE

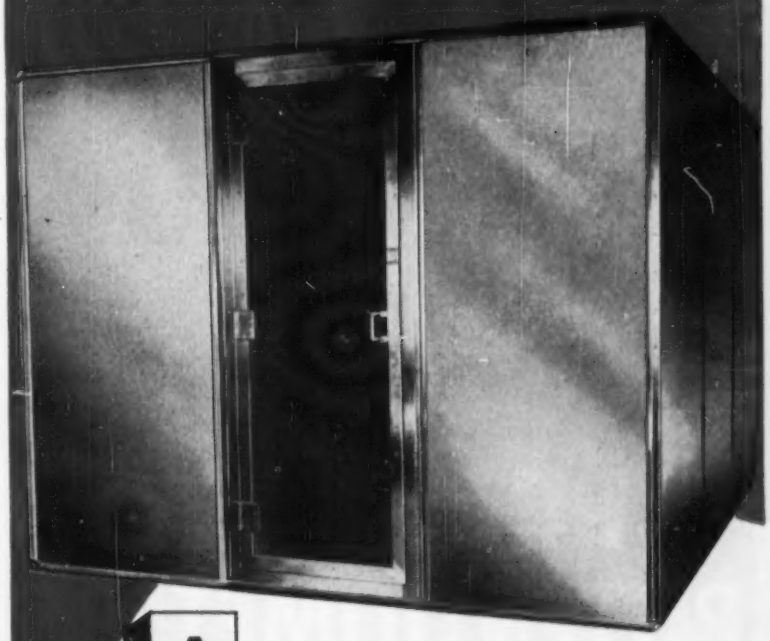

A
B
C

EASY TO INSTALL

A Shielding Universal Enclosure can now be erected by using **only** a screwdriver! . . . saves time and labor costs . . . your choice of modular panels of single or double shielding.

Both cell and isolated type enclosures are now available . . . at your request. Enclosures can be constructed of 40 or 48 inch wide panels and in combinations of both . . . standard door can be installed in **any** wall position to open left or right, in or out.

Completely interchangeable standard panels can be supplied with either **solid** and/or **mesh** material. Construction design insures maximum shielding effectiveness for **any** material specified. For complying with Mil-I-16910 and Mil-I-6181B radio interference specs, Shielding's Universal enclosures provide the quick, correct solution to your **particular** shielding and erection problem.

SEND FOR OUR NEW ILLUSTRATED BROCHURE

"The Talent to Create, the Skill to Produce"

SHIELDING INC.

Dept. [illegible] • Box 217 • RIVERSIDE, NEW JERSEY

In Chicago, R. W. Stemm In Canada, MJS Sales Ltd

NEW! ½-inch wire-wound



ACTUAL SIZE

UP TO 100 K

PRECISION POTENTIOMETERS

NOW YOU CAN specify a Waters pot for your miniaturized designs that require 50K and 100K potentiometers. In the reliability-proved construction of the AP-½, these new, higher values give you:

- *Resistances — 10 ohms to 100 kilohms*
- *Ganging — up to four units*
- *Three mounting styles — plain-bushing, split-bushing, or servo*
- *Three terminal styles — radial, axial, or wire-lead*
- *Automation models — for printed circuits*
- *Encapsulated designs available*

General specifications: Centerless-ground, stainless-steel shaft can be sealed with O-ring; gold-plated, fork-type terminals; 2% standard linearity for 50K and 100K — 5% for lower values; temperature range −55 to +105C, to 125C on order; 2 watts at 80C; anodized aluminum body ½" diameter × ½" long — ⅝" long for 100K; corrosion-resistant-alloy bushing; all electrical connections spot-welded or soldered; furnished with stops or for continuous rotation. *Write for data sheet on these dependable ½" potentiometers.*

Do you ever need pots that are "just a bit different"? Maybe we can help you — by modifying a standard Waters design or by taking a bold, new approach. Tell us your need and we'll tell you what we can do.

Waters MANUFACTURING, inc.

APPLICATION ENGINEERING OFFICES IN PRINCIPAL CITIES

Wayland, Massachusetts
P. O. Box 368, So. Sudbury, Mass.

MFG. INC.

specific antennas in the frequency range of 50 to 400 mc for communication use. Prices and installation details are also included in these bulletins.

Thin Base Magnetic Recording Tapes. Minnesota Mining and Mfg. Co., St. Paul, Minn. Mechanical considerations in the use of thin base magnetic recording tapes are discussed in "Sound Talk" bulletin No. 32. The 4-page technical bulletin is illustrated with graphs and compares the physical properties of thin base and standard base recording tapes.

Among the considerations covered are conformability to the recording head, acetate versus polyester films, inertia effect and guiding and winding. In addition, four major points in use of thin base tapes are summarized.

Temperature Cabinets. Webber Engineering Corp., Box 217, Indianapolis 6, Ind. Bulletin No. 61 features a sub-zero temperature cabinet, model WE-2-140, with 2 cu ft capacity with front or top opening for testing of electronic components, cold treatment of metals, thermal contraction and expansion fitting. Temperature range of the cabinets discussed is from ambient to −140 F. Voltage is 115 or 230, single phase, 60 cycle. Temperature control is visible and adjustable with a temperature range from +150 F to −150 F. Temperature control accuracy is ±1 deg F. Unit compartments described have full opening access panels.

Aluminizer. Kinney Mfg. Div., The New York Air Brake Co., 3529 Washington St., Boston 30, Mass. A 4-page, 2-color bulletin, No. 405, describes the new model CRS-48 aluminizer. Designed for high vacuum coating of tv tubes, this unit incorporates all devices required for fully automatic or manual aluminizing of crt's up to 27 in., and can be readily adapted for processing all types of tubes and bulbs.

The high speed pumping system and easy mounting and removal of

tubes cut pumpdown time to 5 min., complete coating cycle to less than 6 min.

The bulletin describes the construction of the Aluminizer which is totally enclosed in a steel cabinet fitted with convenient, drawer-type control panel.

The text details the method of operation and includes complete specifications and dimensions.

Insulated Wire Wound Resistors. International Resistance Co., 401 N. Broad St., Philadelphia 8, Pa. Catalog data bulletin B-5 is a 4-page brochure dealing with BW insulated wire wound resistors. Comprehensive data on types, construction, tolerance, dimensions, temperature coefficient and derating are given. Detailed charts and graphs are included.

TV Transmitting Antennas. Prodelin Inc., 307 Bergen Ave., Kearny, N. J. A recent bulletin illustrates and describes the ETV model antenna, designed to meet the needs of the low power tv station, satellite or booster type of service. Ordering information, accessories data and specifications are included.

Power Transistors. Minneapolis-Honeywell Regulator Co., 2753 Fourth Ave. South, Minneapolis 8, Minn., has available Form TR-14, literature announcing a new line of transistors incorporating several improvements. Current and power gains are increased. Solder lugs replace the flexible leads. A welded enclosure has been provided. Significant dimensions depart only slightly from those of the earlier types, and the threaded mounting stud is retained.

This combined data sheet-application manual should prove helpful. A new price schedule is also available.

Binary Drums. Airflyte Electronics Co., 535 Ave. A., Bayonne, N. J., has announced a new 4-page brochure on their line of molded binary drums, which are available

Accurate, rapid microwave power measurements

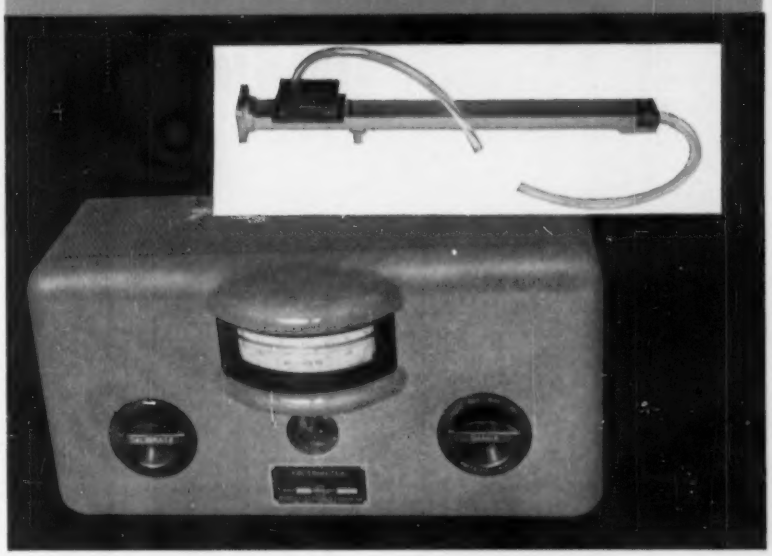

New Calorimeter, X-Band Water Load!

Now Sierra offers a new and highly convenient means of obtaining accurate measurements of power from a few watts to kilowatts—at any frequency 7 KMC to 10 KMC.

Model 190A Calorimeter, together with Model XB187A Water Load, measures rf power with approximately 2% accuracy. The Meter consists of a differential thermopile, millivoltmeter, long flow-path valve, water calibrator heater, and appropriate calibrating switches, meter damping resistors, etc. It operates by measuring the temperature of water before and after power has been dissipated in the water load, and presenting the differential on the millivoltmeter.

Model XB187A Water Load, designed for use with 190A Calorimeter, has frequency range of 7 KMC to 10 KMC, VSWR less than 1.2 over full range.

SPECIFICATIONS

Model 190A Calorimeter
Full Scale Ranges: 300, 600, 1,500, 3,000 w.
Max. Pressure: 50 psi.
Meter Sensitivity: 1.5 millivolts
Thermopile Sens.: 1 mv per °C.
Weight: Approx. 21 lbs.
Dimensions: 8¼" x 9" x 17".

Model XB187A X-Band Water Load
Frequency Range: 7 KMC to 10 KMC.
VSWR: Less than 1.2 full range.
Power: 1 Kw cw, 30 Kw peak.
Coupling: UG-52/U choke flange.
Probe: Fixed. BNC UG-290/U.
Size, Weight: 18½" long. App. 2¼ lbs.

Specifications subject to change without notice.



***New!* Model 189A Differential Thermopile**
Converts differential temperatures in flowing liquids to electrical energy. Has 30 pairs of copper-advance junctions enclosed in watertight case. Electrical connections through sealed banana jacks. Water connections to ¼" tubing through Uniflare fittings. Internal resistance approx. 5 ohms; output voltage approx. 1 mv per °C; max. pressure 75 psi; wt. 15 oz. *Write for bulletin!*

sierra

Sierra Electronic Corporation
San Carlos 2, California, U. S. A.
Canada: Atlas Radio Corporation, Ltd.
Toronto, Ontario

WESCON
Booth 1057

Manufacturers of Carrier Frequency Voltmeters, Directional Couplers, Wave Analyzers, Line Fault Analyzers, Wideband RF Transformers, Custom Radio Transmitters, VHF-UHF Detectors, Variable Impedance Wattmeters, Reflection Coefficient Meters, Calorimeters, Water Loads, Thermopiles, Ion Gauge and Ion Gauge Amplifiers, Phase Changers.

Sales representatives in major cities

Which is ..... The Relay ?
The Transistor ?

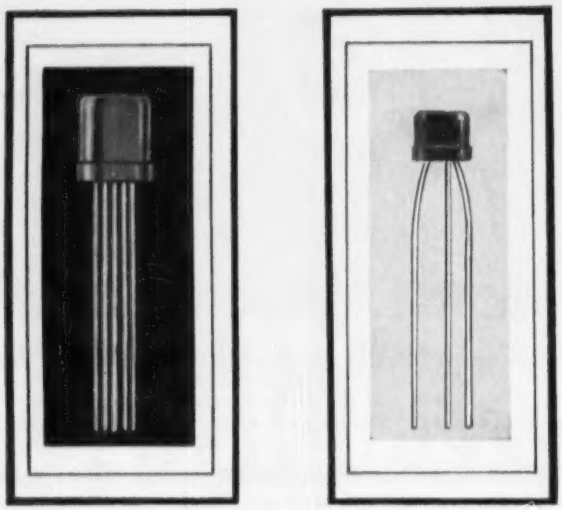

ACTUAL SIZE

BABCOCK'S SENSATIONAL NEW RELISTOR, shown on the left, is only slightly larger than a transistor.

- Extremely high speed operation — *less than one millisec operating time.*
- Mounts three ways — *clamp it, wire it or plug it into subminiature tube socket.*
- Performance unmatched by any relay of its type and size.
- Unsurpassed wherever immunity to shock and vibration, light weight or high speed action is required.

SEE THE RELISTOR AND OTHER BABCOCK RELAYS AT THE WESCON SHOW

BOOTH 1311

1956 wescon LOS ANGELES — August 21, 22, 23, 24 1956 — CALIFORNIA

Babcock RELAYS, INC. 14743 Lull St., Box 3134, Van Nuys, Calif.

in all codes for analog-to-digital converters, machine controls, and shaft position to digital converters. The brochure contains specifications of available materials, tolerances, resolution and sizes of units and charts of various codes.

Servo Motors and Generators. G-M Laboratories Inc., 4300 N. Knox Ave., Chicago 41, Ill. Catalog No. 7 consists of characteristics charts, performance data, dimensional drawings and complete specifications for the company's entire line of servo motors and generators. There is detailed information to enable the system engineer to specify special control phase characteristics for his particular requirements, that is special low impedance windings for transistor amplifiers or special high impedance windings for vacuum-tube amplifiers.

Commutation Switch. Mycalex Electronics Corp., Clifton, N. J. An 8-page illustrated booklet describes the design, manufacture and characteristics of the model TM55 series commutation switches for telemetering and similar applications. The low noise level, precision switches discussed are manufactured under exclusive license of the company.

Providing data on operating characteristics the booklet includes design considerations for the use of the equipment and tabular information covering the electrical and physical properties of Supramica 555 commutation plates, which are available as components for manufacturers of commutation equipment.

Suggested applications of the switches described include telemetering, sampling, signal comparison, remote control, data conversion and similar projects in which extremely low noise level, dependability and long operating life are major considerations.

High-Reliability Tubes. General Electric Co., 1 River Road, Schenectady 5, N. Y. A selection chart listing the company's 5-Star high-

reliability receiving-type tubes for critical applications is now available.

The chart classifies the 34 tubes, applicable military specifications, heater voltages and currents, and gives average characteristics. It is designated ETD-1276.

UHF and Microwave Test Equipment. The Narda Corp., 160 Herricks Road, Mineola, L. I., N. Y. A 28-page catalog, "Microwave and UHF Test Equipment", covers a complete line of coaxial and uhf equipment, microwave test equipment and bolometers and thermistors. Text, specification tables, and photographs describe existing equipment and such recent additions as fixed and variable attenuators, high power impedance meters, tees, fixed and sliding terminations, and uhf coaxial directional couplers.

Smoke Density Indication. Electronics Corp. of America, 718 Beacon St., Boston 15, Mass. Details of the Fireye smoke density indicator system FE-3 are presented in bulletin CM-22. Illustrated with photos and drawings, the bulletin gives complete operating and specification data. Installation information is contained in a series of schematic drawings.

In addition, three Fireye smoke recorders that may be used with the system are described. Two record on 24-hour charts with a single pen, and the other is a multiple-pen unit for recording conditions in two or more stacks.

Double Ridge Waveguide System. Airtron, Inc., 1103 W. Elizabeth Ave., Linden, N. J. A new series of 3 technical catalog sheets on circular bends, assemblies and flexible ridge waveguides—components in the ARA-133 double ridge waveguide system. The literature explains how the system answers the growing need for a waveguide installation which covers the frequency range from 4,700 to 11,000 mc.

The catalog sheets provide the aircraft and radar designer with

New Flexibility
in Servo Potentiometers from

CIRCUIT
INSTRUMENTS INC.

Innovation, improvement, and ingenuity are characteristics you find in all CIRCUIT INSTRUMENTS servo and other type potentiometers. They mean greater flexibility in use . . . greater flexibility in specifying. And when you consider that CIRCUIT INSTRUMENTS production facilities feature the same flexibility, you can see why CIRCUIT INSTRUMENTS delivers the goods faster.

MODEL B POTENTIOMETER WITH SERVO TYPE MOUNTING

GANG UP TO 8 SECTIONS on a common shaft with CIRCUIT INSTRUMENTS servo type potentiometers. Sections can be phased in the field simply by releasing one-piece clamp rings.

CHOOSE MANY RESISTANCES all the way from 500 up to 600,000 ohms. As a special feature, these servo type potentiometers also can be welded or solder tapped.

MEET TORQUE REQUIREMENTS with a ball-bearing mounted shaft that assures smooth, low torque operation. Sleeve bearings also available.

MEET OTHER REQUIREMENTS with linear or non-linear windings, designs for average or high ambient temperatures up to 150° C., and six case diameters from ⅜" to 3"

CIRCUIT
INSTRUMENTS INC.

CIRCUIT INSTRUMENTS INC.
P.O. Box 355, St. Petersburg, Florida

Send data sheets on ☐ Servo Type ☐ Hermetically Sealed ☐ Sub-Miniature ☐ Helical ☐ High Temperature ☐ High Precision Potentiometers.

NAME .....
COMPANY .....
ADDRESS .....
CITY ..... STATE .....

Subsidiary of
IRC
INTERNATIONAL RESISTANCE CO.

In response to the trend toward Single Sideband

A new Signal Generator (Crosby Model 160) designed to meet the requirements of single-sideband receiver tests and also provide low-distortion double-sideband modulation for testing high-performance systems.

. . . Provides continuous coverage from audio frequencies to 50 mc
. . . Has three crystal controlled frequencies
. . . Is versatile—Generates:

- all forms of SSB including an ideal single-sideband signal, independent sideband modulation and inverted speech.
- all forms of DSB including low-distortion AM, carrier eliminated AM or quadrature modulation.

For further information send for Technical Publication No.258

CROSBY

CROSBY LABORATORIES, INC.
P. O. Box 233, Robbins Lane, Hicksville, L. I., New York
WEIls 1-3191

H.O. Boehme, Inc.
Designers and Manufacturers Communication Equipment
Precision Electro-Mechanical Apparatus
915 Broadway • New York 10, N.Y.

HOB

a convenient reference source covering theory, construction, dimensional data, electrical and mechanical characteristics, materials and finishes, flange combinations, and ordering data. Each sheet is illustrated with both photos and drawings of the components.

Production Control. Remington Rand Univac, a division of Sperry Rand Corp., 315 Fourth Ave., New York 10, N. Y. A 6-page, illustrated folder, TM-952, describes the role of Univac in providing better production control at lower cost. It tells how in one pass of the control cards through the Univac punched-card electronic computer, complete production scheduling figures are developed for a company's daily average of 2,500 manufacturing operations.

With Univac, all tabulating work for the entire production control system of the company discussed is handled by only three people.

Welder Control. Sciaky Bros., Inc., 4915 W. 67th St., Chicago 38, Ill., have introduced bulletin No. 338, the first of a group to interpret predetermined, electronic counter welder control. The Dekatron tube type control counts cycles of power line frequency to control welder sequence.

Sections deal with centralization of welder functions and how additions of extra welder function is simplified. Others include maintenance simplification, functional dial calibration, and the company's new rectifier peaking transformer firing system.

Nickel and Nickel Alloys. Superior Tube Co., 1523 Germantown Ave., Norristown, Pa. The 20-page catalog 12 features serviceable handbook information on nickel and nickel alloys for use by designers, production engineers and purchasing executives. In addition to a general discussion of the properties of nickel and nickel alloys as a class, it tabulates for ready reference the specific mechanical properties and chemical compositions of 13 analyses of nickel and nickel

alloy tubing drawn at the company's mill.

A 6-page section on the selection and application of the tubing describes characteristics of each analysis and illustrates typical applications. Among the applications shown are the company's electronic products made from its own nickel and nickel alloy tubing, including cathodes for receiving tubes, disk cathodes for crt's, and tubing and tubular products for use in transmitter and special purpose tubes and semiconductor devices.

All of the information needed to expedite handling and avoid errors in orders of tubing is clearly set forth.

Analog Computer Kit. Heath Co., a subsidiary of Daystrom, Inc., Benton Harbor, Mich. A 4-page folder illustrates and describes the company's inexpensive electronic analog computer kit, an instrument suitable for use as a design tool in industry and universities. One page is devoted to prices of four different types and individual component parts.

Analysis Instruments. Panoramic Radio Products, Inc., 9 South Second Ave., Mt. Vernon, N. Y., has available a catalog digest showing its products for research, development and production. The digest describes instruments that are designed for applications requiring accurate high speed spectrum or waveform analysis, and states that Panoramic visual displays enable quick, easy interpretations. Each instrument is illustrated and full specifications are given.

Opportunities In Electronics. Capital Radio Engineering Institute, Washington 10, D. C., has available a 44-page brochure entitled "Your Future In The New World of Electronics." Of particular timeliness and specific value is a 9-page detailed, factual report on opportunities in the radio-electronic industry for technically educated men. The brochure goes on to describe CREI home study and

DALOHM ... miniature but mighty!
announces the new "MIL-E-TRIZED"
DALOHM Ω
A10-W-TRIMMER POTENTIOMETER
Wire Wound
High Temperature
Humidity Proof—Ruggedized
Designed to meet increased demands of MIL. specifications, DALOHM A10-W-Trimmer potentiometer provides precision adjustment in critical electronic circuits under extreme environmental conditions. The A10-W-Trimmer has an extended winding surface and assures high precision resolution without sacrificing sub-miniature design.
• Unique new safety clutch prevents damage from over-excursion of the trimmer adjustment screw.
• Holds set resistance values—internal units have nearly identical coefficients of expansion.
• Housing has heat resistance of 200° C continuous.
• Resistance values 10 ohms to 50,000 ohms; tolerance 5% standard; power rating .8 watt.
• Size .220 x .312 x 1.250; weight 2.25 grams.
Write for Bulletin R-32
DALE PRODUCTS, INC.

NOW.. A RELAY
15 G UP TO 2000 CPS
ACTUAL SIZE
DIMENSIONS:
15/32" dia. x 1¾" long
WEIGHT:
⅞ oz.
OPERATING POWER:
500 MW. Max. (This relay is available for power requirements as low as 100 MW but with slightly less vibration resistance.)
VIBRATION RESISTANCE:
15G up to 2000 CPS
Limited quantity of model shop samples available — submit your specifications and requirements with your inquiry.
PHOTO
Martin Matador, courtesy
The Glenn L. Martin Company
Wheelock SIGNALS INC
RELAYS
LONG BRANCH, N. J.

MODEL 80F FEMALE
MODEL 80M MALE
Size 3⅜" x ⅞" dia.
VERY HANDY in lab and production test. At signal generator levels and below 5 watts, this is the last word for low VSWR.
MODEL 82
6" x 8½" x 17"

TERMALINE

COAXIAL LOAD RESISTORS

50 ohms DC to 4000 mc—5 watts to 2500 watts

The constant resistance (Low VSWR) of the TERMALINE resistor make it the ideal dummy load and standard resistor at UHF and VHF. Design is such that normal reactance is put to work producing a pure resistance over an extremely wide frequency range. Acting as a "bottomless pit" for RF energy, thousands of TERMALINE units are in daily use in high frequency applications.

Model	Cont. Power Rating	Input Connector
80F	5 watts	UG-23B/U
80M	5 watts	UG-21B/U
80A	20 watts	UG-23B/U
81	50 watts	UG-23B/U
81B	80 watts	UG-23B/U
82	500 watts	Adaptor to fit UG-218/U supplied
82A	500 watts	
82C	2500 watts	

Adapters or cable assemblies for standard coaxial line available.

ALL TERMALINE units, except Model 82C, are self-cooled. Substantial quantity discounts.

LITERATURE UPON REQUEST

BIRD ELECTRONIC CORP.
1800 EAST 38TH ST., CLEVELAND 14, OHIO
TERMALINE Coaxial Line Instruments

VAN GROOS COMPANY
Sherman Oaks, Cal.

A COMPLETE SPINNING SERVICE

FOR THE

ELECTRONIC INDUSTRY

Metal Spinning

FROM 10′ PARABOLA TO THIMBLE-SIZE CASE

Metal Fabrication

COMBINES SPINNING WITH FABRICATION, WELDING and ANNEALING TO PRODUCE A FINISHED PART. (Gov't. certified welders)

Mu Metal Shields

ANNEALED IN OUR OWN HYDROGEN ATMOSPHERE OVEN

COMMITMENTS SOLICITED. SEND FOR OUR BROCHURE
WE ARE A JOB SHOP — WE HAVE NO PRODUCT OF OUR OWN

TEINER *engineering corporation*
115-E Madison Street, Malden 48, Mass.

to outline the course. The curriculum includes practical radio-electronic engineering, broadcast radio engineering, radar and servo engineering, practical television engineering and practical aeronautical electronic engineering.

Aluminum Nameplates. North Shore Nameplate Inc., 214 Northern Blvd., Bayside, Long Island, N. Y., has issued a new 3-color, 4-page brochure illustrating and describing Therma-Cal all-purpose aluminum nameplates for use on irregular surfaces and crinkle finishes. Shown are typical applications: dials, scales, instruction plates, schematic drawings, insignia and trademarks which the company's customers have had permanently color-anodized and etched into the surface of thin-sheet aluminum.

Photographs illustrate two bonding methods which can be used (solvent activation or heat activation) and the advantages of Therma-Cals are completely detailed. One page of the booklet is a catalog sheet describing accessories which can be obtained by Therma-Cal users—including photographs, description and prices.

Airborne Radar D-C Power Supply. Perkin Engineering Corp., 345 Kansas St., El Segundo, Calif., has available a new bulletin describing airborne h-v radar power supplies and more specifically a 6,000-v model. Specifications of the 6-kv unit, which has a d-c output of 6 kv ±5 percent at 100 μa are outlined. Advantages of the use of these tubeless h-v airborne radar power supplies are discussed in the bulletin.

Typical features and components are covered, and the unit is illustrated as well. Complete characteristics are included.

UHF Coaxial Wavemeters. Mico Instrument Co., 80 Trowbridge St., Cambridge, Mass. A catalog-type brochure features the company's line of uhf coaxial wavemeters for the 2 to 75 cm range. Illustrations, specifications and a price list are

included. In addition other items of interest to the electronics industry are covered. These include miniaturized ratio transformers, miniature toroid transformers, miniature inductors and a toroid winder.

Instruments Folder. Hastings-Raydist, Inc., Hampton, Va. A 4-page folder illustrates and describes air meters, vacuum gages, manometer flowmeters and electronic standard cells. A price list is included.

Standing Wave Detector. De-Mornay-Bonardi, 780 S. Arroyo Parkway, Pasadena, Calif. A 4-page folder covers the DB-825 standing wave detector with which one can measure all standard microwave and ultramicrowave frequencies, from 5.8 kmc to 90 kmc. Applications and complete ordering information are included.

Thermocouple Accessories. Revere Corp. of America, Wallingford, Conn. Thermacouple accessories, including adapters, resistors, terminals, and firewall, bayonet and quick-disconnect connectors, are described in engineering bulletin No. 1610-A. The 4-page bulletin includes illustrations, lists part members, and contains a cross reference of products arranged by AN equivalents.

Electrolytic Capacitors. Condenser Manufacturers Inc., 1018 Pearl St., Nashville 4, Tenn., has available a 4-page catalog and addenda sheet showing a few of the many type capacitors manufactured, all of which use the company's high purity foil. Illustrated descriptions, specifications and prices are given for miniature and regular metal-cased single-section tubulars, Plastolytic subminiatures, and Plastolytic ultra-subminiature capacitors for transistor applications.

Meter Relays. Simpson Electric Co., 5200 W. Kinzie St., Chicago 44,

VULCAN
ELECTRIC HEATING UNITS

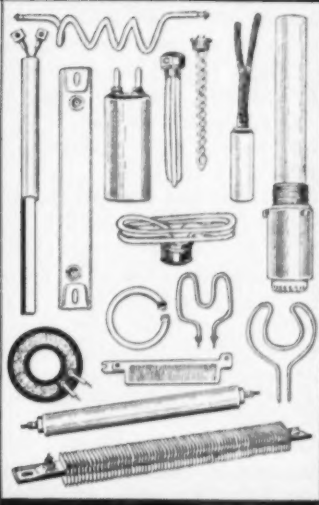

VULCAN
ELECTRIC COMPANY
DANVERS 10, MASS

building your own
COUNTING equipment?

use *DEKATRON** GLOW TRANSFER TUBES

Shown — Model GC10B Decade Tube Bezels and special sockets available

DEKATRON Cold Cathode Glow Transfer Tubes combine visual indication of count and essential switching action. DEKATRON, a multielement gas tube, permits simplified circuitry . . . replaces a number of heater-type vacuum tubes . . . provides low-current, low-heat operation at counting speeds up to 20,000 c.p.s. The reliability of DEKATRONS has been proven over the past 6 years in thousands of hours of unfailing operation. Available in 3 models, decade and duodecade types, DEKATRON is the original, leading counter tube for compact design and superior performance in your counting equipment. For technical data and prices, write for Bulletin G-6.

**Sole distributors for U.S. and Canada*

BAIRD ASSOCIATES-ATOMIC INSTRUMENT CO.
33 University Rd., Cambridge 38, Mass.

marion
advancement in instrument design
new *MEDALIST** meters

Greater readability and modern styling in minimum space. Interchangeable with ASA/JAN 2½ and 3½ inch sizes. Up to 50% longer scale in same space as ordinary type. Available in various colors. Complete data on request.

*Trade Mark
Patents Pending

marion meters
MEDALIST
marion electrical instrument company
GRENIER FIELD—Manchester, N. H., U.S.A.
Copyright 1956 Marion

Visit Marion at Booth 738 at Wescon Show, Los Angeles, August 21-24

high-vacuum
high-voltage
rectifier tubes

DUNLEE

also a complete line of industrial x-ray tubes

DUNLEE CORPORATION
4560 West Congress Street
CHICAGO 24, ILLINOIS

★ ULTRA LOW capacitance & attenuation

TYPE	μμf/ft	IMPED.Ω	O.D.
C 1	7.3	150	.36"
C 11	6.3	173	.36"
C 2	6.3	171	.44"
C 22	5.5	184	.44"
C 3	5.4	197	.64"
C 33	4.8	220	.64"
C 4	4.6	229	1.03"
C 44	4.1	252	1.03"

WE ARE SPECIALLY ORGANIZED TO HANDLE DIRECT ORDERS OR ENQUIRIES FROM OVERSEAS
SPOT DELIVERIES FOR U.S.
BILLED IN DOLLARS—SETTLEMENT BY YOUR CHECK
CABLE OR AIRMAIL TODAY

TRANS T RADIO

NEW 'MX and SM' SUBMINIATURE CONNECTORS
Constant 50Ω 63Ω 70Ω impedances

TRANSRADIO LTD. 138A Cromwell Rd. London SW7 ENGLAND CABLES: TRANSRAD, LONDON

operation: FULLY AUTOMATIC, SAFE, HIGH PURITY, ECONOMICAL

results: PURE NITROGEN WITH CONTROLLABLE HYDROGREN CONTENT PRODUCED AT LOWEST COST

application: FOR MATERIAL OR PROCESS

NITRONEAL GAS GENERATOR

Pure nitrogen is produced by this equipment with a controllable hydrogen content that can be varied to meet changing requirements and maintained at any desired percentage between .25% and 25%.

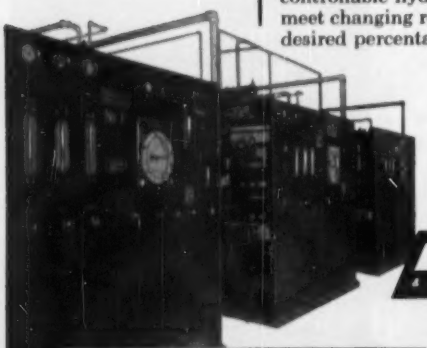

Write for additional data on how the Nitroneal Gas Generator can be applied to your process or in your plant.

Request FREE, informative booklet No. 21.

BAKER & COMPANY INC PRECIOUS METALS
113 ASTOR ST., NEWARK 5, N. J.

ENGELHARD INDUSTRIES
NEW YORK · SAN FRANCISCO · LOS ANGELES · CHICAGO

Ill., has issued a comprehensive 2-color flyer describing its line of 2-in. and 3-in. meter relays.

Featured is a detailed description of model 85, a 3½-in. dial radius meter relay, recommended for alarm, control and limit setting applications. Contacts are non-locking, and the controlling source may be a-c or d-c or voltage within limits of relay design.

Also described is model 185, a 2½-in. dial radius relay, similar to the 85 but for d-c applications only.

Included is information on construction, terminals, weight, dial and scale arc. Illustrations and diagrams clearly indicate mounting and side-view dimensions, terminal location and internal wiring.

Gaussmeter. Nuclear Magnetics Corp., 154 Boylston St., Boston, Mass. A 4-page brochure describes the Numar model M-2 precision gaussmeter, an instrument for the measurement of homogeneous magnetic fields. The gaussmeter discussed, based on the principles of nuclear magnetic resonance, can be used for measuring magnet field strength, calibrating laboratory magnets, plotting magnetic field contours and gradients, and for educational demonstrations of nuclear magnetic resonance. Applications are listed and specifications given.

TV Amplifier Bulletin. Standard Electronics Corp., 285 Emmet St., Newark 5, N. J., has published a new 4-page tv amplifier specifications bulletin which describes high and low-band 10 kw vhf tv amplifiers. The bulletin contains photographs of the company's amplifiers, a complete explanation of how the equipment operates, 2 pages of illustrations and descriptions of major design features, electrical and mechanical specifications, a tube list, and block diagrams of both aural and visual amplifiers.

Smaller Mica Capacitors. Perfection Mica Co., 20 North Wacker Drive, Chicago 6, Ill., has available a technical article describing how new "K" gaged mica permits the manufacture of capacitors having

the same capacitance but only ½ to ¼ the size previously used in transistorized and other printed circuits.

Magnetic Tape Recorders. Amplifier Corp. of America, 398 Broadway, New York 13, N. Y. The Magneloop series of variable and fixed-speed continuous loop magnetic tape recorders—reproducers incorporating an unusual tape drive are described in a 4-page folder.

The brochure completely describes features of 21 models, which are available in single- or dual-speeds as well as in single-, dual- and triple-channels. Recording characteristics are tabulated for easy reference. Complete technical specifications, recommended accessories, as well as direct factory prices are furnished on all units.

Strain Gage Power Supply. Perkin Engineering Corp., 345 Kansas St., El Segundo, Calif. A recent bulletin describes the model M562 strain gage power supply. The unit discussed has a d-c voltage output of 5 v at 1 ampere, with voltage adjustment from 4.5 to 5.5 v and voltage regulation 0 ± 0.1 percent for line or frequency and ± 0.5 percent from 20 percent full load to full load.

Features, specifications and applications as well as outline dimension drawings and an illustration of the unit are shown in the bulletin.

Trimmer Potentiometer. Carter Mfg. Corp., 23 Washington St., Hudson, Mass. Technical data sheet No. 101 describes the ¼-in. diameter trimmer potentiometer. Besides offering a more complete range of resistance values, these units meet the most stringent operational conditions with rugged reliability. Using 20 ppm resistance wire, the resistance range has been expanded to cover from 100 ohms to 15,000 ohms.

Ambient temperature range has been extended to permit ¼ w power rating up to 87.5 C.

Environmental range of the potentiometer discussed has been improved so that in addition to withstanding 30 g shock, the pots will now pass rigid humidity, salt spray and vibration requirements.

Gear-Head Servo Motors. Norden-Ketay Corp., 99 Park Ave., New York, N. Y. Bulletin No. 371 gives specifications and gear ratios for gear-head servo motors sizes 11, 15 and 18, with low inertia and low backlash. Dimensional diagrams are included.

VLF R-I/F-I Equipment. Stoddart Aircraft Radio, Inc., 6644 Santa Monica Blvd., Hollywood 38, Calif. A 4-page illustrated folder describes the NM-40A VVLF (very, very low frequency) radio interference—field intensity measuring equipment. Emphasizing the versatility of the NM-40A, the folder lists various important unusual functions of a tunable equipment covering the 30 cps to 15 kc frequency range. Complete specifications are also given.

Precision Resolvers. Norden-Ketay Corp., 99 Park Ave., New York, N. Y. Bulletin No. 374 gives specifications and characteristics of 36 precision resolvers available in standard frame sizes—10, 11, 15 and 23. The resolvers discussed provide accurate solutions to problems encountered in high precision phase shafting, data transmission, industrial process controls, rectangular to polar coordinate transformation and rectangular coordinate rotations.

Electronic Tools. Allen B. DuMont Laboratories, Inc., 760 Bloomfield Ave., Clifton, N. J. A recent 4-page folder, entitled "Electronics at Work", shows a representative group of electronic tools and systems for industry, research, commerce and military needs now being produced by the company. Included are illustrated descriptions of cro's, c-r and multiplier phototubes, and a line of industrial tv systems. A line of new instruments is listed and engineering services are discussed.

3 Relay Types by FILTORS, INC.

Now a Leader in the *Sub-Miniature Relay Field*

NEW—DPDT SUB-MINIATURE

Actual Size

Engineered for critical Airborne and Guided Missile Applications

TYPE: M26FC6

CONTACT RATING: 2 A Res. at 26.5 VDC or 115 vac
Dia.: 0.635
Mtg. Ctrs.: 0.875
Shock: 50 G
Vibration: 10 G at 5 to 2000 cps
Amb. Temp.:—65°C to +125°C
Weight: 1.3 oz.

NEW—LATCHING SUB-MINIATURE **6PDT**

Actual Size

Magnetically Held—Electrically Reset

UNBELIEVABLY SMALL FOR A LATCHING RELAY

TYPE: L26F18

CONTACT RATING: 3 A Res. at 26.5 vdc or 115 vac
Mtg. Ctrs.: 1.406
Shock: 50 G
Vib.: 10 G at 5 to 500 cps
Amb. Temp.:—65°C to +125°C
(Also available in 2PDT and 4PDT)
Weight: 3.3 oz.

SUB-MINIATURE 4PDT

Actual Size

The Smallest, Hermetically-Sealed 4PDT Relay Available Today

TYPE: 26SR12

Mtg. Ctrs.: 1.406
Shock: 50 G
Vib.: 10 G at 5 to 500 cps
Amb. Temp.:—65°C to +125°C
Weight: 2.6 oz.

MIL SPECIFICATIONS
All Made to MIL-R-5757B and MIL-R-25018 (USAF)

DRY CIRCUIT RELAYS AVAILABLE IN PRODUCTION QUANTITIES

Write Today For New Catalog Listing
Sales & Engineering Office Nearest You

FILTORS, INC.
30 Sagamore Hill Drive
Port Washington, L. I., N. Y.

Canadian Office:
MJS ELECTRONIC SALES, LTD.
P.O. Box 240, Ajax, Ontario
Tel.: EMpire 8-3806

Export Office:
MAURICE I. PARISIER & CO.
1860 Broadway, New York 23, N. Y.
Cable Address:
MIPARISIER NEW YORK

Plants and People

Edited by WILLIAM G. ARNOLD

Western Electronic Show and Convention readies program for an estimated 30,000 visitors. Electronics manufacturers move ahead with further plant expansions and additions. Industry engineers are promoted and move into new positions

WESCON Gets Set For Its Biggest Show and Convention

Pan Pacific Auditorium, exhibit site of this year's Western Electronic Show and Convention in Los Angeles

ELECTRONICS INDUSTRY'S ANNUAL WESCON, Western Electronic Show and Convention, takes place this month in Los Angeles, August 21 - 24th. Total of 706 exhibits will occupy every available space in the Pan Pacific Auditorium and huge tent facilities.

More than 30,000 scientists, executives and engineering personnel in electronic and allied fields are expected to attend the Show and Convention. It is sponsored jointly by the West Coast Electronic Manufacturers' Association and the Los Angeles and San Francisco sections representing the Seventh Region of the IRE.

WESCON was started 11 years ago with only 25 exhibitors and has grown steadily. This year, applications for exhibit space were put on a waiting basis after 706 booths were sold, which used all available space.

▶ **Papers**—There will be 48 technical sessions this year compared to 32 in 1955. A complete listing of all presently scheduled technical papers and sessions along with dates and hours begins on p 388 of this issue. All technical sessions will be held at the Ambassador hotel in Los Angeles, headquarters for the WESCON, and the I.A.S. Bldg.

The all-industry cocktail party is slated for the opening day of the

Left to right, B. S. Angwin, C. F. Wolcott and E. P. Gertsch head up the 1956 WESCON

EDP for me?

Electronic Data Processing—its full efficiency and economy—is now practical for more clerical and arithmetic operations than ever before.

Large Computer Techniques in Low-Cost Unit

Now, the proven electronic techniques of large-scale digital computers are available in a lightweight, desk-sized data processing machine with power requirements of less than 500 watts.

This versatile and highly reliable unit offers all-electronic techniques in arithmetic and switching operations...magnetic drum internal storage...large-capacity external storage...transistorized plug-in circuits...high-speed operation...one-minute re-programming—*nothing* has been overlooked in this high-performance design.

And the cost is little more than the annual wage of four clerks.

Such versatility, reliability and low price in so compact a unit are the result of S-W Electronics' years of experience in supplying digital data processing systems to the military—and advanced developments in circuitry, components and all-electronic techniques.

EDP for You?

Yes! Our staff of systems analysts is ready to survey your particular data handling problems...show you how this practical and versatile equipment can *now* bring you all the modern economies of EDP. Make your request today. Write on your letterhead to Stewart-Warner Electronics, Dept 21, 1300 N. Kostner Ave., Chicago 51, Illinois.

STEWART SW WARNER ELECTRONICS

A DIVISION OF STEWART-WARNER CORP.

Convention in Los Angeles.

To be held at the Ambassador Hotel from 5:30 to 7:30 P.M., it has been alloted some 22,000 sq ft of the space to take care of the expected crowd.

General chairman of the 1956 WESCON is C. Frederick Wolcott of Gilfillan Bros. Convention vice-chairman is Bruce S. Angwin of GE. E. P. Gertsch of Gertsch Products is show vice-chairman.

RETMA Elects Baker President, Honors Galvin

DR. W. R. G. BAKER, vice-president of GE, was elected president of the Radio-Electronics-Television Manufacturers Association at the conclusion of its 32nd annual convention in Chicago.

Dr. Baker will take over the duties performed last year by H. Leslie Hoffman, president of Hoffman Electronics Corp.

Other officers elected by the RETMA Board include:

James D. Secrest, executive vice-president and secretary.

Leslie F. Muter, president of The Muter Company, treasurer and chairman of the finance committee.

Glen McDaniel will continue as the Association's general counsel.

William L. Reynolds was appointed assistant general counsel.

Dr. Baker, one of the world's pioneers in the field of electronics, has been associated with the industry for the past 40 years. He joined the General Electric Laboratory in Schenectady, N. Y., in 1917.

W. R. G. Baker

In 1941, he was elected vice-president of the General Electric Company.

Dr. Baker has headed the Association's engineering activities and has been a member of its board since 1934.

He led the electronics industry through numerous technical difficulties and won national acclaim for his work as chairman of the two National Television System Committees, which developed standards for black and white television in 1941 and color television in 1953. In 1953, he was awarded the RETMA Medal of Honor for his outstanding contribution to the industry. In 1952 the IRE had awarded him its Medal of Honor.

▶ **Award**—Paul V. Galvin, president of Motorola, was presented with RETMA's 1956 Medal of Honor, the industry's highest award given an individual for outstanding service.

In making the presentation, RETMA president, H. Leslie Hoffman, president of Hoffman Electronics Corp., said Paul Galvin's record in RETMA reads like a ship's log. He has been a director for 22 years, a vice-president three years and president three terms.

General Electric Reorganizes Electronics Division

GENERAL ELECTRIC reorganized its electronics businesses into three separate divisions. They are the industrial electronics division, the electronics components division and the defense electronics division.

▶ **Managers**—General managers of the new divisions are:

Harold A. Strickland, Jr., formerly a consultant in the engineering services division in New York City, heads the industrial electronics division.

L. Berkley Davis, formerly general manager of receiving tube subdepartment in Owensboro, Ky., heads the electronic components division.

George L. Haller, formerly general manager of the laboratories

Harold A. Strickland, Jr.

L. Berkley Davis

George L. Haller

do you have a head for figures?

...and do the figures bound from your cranium with a purpose? Then you're the Senior Engineer or Scientist we're looking for at Firestone...a man with real scope who wants to work in a creative climate where figures have already added up to the "Corporal" surface-to-surface ballistic missile... where the benefits measure up to the "head" with real figures.

For 56 years Firestone has led in heads for figures...for Research, for Development and Production. Now we need some more. Here are just a few of the needs.

Systems Test Equipment Design
Component Test Equipment Design
Ground Handling Equipment Systems
Mechanical Production Engineering
Electronic Systems
Materials and Processes

We have a man at Firestone with a head for figures like yours. Write us. We'll arrange a meeting.

Firestone

GUIDED MISSILE DIVISION

RESEARCH • DEVELOPMENT • MANUFACTURE

"Find your Future at Firestone"– Los Angeles • Monterey

WRITE: SCIENTIFIC STAFF DIRECTOR, LOS ANGELES 54, CALIF

Want more information? Use post card on last page.

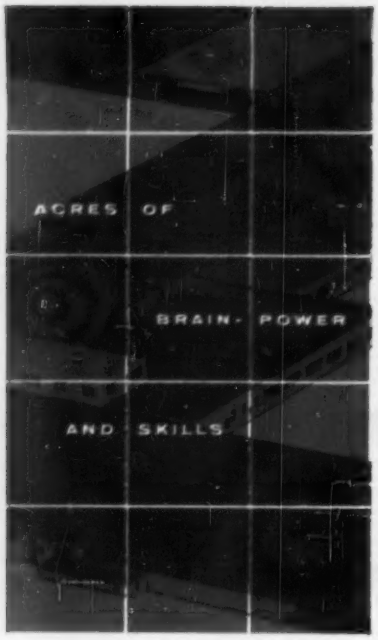

IT TAKES BIG FACILITIES

to get the job done fast and right

and Packard-Bell has 12½ acres of plant space at your service... plus... the brainpower and skills to create, produce and develop quality electronic equipment... and make on-time deliveries.

RESEARCH DEVELOPMENT PRODUCTION

Now Producing Communication, navigation, radar, identification, sonar, missile guidance and missile handling equipment, etc., delay lines, pulse transformers, pulse-forming networks, filters, low-voltage coils, printed wiring boards, assemblies, slip rings, commutators and printed wiring switch plates.

We Invite you to visit us at **WESCON**, booths 113 & 114, Pan-Pacific Aud., Los Angeles, Aug. 21, 22, 23, 24. Write for brochure to: Technical Products Division, Dept. *P-8*, Packard-Bell Company, 12333 W. Olympic Blvd., Los Angeles 64, Calif.

Packard-Bell

TECHNICAL PRODUCTS DIVISION

LEADERSHIP IN ELECTRONICS FOR OVER 30 YEARS

Want more information? Use post card on last page.

department, Syracuse, N. Y., heads the defense electronics division.

Dr. W. R. G. Baker, vice-president and general manager of the former electronics division, under whose direction its rapid growth has taken place, will serve as vice-president and consultant to C. W. LaPierre, executive vice-president of the Electronic, Atomic and Defense Systems Group, until his retirement next year under the company's mandatory retirement program.

▶ **Industrial**—The industrial electronics division will have product responsibility for x-ray equipment for industrial and medical use, a wide variety of electronic control devices used in industry, radio and television broadcast equipment, including closed-circuit tv, mobile and microwave radio communications equipment, and industrial computers. It comprises the technical products department, William J. Morlock, general manager; specialty control department, Louis T. Rader, general manager; and x-ray department, John H. Smith, general manager.

▶ **Parts** — The electronic components division is charged with product responsibility for such items as transistors and rectifiers, printed wiring boards, ferrite products and a wide range of electronic tubes.

In this division are the cathode ray tube department, J. Milton Lang, acting general manager; the semiconductor products department, H. Brainard Fancher, general manager; specialty electronic components department, Edward L. Hulse, general manager; power tube department, Robert O. Bullard, general manager; receiving tube department and electronic components sales, L. Berkley Davis, acting general manager.

▶ **Military**—The new defense electronics division has product responsibility for a complete line of electronic-defense items ranging from tiny fuzes to complex military systems. Components of the division are:

The aircraft products department, Fred B. Law, general manager; heavy military electronic equipment department, John J. Farrell, general manager; light military electronic equipment department, Herman F. Konig, general manager; naval ordnance department, Walter B. Booth, general manager; and special defense projects department, George F. Metcalf, general manager.

Other operations in the new defense electronics division are aeronautic and ordnance, Fred B. Law in charge; equipment, utilities and relations, William M. Barker, manager; laboratories, George L. Haller, acting manager; and legal, Robert M. Estes, counsel.

Honeywell Appoints Engineering V-P

Glenn E. Seidel

MINNEAPOLIS - HONEYWELL appointed Glenn E. Seidel to the newly-created corporate position of vice-president in charge of engineering.

He has been a member of the firm's engineering organization for nearly 14 years and since 1952 has been vice-president in charge of engineering in the company's Minneapolis plants.

In his new position, he will have responsibility at the top-management level for coordinating and directing research and engineering activities throughout the corporation and will represent these activities in corporate plans and decisions.

Such activities range from basic research work to applied research and a wide variety of engineering carried on in the company's manufacturing divisions. Of Honeywell's

27,000 employees, better than one out of every 10 is engaged in research or engineering activities.

Seidel has served successively as field engineer, engineering supervisor, manager of development engineering, and before becoming vice-president, he was director of the company's ordnance division which supplies precision controls and weapons systems for tanks and other military vehicles.

Sperry Rand Plans Plants, Appoints Engineers

A $1,250,000 SPERRY RAND research and development facility, to begin local operations before the end of 1956, is planned for Salt Lake City, Utah. Immediate construction is planned for the 50,000 sq ft lab and office building.

Paul W. Vestigo, former ground armament engineering head at Sperry Gyroscope Co., has been appointed as resident manager of the new Salt Lake facility, to be known as the Sperry Utah Engineering Laboratory. Vestigo directed first engineering designs of the Army's "Skysweeper" automatic antiaircraft weapon and other military ground systems still classified for security. He now heads a small group of experienced Sperry scientists who will transfer from Long Island headquarters to form the nucleus of a new Salt Lake engineering staff.

By early next year, planned employment of 300 engineers and technical personnel is expected to be complete. Initial plans of Sperry Rand are limited to this operational objective, with provision for step-by-step expansion at a later date if additional projects of Sperry Gyroscope or other corporate divisions are assigned to the new Utah facility.

Sperry Rand also formed the Sperry semiconductor division in South Norwalk, Conn., a $500,000 production laboratory for development of better transistors to meet severest requirements of modern weapons and supersonic flight.

Local operations employ a techni-

easy to read . . .

THE MOSELEY **DC VOLTMETER** MODEL 20

A high accuracy, multi-range, servo actuated DC voltmeter with large linear scale. Eleven ranges from 3 millivolts to 300 volts, full scale. Available also with digitized output for direct connection to printer or other digital apparatus.

a servo voltmeter, easy to read, fast — adapted to data translation

We'll be glad to furnish additional information. Write:

F. L. MOSELEY CO.
409 N. FAIR OAKS AVE.
PASADENA, CALIFORNIA

EXPERIENCE has no competitors

YES - YOU TOO CAN HAVE LABORATORY APPROVED CIRCUITS

Why gamble when you can have the best available. When the designers at the Maico Company, Inc., manufacturer of hearing aids, sought new ways to miniturize and improve their product they naturally turned to the Printed Circuit. The delicate circuit measuring only ½"x1-½" required precision, reliability, and safety. Maico, as so many have done, turned to CRONAME. The circuit produced by our Underwriter's Laboratory approved "Printed Circuitry" process more than met the requirements of Maico. Now—YOU TOO can have Laboratory Approved Circuits. Let CRONAME'S experience bring you the benefits promised by circuitry "revolution." Facilities for etching, plating, printing, screening and machining have served America's industrial leaders for over 50 years. Small or large runs, unassembled or assembled with eyelets, terminal lugs, etc. Consult us today on your circuitry problems.

OTHER PRODUCTS
Nameplates, dials, panels, escutcheons, bezels, mechanisms, light assemblies, masks, decorated glass, control panels, cabinets, CroRoto embossed.

CRONAME INCORPORATED
1747 GRACE STREET
CHICAGO 13, ILL. BI 8-7500

Gentlemen:
Please send me information on Printed Circuitry.
Have your representative call.
Name _____
Firm _____
Address _____
City _____ State _____

where does
COTO-COIL
figure here?

Lightning speed business machines are a bookkeeper's best friend. And in many of the finest precision instruments, Coto-Coils make amazing rapidity and accuracy possible.

If you use coils, Coto-Coil can solve your difficult problems of design and production.

Send details to

COTO-COIL CO., Inc.

65 Pavilion Ave., Providence 5, R. I.

PRECISION
Coto Coils
WOUND

for service and lab. work

Heathkit
PRINTED CIRCUIT
OSCILLOSCOPE KIT
FOR COLOR TV!

① Check the outstanding engineering design of this modern *printed circuit* Scope. Designed for color TV work, ideal for critical Laboratory applications. Frequency response essentially flat from 5 cycles to 5 Mc down only 1½ db at 3.58 Mc (TV color burst sync frequency). Down only 5 db at 5 Mc. New sweep generator 20-500,000 cycles, 5 *times* the range usually offered. Will sync wave form display up to 5 Mc and better. Printed circuit boards stabilize performance specifications and cut assembly time in half. Formerly available only in costly Lab type Scope. Features horizontal trace expansion for observation of pulse detail — retrace blanking amplifier — voltage regulated power supply — 3 step frequency compensated vertical input — low capacity nylon bushings on panel terminals — plus a host of other fine features. Combines peak performance and fine engineering features with low kit cost!



① MODEL O-10 $69.50* Shpg. Wt. 27 lbs.

Heathkit TV
SWEEP GENERATOR KIT
ELECTRONIC SWEEP SYSTEM

② A new Heathkit sweep generator covering all frequencies encountered in TV service work (color or monochrome). FM frequencies too! 4 Mc — 220 Mc on fundamentals, harmonics up to 880 Mc. Smoothly controllable all-electronic sweep system. Nothing mechanical to vibrate or wear out. Crystal controlled 4.5 Mc fixed marker and separate variable marker 19-60 Mc on fundamentals and 57-180 Mc on calibrated harmonics. Plug-in crystal included. Blanking and phasing controls — automatic constant amplitude output circuit — efficient attenuation — maximum RF output well over .1 volt — vastly improved linearity. Easily your best buy in sweep generators.



② MODEL TS-4 $49.50* Shpg. Wt. 16 lbs.

Heath COMPANY
A SUBSIDIARY OF DAYSTROM, INC.
BENTON HARBOR 14, MICH.
WRITE FOR FREE CATALOG
...COMPLETE INFORMATION

cal staff of between 100 to 200. Initial production will be used by other Sperry Rand divisions.

B. J. Rothlein

Dr. Bernard J. Rothlein, who conducted basic studies of semiconductor applications at Sperry Gyroscope Co. in Lake Success, L. I., will be technical director of the new division. Manager of the facility will be Samuel M. Grafton, former administrative engineering head for armament radar at Sperry.

George A. Crowther was named chief engineer of Sperry Rand's Ford Instrument Co.

Crowther now assumes full responsibility for direction of engineering division projects that include missile and weapon controls, air and sea navigational equipment and computing devices. He will report to Charles R. Burrows, recently appointed vice-president for

G. A. Crowther

engineering. He was previously engineering director for marine equipment.

Hugh E. Webber was appointed chief engineer of the microwave

HYCOR
TELEMETERING
FILTERS

Hycor band-pass and low-pass telemetering filters are produced in exact accordance with accepted military standards. In addition to designs which conform to Applied Physics Laboratory specifications, miniature units are available.

Hycor telemetering filters are potted for complete protection against vibration and humidity. The finest components are used to minimize aging effects on characteristics.

Send for **Bulletin TF** *which describes standard types available.*

Hycor engineers will be pleased to quote on your most exacting specifications.

Representatives in Principal Cities

HYCOR

DIVISION OF
INTERNATIONAL RESISTANCE COMPANY

1297C Bradley Avenue, Sylmar 1, Calif.

See us in Booth 912 at the Wescon Show
Want more information? Use post card on last page.

electronics division of the Sperry Gyroscope Co. He joined the firm in 1941.

In his new post, he will direct close to 200 engineers in basic research, development and production engineering on intricate instrumentation and new electronic systems produced by the division.

Robinson Aviation Dedicates New Plant

AT SPECIAL DEDICATION CEREMONIES, Robinson Aviation, manufacturer of vibration control systems, took a long term lease to a 42,000 sq ft laboratory, factory and office building just completed by the Port of New York Authority at Teterboro Airport in New Jersey.

Officers of the company include G. deFreest Larner, chairman of the board and general manager; C. S. Robinson, president and chief engineer and Mrs. Dorothy Robinson Sorrell, vice-president and secretary of the corporation.

The company revealed its new Robinson Vibration Control System. The heart of the new system is a resilient cushion made of knitted metal wire, a material somewhat similar to that used in the "chore girl" with which American housewives have long scrubbed their pots and pans.

Prior to moving into the new facilities constructed by the Port of New York Authority, operations since the company's inception in 1942 were first carried on in New York City and since 1945 at Teterboro Airport.

Since 1950, the firm has expanded eight times in size. In 1952, the west coast engineering office was opened in Santa Monica, Calif. Today, the company employs 260 people, of whom 220 are at Teterboro and 40 at Santa Monica. The company's Met-L-Flex mounts are supplied to virtually every leading American airframe manufacturer as well as to more than 500 makers of electronic and related equipment, according to the firm.

As compared with total wartime deliveries of $8,000,000, shipments this year alone amount to almost

CODE MARK
Anything!
WITH

CANC
INSP
RECO
35
PART NO
10

★ CODE MARKING INKS
For Resistors and Capacitors. For Machine or Hand Application.

Whatever the substance, Phillips has an ink to mark it permanently and legibly—or can make one. Marking experts insist on "Clear Print" Wood Block Stamp Pads and Opaque Inks. They get clear, sharp, fast-drying impressions. Also inks for brush, pen, stencil or machine application available in a variety of colors and quantity containers.

★ Quick Laboratory Service On Your Problem Markings.

★ To Permanently Mark . . . Metals, Plastics, Glass, Wood, Paper, Leather, Ceramics—glazed, varnished or lacquered surfaces and virtually every other known material.

WRITE FOR FREE BOOKLET

L. A. PHILLIPS, President
PHILLIPS
PROCESS CO. INC.
192 MILL STREET
ROCHESTER 14, N. Y.

Want more information? Use post card on last page.

MEI DESIGN IDEAS

NEW!

CONNECTOR FOR TRI-AXIAL CABLE UP TO 18 KV-RMS

Essex ingenuity solved the "tri-ax" connector problem. And hundreds more. Ask Essex engineering to apply its imagination and skill to your RF connector problems.



Or select from a comprehensive line of standard MIL connectors. Manufacturing follow-through delivers complete units. Modifications of standards invited. Rapid delivery.

ESSEX CONNECTOR DIVISION

NEW!

ELECTRIC CABLE ELASTICABLE®

STRETCHES OVER TWICE ITS LENGTH! CARRIES 2 AMPS!



"Elasticable"! Where can you use it? To cut down long wires? Fight vibration? Increase portability? Improve mobility? Save space? Eliminate coils?

21 strand braided conductor. Available 1 to 6 leads, terminated with alligator clips, jacks, spades. 1000 V. insulation between conductors. Choice of covering.

UC UNITED CABLE DIVISION

MUTUAL ELECTRONIC INDUSTRIES CORPORATION
85 Beechwood Avenue, New Rochelle, N. Y.
N.Y.C. New Rochelle 6-3000

Want more information? Use post card on last page.

$4,000,000. The new facilities will double the company's productive capacity.

Scala Elected President Of Chatham Electronics

ANTHONY SCALA, formerly vice-president and general manager of Chatham electronics division of

Anthony Scala

Gera Corp., has been elected president of the Chatham electronics division to succeed W. L. Meier who has been appointed director of research.

Scala still holds the office of vice-president of Gera Corp., and is a director of the parent organization, RKO Industries Corp.

The Chatham electronics division in Livingston, N. J., manufactures electronic tubes, and equipment. Scala will continue to make his headquarters at this division, and act in capacity of general manager, in addition to his new duties.

Gulton Moves Ahead In Expansion

GULTON INDUSTRIES acquired an additional building that will eventually add over 50,000 sq ft of research, engineering and testing space to its present facilities.

Initial construction, already underway and scheduled for completion this summer, 1956, will provide approximately half of the final total. The first increase includes the

PRECISION ATTENUATION to 3000 mc!

SINGLE *"in-the-line"* ATTENUATOR PADS *and* 50 ohm COAXIAL TERMINATIONS

PROTECTED UNDER STODDART PATENTS

This new group of pads and terminations features the popular Types C and N connectors, and permits any conceivable combination of the two styles.



PROTECTED UNDER STODDART PATENTS

six-position TURRET ATTENUATOR

- **Frequency Range:** dc to 3000 mc.
- **Characteristic Impedance:** 50 ohms.
- **Available Attenuation:** Any value from 1 db to 60 db.
- **Accuracy:** ±0.5 db.
- **Power Rating:** One watt sine wave power dissipation.

STODDART
Aircraft Radio Co., Inc.
6644-A SANTA MONICA BLVD.
HOLLYWOOD 38, CALIF. • HO 4-9294

See us in Booth 111 at the Wescon Show

Want more information? Use post card on last page.

establishment of a new medical instruments research laboratory and expansion of present ultrasonic research and production for the Vibro-Ceramics Corp., and expansion of shock and vibration testing facilities for the Gulton Manufacturing Corp.

Raytheon Elects Top Officers, Plans Lab

HAROLD S. GENEEN has been elected executive vice-president of Raytheon Manufacturing Co. He has resigned his former position of vice-president and controller of Jones & Laughlin Steel Corp. in Pittsburgh, in order to join Raytheon at Waltham, Mass.

Geneen joined the Jones & Laughlin Steel Corporation in 1950 as assistant to the vice-president of general services. He was made controller in 1951 and named a vice-president in 1954.

From 1946 to 1950 he was with the Bell & Howell Co. in Chicago where he was vice-president, controller and director.

Raytheon also announced purchase of a 15 acre site in Goleta, Calif., 5 miles west of Santa Barbara, for a new engineering laboratory to be used in the design and development of airborne electronics and infrared equipment.

The firm already has a few personnel working in 11,000 sq ft of temporary space in Santa Barbara. The company plans to transfer additional personnel and their families from its Chicago equipment laboratory, which will be discontinued after the transfer is completed. These people will form the nucleus of an engineering group in the temporary quarters, which is expected to total approximately 125.

Plans are for a 35,000 sq ft, laboratory to be erected on the Goleta site, which is expected to be in operation in the spring of 1957.

AC Spark Plug Begins Expansion

AC SPARK PLUG DIVISION OF GENERAL MOTORS has begun construc-

ENGINEERING TIMETABLE

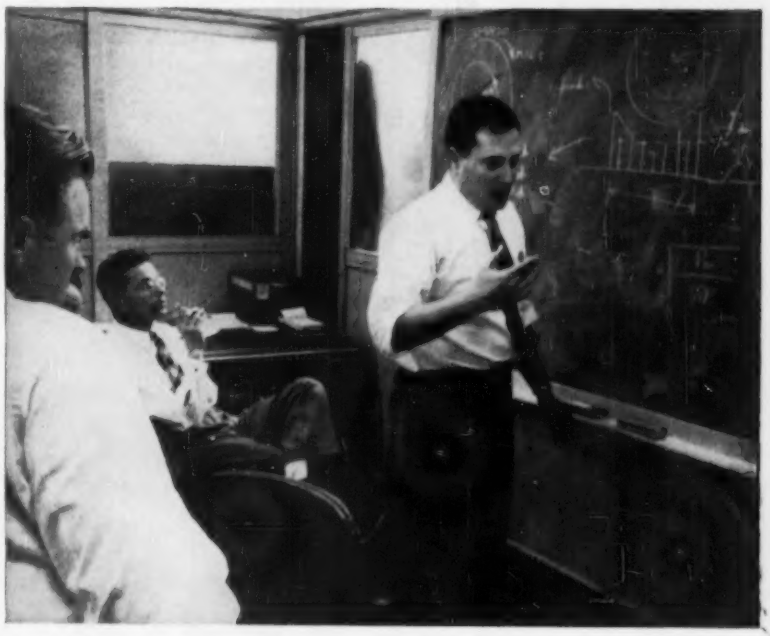

3:35 P.M. "Soft Words and Hard Arguments"

That, says the *Handbook of Proverbs*, is the key to success. When you apply the adage to group discussion, such as that pictured above, you have a sound rule for making fast progress on difficult problems.

At Fairchild Guided Missiles Division talented and inventive engineers work together on projects, following them through from start to finish *as a team*. The concept of group brainpower puts more thinking to work solving problems in such fields as inertial guidance, passive guidance and radar, and entire new missile systems.

Where do you fit into this dynamic engineering picture? Take a look at the listings on the right and see. Arrange an interview. You'll like what you see when you investigate the excellent working climate at Fairchild Guided Missiles Division.

Send your resume to R. B. Gulliver.

Senior Electronics Engineers:
Missile systems

Senior Electronics Engineers:
Servo and Analog Computer experience

Project Engineers:
Electronics or Electromechanical background

Senior Aerodynamicists:
Supersonic Aerodynamics, includes performance, stability and control analysis

...WHERE THE FUTURE IS MEASURED IN LIGHT-YEARS!

FAIRCHILD

GUIDED MISSILES DIVISION • WYANDANCH, LONG ISLAND, N.Y.

A Division of Fairchild Engine and Airplane Corporation

Want more information? Use post card on last page.

Beckman

leak detector

PINPOINTS LEAKS

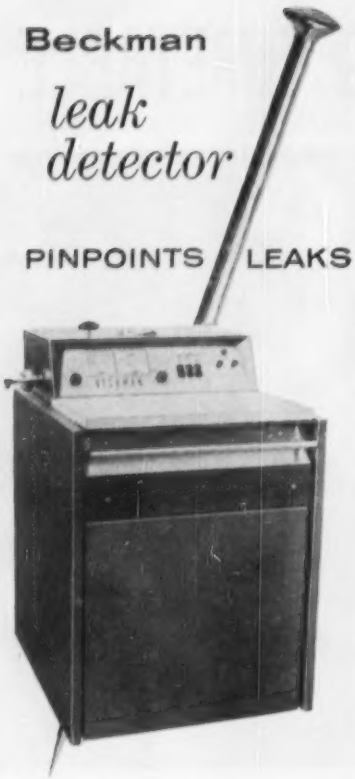

THE BECKMAN LEAK DETECTOR finds leaks with production-line speed in vacuum, pressure and hermetically-sealed systems and units of any size. It is useful in the manufacture of instrument and electronic components, testing glass-to-metal seals and welded or soldered joints, maintenance of pressure and vacuum processing systems—wherever operating and shelf life and system efficiency are sharply reduced if even normally insignificant leaks are present.

A unique radio-frequency principle makes the Beckman Leak Detector a simpler, more reliable and less expensive mass spectrometer leak detector. It is sensitive to leakage rates down to 10^{-9} standard cc/sec., it is easy to use and completely safe for operator and system under test because inert helium is the leak tracing agent, and it is portable and dependable. Write for Data File N20-58 to Beckman Instruments, Inc., Process Instruments Dept., Fullerton, California.

Beckman® *process instruments*

Want more information? Use post card on last page.

tion of a 225,000 sq ft plant near Milwaukee for production of electronics for defense.

The division, which has headquarters in Flint, Mich., now employs more than 4,000 persons in Milwaukee.

The Milwaukee plants are chiefly producing electronic bombing systems and gun-bomb-rocket sights.

The new plant, to be built in suburban Oak Creek, is scheduled for completion late this year and will expand AC's floor space in Wisconsin to nearly a million sq ft.

Air Associates Promotes Sereno

Charles A. Sereno

CHARLES A. SERENO was elected executive vice-president of Air Associates.

With the firm for the past eight years, Sereno served as chief engineer and later, vice-president of sales and engineering. He headed operations at the company's research and development plant in Orange, N. J. where he directed the development of advanced electronic products.

Consolidated Elects New President, Opens Plant

HUGH F. COLVIN has been named to succeed Philip S. Fogg as president of Consolidated Electrodynamics Corp.

Fogg will continue as chief executive officer and will remain in

TRANSISTOR MAKING EQUIPMENT



DIODE MACHINERY AUTOMATIC OR SEMI-AUTOMATIC

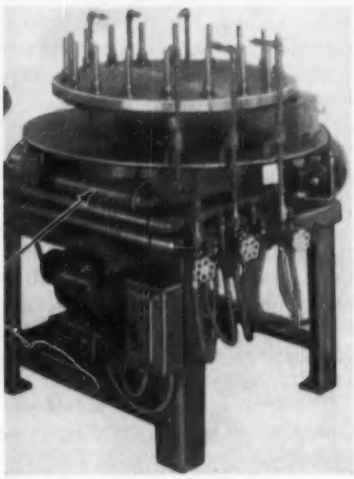

24 POSITION TRANSISTOR OR DIODE SEALER FULLY AUTOMATIC
WIRE, GLASS AND SHELL HOPPER FEEDS

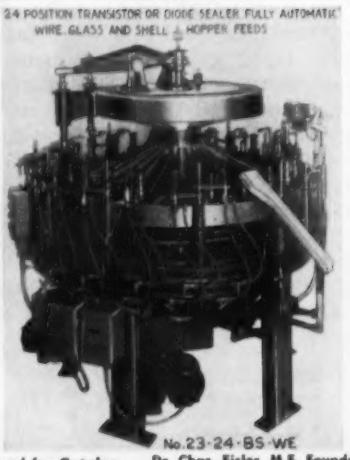

Send for Catalog Dr. Chas. Eisler, M.E. Founder
CHAS. EISLER, JR., PRES.

EISLER ENGINEERING CO., INC.

751 So. 13th St. NEWARK 3, N. J.

Want more information? Use post card on last page.

WHEN YOU NEED

Switches and Keys...

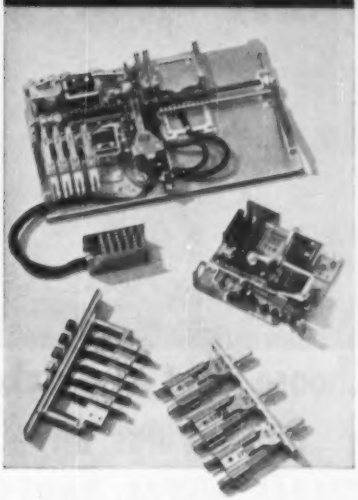

. . . you'll be glad to know that expanded production at

STROMBERG-CARLSON

now makes available to you the top-rated products formerly distributed only to the Independent telephone industry.

This announcement promises the two most important things in your supply problem—*quality* in the products and *no priority* in orders for these hard-to-get items.

The 62-year reputation of Stromberg-Carlson is your guaranty of excellence. And our booming expansion program lets us offer production to industries we could not supply in years past.

START *with a look at our new catalog—sent on request. Or, if you have an immediate and specific problem, write to the address below and we'll suggest a solution.*

S-C

STROMBERG-CARLSON

A DIVISION OF GENERAL DYNAMICS CORPORATION

TELEPHONE INDUSTRIAL SALES

114 CARLSON ROAD, ROCHESTER 3, N. Y.

Want more information? Use post card on last page.

control of general company policy, but will be principally concerned with the corporation's long-range expansion and capital financing programs which will be greatly accelerated during the next few years.

Hugh F. Colvin

Colvin will be responsible for general management and daily direction of the business. He has served as vice-president and general manager of the firm since July, 1953. He joined the firm in 1947 as treasurer and assistant to the president.

The company also completed its new $1.5-million research, engineering and marketing building in Pasadena, Calif.

The three-story structure has an area of 127,000 sq ft and is located on an eight-acre site.

McKenney Joins ECA As Chief Engineer

HENRY F. MCKENNEY has been appointed vice-president for engineering of Electronics Corporation of

Henry F. McKenney

REDUCE Your Rejects



USE "ACME"

UNIFORM COMPONENTS

MAGNET WIRE
COIL WINDINGS
VARNISHED INSULATIONS
INSULATING VARNISHES
COMPOUNDS

"Acme" stands for a half century of specialization in electrical insulations, with *uniformity* a first consideration.

Standardize on Acme-made components in your product and be 100% sure of a balanced assembly every time.

Submit us your product for a no-obligation analysis. Our engineers may be able to save you many dollars in its production. Our catalog should be in your *planning*. Let us send you one.

ACME WIRE CO.

NEW HAVEN, CONN.

Want more information? Use post card on last page.

DURANT

Electric "SP"

PREDETERMINED COUNTER

(COUNTS ELECTRICALLY and CLOSES SWITCH AT END OF PRE-SET COUNT)

C·O·U·N·T·S ELECTRICALLY



COMPACT • RUGGED
FAST • ACCURATE

Eliminates costly over-runs or time consuming under-runs. Actuated by Photo Electric Cell, Tube, Relay, or Contact Switch. Counter can be located where desired. Predetermined count may be set at any figure to 99,999. Hundreds of applications in all phases of production and instrument work.

Send for Catalog No. 56

DURANT MFG. CO.
1912 N. Buffum St., Milwaukee 1, Wis.
12 Thurbers Ave., Providence 5, R. I.
Representatives in Principal Cities

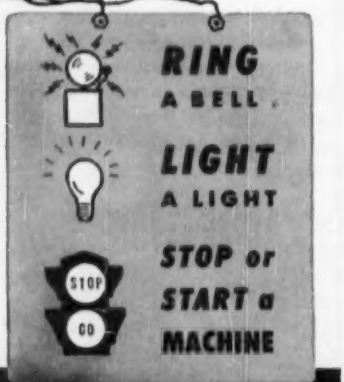

PRODUCTIMETERS
SINCE 1879 *Count Everything*

Want more information? Use post card on last page.

America. He previously was chief engineer of the Ford Instrument Co. division of Sperry-Rand Corp. He will accelerate the firm's programs of applying infrared, electronics and radiometric techniques to the field of long-range navigation, missile guidance and industrial automation, including that of atomic reactors.

Fenwal Electronics Appoints President

Robert S. Goodyear

ROBERT S. GOODYEAR has been named president of Fenwal Electronics of Framingham, Mass., a recently-organized firm specializing in the manufacture of precision thermistors and sensing elements incorporating thermistors.

Goodyear formerly was vice-president and chief engineer of Victory Engineering Corp., where he was instrumental in the technical development and marketing of thermistors. Previously he had been with Western Electric in New York, where he designed the plant, manufacturing facilities and methods for producing thermistors, and prior to that with the Naugatuck, Conn., plant of the U. S. Rubber Co.

Stavid Names Research Director

ROBERT C. MAIN has been appointed director of research and development at Stavid Engineering, Plainfield, N. J. In this position he is responsible for the engineering

Choose right and make Big Savings on SMALL METAL PARTS

COSTS HALVED! Instead of turning and drilling parts like these from solid rod, or stamping and forming them, the BEAD CHAIN MULTI-SWAGE Process automatically swages them from flat stock. By doubling the production rate and eliminating scrap, this advanced process can save you as much as fifty percent of the cost of other methods.

The BEAD CHAIN MULTI-SWAGE Process produces a wide variety of hollow or solid metal parts—beaded, grooved, shouldered—from flat stock, tubing, rod, or wire—of any metal. Sizes to ¼" dia. and 1½" length.

GET COST COMPARISON ON YOUR PARTS—If you use small metal parts in quantities of about 100,000, don't overlook the almost certain savings of this high-speed, precision process. Send sketch, blueprint or sample part and our engineers will furnish facts about Multi-Swage economy. Or, write for Catalog. The Bead Chain Manufacturing Co., 88 Mountain Grove St., Bridgeport, Conn.



BEAD CHAIN MULTI-SWAGE PROCESS
TRADE MARK

Want more information? Use post card on last page.

design of military electronic equipments.

He formerly was operations manager for the Missile Master program at Glenn L. Martin Company, Baltimore, Maryland.

Hughes Appoints Missile Lab Head

E. H. MEIER has been appointed assistant director of the guided missile laboratories of Hughes Aircraft. He is presently engaged in guided missile research and development work at Tucson, Arizona.

Meier was formerly head of the systems engineering department of the guided missile laboratories at Culver City, Calif.

Hycon Selects Executive V-P

WILLIAM C. MCFADDEN has been appointed executive vice-president of Hycon Mfg. Co. of Pasadena, Calif.

Formerly vice-president and general manager of the firm's new camera and instrument division, he joined the company in 1949.

He had been a project engineer for Sanburg-Serrel Corp., Pasadena, consulting engineers.

Earlier, he spent four years as chief engineer of Pacific Airmotive Corp., Burbank, was assistant maintenance engineer with Pan American-Grace Airways in Lima, Peru, and supervised engineering for Walt Disney Productions, Burbank.

Mycalex Expands Synthetic Mica

CONTRACTS have been signed for the construction of an enlarged research and development center for Synthetic Mica Corp., subsidiary of Mycalex Corporation of America.

The new structure, which will double the floor space now devoted to research and development, will be an addition to the manufacturing and research building opened in the summer of 1955 as the first unit of a proposed 150,000 sq ft of production facilities.

Advanced research into the commercial applications of synthetic mica and product development

Engineers

- Electronic
- Electrical
- Vacuum Tube
- Mechanical

Physicists

Important questions concerning your future:

1. Have you found that your education and talents are not fully utilized?
2. Are you missing the personal satisfaction of using your knowledge in the development of interesting and important projects?
3. Are you interested in a challenge to your creative ability?

***At* GENERAL ELECTRIC X-RAY *your future is* UNLIMITED**

Expansion has created excellent opportunities at our Milwaukee, Wisconsin, and St. Petersburg, Florida, plants.

Good salary, exceptional employee benefits and unlimited opportunities for advancement in our development and engineering laboratories. These are our fields:

- Radiation
- Particle acceleration
- Electron beam generation
- Medical and industrial radiography
- X-ray diffraction, spectroscopy and microscopy
- Electron optics and emission
- Vacuum tube technology
- High-voltage generation
- Circuitry
- Instrumentation

For additional facts and an appointment write to:
M. J. ZUNICK, Engineering Section
X-Ray Department, General Electric, Room BY-87
Milwaukee 1, Wisconsin

Progress Is Our Most Important Product

GENERAL ELECTRIC
X-RAY DEPARTMENT

Want more information? Use post card on last page.

designed for continuous duty...

360-440 CPS BENCH TYPE

Variable Frequency Power Supply

Operating from standard 115v 60 cps power, the Model 1460 provides 400 cps 100-130 volt supply at any bench position. Utilization of units of this type allows testing at 400 cps - 10% at any individual position without interference with any other test position. The unit can be easily operated by unskilled personnel.

...WHERE DEPENDABILITY IS OF PRIME CONCERN

Catalog "M" describing this unit as well as other CML generators in the power range of from 50 VA to 80 KVA in single and three phase units and frequency range of 20 cps to 60 KC with all specifications listed, is yours on request.
Our design engineering department is at your service to design and custom-build a power supply unit for your specific need.

OUTPUT - 100 V. A.
DISTORTION - 2%
STABILITY - 1 CPS
REGULATION - 1%

CML COMMUNICATION MEASUREMENTS LABORATORY, INC.
350 LELAND AVENUE, PLAINFIELD, NEW JERSEY

STOCK KNOBS

IN ANY QUANTITY

NEVER A MOLD CHARGE

GEE-LAR—The House of Knobs—can give you a wide selection of knobs for every application. Hundreds of patterns and styles always in stock, and you're never concerned with a tool charge.

WRITE TODAY for Illustrated GEE-LAR Catalog. Free!

GOLD INLAY KNOBS

Select your knobs or pointers from GEE-LAR'S huge stock of quality products. Fast service . . . lower cost—always at GEE-LAR!

GEE-LAR MANUFACTURING COMPANY

421 South Wyman Street • Rockford, Illinois

based on the use of the material will be housed in the new building, scheduled for completion August 1, 1956. A major project of the new research laboratories will be development of self-bonded material for punched parts and other components now fabricated from mica crystals.

RCA Promotes Two Executives

THEODORE A. SMITH was elected executive vice-president of defense electronic products for RCA and Arthur L. Malcarney, vice-president and general manager of commercial electronic products.

Smith has been vice-president and general manager of defense electronic products, since 1955. For two years previously, he was vice-president in charge of the engineering products department of the former RCA Victor division. He has been associated with RCA since 1925.

Malcarney, who joined RCA in 1933, has served as general manager, commercial electronic products, since 1955. Previously, he had been for two years manager of production of the former engineering products department. From 1947 to 1953, he was general plant manager of the department, and earlier he had engaged in component manufacturing and quality control activities of RCA.

IT&T Appoints Officers, Sets New Division

CHARLES D. HILLES, JR., vice-president, former general attorney and more recently in charge of IT&T's telephone and radio operating department, has been appointed executive vice-president of IT&T.

Henri G. Busignies, executive vice-president of Federal Telecommunication Laboratories of IT&T, has been appointed president of that division.

Henry H. Scudder, vice-president of IT&T's International Standard Electric Corp., has been advanced to executive vice-president of that company.

IT&T's Farnsworth Electronics Co. has formed a Pacific division, following the acquisition by Farns-

BARBER COLMAN

ultra-sensitive relays

HELPFUL DATA FOR YOUR CIRCUITRY IDEA FILE...

(No. 2 in a series by Barber-Colman Company)

The circuit drawing below indicates just one of the hundreds of ways many manufacturers are utilizing Barber-Colman Micropositioner ultra-sensitive relays to solve complex control problems. Could this be the answer to some of yours, too?



SERVOMECHANISMS APPLICATIONS

Many remote positioning applications can be solved by utilizing the Barber-Colman Micropositioner ultra-sensitive relay either as a null detector or a differential relay.

In the circuit shown above, movement of the transmitting potentiometer introduces an error signal in Micropositioner coil P, which in turn energizes the positioning motor until balance is restored. Secondary relays R_1 and R_2 operated by the Micropositioner handle larger loads. This circuit can also be applied to synchronization . . . or the Micropositioner can be utilized in the output of an electronic servo control.

Among the many applications for this simplified servo control relay are positioning of antenna rotators and tuning condensers . . . aerial camera mounts . . . valves . . . test cell apparatus.

If your projects involve servomechanisms, why not make a test with a Micropositioner designed for circuits similar to that shown above? Write for technical bulletins F7279 and F3961-5.

BARBER-COLMAN MICROPOSITIONER POLARIZED DC RELAYS

Various types...plug-in, solder-lug, screw terminal, hermetically sealed. Operate on input powers of 50 to 1,000 microwatts for use in photoelectric circuits, resistance bridge circuits, and electronic plate circuits. Send for data.

Barber-Colman Company

Dept H, 1459 Rock Street, Rockford, Illinois

Want more information? Use post card on last page.

Henri G. Busignies

worth of the Bennett Products Manufacturing Co. of Palo Alto, Calif.

The newly created division will continue the production of glass-on-metal hermetic seals, insulators, hermetically sealed switches and connectors utilized in electronics for both industrial and military applications, and will also serve as the Western Headquarters for expansions of Farnsworth sales engineering and light electronic component production and instrumentation.

The company also announced the election of Vinton D. Carver as vice-president and general manager of the new division.

Carver came with Farnsworth in 1953 as chief mechanical production engineer. In 1954, he was appointed to the position of chief mechanical engineer for the research and development division, and subsequently was elevated to product engineering manager which position he has held until his appointment on the West Coast.

Datamatic Elects Finke President

WALTER W. FINKE was elected president of Datamatic Corp. of Newton Highlands, Mass. Finke, who was vice-president and general manager, succeeds John J. Wilson, who continues as director.

Datamatic, manufacturer of electronic data processing systems, is owned by Minneapolis-Honeywell Regulator Co. (60 per cent) and

PRECISION DEFLECTION YOKES

COSSOR (Canada) are now supplying precision deflection yokes to many of the largest laboratories and defence project industries in the U.S.A. Yokes are available to customer's specification, in Nickel Iron, Ferrite, Class A, Class H insulation.

- Linearity - standard ± 1%, custom build to ±.1%.
- Orthogonality ± ¼°.
- Half-axis colinearity ± ½°.
- Mutual interaxis coupling .0025 or as specified by customer.
- Differential capacity unbalance - 3.5 uuf max.
- High Altitude Performance is limited only by flashover point of the terminals, which can be specified by customer.
- Temperature Range -

  Standard deflection yokes will operate as specified from -10°C to + 60°C.

  Class H insulated deflection yokes will operate from -50°C to + 160°C.
- Humidity: The yoke is unaffected by humidity.
- Meet JAN and MIL Specs.

For further information write:

COSSOR
(CANADA) LIMITED
301 Windsor Street
Halifax, Nova Scotia

Want more information? Use post card on last page.

HOW TO
SAVE THOUSANDS OF
PRODUCTION DOLLARS
on an investment of
only $7.00 PREPAID
$7.50 East of Rockies

Faster... More Efficient
CONNECTOR SOLDERING
Use this New Cost-Cutting Device
CONNEX

Connector snaps firmly in place.

Solder FAST from any angle.

No slips... less chance for burns.

Proved cost savings and performance on major Aircraft Assembly lines!

Perfect for any commonly used type connector! Lock it in by finger touch! Then try and budge it! BUT ... easily adjustable to any desired working angle. Rubber shields prevent damage to connectors or other small items requiring soldering. Stands rough treatment.

Satisfaction Guaranteed—Order Today

Joslyn-Hudson, Inc. subsidiary of **AMELCO, INC.**
2040 Colorado Ave., Santa Monica, Calif.

Please send me _____ No. _____ Connex
Name _____
Address _____
City _____ State _____
☐ Check enclosed ☐ Send C.O.D.

See this product at Wescon Show August 21 24

Want more information? Use post card on last page.

Raytheon Manufacturing Co. (40 per cent).

Before joining Datamatic, Finke held executive positions with Honeywell. He headed its ordnance

Walter W. Finke

division and its power transistor division and was later assistant to the president.

J. Ernest Smith was re-elected vice-president and Paul Hannah as secretary-treasurer.

Beckman Acquires Lou-Bar, Sets Computers

BECKMAN INSTRUMENTS has acquired all physical assets of Lou-Bar Products, a Los Angeles manufacturer of precision components for automatic control systems.

The firm will be operated as a wholly-owned subsidiary at its present Los Angeles location. Arthur Buenzli, Lou-Bar president, will remain in charge as resident manager.

Berkeley division of Beckman has established a new analog computer department headed by Joseph L. Hussey, formerly assistant chief engineer, computers.

The new department is responsible for sales, installation, field engineering plus design and development of special computer equipment.

A member of the Beckman organization for nearly four years, Hussey was active in the development of Berkeley's original EASE analog computer.

Prior to joining Beckman, he was associated with Northrop Aviation

Find that "SHORT" Quickly!

UNIVERSAL
CONTINUITY METER

IS GUARANTEED TO SAVE COUNTLESS HOURS OF PRODUCTION TIME.

Amelco's new Low Ohm Safety Meter checks the original wiring, including high current filament circuits, etc., which cannot be reliably checked with any other production instrument. More important, the Low Ohm Safety Meter saves hours and hours of trouble shooting.

$75.00 Complete

THE AMELCO "SAFETY METER" WILL PERFORM THE FOLLOWING PRODUCTION AND TEST REQUIREMENTS NOT POSSIBLE WITH ANY OTHER "PRODUCTION" TYPE OF INSTRUMENT

1. Will not damage delicate components.
2. Will differentiate between legs of high current filament circuits.
3. Will indicate potential sources of trouble in switches, relay contacts and connectors.
4. Locate incomplete electrical bonding.
5. Save hours of time locating shorts in B-lines, signal grounds, etc.
6. Detect unsoldered and "cold" soldered connections.
7. Eliminate possibility of a good continuity indication through a mis-connected part.

NOW YOU NEED NEVER "BURN-UP" ANOTHER UNIT

- **No more smoke tests**
- **No more scrapping of units.**
- **No more checking for hours.**
- **No more tearing up of circuits.**

PRICE $75.00 f.o.b. Santa Monica

Satisfaction Guaranteed—Order Today

Joslyn-Hudson, Inc. subsidiary of **AMELCO, INC.**
2040 Colorado Ave., Santa Monica, Calif.
Please rush a Continuity Meter to us, with the understanding that we may return in 30 days if not satisfactory.

Name _____
Address _____
City _____ State _____
☐ Check Enclosed ☐ Send C.O.D.

See this product at Wescon Show August 21 24

Want more information? Use post card on last page.

Co., where he was a member of the computer facility devoted to guided missile development.

Globe-Union Buys Wico

WICO ELECTRIC CO. of West Springfield, Mass. has been acquired by Globe-Union.

Wico will operate as a division of Globe-Union.

The firm produces ignition equipment.

Alpha Wire Moves To Larger Quarters

ALPHA WIRE CORP., manufacturers of electronic wire, cable and insulating tubing and sleeving, has moved its general offices, part of its factory and warehouse facilities to new larger quarters occupying a full city block in New York, N. Y.

Teletronics Names Chief Engineer

TELETRONICS LABORATORY appointed Henry Schwiebert to the position of chief engineer. Schwiebert, who joined Teletronics in June, 1955, was formerly the assistant chief engineer of Wheeler Laboratories and prior to that held the position of project engineer with Hazeltine Electronics Corp.

Nuclear Adds Two Firms, Ups Engineer

NUCLEAR CORP. OF AMERICA acquired Central Sales & Manufacturing Corp. of Denville, N. J., now to be known as Central Electronic Manufacturers, and to operate as a wholly-owned subsidiary.

Bernard Bernstein was appointed chief engineer of Central's electronic tube division. He was formerly manager of the large transmitting tube department of Amperex Corp. Nuclear manufactures radiation detection equipment, electronic components and related end-equipment, radio pharmaceuticals, and special chemicals.

Nuclear also acquired Isotope Specialties Co. of Burbank, Calif.

Isotope produces tagged chemi-

IF IT'S NEW . . . IF IT'S NEWS . . . IT'S FROM ELCO

For Complete Details . . . Write! Phone! Wire!

ELCO CORPORATION, M ST. BELOW ERIE AVE., PHILA. 24, PA., CU 9-5500

Research and Development Laboratories!

Vari-Flex® CHASSIS and POWER SUPPLIES

. . . are designed to save TIME and MONEY

An ultra stable Vari-Flex Regulated Power Supply mounted on a precision Vari-Flex Chassis puts you days ahead in the design and construction of electronic circuitry for research and development—and provides a finished item which conforms to the highest standards of the professional art. The chassis is a precision, pre-drilled and tapped, ready to assemble, unit of great flexibility. The series of four regulated supplies, which amply cover all normal demands of modern electronic circuitry, are soundly engineered and built, ready to connect and operate. Vari-Flex will greatly enhance the efficiency of your organization.

Send for literature and prices!

Hamner

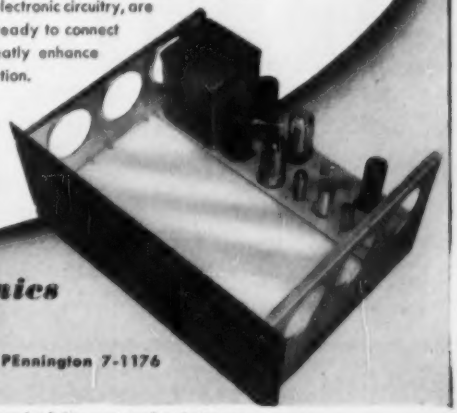

Hamner Electronics Co., Inc.

P.O. BOX 531, PRINCETON, N.J. • PEnnington 7-1176

Want more information? Use post card on last page.

tiny
ELECTROCRAFT
PLUGS·JACKS·CONNECTORS
in true miniature
sizes

Plugs, jacks and connectors in true miniature sizes are now available for all electronic and industrial applications. The tiny plugs, 2 conductor type with combination clamp and solder lug terminals, pass the same 500 volt breakdown test as do plugs many times larger. Miniature jacks are also 2 conductor type, with either open or closed circuit. Tiny microphone connectors are available in both cord mounted and panel mounted types.

For plugs, jacks and connectors . . . standard or miniature . . . call on Electrocraft.

ELECTROCRAFT

Richards Electrocraft, Inc.

3743 N. Kedzie Avenue, Chicago 18, Illinois

YOKE
SPECIALISTS

COMPLETE LINE of deflection yokes for every need including military and special yokes. Focus Coils for tough problems. We'd like to help you with new applications. Write or phone Dr. Henry Marcy today.

syntronic
INSTRUMENTS, INC.

170 Industrial Road • Addison, Ill. • Phone: TErrace 4-6103

cals including over 150 products used in industrial and investigative procedures.

Addition of Isotope Specialties to the Nuclear Corporation family marks the fourth phase in the corporation's program of expansion of its operations through internal growth and the acquisition of going enterprises.

AMF Dedicates Lab, Appoints Meade

AMERICAN MACHINE & FOUNDRY officially opened its new laboratory in Raleigh, N. C. The 20,000 sq ft building makes it possible to consolidated three separate facilities in one location. The new building is divided into three major development sections—electrical, mechanical and electro-chemical.

The electrical engineering section engages primarily in the development of industrial measurement and control devices, utilizing dielectric and radioisotope instruments in conjunction with automatic controls. The electrical control devices developed are applicable to many mass-production processes and are extensively used in the cigarette industry.

The lab employs 125 people. Of these, 27 are engineers and designers with experience in many fields of science and engineering. To augment its research and development staff, the laboratory maintains a machine shop and pilot production plant. These are staffed with trained machinists and assem-

John E. Meade

blers experienced in the building and testing of various machines and batteries.

Haywood C. Smith is general manager of the laboratory.

▶ **Electronics**—John E. Meade has been appointed director of engineering of the electronics division of American Machine & Foundry Co. in Boston. He was formerly associate superintendent of radar division, Naval Research Laboratories, and has been in electrical engineering and the electronics field for 23 years. He has sixteen years' experience in research and development on radar, fire control and missile guidance systems.

Construction Begins On New IBM Plant

CONSTRUCTION begins in Owego, N. Y. on the airborne computer laboratories of IBM's military products division, built under a necessity certificate granted by the U. S. government for production under defense contracts. The engineering and manufacturing work on advanced bombing and navigational systems now entering production at IBM's Vestal and Poughkeepsie, N. Y. plant, will be moved to the new Owego plant beginning late in 1956. It is expected that 2,000 persons will be employed by March, 1957, and a total of 2,200 employed by the Summer of 1957, which is the target date for completion. Plans call for three buildings on a 672-acre tract, a three story administration building of 72,000 sq ft, a three story engineering building of 152,000 sq ft and a one story manufacturnig building of 184,000 sq ft.

Chromatic Names Color Engineers

CHROMATIC TELEVISION LABORATORIES named Albert A. Chesnes to the post of technical director.

In his new capacity, he will be responsible for the overall supervision of the firm's color development program and for its military electronics activities.

Sy Krinsky has joined Chromatic as chief engineer. Paul Neuwirth

THE NEW WAY TO
MARK EQUIPMENT....
with
GRAVOflex
the first chip-proof, flexible engraving stock
on the versatile
Engravograph

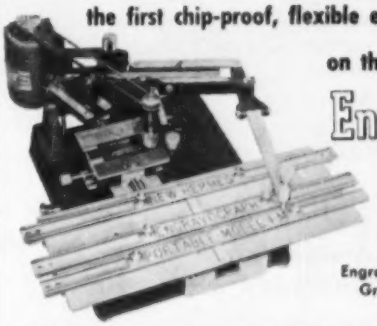

Send for booklets:
Engravograph Booklet 1M-29
Gravoflex Booklet G-29

So simple to engrave Gravoflex. Lettering stands out permanently on contrasting background. No paint needed. 10,000 Engravographs used for engraving on metals and plastics. Only Engravograph has these patented features:

- Adjustable for 15 ratios.
- Automatic depth regulator.
- Self-centering holding vise.
- Adjustable copy holders.

NEW HERMES ENGRAVING MACHINE CORP.
13-19 UNIVERSITY PLACE, NEW YORK 3, N.Y.

shear it
SAFETY VALVE
bend it
form it
punch it

NEMS-CLARKE MODEL TR-1

WOAY KLEW KVOO KIDO WGBS WDMJ KVAL WICA KLIX KFXJ CMQ KSTF KTRE KDRO KBES WRTV KIMA WWTV WGLV

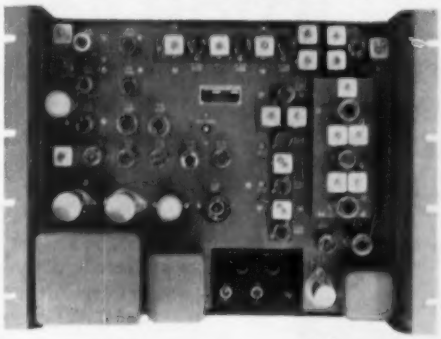

KXJB KZTV KFBC WABI KMID KNOX WFLB WNBF WFAM KDLO WKSN KGUL WSPD KVEC WIRI WKBN WGBI WBOC KSBW

TV Rebroadcast Receiver
NOW IN USE FROM COAST TO COAST

The Model TR-1 TV Rebroadcast Receiver has been designed specifically to meet the requirements for a high-quality receiver for use in direct pickup and rebroadcast of television signals. It embodies features which give the reliability necessary for full-time commercial use and provides signals of exceptional quality, fully equal to, or better than, that provided by the usual intercity network facility.

NEMS-CLARKE
Incorporated
919 JESUP-BLAIR DRIVE
SILVER SPRING, MARYLAND
Write Dept. G-2 For Further Information

Want more information? Use post card on last page.

have you ever seen a graphic recorder with . . .

- **PORTABILITY** . . . weighs less than 15 pounds, measures 10" x 7⅛" x 8".
- **VERSATILITY** . . . can be used as recording millivoltmeter or —with appropriate transducers — to record measurement of physical quantities.
- **RECTILINEAR** trace representation.
- **FULL CHART** zero positioning.
- **HIGH INPUT** impedance and high allowable signal source impedance.
- **PANEL** damping control for optimum stability.
- **CHART DRIVE** extension for synchronization with other equipment.

THE VARIAN G-10 GRAPHIC RECORDER HAS ALL THESE FEATURES AND MORE . . . IS PRICED AT $295



WRITE TODAY FOR COMPLETE TECHNICAL DATA ON THIS REMARKABLE NEW INSTRUMENT AND ITS FULL ACCESSORY LINE.

Special Products Division
VARIAN associates
PALO ALTO 2 CALIFORNIA

Representatives in all principal cities
MICROWAVE TUBES — INSTRUMENTS

Want more information? Use post card on last page.

has joined the firm as department chief, color television development. Albert Jacobs has been appointed department chief, government research and development.

Krinsky had previously been chief engineer of Telechrome Manufacturing Co. Neuwirth had been project engineer in charge of color receiver development for CBS-Columbia. Jacobs had been associated with Chromatic's government program activities in the fields of radar equipment and radar displays.

Army Plans Huachuca Expansion

THE Army contemplates a $40 million expansion program at Fort Huachuca, electronics research center in southern Arizona. Maj. Gen. Emil Lenzner, post commander, said the sum will be spent over the next 5 years on the 77-square mile proving ground.

This includes a $5 million building program for housing and other technical facilities and utilities necessary for Signal Corps testing.

Pyramid Elects New Officers

STEPHEN D. FULLER was elected as chairman of the board of Pyramid Electric.

Ralph M. Scarano, formerly executive vice-president and treasurer, was elected to the offices of president and treasurer succeeding Stanley Staklinski, who formerly held the position of president. Staklinski continues as a member of the board of directors.

The following officers were also elected: Arnold R. Andrews, vice-president; Samuel Siegler, secretary; David Unterberg, assistant secretary and George J. Desposito, assistant treasurer.

Admiral Acquires Two Raytheon Plants

ADMIRAL CORPORATION acquired the television and radio manufac-

let Williams help you apply

FERRIC OXIDES

to the manufacture of your

FERRITES

You'll be well repaid by getting the facts on a special group of Pure Ferric Oxides, developed by Williams especially for use in the manufacture of ferrites.

Williams Ferric Oxides analyze better than 99% Fe_2O_3. They contain a minimum of impurities. They are available in a broad range of particle sizes and shapes. Among them, we're certain you'll find one that's "just right" for your requirements. The proper application of Ferric Oxides to the manufacture of Ferrites is our specialty.

Tell us your requirements . . . we'll gladly send samples for test. Chances are good that our Ferric Oxide "Know How" can save you considerable time and money. Address Dept. 25, C. K. Williams & Co., Easton, Pa.

WILLIAMS
COLORS & PIGMENTS
C. K. WILLIAMS & CO.
Easton, Pa. • East St. Louis, Ill.
Emeryville, Cal.

P.S. We also produce IRN Magnetic Iron powders for the Electronic Core industry, the Magnetic Tape Recording industry and others. Write for complete technical information.

Want more information? Use post card on last page.

turing division of Raytheon Manufacturing Co. located in Chicago.

The new acquisition will be operated as the Belmont division of Admiral Corp. Included in the purchase are two plants in the Chicago area, an inventory of finished television and radio receivers and all plant equipment.

No changes are contemplated in the present organization and Admiral intends to expand the manufacturing operation and to move into the high fidelity phonograph field as well.

The plants include a 225,000 sq ft facility and a recently completed 208,000 sq ft building.

C. F. Adams, Jr., president of Raytheon, said that Raytheon's major operations, which are concentrated in the greater Boston area and which include the company's picture tube and receiving tube business, will not be affected.

Westinghouse to Build For Materials Research

WESTINGHOUSE ELECTRIC will build an addition to its new Research Laboratories near Pittsburgh. The addition will consist of a four-story wing on the present L-shaped building.

Construction will begin immediately with completion scheduled in late 1957.

The new wing, which will contain about 150,000 sq ft of laboratory and office space, will house the facilities of the firm's materials engineering department, now located at the company's East Pittsburgh plant.

The company also announced plans to expand its receiving tube manufacturing plant in Bath, N. Y.

Texas Instruments To Purchase Mann

TEXAS INSTRUMENTS will acquire the Wm. I Mann Co., producer of precision optical components. It employs about 100 persons and has yearly sales of approximately $800,000. All manufacturing facilities are located in Monrovia, Los Angeles County, Calif.

Texas Instruments has 15 wholly-owned subsidiaries. Consolidated

New!
COLOR
& BLACK & WHITE
LAB & TV SERVICE
5" SCOPE

5 MC BANDWIDTH
& DC AMPLIFIERS

- Flat from DC to 4.5 mc to reproduce 3.58 mc sync burst and oscillator signals in color TV sets.
- 4-step freq-compensated attenuator in both AC and DC positions.
- Built-in calibrator permits peak-to-peak voltage measurement.
- Automatically syncs anything visible on the screen.
- Pre-set TV V & H sweep positions (30 cps & 7875 cps).
- Edge-lit lucite engraved graph screen with dimmer control; filter; standard bezel fits standard photographic equipment.
- 5UP1 CRT

#460
Factory Wired $129.50
KIT $79.95

- V amplifier direct-coupled and push-pull thruout; gradual roll-off beyond 4.5 mc; useful at 10 mc.
- High V sensitivity: 25 mv/in.
- Choice of direct coupling (DC) or capacitive coupling (AC).

EICO®
84 Withers Street • Brooklyn 11, N. Y.

Write for FREE New 1956 Catalog E-8 and Name of Distributor

©56 Prices 5% Higher on West Coast

NOW IN STOCK AT YOUR NEIGHBORHOOD DISTRIBUTOR . . . ORDER NOW!

If you are a

TOP NOTCH
RELIABILITY ENGINEER

please answer these questions:

(1) Have you an inquisitive mind?

(2) Do you respond to professional challenge?

(3) Is personal recognition important to you?

(4) Doesn't the current work on Missile Systems Reliability impress you as one of the most fruitful fields in engineering today—in scope, in equipment available, in talents engaged?

(5) Isn't North American Aviation's Missile Engineering staff the place for YOU—where your electrical, electronic, mechanical or aeronautical ability can be stimulated to optimum performance?

Your immediate, positive reaction to these questions can start you toward a position of authority in this field. Join this group and share in its successes. Write: R. L. Cunningham, Missile Development Engineering Personnel, Dept. 991-20 EL.

NORTH AMERICAN AVIATION, INC.
12214 Lakewood Boulevard, Downey, Calif.

Want more information? Use post card on last page.

BRING US YOUR HEADER PROBLEMS!

SIMPLE OR COMPLEX
— We make them all, ranging from 2- and 3-electrode crystal holder bases and standard octal headers, to 14- and 18-terminal headers for sealed Transformer and Relay applications — with a wide selection of styles and sizes in our series of basic designs.

SPECIAL DESIGNS
— We also manufacture Sealed Headers and Terminals to meet special requirements, and will be glad to quote upon receiving your specifications.

COMPLETE ASSEMBLIES
— We have facilities for handling the complete assembly of many units — including wiring, evacuating and pressure-filling enclosures.

NEW CATALOG
— Just off the press, a new Hermaseal catalog, with descriptions and specifications of some of our standard Sealed Headers and Terminals. Write for your copy today!

Hermaseal THE HERMASEAL CO, Inc. Elkhart 10, Indiana

Electroplated WIRE ...
for many different applications

SINCE 1901

Specialists in the Unusual

More and more people are turning to us for electroplated wire. We electroplate by continuous methods a wide variety of wire in a range of diameters from .035" to the smallest available. In our laboratory, Tungsten wire as small as .00015" has been electroplated with Gold . . . New applications for electroplated wires on different base materials are being developed from time to time . . .

Your inquiry is invited. Consult our staff, without obligation, about your specific wire problems.

SIGMUND COHN MFG. CO., INC.
121 SOUTH COLUMBUS AVENUE, MOUNT VERNON, N. Y.

BOOTH 1303 at the WESCON SHOW

TI sales for 1956 are expected to be approximately $40,000,000, up 40 percent from 1955's $28,600,000.

The Mann Company's output is principally of spherical and prismatic optical components which complements the line of principally flat and cylindrical optical components produced by Houston Technical Laboratories, TI subsidiary.

Amphenol Appoints Soria Vice-President

Rodolfo M. Soria

RODOLFO M. SORIA has been appointed vice-president of engineering of Amphenol Electronics Corp.

Dr. Soria joined Amphenol in 1946, as a project engineer, became director of research in 1949 and was named director of engineering in 1954. In this position he supervised all engineering, inspection and quality control at the plant.

He was president in 1954 of the National Electronics Conference.

He is also a consultant to the Office of the Assistant Secretary of Defense for Research and Development as a member of the Advisory Group on Electronic Parts, and is United States delegate to the International Electrotechnical Commission.

General Instrument Names Vice-Presidents

GENERAL INSTRUMENT CORP., producer of radio, television and electronic components, elected two vice-presidents:

J. Gerald Mayer, former executive vice-president of Micamold

GUDEMAN

NEW "XC" PLASTIC FILM DIELECTRIC CAPACITORS

Hermetically Sealed (Glass to Metal) Tubular Cased

The development of the Gudeman "XC" capacitors results in a new line of high temperature capacitors that has exceptionally high insulation resistance, low power factor and low dielectric absorption. The case sizes were selected whereby no voltage derating is required when the capacitors are used within a temperature range from −65° C. to +165° C.

The Gudeman "XC" capacitors as shown are hermetically sealed, tubular, oil filled (Gudeman Impregnant #258), plastic film dielectric. Other case styles such as bathtub and rectangular types are available.

NEW MINIATURE DRY ELECTROLYTICS

- Gudeman "EMM" Type
- Size Range 3/16" to ⅜" Diameter—½" to 1" Long
- Capacity Range: 1 MFD to 100 MFD
- Voltage Range: 3 V.D.C. to 50 V.D.C.
- Operating Temperature: 65° C.
- Hermetically Sealed
- 99.99% Purity Foil
- Low Leakage Current
- Low Equivalent Series Resistance

THE GUDEMAN CO.

340 W. Huron, Chicago 10

Want more information? Use post card on last page.

Electronics Manufacturing Corp., newly-acquired General Instrument subsidiary, who was elected a director of General Instrument as well as vice-president.

Sol W. Gross, former vice-president of Emerson Radio and Phonograph Corp. and a specialist in radio and television development for more than 25 years. He was named General Instrument vice-president and general manager of Micamold, in over-all charge of operations at its plants in Brooklyn, N. Y., and Tazewell, Va.

Standard Coil Elects President

James O. Burke

JAMES O. BURKE has been elected president of Standard Coil Products Co. He succeeds Glen E. Swanson who becomes chairman of the board of directors.

Burke, who became executive vice-president in 1954 assumed the responsibilities of president in April of this year when Swanson was granted a leave of absence for reasons of health. By profession an accountant, Burke was one of the original founders of Standard Coil in 1935.

Beck Joins Lockheed Division

CLARENCE H. BECK has joined Lockheed's missile systems division in Van Nuys, Calif., as a design specialist in the research laboratory's flight test electronics department.

Beck had been chief of the stand-

GUDEMAN

NEW MINIATURE FEED-THRU CAPACITORS

Paper Dielectric—Hermetically Sealed Gudeman Impregnant #257 Types 271 and 272

The Gudeman Feed-Thru Capacitor, Types 271 and 272, is a three-terminal component designed to be used for R.F. interference suppression in a manner similar to a low pass filter. The typical insertion loss characteristics for these Feed-Thru Capacitors when measured in a 50 ohm line are in accordance with MIL-Standard 220.

The internal construction of these Feed-Thru Capacitors is designed so as to minimize the inherent inductance; therefore, these units perform functionally as nearly as possible to an ideal capacitor.

NEW RADIO INTERFERENCE FILTERS

- Screw neck mounting
- Hermetically sealed tubular construction
- Glass compression or ceramic solder seal terminals
- High insertion loss from .15 to 1000 MC
- Ratings range from 1 to 20 amps at 125 V.A.C. (0-400 cycles) or 400 V.D.C.
- Operating temperature range: −55° C. to + 85° C.

THE GUDEMAN CO.

340 W. Huron, Chicago 10

Want more information? Use post card on last page.

NOW!
QUICK-EASY SELECTION

Johnson
PILOT LIGHTS

For "in the field" replacement or original equipment manufacture, you'll find that it's easier and faster to specify Johnson Panel Indicators. Available in a wide variety of types, Johnson "preferred" units are immediately available at parts distributors throughout the country. Careful standardization, with an eye to replacement as well as interchangeability, makes Johnson Pilot Lights the first choice of many leading manufacturers.

Available types include: continuous indication neon types; models for high and low voltage incandescent bulbs; standard or wide angle glass and lucite jewels in clear, red, green, amber, blue, or opal lenses. Specials, including those meeting military specifications are also available in production quantities. For full information write today!

NEW CATALOG! Covers complete Pilot Light Line—write for your copy today!

SOLDERLESS
NYLON CONNECTORS

Available in 11 bright colors. Shockproof nylon sleeves won't chip or crack with hardest usage. Excellent for high voltage applications. Highly resistant to extremes of heat, cold, and moisture. Tip and banana plugs designed for simplified solderless connection of up to 16 gauge stranded wire — jacks require soldered connection. Simple, functional design gives top quality at low cost.

Write for samples, prices, and further information.

E. F. Johnson Company
2314 SECOND AVE. S.W. • WASECA, MINN.

Want more information? Use post card on last page.

ards engineering department at Gilfillan Bros. in Los Angeles since 1949.

Sealectro Unveils Another Plant

SEALECTRO CORPORATION, manufacturers of "Press-Fit" Teflon terminals, announced the opening of a second plant, in Mamaroneck, N. Y.

The structure houses production facilities, general offices and research and engineering activities.

Aerovox Selects Engineering V-P

AEROVOX appointed James Luther as vice-president of engineering. He has been a vice-president since 1955 when his company, the Luther Manufacturing Co. of Olean, N. Y., became affiliated with Aerovox The present assignment broadens the scope of his activities.

At the same time, Louis Kahn assumes the position of technical assistant to the president to assist W. Myron Owen on all technical matters. He has been with Aerovox since 1937.

Magnetic Amplifiers Opens In The West

MAGNETIC AMPLIFIERS of New York, N. Y., opened its west coast division in El Segundo, Calif.

In addition to handling the company's standard line of equipment, the new branch will engage in engineering and development, breadboarding, manufacturing of prototypes and production.

WESCON Outlines Technical Program Plans

FOLLOWING is a complete list of all presently scheduled technical papers and sessions to be presented at the 1956 Western Electronic Show and Convention in Los Angeles, August 21-24:

▶**Session 1**—EARTH SATELLITE

Tuesday, August 21, 9:30 AM—11:30 AM

The Professional Group on Military Electronics by Capt. C. L. Engleman, USN.

The U. S. Earth Satellite Program Project Vanguard by M. W. Rosen of Naval

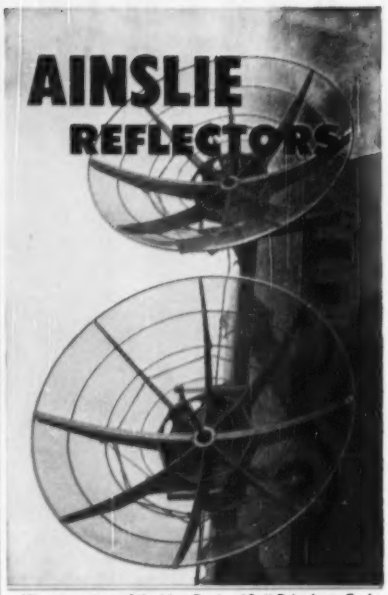

(Photo courtesy of the New England Bell Telephone Co.)

THE REFLECTION OF PRODUCT ACCEPTANCE

AINSLIE-built Reflectors were specified for the installation atop the New England Bell Telephone Company building, Boston, and have proven their dependability and accurate performance under severe service conditions for several years.

AINSLIE REFLECTORS
GIVE RELIABLE PERFORMANCE

Complete coordination of design, manufacture and performance gives permanent reliability to AINSLIE Reflectors. We deliver from stock Mesh Reflectors from 4' diameter to 18'; Spun Reflectors from 4' to 10'; larger sizes and Radar Reflectors made on special order to your specifications.

[We will gladly work with you in the development of any unusual antenna requirements]

Designed and Manufactured for:

- MICRO-WAVE RELAY • AIRCRAFT
- MISSILES • RADIO ASTRONOMY
- RADAR



Send for our NEW illustrated brochure. Quotations on request without obligation.

Ainslie
CORPORATION
317 QUINCY AVENUE, QUINCY, MASS.

Want more information? Use post card on last page.

Research Laboratory. D. J. Markcarian, Glenn L. Martin Co.

▶Session 2—MICROWAVE THEORY AND TECHNIQUES

Tuesday, August 21, 9:30 AM—11:30 AM

Applications of a Waveguide Slot Coupler with Unity Coupling by R. W. Clapp of Hughes Aircraft Co.

The Effect of Mode Filters on the Circular Electric Wave Transmission Properties of a Long Multi-mode Circular Waveguide by W. D. Warters of Bell Telephone Laboratories.

Equivalent Circuits for Thin Waveguide-Coaxial Junctions by Curt A. Levis of Ohio State University.

Exponential Transmission Lines as Transformers and Cavities by Rabindra N. Ghose of RCA.

▶Session 3—ENGINEERING MANAGEMENT

Tuesday, August 21, 9:30 AM—11:30 AM

Management of Large Research and Development Organizations by N. I. Hall of Hughes Aircraft Co.

People, Things and the Engineer by James F. Gordon of Beckman Instruments.

Future of Engineers in the Management of Industrial Enterprise by A. C. Fontaine of Bendix Aviation Co.

Situations that Effect the Productivity of Engineers by M. C. Batsel of RCA.

▶Session 4 — MEDICAL ELECTRONICS

Tuesday, August 21, 9:30 AM—11:30 AM

Exposure Hazards from Cosmic Radiation in Flight in Extra-Atmospheric Regions by Hermann J. Schaefer of Naval School of Aviation Medicine.

Progress in the Field of Xerography, Speaker from General Electric Co.

Methods of Measuring Blood Pressure and Blood Flow by John P. Meehan of University of Southern California.

▶Session 5—TUBE TECHNIQUES

Tuesday, August 21, 9:30 AM—11:30 AM

Development of a Line of Microminiature Ceramic Tubes by R. E. Moe of GE.

Noise Performance of a Microminiature Triode by J. W. Rush of GE.

Flat Display Device with Matrix Display Selection by B. A. Findeisen of GE.

A Flash Coding Tube by R. W. Sears of BTL.

Ceramic Seals for Microwave Tubes by Curtis Ward of Varian Associates.

New Techniques Used in The Development of a 40 Watt Ceramic UHF Power Tetrode by M. B. Shrader of RCA.

▶Session 6—Not scheduled

▶Session 7—PROPAGATION

Tuesday, August 21, 2:00 PM—4:30 PM

Reflection of a Transient Electromagnetic Wave from a Conducting and Anisotropic Medium by James R. Wait of National Bureau of Standards.

The Prediction of Tropospheric Propagation from Meteorological Data by L. J. Anderson and J. B. Smyth of Smyth Research Associates.

Some Observations of Antenna-Beam Distortion in Trans-Horizon Propagation by A. T. Waterman, Jr., N. H. Bryant and R. E. Miller of Stanford University.

A Study at 1046 Megacycles of the Reflection Coefficient of Irregular Terrain at Low Angles of Incidence by R. E. McGavin and L. J. Maloney of National Bureau of Standards.

Radar Terrain Return at Near-Vertical Incidence by R. K. Moore and C. S. Williams, Jr. of University of New Mexico.

▶Session 8—MICROWAVE THEORY AND TECHNIQUES — ACTIVE ELEMENTS

Tuesday, August 21, 2:00 PM—4:30 PM

Recent Developments on Transmit-Receive Switch Tubes by Louis W. Roberts of Bomac Laboratories.

Characteristics of Crystal Video Receivers Employing R-F Pre-Amplification by William E. Ayer of Stanford University.

Coupled-Cavity Stabilization of Kly-

PHAZOR PHASE METER

Pat. Pend.

MODEL 200 A

PRICE $349.50 F.O.B. NEW YORK

- HIGH ACCURACY
- MEASURES FROM 0 TO 360 DEGREES
- READINGS NOT AFFECTED BY NOISE AND HARMONICS
- PHASE SHIFTS OF THE ORDER OF .01° CAN BE MEASURED EMPLOYING SPECIAL CIRCUIT TECHNIQUES
- MEASURES IN-PHASE AND QUADRATURE COMPONENTS SEPARATELY

For further information contact your nearest representative or write for brochure

INDUSTRIAL TEST EQUIPMENT CO.
55 E. 11th ST. · NEW YORK 3 · GR. 3-4684

Manufacturers of

PHASE METERS • NULL DETECTORS • IMPEDANCE COMPARATORS • POWER OSCILLATORS • FREQUENCY STANDARDS • AUTOMATIC HI-POT •

Other Electronic Test Equipment

FROM NEW YORK COIL COMPANY

COIL WINDINGS . . .

Custom-made to your specifications

Designed to solve your problems

Need coil windings custom-manufactured to your absolute specifications? NYCO's 53 years of manufacturing experience is your guarantee of just-right coil windings.

For specification-correct transformers, reactors, chokes, capacitors, potting and encapsulation, assembly with or without parts fabrication, contact NYCO . . . producer since 1903 of electrical and electronic parts.

Send your specifications now for quotation. Address New York Coil Company, Phoenixville 12, Pennsylvania.

nyco

AS OLD AS THE INDUSTRY

Want more information? Use post card on last page.

HEYCO NYLON STRAIN RELIEF BUSHINGS CUT PRODUCTION COSTS AND IMPROVE PRODUCT QUALITY

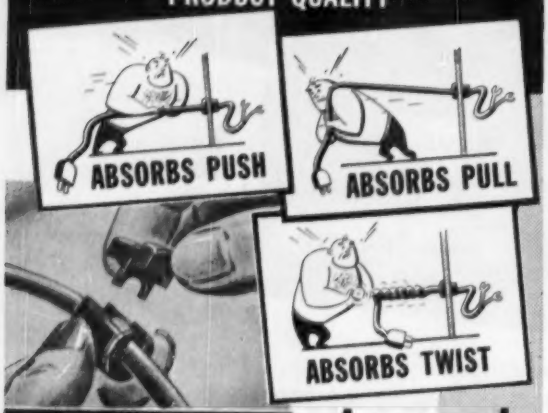

1—SLIP OVER WIRE
2—SNAP INTO HOLE

Approved

With Heycos it's no longer necessary to tie wire knots or use insulating grommets. Product life is increased and product appearance is greatly enhanced.

HEYMAN MANUFACTURING COMPANY
Kenilworth 2 New Jersey

HEYCO

Send wire sizes for free samples and specifications.

DEFLECTION YOKES

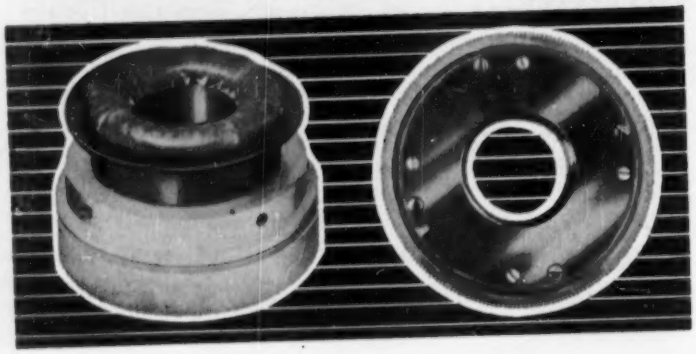

We specialize in the design and manufacture of precision deflection yokes for military and commercial applications. Phone or write for immediate engineering evaluation of your critical display problems.

Celco

Phone: RAmsey 9-1123

Constantine Engineering Laboratories Co.

Island Avenue Mahwah, N. J.

strons by Maurice St. Clair of Varian Associates.

Burnout Experiments on S-Band and X-Band Crystals by Ben Hecht of Bomac Laboratories.

▶Session 9 — CIRCUIT THEORY —FREQUENCY DOMAIN TECHNIQUES

Tuesday, August 21, 2:00 PM—4:30 PM

Realization of Driving Point Impedance Functions Without Mutual Inductance by R. H. Pantell of Stanford University.

RLC Transfer Function Synthesis by E. C. Ho, Logistics Research Inc. and University of California.

Synthesis of Grounded Two-Element-Kind Symmetrical Networks by P. M. Lewis of MIT.

Some Simplifications for Analysis of Linear Circuits by G. L. Matthei of Ramo-Wooldridge Corp.

Network Design by First Order Predistortion Technique by C. A. Desoer of Bell Telephone Laboratories.

▶Session 10—INSTRUMENTS

Tuesday, August 21, 2:00 PM—4:30 PM

A Practical Application of Phase Measuring Techniques to Precision Angle and Distance Measuring Equipments by William T. Thompson of Cubic Corp.

A Multi-Pressure Measuring and Recording System for Wind Tunnels by M. Bain of Jet Propulsion Lab.

Electromagnetic Flowmeters — Operating Characteristics and Applications by Eugene Mittelmann, Consulting Engineer.

3-D Magnetic Flux Meter by M. Muller and R. Feldt of Federal Telephone and Radio Co.

▶Session 11 — TELEVISION RECEIVERS

Tuesday, August 21, 2:00 PM—4:30 PM

Stagger-Tuned Transistor Video Amplifiers by Victor H. Grinich of Stanford Research Institute.

Analytical Approaches to Local Oscillator Stabilization by W. Y. Pan and D. J. Carlson of RCA.

Retrace Driven Deflection Circuit by Walter B. Guggi of Stanford Research Institute.

Graphic Derivation of the Chromaticity Diagram by Edward L. Michaels of Hughes Aircraft Co.

▶Session 12 — MILITARY ELECTRONICS

Tuesday, August 21, 2:00 PM—4:30 PM

Electronics Circuit Standardization by J. H. Muncy and G. J. Rogers of National Bureau of Standards.

Application of Solar Furnaces to High Temperature Research by Lt. Col. R. H. May of Armed Forces Special Weapons Project.

Nuclear Weapons Effects on Communication Systems by Jack Eggart of Signal Corps Engineering Laboratories.

Silicon Solar Cell by M. B. Prince of National Semiconductors Products.

▶Session 13—ANTENNAS I

Wednesday, August 22, 9:30 AM—Noon

Radiation and Diffraction Problems Involving Wedges and Cones by L. B. Felsen of Polytechnic Institute of Brooklyn.

External Fields Produced by a Slot on a Cone by G. Held and G. Hasserdjian of University of Washington.

A Slot Analog of the Loop-Dipole D-F Antenna by F. D. Clapp and H. Masuda of University of California.

The Effects of Thin Conductive Coatings on Low-Frequency Aircraft Antenna Performance by C. W. Steele of Stanford Research Institute.

The Tacan Antenna by A. Casabona of Federal Telecommunication Laboratories.

▶Session 14 — CONTROL THEORY AND METHODS

Wednesday, August 22, 9:30 AM—Noon

Consideration Regarding Design of Stabilizing Elements for Control Systems by T. H. Chin of University of Pittsburgh.

Solution of Statistical Problems by Differential Operator Approach by R. L.

F(X)=

FOR THE FIRST TIME –

a random voltage or noise source with precisely controlled power frequency spectrum and predetermined amplitude probability characteristics.

GAUSSIAN NOISE AMPLITUDE probability distribution is produced by the G-1000 Sigmatron.

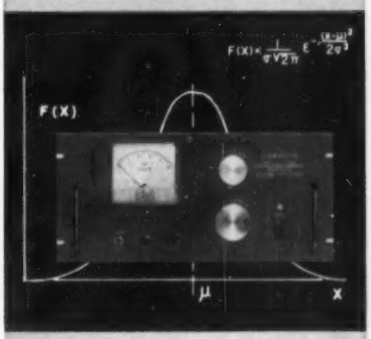

The Sigmatron G-1000 ultra low frequency random signal generator was created to fill the most critical analysis requirements of modern systems engineering.

A tremendous advance in instrumentation, the Sigmatron provides a powerful tool for the analysis and test of guided missile systems, servomechanisms, computers, vibration, data reduction, information theory, filter design, and quality control.

See the Sigmatron in action at the WESCON show.

sigmatron®

ULTRA LOW FREQUENCY RANDOM SIGNAL GENERATOR

For additional information address inquiries to:

INTERCONTINENTAL DYNAMICS CORPORATION

170 Coolidge Avenue • Englewood, N. J.

Want more information? Use post card on last page.

Cosgriff of Ohio State University.

Describing Function Technique Applied to the Analysis of a Non-Linear Control System Used in Space Stabilizing a Missile in Roll by Leonard Atran of Westinghouse Electric.

Statistical Theory and Analysis of Multiply-Instrumented Control Systems by R. M. Stewart of Jet Propulsion Laboratory.

A Time-Domain Synthesis for Optimum Extrapolators by C. W. Steeg of MIT.

▶Session 15—TRANSISTOR CIRCUITS — LINEAR, LOW AND HIGH FREQUENCY APPLICATIONS

Wednesday, August 22, 9:30 AM—Noon

Design of Negative Feedback Transistor Amplifiers for Hi Fi Equipment (with demonstration of equipment), by H. R. Lowry of GE.

Silicon Transistor Video Amplifier by R. E. Leslie of Sperry Gyroscope Co.

Stability and Power Gain of Tuned Transistor Amplifiers by A. P. Stern of GE.

High Frequency Equivalent Circuits for Junction Triodes by R. M. Scarlett of Stanford University.

Some Circuit Applications of Silicon Tetrodes by R. R. Webster and R. F. Stewart of Texas Instruments.

▶Session 16—CYBERNETICS

Wednesday, August 22, 9:30 AM—Noon

Spatial Perception by Robert Tschirgi of UCLA.

The Use of Digital Computers in the Study of Neural Networks Models by Stanley Frankel of Conoco Corp.

Engineering Studies of Sensory Organs by Joseph Hirsch of Aerophysics Corp.

Cybernetics Past, Present and Future by Leonard Gardner of Rocketdyne.

▶Session 17—MICROWAVE TUBES I

Wednesday, August 22, 9:30 AM—Noon

Design of Laminar Flow Electrostatically Focused Electron Beams by W. M. Mueller of University of California, HAC.

Growing Waves in Magnetically Focused Electron Beams by R. W. Gould of California Institute of Technology.

Gain of a Low Level Signal in the Presence of a Large Signal by H. L. McDowell of BTL.

Noise and Spurious Oscillations in Backward Wave Oscillators by W. Rorden and C. Conners of Varian Associates.

Gridded Pulse TWT Serrodynes for Application to Continuously Coherent MTI Radars by R. M. Whitehorn and H. Mandoli of Varian Associates.

A Backward-Wave Oscillator for the 4 mm Wavelength Region by C. F. Hempstead of Bell Telephone Laboratories.

▶Session 18—RELIABILITY; ORGANIZATION, SYSTEMS, AND EQUIPMENT

Wednesday, August 22, 9:30 AM—Noon

Organizing for Reliability by A. M. Okun and J. Cohen of Bell Aircraft Corp.

Price of Reliability in Airborne Electronic Equipment by Arthur H. Wulfsberg of Collins Radio Co.

Missile Unreliability Cost Evaluation by A. L. Stanley and J. Tampico Associated Missile Products.

Calculations of the Risk of Component Applications in Electronic Systems by J. A. Connor of RCA.

Reliability as a Management-Engineering Responsibility by H. S. Hansen of Servo Mechanisms.

▶Session 19—Program to be arranged

Wednesday, August 22, 2:00 PM—4:30 PM

▶Session 20—CONTROL MECHANISMS AND AUTOMATION

Wednesday, August 22, 2:00 PM—4:30 PM

Mechanization and Application of Verti-

EXPAND YOUR PORTABLE TV SALES

WITH **ATR**

INVERTERS

for changing your storage battery current to

A. C. HOUSEHOLD ELECTRICITY

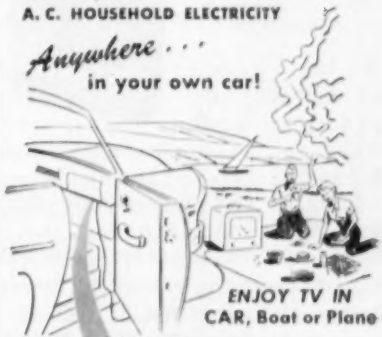

mounted out of sight under dash or in trunk compartment!

ATR INVERTERS

especially designed for operating standard 110 volt A.C. portable TV sets

also
- TAPE RECORDERS
- DICTATING MACHINES
- WIRE RECORDERS
- ELECTRIC RAZORS

for
- EXECUTIVES
- OUTDOOR MEN
- SALESMEN
- REPORTERS
- PUBLIC OFFICIALS
- FIELD INSPECTORS
- POLICEMEN
- DOCTORS
- FIREMEN
- LAWYERS, ETC.

See your jobber or write factory

√NEW MODELS "A" Battery Eliminators, √NEW DESIGNS DC-AC Inverters, √NEW LITERATURE Auto Radio Vibrators

ATR AMERICAN TELEVISION & RADIO CO.

Quality Products Since 1931

SAINT PAUL 1, MINNESOTA, U. S. A.

Want more information? Use post card on last page.

EXAMINE FREE!

Profit NOW with the latest on successful transistor design, application, operation

—IN ONE COMPLETE VOLUME!

TRANSISTOR ELECTRONICS

by Arthur W. Lo, Richard O. Endres, Jakob Zawels, Fred D. Waldhauer, Chung-Chih Cheng; all RCA engineers.

At last, here's an authoritative, practical book which rounds up all available information, ideas and techniques on transistors and presents this useful data to you in 520 illustrated, easy-to-follow pages! These RCA experts cover the whole field, from **design** and **operation** of transistors to their **application.** Much material is **just released,** printed here for the first time. Whether you're a beginner or seasoned vet . . . working in radar, TV, radio, computing, or allied fields . . . this complete, new book will give you mastery of transistors and show you how to use this knowledge profitably and successfully!

Gives Complete Coverage. Including:

Physical concepts (36 pages) . . . characteristics, parameters, equiv. circuits (44 pages) . . . basic amplifier configurations (50 pages) . . . low freq. amplifiers (42 pages) . . . hi-freq. amplifiers (39 pages) . . . power amplifiers (28 pages) . . . hi-freq. operation (47 pages) . . . physical interpretation of transistor parameters (38 pages) . . . oscillators (38 pages) . . . modulation & demod. (48 pages) . . . pulse circuits (76 pages) . . . tabular-analyses of fundamental transistor networks & circuits . . . shows parallels, contrasts between transistor and vac. tube circuits . . . features **practical** circuits . . . plus much more valuable material and workable, useful techniques.

MAIL NOW—FREE TRIAL OFFER

Prentice-Hall, Inc., Dept. 5204-K1
Englewood Cliffs, New Jersey

Please send me a copy of TRANSISTOR ELECTRONICS for 10 days' FREE use. Within 10 days I'll either return book and owe nothing, or will keep it and remit $4 down (plus small postage charge) and then $4 a month for two months in full payment.

Name .....

Address .....

City..... Zone..... State.....

Save! Send $12.00 with this coupon and we pay postage. Same return and refund guarantee.

Want more information? Use post card on last page.

cal Reference System by G. H. Singer of Kearfott Co.

The Eye as a Control Mechanism by Robert B. Lockard of U. S. Naval Ordnance Test Station.

Automatic Determination of Missile Air Foil Characteristics in Mass Production by E. L. Watkins of Convair.

A New Digital Path Control System for Machine Tools by Jack Rosenberg of Electronic Control Systems.

▶Session 21—CIRCUIT THEORY—SWITCHING THEORY, TOPOLOGY AND TIME DOMAIN SYNTHESIS

Wednesday, August 22, 2:00 PM—4:30 PM

Switching Theory by D. A. Huffman of MIT.

Some Aspects of the Network Analysis of Sequence Transducers by J. M. Simon of Sperry Rand Corp.

Some Topological Considerations in Network Theory by F. Reza of Syracuse University.

Network Synthesis for Prescribed Impulse Response Using A Real Part Approximation by R. A. Pucel of Raytheon Manufacturing.

Time Domain Synthesis by Delay Line Analogy by M. Strieby of Ramo-Wooldridge Corp.

▶Session 22—CYBERNETICS SYMPOSIUM

Wednesday, August 22, 2:00 PM—4:30 PM

The Philosopher's Approach to Cybernetics by Abraham Kaplan, UCLA.

Studies of Neural Physiology in the Learning Processes by Joseph A. Gingerelli of UCLA.

The third and fourth periods of this session will be devoted to an open panel discussion with audience participation.

The panel members are: Robert Tschirgi, Stanley Frankel, Joseph Hirsch, Leonard Gardner, Abraham Kaplan, and Joseph A. Gingerelli.

▶Session 23—MICROWAVE TUBES II

Wednesday, August 22, 2:00 PM—4:30 PM

Characteristics of Modern External Tuning Cavity Reflex Klystrons by T. Moreno of Varian Associates.

A Rugged 8 mm Reflex Klystron by W. G. Abraham and F. L. Salisbury of Varian Associates.

An X-Band Folded Line Type Backward-Wave Oscillator by R. H. Winkler of Cascade Research Corp.

A Demountable Tube for Gas Discharge Microwave Detection Studies by H. Farber of Polytechnic Institute of Brooklyn.

Means for Electronically Controlling the Current from a Magnetron Cathode by J. S. Needle of Northwestern University.

Design and Calculation Procedures for Low-NoiseTWTs by G. Wade, R. W. DeGrasse and L. D. Buchmiller of Stanford University.

A Rugged 915 MCCW Magnetron for Electronic Cooking by P. C. Gardiner of GE.

▶Session 24—COMPONENT RELIABILITY AND TEST METHODS

Wednesday, August 22, 2:00 PM—4:30 PM

The Unreliable Universal Component by Marcus A. Acheson of Sylvania Electric.

Improved Guided Missile Tube Reliability by Alfred Biattel of Raytheon Mfg.

Tube Failure Rate Variations by M. B. Feyerhern of RCA.

Cine-Radiography, A New Testing Concept of Component Reliability by W. H. Grumet of Rototest Labs.

▶Session 25—PANEL ON EDUCATION

Thursday, August 23, 9:30 AM—Noon

Frederick Terman of Stanford University, Thomas L. Martin, Jr. of the University of Arizona, Dan Noble of Motorola,

Lavoie 239CR (AN/USM50A) Oscilloscope

Now available as shelf item for exacting bench use . . . for design and production work.

ALSO FOR CONTRACTORS

to furnish as support equipment for military systems . . . for as AN/USM50A it is the official general purpose oscilloscope for the military services. Available with dust cover or for standard rack mount. Extremely rugged; easy and straightforward to use.

With the Exclusive

LAVOIE

Non-parallax Scale

For accurate voltage and time measurement. There can be no error of parallax... the unique Lavoie reflecting scale superimposes the reticule on the optical plane of the cathode-ray screen. The reflecting scale does not prevent the use of a camera with the Lavoie 239CR Oscilloscope. A camera adapter plate is available for use with the Fairchild F-284 camera. The same instrument is also available in the conventional flush-face version (model 239CF).

- **Wider Bandwidth**
- **Extended Sweep Frequencies**
- **Square Wave Response**
- **Higher Signal Sensitivity**

For illustrated brochure containing complete specifications on this instrument and the name of our representative nearest you, please write:

Lavoie Laboratories, Inc.

MORGANVILLE 1, NEW JERSEY

Want more information? Use post card on last page.

Burgess Dempster of Electronic Engineering Co.

▶Session 26—COMPUTERS: ANALOG TECHNIQUES

Thursday, August 23, 9:30 AM—Noon

Magnetic Amplifier Analog Computation Techniques by Henry W. Patton of Airpax Products Co.

Wide-Dynamic Range Analog Integrator by George Myers of Rome Air Development Center.

A New Computer for Complex Functions by Merle L. Morgan of Electro-Measurements.

Automatic Computation of Fourier Expansion Coefficients by Analog Means by R. W. Hubbard and W. E. Johnson of NBS.

▶Session 27—TRANSISTOR CIRCUITS—SWITCHING AND COMPUTER APPLICATIONS

Thursday, August 23, 9:30 AM—Noon

Critical Survey of Fundamentals of Junction Transistor Pulse and Switching Circuits by D. O. Pederson of University of California.

Maximum Efficiency Switching Circuits by R. H. Baker of MIT.

Transistor Circuitry for Analog to Digital Conversion by F. H. Blecher of Bell Telephone Laboratories.

▶Session 28 — INSTRUMENTATION TECHNIQUES

Thursday, August 23, 9:30 AM—Noon

Distributed-Parameter Variable Delay Lines Using Skewed Turns for Delay Equalization by Frank D. Lewis and Robert M. Frazier of General Radio Co.

Application of Scale Factors in Data Recording Systems by Thomas L. Greenwood of Redstone Arsenal.

Adjustable Pulse Width High Voltage Power Supplies by Victor Wouk of Beta Electric Corp.

Transistorized Logarithmic Time-and-Amplitude Quantizer by Euyen Gott of Johns Hopkins University.

▶Session 29—ANTENNAS II

Thursday, August 23, 9:30 AM—Noon

Relation of Scattering Problems to Radiation from Simple Shapes by K. M. Siegel, University of Michigan.

Launching Efficiency of Wires and Slots for a Dielectric Rod Waveguide by R. H. DuHamel and J. W. Duncan of University of Illinois.

Analysis of a Shunt Excited Airframe Antenna by T. G. Dalby of Boeing Airplane Co.

A New Method for Optimum Yagi Design by H. W. Ehrenspech and H. Poehler of Air Force Cambridge Research Center.

▶Session 30 — HIGH TEMPERATURE COMPONENT PARTS

Thursday, August 23, 9:30 AM—Noon

Miniature High Altitude and High Temperature Connectors by C. H. Stuart and R. F. Dorrell of Amphenol.

Impregnation of Toroids for High Temperature Service by E. O. Deimel of GE.

Typical Expected Performance Characteristics of Extreme Temperature Range Tantalum Capacitors by J. W. Maxwell of P. R. Mallory.

Some Basic Physical Properties of Silicon and How They Relate to Rectifier Design and Application by G. P. Finn of Sarkes-Tarzian.

▶Session 31 — RELIABILITY OF ELECTRONIC TUBES

Thursday, August 23, 2:00 PM—4:30 PM

White Noise Vibration Test for Electronic Tubes by John D. Robbins of Sylvania Electric.

Environment Effects on Vacuum Tube Life by H. D. Pleak of Sylvania Electric.

Increased Reliability of Guided Missile Tubes Through Comprehensive Quality Control by H. H. Hoyle and N. J. Davis of Raytheon Mfg.

New Filamentary Tubes of High Re-

if you use small
gears & pinions
IT WILL PAY YOU TO CHECK
GRC'S STOCK SHEET
Before you order gears or pinions, see GRC's new Stock Sheet. All items listed are cast from stock dies, individually or in various combinations of gears, pinions, hubs, shafts, etc. Holes, shafts spacers, shoulders, etc., are made to your exact specifications at no extra tool charge, quantity permitting. Maximum O.D. about 1½", with ¼" face width; wider faces for smaller diameters. • Unusual shapes, extra precise requirements, available on special order.
WRITE TODAY for new stock sheet and samples.
SEND SPECIFICATIONS FOR PROMPT QUOTATION — 100,000 TO MILLIONS
GRIES
GRIES REPRODUCER CORP.
World's Foremost Producer of Small Diecastings
151 Beechwood Ave., New Rochelle, N. Y. • Phone NEw Rochelle 3-8600

Want more information? Use post card on last page.

TRANSISTORIZED
PULSE TEST EQUIPMENT
by Navcor



NAVCOR'S new 100A series of logic blocks are ideally suited as portable test equipment for generating variable pulse chains. Pulse generators, standardizers, delays, counters, and shift registers are among the logic functions available. All units are completely transistorized and stabilized over wide operating ranges . . . and the built-in power supply utilizes only two voltages to power up to 15 plug-in units. Individual units can be easily interconnected by back panel 'patch board' plugs to build-up a complete data handling system.

The NAVCOR Transi-Pulse 100A series of pulse generating and programming test equipment is in demand for all projects involving magnetic logic and switching transistor circuits up to 200 KC. In addition, the blocks can be readily adapted as integral components of industrial control systems.



NAVCOR Transi-Pulse test equipment can help you get your transistor development project 'off the ground' — write for complete data!

NAVIGATION COMPUTER CORP.
2001 S. 29th STREET
PHILADELPHIA 45, PA.

Want more information? Use post card on last page.

liability by Ross Wood of Raytheon Mfg.

▶Session 32—COMPUTERS: SOLID STATE SWITCHING DEVICES

Thursday, August 23, 2:00 PM—4:30 PM

Magnetic Cores as Generalized Non-Linear Components by William H. Bridge of Airtronic Research.

Pulse Response Properties of Magnetic Materials for Switching Applications by James D. Childress of General Ceramics Corp.

High-Current Switching Applications of Low Power Transistors by Chaang Huang and William F. Palmer of Sylvania Electric.

High-Gain Transistor for Very High Switching Speeds by James B. Angell of Philco Corp.

▶Session 33—CIRCUIT THEORY—TRANSISTOR AND ACTIVE CIRCUITS

Thursday, August 23, 2:00 PM—4:30 PM

Power Transistor Specifications for Circuit Applications by H. T. Moore of Minneapolis-Honeywell.

Transistor Bootstrap and Miller Sweep Circuit by J. S. Sherwin of University of California.

An All Transistorized Pulse Generator by E. J. Fuller of Sperry Gyroscope.

Negative Impedance Converter Design and Its Use in Active Circuits by A. I. Larky of Stanford University.

A D-C Negative Immittance Converter by M. A. Karp of Johns Hopkins University.

▶Session 34—BROADCAST TRANSMISSION SYSTEMS

Thursday, August 23, 2:00 PM—4:30 PM

The Application of Modern Techniques to The Determination of Service Areas of Television Stations in Smooth and in Mountainous Terrain by A. Earl Cullum, Jr. of Earl Cullum Jr. and Associates.

Achievement of Practical Tape Speed for Recording Video Signals by C. P. Ginsburg of Ampex Corp.

A Transistorized Television Camera Chain by W. Uzsler, R. J. Decredico, G. W. Trebing, and J. W. Smiley of RCA.

Design Considerations for a High Quality Transistorized Program Amplifier for Remote Broadcast Use by John K. Birch of Gates Radio Co.

▶Session 35—MICROWAVE THEORY AND TECHNIQUES—FERRITES AND TEST EQUIPMENT

Thursday, August 23, 2:00 PM—4:30 PM

Coupling Through an Aperture Containing Ferrites by Donald C. Stinson of University of California.

Microwave Frequency Doubling in Ferrites from 9 to 8 KMC by P. H. Vartanian, J. L. Melchor, W. P. Ayres of Sylvania Electric.

A Ferrite Image Rejection Filter for Use in S-Band Microwave Receivers by James H. Burgess of Sylvania Electric.

Calorimeters for Centimeter and Millimeter Waves by Sam Hopfer of Polytechnic Research and Development Co.

▶Session 36—ENVIRONMENTAL EFFECTS ON COMPONENT PARTS

Thursday, August 23, 2:00 PM—4:30 PM

Environmental Testing of Precision Potentiometers by Shultz-Green of Helipot Corp.

Capabilities of Hot-Molded Composition Resistors by A. C. Pfister of Allen-Bradley Co.

Hermetic Sealing of Precision Potentiometers by I. W. Braun of Circuit Instrument.

The Effects of Nuclear Radiation on Electronic Components by C. C. Robinson of W.A.D.C.

▶Session 37—SEMICONDUCTORS I

Friday, August 24, 9:30 AM—Noon

Semiconductor Materials and Properties

Sturdy TEMFLEX 105...

Meets Military and Commercial Specifications

● Irvington's Temflex® 105 helps put *your* product in the strategic position of meeting both government and commercial insulation requirements. This versatile, flexible plastic tubing meets Mil-I-631-C specification (... far exceeds it!) Temflex 105 is QPL and UL approved as a 105° C. tubing. Improved heat deformation qualities and resistance to "cut through" give you 20% greater strength over older types. Self-extinguishable and fungus resistant Temflex is produced by Irvington's Plastics Department in all standard colors to fit all standard wire sizes. Send for literature and samples.
®Reg. U.S. Pat. Off.

IRVINGTON
DIVISION
Minnesota Mining and Manufacturing Co.
3M COMPANY
11 Argyle Terrace, Irvington 11, N. J.

Want more information? Use post card on last page.

by Phyllis E. Stello, D. M. Van Winkel, and J. Dale Turner of Hughes Aircraft.

Developments in Transistor Physics by Leopold B. Valdes of Shockley Semiconductor Labs.

High Current Amplification—Forward and Reverse—At High Collector Current in PNP Transistors by A. P. Kordalewski of GE.

Very High Power Transistors with Evaporated Aluminum Electrodes by Gene Strull and H. W. Henkels of Westinghouse Electric.

Silicon Alloy Power Transistors by R. E. Anderson of Texas Instruments.

▶Session 38—COMPUTERS: ADVANCED DESIGN TECHNIQUES

Friday, August 24, 9:30 AM—Noon

The Effect of a Transverse Field on Switching Rates of Magnetic Memory Cores by T. D. Rossing and S. M. Rubens of Remington Rand Univac.

High Speed Coincident-Flux Magnetic Storage Principles by E. W. Bauer and L. P. Hunter of IBM.

Investigation of Problems Using Analog-Digital Computer Combinations by Herbert E. Salber of Convair.

The Synthesis and Analysis of Digital Systems by Boolean Matrices by J. O. Campeau of Hughes Aircraft.

▶Session 39—RADAR SYSTEMS

Friday, August 24, 9:30 AM—Noon

Taxi Radar—Eyes of the Tower, The Radar Approach Control (RAPCON) Center by D. R. Kirschner of Rome Air Development Center.

Extended Radar Range Timing Techniques by A. I. Mintzer of RCA.

TACAN Bearing and Distance Measurement Techniques by J. B. Majerus and K. W. Porter of Collins Radio Co.

▶Session 40—VEHICULAR COMMUNICATIONS I

Friday, August 24, 9:30 AM—Noon

A Communication System for the New York Throughway by D. S. DeWire of New York Telephone Co.

Transistorized Communications Receivers by Seymour Schwartz of MIT.

VHF Radio Coordinated Traffic Light Control System by Elmer W. Hammel of GE.

VHF-UHF Communications System Interference Reduction through Use of Selective Filters by M. W. Caquelin of Collins Radio Co.

▶Session 41—ANTENNAS III

Friday, August 24, 9:30 AM—Noon

Fundamental Problems in the Antenna Field by S. Silver of University of California.

Scanning Lens Design for Minimum Mean-Square Phase Error by E. K. Proctor and M. Rees of GE.

A duplexer for Sweep-Frequency Pulse Transmitters by R. Silberstein of NBS.

The Triport Conical Scan Antenna by E. Wantuch and L. A. Kaiser of Raytheon.

▶Session 42—NEW TRENDS IN COMPONENTS

Friday, August 24, 9:30 AM—Noon

The Impact of New Electronics on Mercury Battery Designs by J. L. Dalfonso of P. R. Mallory.

Criteria For Selection of Magnetron Beam Switching Tube as a circuit Component by S. Kuchinsky of Haydu Brothers.

Application of Large Capacitors for Energy Storage by D. F. Warner of GE.

Film Type Precision Resistors by B. Solow and C. Wellard of International Resistance Co.

▶Session 43—SEMICONDUCTORS II

Friday, August 24, 2:00 PM—4:30 PM

Point Contact Diode Theory by Melvin Cutler of Hughes Aircraft.

Component Improvement, Germanium and Silicon Low Power Rectifiers by G. N. Hall of GE.

A Miniature Silicon Diode for Both

RIBBONS · STRIPS

of

★ PURE TUNGSTEN ★ THORIATED TUNGSTEN
★ MOLYBDENUM ★ SPECIAL ALLOYS

and OTHER METALS
IN

ULTRA THIN SIZES

to

TOLERANCES CLOSER THAN COMMERCIAL STANDARDS
by

OUR SPECIAL ROLLING TECHNIQUE

Note: for highly engineered applications—strips of TUNGSTEN and some other metals can be supplied

ROLLED DOWN TO .0003 THICKNESS

- Finish: Roll Finish—Black or Cleaned
- Ribbins may be supplied in Mg. weights if required

FOR ELECTRONIC APPLICATION

DEVELOPED AND MANUFACTURED BY

H. CROSS CO. 15 BEEKMAN ST., N. Y. 38, N. Y. TELEPHONE WOrth 2-2044 COrtlandt 7-0470

have you Edge Lighting Problems?

The unparalleled design flexibility of the Lackon® photo-marking process may offer you the best solution. With a minimum of gimmicks and gadgetry, Lackon® gives you a panel of unequalled marking accuracy, optimum legibility and lighting uniformity, with excellent resistance to severe environmental conditions. Designed, tested and quality controlled in our government approved laboratory, Lackon® edge lighted panels, knobs and knob skirts meet and exceed lighting, legibility and durability requirements of specification MIL-P-7788.

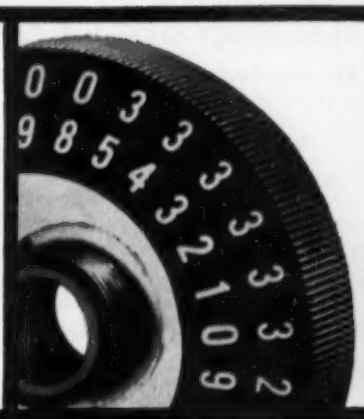

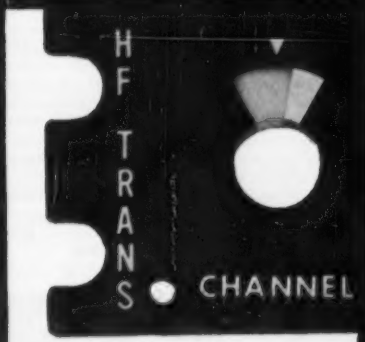

The Lackon® engineering staff of the United States Radium Corporation will readily assist your panel engineering department during the initial design stage. The cooperative application of their skill and experience in lighting techniques will speedily resolve design difficulties, result in decided production economies, and yield a remarkably superior finished product. For information write Dept. E-8

See us at WESCON — Booth 347

United States Radium Corporation

Hanover Ave., Morristown, N. J.

Regional Offices: 5420 Vineland Ave., N. Hollywood, Calif.; 4624 W. Washington Blvd., Chicago, Ill. Affiliates: In Canada — Radelin-Kirk Ltd., 1160 Bay St., Toronto, Ont.; In Europe — United States Radium Corp.—Europe, 36 Avenue Krieg, Geneva, Switzerland.

Want more information? Use post card on last page.

HIGH PRODUCTION, PRECISION,

GENERAL SILK SCREEN PRINTING

*Electronic Circuits
*Nameplates *Dials...

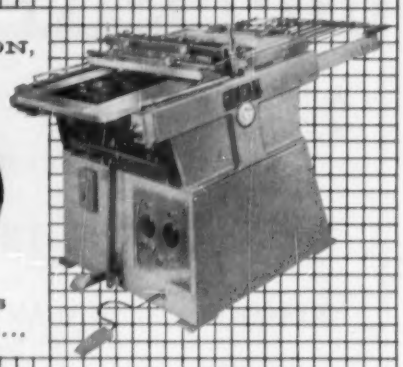

GENERAL DECORATOR PRESSES—SERIES "B"

A new General precision built screen process press, especially adapted to the high volume production of printed circuits, nameplates and dials. Incorporates a new and completely different approach to the handling of many difficult materials. Precision register assures proper placement of print on panel and accurate backing-up of two-sided circuits. Heavy deposits of plating and acid resists can be laid down assuring quality printed circuit results. Fine lines print clean and sharp and the enamel effect required in the manufacture of nameplates and dials is effectively reproduced. Work can be both fed and delivered at front of press, or delivered at rear for in-line operation with the General Thermo-Jet Dryer, or other drying equipment.

Model	Sheet Size	Speeds Up To
B1224	13"x25"	1000 iph
B2230	22"x30"	800 iph
B2236	22"x36"	800 iph

Write for complete information!

GENERAL RESEARCH & SUPPLY CO.
572 S. Division Avenue
Grand Rapids 3, Michigan

FREQUENCY-SHIFT V-F CARRIER-TELEGRAPH SYSTEM

Provides one, two, or three frequency-shift teletype channels above the voice on a 3400-cycle telephone circuit

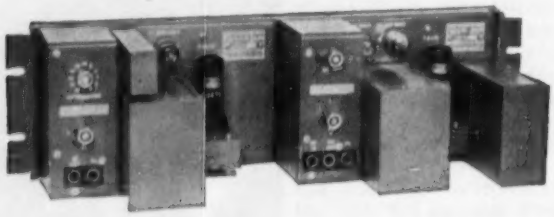

A send and a receive panel require 5¼" of mounting space on a standard 19" rack

This system provides an economical trouble-free method of obtaining up to three full-duplex 100 wpm telegraph channels at the upper end of a broad-band telephone channel, and still retain a 2950-cycle voice circuit. Mid-channel carrier frequencies of 3120, 3240 and 3360 cycles are employed. The mark frequencies are 30 cycles below and the space frequencies are 30 cycles above the mid-band frequencies. The three telegraph channels are transmitted in the band 3080 to 3400 cycles, leaving the band below 2950 cycles for the voice channel.

Fault-free teletype circuits are obtained, even where the telephone circuit on which they are superimposed suffers from noise or abrupt level variations which may be so great as to render on-off keyed signals unintelligible. Frequency-shift signals do not suffer deterioration from non-linear transmission, such as is caused by overloading in voice-frequency, carrier or radio equipment. Under most circumstances a signal-to-noise ratio per channel as low as 20 db is satisfactory, and under some conditions even lower ratios result in fault-free operation. This equipment meets the requirements of current MIL specifications wherever applicable.

RADIO ENGINEERING PRODUCTS
1080 UNIVERSITY STREET, MONTREAL 3, CANADA
Telephone: UNiversity 6-6887 Cable Address: Radenpro, Montreal
MANUFACTURERS OF CARRIER-TELEGRAPH, CARRIER-TELEPHONE AND BROAD-BAND RADIO SYSTEMS

Power and Circuit Applications by Arthur L. Rossoff of Radio Receptor Co.

A New UHF Transistor Structure by Wolfgang W. Gartner of Evans Signal Laboratory.

Transistors with Vacuum Tube Properties by M. N. Ross and Hans E. Hollmann of National Aircraft Corp.

▶Session 44—COMPUTERS: DATA GATHERING AND PRESENTATION SYSTEMS

Friday, August 24, 2:00 PM—4:30 PM

Electrofax Printer, A Continuous Direct Dry Process Enlarger for Digital Computing Systems by Henry G. Reuter, Jr. of RCA.

Ultratype Camera, A High Speed Electron Optical Printer for Digital Computing Systems by A. M. Spielberg, S. R. Parker, and K. G. Kaufmann of RCA.

A High Speed, Precision, Large Quantity Data Processing System; IDIOT II by Martin L. Klein of North American Aviation.

A Centralized Data Processing System for the Air Force Flight Test Center by O. F. Vogel of Electronic Engineering Company of California.

▶Session 45—AIRBORNE ELECTRONICS

Friday, August 24, 2:00 PM—4:30 PM

Thermal Design and Evaluation of an Airborne Electronic System by Richard E. Burton of Collins Radio Co.

Flight Control Systems for Jet Transports by H. Miller and R. H. Wagner of Sperry Gyroscope Co.

Electronic Problems Encountered in High-Speed Commercial Jet Aircraft by Dick Hedges of Douglas Aircraft Co.

Bearings and Their Properties as a Design Consideration in Electronic Systems by H. F. Stern of Industrial Tectonics.

▶Session 46—VEHICULAR COMMUNICATIONS II

Friday, August 24, 2:00 PM—4:30 PM

Communication with Moving Trains in Tunnels by Newton Monk of Bell Laboratories.

New Developments in Two-Way Communications by Angus MacDonald of Motorola.

Railroad Communications by D. L. Kesselhuth of Bendix.

To be announced.

▶Session 47—INFORMATION THEORY

Friday, August 24, 2:00 PM—4:30 PM

Synthesis of the Linear Time-Varying Predictor for Stationary Signals by Cheng Ling of Minneapolis-Honeywell.

The Relationship of Sequential Filter Theory to Information Theory and Its Application to the Detection of Signals in Noise by Bernoulli Trials by Herman Blasbalg of The Johns Hopkins University.

Theory of Weighted Smoothing by Louis A. Ule of Gilfillan Bros.

The Response of a Phase-Locked Loop to a Sinusoid Plus Noise by Stephen G. Margolis of Jet Propulsion Laboratory.

Autocorrelator for Radioactive Sample Noise Generator by G. W. Anderson and James E. Murrin of J. B. Rea Co.

▶Session 48—PRODUCTION CONSIDERATIONS OF ELECTRONIC EQUIPMENT

Friday, August 24, 2:00 PM—4:30 PM

Problems of Semi-Automatic Assembly of Electronic Test Equipment by C. S. Selby of Hewlett-Packard Co.

Eyelet Failure in Etched Wiring by W. J. Hodges of Hughes Aircraft.

Mechanical Design Considerations in the Erma System by R. W. Melville of Stanford Research Institute.

The Selection of Coatings for Printed Circuits by R. A. Martel and L. J. Martin of Hughes Aircraft.

Packaging of Transistorized Assemblys by A. A. Lawson and R. J. Simms.

New Books

Color Tv Engineering

By JOHN W. WENTWORTH
McGraw-Hill Book Co., New York, 1956, 459 p, $8.00

PROBABLY no engineer is better fitted to describe and to clarify the basic concepts of color television than one who is familiar with tv studio and terminal equipment. Mr. Wentworth's experience with studio equipment and with the generation and transmission of color signals is quite evident, for his viewpoint is exceptionally broad concerning the important facts of color tv and their relationship to the original monochrome system. The general theme followed in handling the material in this book is simple and straightforward. It starts by explaining and illustrating the basic reactions produced by colored light on the physical human being and even more particularly on a person's psychological apparatus. To complement quantitatively the subjective aspects of color there follows a chapter on colorimetry, which, although lengthy and somewhat involved, is a necessary background for anyone who wants a thorough grounding in fundamentals.

▶**Color Transfer**—The transfer and the reproduction of color, both photographically and optically, as in tv, constitute a logical three-chapter crystallization of basic principles. The precise detail followed in explaining all phases of the transfer problem may seem at first redundant although in this reviewer's opinion the subject has been neglected in other texts.

In the next hundred pages the author gives a concentrated and simple explanation of the mechanism making up a color television system; he places emphasis upon the features of multiplexing and compatibility. His historical treatment of the development of color tv is particularly pertinent for, in discussing the sequence of technical advances, he traces an important technical evolution which forms the foundation of our present compatible system. The story of how the basic principles of matrixing, proportioned bandwidths, two-phase modulation, and frequency interlace evolved from the earlier dot sequential systems and how they came to be established as the present NTSC system is as important as it is fascinating. Familiarity with this step in electronic progress and the tribute it bestows on the ingenuity of the tv engineering profession is almost to be considered a necessity for anyone desiring a broad background in color tv.

▶**Studio**—Chapter 10 concerns the application of color tv to studio equipment and is valuable information for an engineer versed in the complexities of monochrome studio techniques. A further detailing of these applications for such complicated equipment would be hardly advisable.

On color picture tubes and receiver practices the material is disappointing after the excellent treatment given in previous chapters. We find deficiencies on two counts: (1) a more detailed explanation of the shadow-mask kinescope is needed, covering improvements in construction plus associated circuit applications. Since several receiver models have emerged since the original sets using the 15-in. shadow mask tube and since the picture tube is a key device in the whole color tv system, a few additional pages would have been appropriate on the newer 21 and 22-in. tubes discussing their improved, stable construction, their simpler convergence and driving circuits, as well as other refinements; (2) modern receiver circuitry on high level demodulators, on color difference circuits and on simplified matrixing, is not too new to have been omitted since it offers some rather notable advances over the original color receiver circuitry. The new sets with 24-26 tubes need reconciliation with the old 38-40 tube Model CT100.

▶**Testing**—Color test equipment, described in the final chapter, has appeal to the operating specialist

a complete line of
Printed Circuit Hardware
and
Terminal Inserting Equipment



Tubular Pin Terminals—Insert automatically into printed circuit board at huge production savings. Snap into position with positive locking action by means of self-retaining snap-in feature. Double ends permit wrapping or inserting leads at either end. Ask for Bulletins 550 and 551.



Solderless Wire Disconnect Female Terminals—Speedily applied to leads by means of cost-saving automatic equipment. Fits quickly and firmly to tubular pin terminals. Solderless wire crimp can be varied to fit various size insulated wires. Ask for Bulletin 553.



Line Cord Interlock Terminals—For single or multiple lead connections. Another Malco automation development to provide production short cuts and assembly economy. Terminals are staked quickly and firmly into printed circuit boards. Ask for Bulletin 554.

Malco printed circuit hardware can be engineered to your specific requirements. Give us the facts about your operation. We'll show you how your costs can be lowered and your production increased. Ask for Bulletin 551.

Malco TOOL and MANUFACTURING CO.
4023 W. Lake St., Chicago 24, Ill.
Want more information? Use post card on last page.

There's a Toroid Product to meet your needs—quickly available from HARDER!

Our fast growing Southern California plant is equipped to handle many phases of electronic engineering and production of components or complete equipment. Our coil winding shop provides facilities for transformer, duolateral, bobbin, toroidal and miscellaneous types of windings.

Magnetic amplifier and transistor applications are among the prime fields of investigation. Prompt engineering service is available.

MAGNETIC AMPLIFIERS

Toroidal construction assures high gain and fast stable response. 60 cycle, 400 cycle and special operating frequencies. Wide temperature range. Hermetic sealing to MIL specs.

FILTERS

All types of filters. Quality components for maximum stability.

DELAY LINES

Lumped or distributed constant type designed to your specifications.

TOROIDAL TRANSFORMERS

Power rating to 200 V.A. Class A, B and H per MIL-T-27A.

All HARDER products are custom-built to your most *exacting* specifications.

For additional information contact

DONALD C. HARDER CO.

3710 MIDWAY DRIVE
SAN DIEGO 10, CALIFORNIA
PHONE: ACademy 2-5240

Want more information? Use post card on last page.

who requires reference on particular apparatus.

On the whole, this book gives the average tv engineer a well-based and thorough approach to color tv engineering. Barring a few digressions and gaps in receiver operation, the material leads the reader along a clearly defined transition from the basic background in color to and through the operating characteristics of our present compatible color tv system—HARRY E. THOMAS, *Senior Project Engineer, Federal Telecommunication Laboratories, Nutley, New Jersey.*

Transistors I

RCA Laboratories, Princeton, New Jersey, 1956, 676 *p,* $4.50

THEORY, fabrication and application of transistors are dealt with in this collection of papers prepared by members of the RCA Laboratories staff.

This volume is made up of 31 complete papers which have not been published previously, 10 papers which have appeared in periodicals and 46 abstracts. The papers cover semiconductor diodes as well as transistors.

► **Material**—The book begins with two papers dealing with basic concepts and with recent advances in junction transistors.

The section on materials and techniques comprises nine papers which cover zone refining, crystal pulling, alloying, surface treatment and the melt-quench process for making junction transistors.

Seven papers are concerned with transistor devices including the *pnp* and *npn* structures, power transistors, high-frequency diodes and the drift transistors. In this connection, one weakness in a book restricted to reporting work done at one laboratory becomes evident. Understandably devices such as the surface-barrier transistor, diffused-base units, tetrodes and *pnip* units have had to be excluded.

Three papers discuss noise in transistor amplifiers especially the $1/f$ noise peculiar to these devices. Four papers treat test equipment for determining transistor parameters.

► **Applications**—The bulk of the

DANO COILS

***LIFELINE* TO PRODUCTION**

From design engineer to the purchasing agent to Dano—a perfect "lifeline" to production.

CALL or WRITE TODAY and DANO'S quote will be on the way.

- Bobbin Coils
- Form Wound Coils
- Paper Section Coils
- Acetate Bobbin Coils
- Cotton Interweave Coils
- Coils for High Temperature Applications
- Encapsulated Coils—in either Polyester or Epoxy Resins

Also, TRANSFORMERS MADE-TO-ORDER

THE DANO ELECTRIC CO.
MAIN ST., WINSTED, CONN.

now...

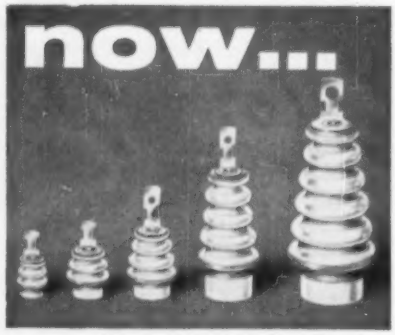

Frenchtown Metallized Terminals!

Here is Frenchtown's improved line of Annuluted Type NICOTE Metallized Hermetic Terminals for use in controls, relays, transformers, capacitors, motors, and heater units. Custom-engineered of HIGH ALUMINA CERAMICS and metallized with our exclusive NICOTE, these terminals are available in six varying sizes with a choice of terminal hardware to fit any exacting application. Write for Engineering Bulletin 1055.

frenchtown PORCELAIN COMPANY
86 Muirhead Avenue • Trenton 9, N. J.
National Representatives: Lundey Associates
694 Main St., Waltham 54, Massachusetts

Want more information? Use post card on last page.

CADMIUM

PHOTOCELLS

TYPE PC-1. Spectral response in the visible and X-ray range. Dark resistances cover a wide range, as well as the operating voltage. Cells on special order can be supplied to operate at 1 or 2 volts, ideal for transistor applications. Sensitivities are classed from AA the most sensitive to class C of nominal sensitivity. Resistance change is proportional to light received. Sealed in a small plastic case.

TYPE PC-2. Spectral response in X-ray, visible and infra-red. Dark, resistances from 10,000 meghoms to 100,000 ohms can be supplied. Sensitivities from AAA to class C cover sensitivities of amperes per lumen to micro amperes per lumen. Voltage operation from a few volts to 300 volts. Response time as fast as 10 milli-seconds for some classes. Ideal for auto dimmers and the like. Activation from any direction. Cell is hermetically sealed in glass and under high vacuum, for many years of unchanging operation.

TYPE PC-3. Has the same crystal as the PC-1 (Cadmium sulphide) but is hermetically sealed in glass and under high vacuum. This gives a more stable operation for exacting work and faster response and longer life.

All of these types are extremely sensitive to low levels of illumination. Sensitivity comparable to photo-multipliers per unit area.

PHOTO-CRYSTALS, INC.

15 S. First St. GENEVA, ILL.

DESIGNERS
ENGINEERS
PRODUCTIONEERS

Investigate the merits of

Westlake

ULTRA-ETHYLUX

The New, Special Service Super-Polyethylene

- 4 times greater rigidity
- Stability at much higher temperatures
- Superior di-electric properties
- Same relative low cost . . . when compared to normal Polyethylene

Test samples, preliminary data and technical service supplied in response to your detailed inquiries.

Westlake plastics co.

133 W. Lenni Road, Lenni Mills, Penna.
In Lower Delaware Valley, U.S.A.
New Phone No.: MEdia 6-5170

CONDENSER SPECIALISTS SINCE 1923

COSMIC CONDENSERS

ELECTROLYTIC & PAPER TUBULAR

For A.C., D.C. Sets - Radio, Television Phonographs, etc.

STABILITY AND RELIABILITY

COSMIC CONDENSER CO.
853 WHITTIER ST., BRONX, N. Y.
Phone: LUdlow 9-3360

CONTROL FORCE MEASURING SYSTEM

that provides



1. Accurate measurements of better than 1/2%
2. Accurate measurements of pressure, force, acceleration, and position among others.
3. High gain with a frequency response of 15 cps.
4. Excellent operation under adverse environmental conditions.
5. Miniaturized and ruggedized construction.
6. Direct operation from resistive type transducers.

RADIATION Inc.

Electronics · Avionics · Instrumentation

Personnel Inquiries Invited

used by LEADING MANUFACTURERS of transistorized radios !

1/2" TRANSISTOR I. F.
RI·trans

actual size



for wired circuit for printed circuit

top and bottom tuned • higher efficiency • low loss dielectric base material

Designed to meet any transistor impedance.

	type I	
	W.C.	P.C.
capacity in mfd.	65-450	65-450
"Q"	200 max.	200 max.
dim. "A"	45/64	27/32
	type II	
	W.C.	P.C.
capacity in mfd.	125-450	125-450
"Q"	200 max.	200 max.
dim. "A"	37/64	23/32
	type III	
	W.C.	P.C.
capacity in mfd.	140-450	140-450
"Q"	110 max.	110 max.
dim. "A"	37/64	23/32

also low voltage class 2

DISC CAPACITORS

RI·CAP K-500 series



W.V.—30 VDC
I.R.—2500 megohms min.
P.F.—3% max. at 1 KC
T.V.—2 X rating
T.C.—from 25°C to 10°C not greater than 20%, and 25°C to 65°C not over 60%

cap. in mfd. +100% −20%
.001
.005
.01
.02
.03
.05
.10
.20

built by RI economical quantity production process

write for details

RADIO INDUSTRIES, INC.
5225 no. ravenswood ave.
chicago 40, ill.

Want more information? Use post card on last page.

book, sixteen papers, discusses applications of transistors. Home-entertainment circuits are represented by an experimental auto radio, pocket-sized portable, audio amplifiers and three circuits for use in television receivers. Also described are counting circuits, oscillators and i-f amplifier problems as well as more general topics such as temperature stabilization, complementary symmetry and switching characteristics.—J.M.C.

Electromagnetic Waves

By G. Toraldo di Francia

Interscience Publishers, New York, 1955, 320 *p*

This book originated from a course of lectures given by the author at the University of Florence. The book is intended primarily for students of theoretical physics at the graduate level. While others may find the subject of interest, it is doubtful that adequate use of the material can be made without a background in mathematics.

▶ **Tensors**—The subject of electromagnetic waves has been covered many times in many books. This book, however, differs from others in that it makes extensive use of the tensor notation whenever it appears to afford a means of attaining the desired mathematical result.

The reader is prepared for the tensor method of attack during his perusal of the mathematical introduction in the first chapter. Here vector calculus, elements of tensor calculus, Fourier series and integrals and the principals of stationary phase are reviewed. Following this is a short chapter dealing with the Giorgi or rationalized mks system of units throughout.

▶ **Field Theory** — The reader is launched into a discussion of electromagnetic field basic properties, propagation, potentials and the field in a moving system in Chapters 2 through 5.

Chapter 6 deals with the subjects of electric circuits and transmission lines where Ohm's and Kirchoff's laws are discussed as well as such subjects as R, C and L circuit pa-

Beattie
ELECTRIC CAMERAS
For Practically Every Industrial Use!

Beattie VARITRON Electric Camera—Model E

Data Recording Cameras that save you time... give you a permanent, accurate record. Built to withstand environmental conditions, on land, in the air or at sea. Completely automatic at any time interval. Choice of fifteen models... specially engineered variations can be supplied.

Write for complete detailed literature today

Photographic Products Inc.
1000 NORTH OLIVE STREET
ANAHEIM, CALIFORNIA

SINCE 1920 QUALITY WENCO PRODUCTS
SPADE BOLTS

Specialists in designing and manufacturing of all-purpose fasteners and wire forms. Tooled to produce over 1000 styles in any screw size, material, finish, quantity, to your specifications.

Serving Industry for Thirty-five Years
— OTHER PRODUCTS —

Simplex
WIRE STRIPPERS & CUTTERS

• TOOLS • DIES • STAMPINGS

Bulletins on complete line upon request

WENCO MANUFACTURING CO.
1133 W. Hubbard St., Chicago 22, Ill., U.S.A.

Want more information? Use post card on last page.

.....for the finest
MODULAR INSTRUMENT ENCLOSURE SYSTEM



Amco save time! save money!

COMPARE
- True custom built appearance
- Complete modular versatility
- Multi-width exterior surfaces independent of frames

SEND FOR OUR NEW CATALOG NO. 101

Look for us at WESCON
Booth No. 1264

AMCO ENGINEERING COMPANY
7335 Ainslie St. Chicago 31, Ill.

D-B broad band gas-filled cavity wavemeters



Each instrument covers a wide segment of the total range. Only 11 sizes serve from 2.6 KMC to 90 KMC. Accuracy is so high they may be used as secondary standards. Nitrogen filled and sealed for long life and high Q. Bi-metallic structure provides high degree of thermal compensation. Write for literature.

DE-MORNAY BONARDI

780 South Arroyo Pkwy. • Pasadena, Calif.

Want more information? Use post card on last page.

rameters, impedance, and characteristics of transmission lines.

Characteristics of plane waves in homogeneous media and general waves in continuous media are discussed in Chapters 7 and 8.

Reflection, refraction and geometrical optics are discussed in Chapter 9. Diffraction phenomena are treated in Chapter 10. This chapter also includes a discussion of parageometrical optics which is the authors contribution to the art.

▶ **Waveguides** — Guided propagation, waveguides and transmission lines and resonant circuits are discussed in Chapters 11 through 13.

While the contents of this book are clearly presented, it is felt that the material could be rearranged to produce a smoother transition from the loftier concepts of pure theoretical physics to the more mundane subjects of Ohm's and Kirchoff's laws.

The author has performed a definite service for the reader by including at the end of many of the chapters a short historical account of the concepts explained in that chapter.

The advanced student of theoretical physics as well as the practising physicist should find this work to be a welcome addition to his library of source material on electromagnetic waves.—J. M. K.

Laplace Transforms for Electrical Engineers

BY B. J. STARKEY
Iliffe and Sons Ltd., England, 1954, 280 *p*, 30 *shillings*

TRANSFORMATION calculus is finding increasing use with electrical and electronic engineers in analysis of circuit and system problems involving transients. One of the most useful operational tools available to the engineer in this work is the Laplace transform. This volume is based on a series of lectures on Laplace transformation presented by the author, who is on the staff of the Royal Aircraft Establishment at Farborough, England, to the engineers at the Signals Research and Development Establishment.

▶ **Introduction**—Chapter one is de-

Have you received your copy?



VALUABLE NEW TECHNICAL DATA
DESIGN IDEAS
MATERIEL INFORMATION

Send for "Introduction to Fiberglas Fabrication" by KOCH FIBERGLAS FREE!

TENTH ANNIVERSARY 20-PAGE ILLUSTRATED MANUAL

Every day, Koch Fiberglas is filling new uses in your industry

Koch cases for electronic equipment will not dent, are impervious to moisture, vapor, fungus, mildew and corrosion. They are shock and vibration-proof when fitted to Koch specifications with special hair-latex shock pads. Can be self-palletized for fork lift. Can be insulated by Koch with foamed-in-place plastic. Koch cases are air-tight; require no paint or outer packaging for long-range storage or overseas shipment. Re-usable, so cost amortizes through re-use. Withstand parachute drops from any height, free falls onto water or snow from 500 feet, or submersion.

For manual, write on your business letterhead to Dept. EBC.

KOCH
PRONOUNCED "COKE"
FIBERGLAS
CORTE MADERA, CALIFORNIA

One of the world's largest fabricators of molded Fiberglas products

Want more information? Use post card on last page.

just off the press

- NEW PRODUCTS
- CONTINUALLY EXPANDING LINE

NEW 1956
SWITCHCRAFT INC.
CATALOG S-57

28 pages of concise, valuable information, details, drawings, schematic circuits and prices on Switchcraft ELECTRONIC COMPONENTS.

Send for your copy today

See the many new products at

BOOTH 805
1956 WESCON SHOW
Pan-American Auditorium
Los Angeles
August 21-24

SWITCHCRAFT INC.
1336 N. HALSTED ST., CHICAGO 22, ILL.
Canadian Representative: Atlas Radio Corp., Ltd., 50 Wingold Ave., Toronto, Canada

Want more information? Use post card on last page.

voted to elementary circuit relationships and an introduction to the Fourier transform.

Chapter two introduces a term, cisoidal, which is usually not found in our terminology, but seems to be the equivalent of our term complex. For example, $\text{cis}\ \omega t = \cos\omega t + j\sin\omega t$. A differentiation is made between sinusoidal and cissoidal functions as follows: "Sinusoidal oscillations are physically realizable (if we accept the ability to realize steady state conditions) . . . Cisoidal oscillations are not physically realizable, but formally they possess quite clear meaning as complex pairs of damped sinusoidal oscillations (of real frequencies)."

To fully appreciate the material in following chapters of this book, it would be wise for the reader to have these different terms and their philosophy clear in his mind.

▶ **Transform**—Chapter three introduces the Laplace transform and Chapter four shows its application to circuit theory. Included are: switching of an idealized transformer; network synthesis of bridge circuits; electron-tube problems.

Chapters five, six, seven and eight cover functions of a complex variable and contour integration in the complex plane. Three dimensional sketches of various complex functions help the reader to visualize and interpret their meaning.

Chapters nine to twelve go into the theory of the Laplace transform, theorems on the Laplace transform and methods of inverse transformation.

Appendixes A and B cover analytic functions of complex variables and higher mathematical functions such as the gamma function, cylinder functions, Bessel functions of the first, second and third kinds, Thomson's (Kelvin) functions, Struve's function, the error function, Fresnel's integrals, Hermite polynomials, theta functions, Legendre's polynomials and Laquerre polynomials.

Appendix C is a comprehensive, 13-page table of Laplace transforms.

Workers in this field will find this

SIMPLYTROL AUTOMATIC PYROMETER

Cat. No. 4531 0/2500° F.
Price $132.00

Thermocouple type Automatic Pyrometer for controlling temperature in furnaces, ovens, and processes. The Simplytrol is economical and reliable with few moving parts. There are no vacuum tubes. The regular load relay is S.P.D.T. 5 Amps. Optional heavy duty relays to 40 Amps.

10 temperature ranges cover from −75° to 3000° F. Several special ranges to −400° F. "On & Off" control for holding the desired temperature works on gas, oil or electric heat. Indicating meter-relay is medium high resistance and has bimetal cold junction compensation. For use with all standard thermocouples. Accuracy 2%.

"Auto-Limit" switch changes Simplytrol from automatic controller to limit pyrometer for safety shut down or warning. Cabinet: 6½x6½x9½ inches. Also flush panel mount models. Send for new Bulletin G-7 for more data.
Assembly Products, Inc., Chesterland 4, Ohio.
West Coast: Desert Hot Springs 4, California
See us at Wescon Show, Aug. 21-24, Los Angeles

For consistently high purity...
"LINDE" M.S.C. RARE GASES

Trade-Mark
(Mass Spectrometer Controlled)

- Helium
- Argon
- Neon
- Krypton
- Xenon

In radar electronic equipment, nuclear radiation counters, cosmic ray cloud chambers, and thyratrons, where the purest rare gases are demanded, LINDE M.S.C. Grade gases meet the specifications. They are produced under continuous mass spectrometer control to assure you of gases of *known* purity and consistently high quality. LINDE, the world's largest producer of gases from the atmosphere, can meet your individual needs of volume, mixture, and container.

For information on the physical, chemical, and electrical properties of these gases, send for the booklet, "LINDE Rare Gases."

*

LINDE AIR PRODUCTS COMPANY
A Division of
Union Carbide and Carbon Corporation
30 E. 42nd Street UCC New York 17, N.Y.

In Canada:
LINDE AIR PRODUCTS COMPANY, Division of Union Carbide Canada Limited, Toronto

The term "Linde" is a registered trade-mark of Union Carbide and Carbon Corporation.

Want more information? Use post card on last page.

WHY COUPLING



Coupling is used for the transmission of power or control of movement between parts located close together in a piece of equipment. It is not a separate type of flexible shaft but rather an added application of flexible shafting.

The coupling can be composed of either power drive or remote control flexible shafting although the latter is generally used due to the added advantage of its ability to rotate both clockwise and counter clockwise. Generally used between two units which are but a few inches apart, coupling may transmit power between any two parts regardless of their relative positions.

For example, the diagram above shows an advantage in using small lengths of flexible shafting in a coupling application. Although the drive end and the driven end are not exactly in line, the coupling compensates for the difference in alignment between the two.

Many manufacturers use flexible shaft coupling even where parts may be connected by solid shafts because of the savings realized in the initial and the maintenance costs as well as in time and labor.

For complete information on how flexible shaft couplings may help improve your product design, write F. W. Stewart Corporation, 4311-13 Ravenswood Avenue, Chicago 13, Illinois.

HIGH-μ FERRITE POT CORES FOR EFFICIENT MINIATURIZATION

Versatile Ferroxcube pot cores permit construction of miniature coil assemblies having moderate inductance values with relatively high Q. Shielding is excellent, stray fields are minimized. Cores can be placed close together or even stacked, with negligible coupling between adjacent coils.

Ferroxcube Pot Cores are available in 3 high permeability ferrite formulations.

WRITE FOR ENGINEERING BULLETIN

FERROXCUBE CORPORATION OF AMERICA

A Joint Affiliate of Sprague Electric Co. and Philips Industries Managed by Sprague

33 EAST BRIDGE STREET · SAUGERTIES, NEW YORK

A copy of this quick-reading, 8-page booklet is yours for the asking. It contains many facts on the benefits derived from your business paper and tips on how to read more profitably. Write for the "WHY and HOW booklet."

• • • • • • • • • • • • • •

McGraw-Hill Publishing Company, Room 2710, 330 West 42nd St., New York 36, N. Y.

COMPLETE BURNER CATALOG

AGF, builders of gas burners and equipment for over 77 years, offers this first complete catalog of technical data on air-gas and oxygen-gas burner equipment.

- **Sharp Flame, Fish Tail, Blast and Oxygen-Hydrogen Burners.**
- **Blowpipes, Hand Torches and Mixing Equipment.**
- **Flow Meters, Fire Checks and Ball Joints.**
- **Many accessories and much technical data.**

All of the above are available in the new AGF Burner Catalog, promptly mailed to you upon written request on your company's letterhead.

AGF — AMERICAN GAS FURNACE CO.

130 Spring St. Elizabeth 4, N. J.

FOR PUBLIC ADDRESS, RADIO, and kindred fields, JONES 400 SERIES PLUGS & SOCKETS

of proven quality!

P-406-CCT



S-406-AB

Socket contacts phosphor bronze cadmium plated. Plug contacts hard brass cadmium plated. Insulation molded bakelite. Plugs and sockets polarized. 2, 4, 6, 8, 10, 12 contacts. Steel caps with baked black crackle enamel.

Catalog No. 21 gives full information on complete line of Jones Electrical Connecting Devices — Plugs, Sockets and Terminal strips. Write

"See New Developments at the WESCON Show—Booths 614-618"

Jones — HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION
CHICAGO 24, ILLINOIS



Miniature and Sub-Miniature

SLIP RING ASSEMBLIES
BRUSH BLOCK ASSEMBLIES
COMMUTATORS

and other
Electro-Mechanical Components

PRECISION MADE
TO YOUR OWN SPECIFICATIONS

Precision molded products with exacting tolerances in precious and non-precious solid metals of all alloys. All types of Thermo-Plastic and Thermo-Setting materials

Slip Ring Assemblies fabricated or one-piece precision molded to your specifications in Nylon, Kel-F, Mineral filled Mellamine, Phenolic, and other materials. Rings and leads spot welded or brazed together for positive electrical circuit.

Our Swiss methods and techniques are geared to meet exacting requirements. We invite your inquiries.

COLLECTRON CORPORATION
MUrray Hill 2-8975 • 216 East 45th Street • New York 17, N. Y.

WHEN QUESTIONS ARISE — REMEMBER...
The SURE WAY is to CHOOSE and USE the transformers of proven performance and quality

MAGNATRAN LEADS THE WAY

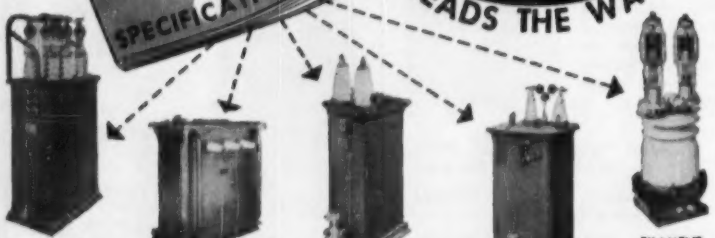

UNITIZED RECTIFIERS • | RECTIFIER PLATE TRANSFORMERS | FILTER REACTORS | MODULATION TRANSFORMERS- REACTORS | FILAMENT TRANSFORMERS-AMPLIFIER RECTIFIER

Magnatran transformers have become "Standard" for many of America's largest Electronic Manufacturers.
Whether you require conventional equipment or specially engineered products, choose and use Magnatran. Be modern and secure.
All Magnatran components meet or exceed the standards of AIEE, ASA, NEMA and RETMA.

Write for **BULLETINS**

MAGNATRAN incorporated
P.O. Box 211 KEARNY, NEW JERSEY, U.S.A.

Want more information? Use post card on last page.

book a worthy addition to their libraries.—H. A. M.

Thumbnail Reviews

Techniques for Application of Electron Tubes in Military Equipment. Rex S. Whitlock. O. T. S., U. S. Dept. of Commerce, Washington, D. C., 1955, 295 p, $5.00 (paper). Application data on 26 electron tube types to serve as a guide for equipment designers. Report by Wright Air Development Center for U. S. A. F., and conforms to latest military standards (Mil-Std.-200).

Introduction to Electrical Engineering. Walter La Pierre. Harper Bros., New York, 1956, 332 p, $5.25. Provides a broad view of the electrical engineering field for undergraduate engineering students. Covers fundamental properties of electrical circuits, a-c and d-c. Also treats production, distribution, and utilization of electrical energy. This book does not go into electronics as such.

Electronics and Management. Lowell H. Hattery and George P. Bush. University Press of Washington, D. C., Washington, D. C., 1956, 207 p, $6.00. Adapted from Proceedings of Conference held at the American University in November, 1955. Covers equipment, case histories, and suggestions for management in the matter of selecting, installing, and using electronic computers and data processing systems. Authors of papers include representatives of Armed Services, Government, and industry.

Analysis of Electric Circuits. William H. Middendorf, John Wiley & Sons, New York, 1956, 306 p, $6.00. Undergraduate textbook covering basic laws, complex numbers, circuit parameters, network simplification, polyphase, and communications circuits. The chapter on communications circuits deals with series and parallel resonance, and with coupling. The book is replete with worked-out illustrative examples and problems, many of which have answers given.

The Use of Selenium Photocells, and Sun Batteries. John Sasuga. International Rectifier Corporation, El Segundo, California, 58 p, $1.50 (paper). Circuits and applications of photoelectric relays, including door-openers, street-light controls, and fire-alarms. Also covers theory and application of photocells, and light powered devices such as the sun battery.

Patent Abstract Series No. 5. Electrical and Electronic Apparatus. O. T. S., U. S. Dept. of Commerce, Washington, D. C., 160 p, 1954, $4.00 (paper). A list of 1,915 Government-owned inventions available for license and classified according to their industrial use. Covers activity as of December 31, 1953.

PROFESSIONAL SERVICES

Consulting—Patents—Design—Development—Measurement

in

Radio, Audio, Industrial Electronic Appliances

BRIGGS ASSOCIATES, INC.
Engineering Services

ELECTRONICS MECHANICAL

Development — Manufacturing — Consulting
Special Machines — Instrumentation — Automation
Electron Tube Design, Materials, Reliability

10 DeKalb St. Broadway 9-2120 Norristown, Pa.

BART LABORATORIES
Division of BART MANUFACTURING CORP.

Consultation and Manufacturing Services on precision electro-forming and precious metal plating since 1916.

227 Main Street Belleville 9, N. J.
FLymouth 9-0200

CROSBY LABORATORIES, INC.
Murray G. Crosby & Staff

Radio - Electronics
Research Development & Manufacturing
Communication, FM & TV

Robbins Lane, Hicksville, N. Y.
WEllis 1-2191

DELAWARE PRODUCTS CO.
Analog Voltage to Digital Conversion
Digital Voltage Recording Systems

Design-Development-Manufacturing

300 Broadway Camden 3, N. J.

Eldico of New York, Inc.
Pioneers of Television Interference Elimination from Transmitters, Induction Heaters, Diathermy and etc.

Donald J. S. Merten & Engineering Staff

12 E. Second St. Mineola, L. I., N. Y.
Pioneer 6-5213

ELECTRONIC RESEARCH ASSOCIATES, INC.
"TRANSISTORIZE" YOUR PRODUCT!
Complete Service in consulting, research, development, and production on Transistor circuitry, products and instrumentation.

67 East Centre Street Nutley, N. J.
NUtley 2-5410

ERCO RADIO LABORATORIES, INC.
Radio Communications Equipment

Engineering - Design - Development - Production
Our 27th Year in Air to Ground
Communications and Radio Beacons

Garden City • Long Island • New York

GENERAL ATRONICS CORPORATION
David E. Sunstein, George J. Laurent
Dr. Robert W. Roop, Bernard D. Steinberg

Consulting Services—Electronics, Acoustics, Technical Planning, Operations Research for Industrial, Consumer and Government Products.

125 City Line Av. Bala-Cynwyd, Pa. (Phila. suburb)
MOhawk 4-8090

HANSON-GORRILL-BRIAN INC.
Product & Mfg. Development

ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL

One Continental Hill Glen Cove, N. Y.
Glen Cove 4-7300

THE KULJIAN CORPORATION
ELECTRONICS DIVISION
Consulting Electronic Engineers

Research Development, Production of
Automatic Controls — Special Instrumentation

1200 No. Broad St., Philadelphia 21, Pa.
Stevenson 2-9000

McDOWELL ELECTRONICS, INC.
Soft soldering of
metallized ceramics by
induction heating.

Consulting—Development—Manufacturing
P. O. Box 342, Metuchen, N. J.
Liberty 8-9109

Measurements Corporation
Research & Manufacturing Engineers

HARRY W. HOOOE MARTIAL A. HONNELL
JOHN M. VAN BREEEN

Specialists in the Design and
Development of Electronic Test Instruments
Boonton, New Jersey

MINOT INFORMATIC DEVICES
AUTOMATIC RECOGNITION OF
SHAPES, PATTERNS & INFORMATION
RESEARCH - INVENTION - CONSULTING
on detection and interpretation of
complicated forms, characteristics of
materials, printed characters, etc.

Otis N. Minot, 22 Eliot Rd., Lexington 73, Mass.
Tel. VOlunteer 2-9465 or -3974

DR. HAROLD NARCUS
Consultant
METALLIZING NON-CONDUCTORS

Pioneer in the field of metallizing non-conductors such as plastics, ceramics, glass, etc. for both industrial and decorative applications. Techniques and processes developed during 20 years specialization in the field. Recognized authority with well-known record of achievement.

Tel. PLeasant 3-5918
15 Vesper Street Worcester 2, Mass.

NIAGARA ELECTRON LABORATORIES
CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY

Specializing in solution of problems of **eelctronic** and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.

Andover, New York Cable Address:' NITRONLAB

NUCLEAR-ELECTRONICS CORPORATION
From Engineering Design to the Finished Product
Specialists in
Nuclear Instrumentation—Communications
Test and Measuring Equipment
Industrial Electronics—Audio Equipment

2432-36 W. Cumberland St. Philadelphia, Pa.

PICKARD & BURNS, INC.
Consulting Electronic Engineers

Analysis and Evaluation
of Radio Systems
Research Development and Production
of Special Electronic Equipment

240 Highland Ave. Needham 94, Mass.

ALBERT PREISMAN
Consulting Engineer

Television, Pulse Techniques, Video
Amplifiers, Patent technical consultation.

616 St. Andrews Lane, Silver Spring, Maryland.
JUniper 5-6207

TELECHROME, INC.
Electronic Design Specialists

COLOR TELEVISION EQUIPMENT
Flying Spot Scanners, Color Synthesizers, Keyers, Monitors, Oscilloscopes and Related Apparatus
J. B. Popkin-Clurman, *Pres. & Ch. Engr.*

88 Merrick Rd. Amityville, L. I., N. Y.

WHEELER LABORATORIES, INC.
Radio and Electronics
Consulting — Research — Development
R-F Circuits — Lines — Antennas
Microwave Components — Test Equipment
Harold A. Wheeler and Engineering Staff

Great Neck, N. Y. HUnter 2-7876

YARDNEY LABORATORIES
Research-Design-Development

Electro-Chemical Generators of Energy

40-46 Leonard Street Worth 4-3144
New York 13, N. Y.

THE REAL VALUE

of placing your unusual problem in the hands of a competent consultant is that it eliminates the elements of chance and uncertainty from the problem and provides real facts upon which to base decisions

HANDS OFF

For Moisture and Acid Are Likely to Contaminate the Winding . . .

In using a BOESCH toroidal winding machine, the operator never touches the coil during winding. Of course a core must be placed in the machine and the finished coil removed, but other than that the coil is never touched.

With all BOESCH winding machines you can produce toroids with uniformly wound layers in less time . . . with less handling.

Write today for detailed information on these BOESCH Winding Machines.

- **Model TW-200**
  Fully-Automatic Toroidal Winder
- **Model TW-201**
  Semi-Automatic Toroidal Winder
- **Model SM**
  Subminiature Toroidal Winder

BOESCH
MANUFACTURING CO., INC.
DANBURY, CONN.

Want more information? Use post card on last page.

Backtalk

Old Voice Power

DEAR SIRS:

IN the March '56 issue of ELECTRONICS, page 226, there is a report of a voice-powered radio transmitter which has just been developed by the Signal Corps.

It may interest some of your readers to know that in 1925, when I was operating my old "ham" station 6BWA, I had such a transmitter on the air. It did not use transistors, of course, but the principle of operation was the same as that described in the Signal Corps development.

A heavy current carbon microphone supplied plate power to a Hartley oscillator through a Ford spark coil with the vibrator clamped. I believe that the tube was a Western Electric VT2.

It created quite a stir in the neighborhood since it was radiophone without a carrier, and I was given credit by those who did not know the gimmick for having done very advanced work in supressed carrier transmission. The reason, of course, was that I could not afford the high-voltage power supply and all the other junk that it would take to make a real phone transmitter.

RICHARD G. LEITNER
Chief Engineer
TelAutograph Corp.
Los Angeles, Cal.

Ground Tank Tap

DEAR SIRS:

LETTER from Mr. Gotte of Martin-Luther University turns up error in Fig. 3 of my article, "Capacitance Transducer Circuit," p 186, Oct. 1955. To fix it, ground the center-tap of the 10-μh tank coil.

LAWRENCE FLEMING
Falls Church, Va.

Man's Dissipation

DEAR SIRS:

IN March *Cross Talk* you say man is a one-watt resistor. Since man's heat dissipation is about 100 watts, no wonder we may sometimes consider man unreliable!

JUSTIN J. SHAPIRO
American Instrument Co.
Silver Spring, Maryland

CONTACTS



OUR CARD, SIR!

We accept the challenge to prove that somewhere in our service area is the right location for your operation.

CHOOSE FROM OVER
350 VIGOROUS COMMUNITIES

Address:
S. P. Vecker, Vice President
Area Development Dept.

Carolina Power & Light Co.
RALEIGH / NORTH CAROLINA

MICA
India ● Brazil
BLOCKS • FILMS • SPLITTINGS
All Grades & Qualities—Warehouse Stocks
New York—Prompt Forward Shipments
Phone: WOrth 4-4192 or write
ASSOCIATED COMMODITY CORPORATION
Woolworth Bldg., New York 7, N. Y.

MANUFACTURERS' REPRESENTATIVES

MARYLAND

MACLEN CORPORATION
Manufacturers Representative
8616 Georgia Ave., Silver Spring, Md.
Components & Equipment

Territory:
Pennsylvania New Jersey
Delaware Maryland
Virginia W. Virginia
District of Columbia

Government and Industry

Want more information? Use post card on last page.

EMPLOYMENT OPPORTUNITIES

The Advertisements in this section include all employment opportunities—executive, management, technical, selling, office, skilled, manual, etc.

Positions Vacant
Positions Wanted
Part Time Work

Civil Service Opportunities
Selling Opportunities Wanted
Selling Opportunities Offered

Employment Agencies
Employment Services
Labor Bureaus

DISPLAYED ———**RATES**——— **UNDISPLAYED**

The advertising rate is $21.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

An advertising inch is measured ⅞" vertically on a column—3 columns—30 inches to a page.

Subject to Agency Commission.

$2.10 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.
Box Numbers—counts as 1 line.
Position Wanted ads are ½ of above rate.
Discount of 10% if full payment is made in advance for 4 consecutive insertions.
Not subject to Agency Commission.

Send NEW ADS or inquiries to Classified Advertising Division of ELECTRONICS, P.O. Box 12, N. Y. 36, N. Y., for September issue closing August 2nd

REPLIES (Box No.): Address to office nearest you c/o This publication Classified Adv. Div.
New York: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

Radar Circuit Design Engineers—with experience in indicator, timing, receiver and video circuits. Professional recognition assured by reputable electronics company. P-2318, Electronics.

Are you interested in the planning, analysis, "debugging" and evaluation of complex airborne military electronic systems? Leading electronic company needs an engineer with good design or system experience who wants to meet the challenges of urgent USAF development programs. P-2341, Electronics.

Modulator and Transmitter Design—experienced in high-power pulse-forming techniques and/or the use of magnetic components associated with radar transmitters. P-2321, Electronics.

Missile Systems Engineer—Opportunity in a missile system research and development assignment. Study of noise and interference problems related to pulse and CW radar. Report of studies leading to design recommendation. P-2327, Electronics.

Product Design—The final design of an electronic package requires fertile imagination and knowledge of many fields and techniques. Eastern company has several openings for experienced engineers who can qualify. P-2337, Electronics.

MICROWAVE DESIGN

A leader in the field needs a high-level electronic engineer for microwave design in radar and communications. Applicable experience and ability to assume responsibility required.

P-2330, Electronics
Class. Adv. Div. P.O. Box 12, N.Y. 36, N.Y.

SENIOR ELECTRONICS ENGINEER

Bachelor's degree with four years' design experience in pulse circuits for radar or allied field. Broad scope for individual initiative and ingenuity. Opportunity for advancement with expanding division of progressive firm.

P-2323, Electronics
Class. Adv. Div. P.O. Box 12, N.Y. 36, N.Y.

Heat Transfer Analysis

Established electronics firm will swap ideal working and living conditions for your background in thermodynamics and fluid mechanics. With the pressing problem of doing more in less space, we must develop more-sophisticated cooling systems.

P-2333, Electronics
Class. Adv. Div. P.O. Box 12, N.Y. 36, N.Y.

WEAPONS SYSTEM ANALYST

Excellent position for an engineer or physicist interested in theoretical aspects of weapons systems — propagation theory, radar detection theory, statistical prediction, and comprehensive system analysis.

P-2324, Electronics
Class. Adv. Div. P.O. Box 12, N.Y. 36, N.Y.

RAYTHEON'S
WAYLAND LABORATORY

. . . is devoted exclusively to the design and development of advanced electronic equipment—from subminiature communication sets to complete ground-based, airborne and shipboard weapons systems.

The Radar Department of the Wayland Laboratory offers choice opportunities to Engineers with advanced degrees and/or high-level experience who can apply themselves intently to challenging problems in the following fields:

SYSTEMS — ELECTRONIC CIRCUITRY — MICROWAVE
SERVO — TRANSISTOR APPLICATION — MECHANICAL
PRODUCT DESIGN — HEAT TRANSFER

Excellence **RAYTHEON** *in Electronics*

Send name and address to:

Robert E. Doherty — RAYTHEON MFG. CO. — WAYLAND, MASS.

JOIN THE ELECTRON TUBE BANDWAGON

CONTINUING INCREASE IN THE DEMAND FOR RAYTHEON'S LINE OF RELIABLE TUBES HAS CREATED SEVERAL OUTSTANDING OPPORTUNITIES FOR FUTURE-MINDED ENGINEERS.

- **SENIOR RADIO TUBE ENGINEERS, degree in Physics, Electrical Engineering, or Mechanical Engineering and a minimum of 5 years' experience to work in vacuum or allied techniques as applied to radio tube development and manufacture.**
- **CIRCUIT APPLICATION ENGINEERS, degree in Physics or Electrical Engineering and a minimum of 5 years' experience in circuit work in the radio tube industry.**

RAYTHEON

Please Send Complete Resume to
TECHNICAL PLACEMENT OFFICE
RAYTHEON MANUFACTURING CO.
SPECIAL TUBE DIVISION
55 Chapel St., Newton 58, Massachusetts

ELECTRONIC SYSTEMS SPECIALISTS

Here are some typical problems Sylvania engineers and physicists meet and solve at our Buffalo, N. Y. and Waltham, Mass. plants.

AT BUFFALO:

1. How do you design 10 similar microsecond timing circuits whose delay times can be varied over a range of 100 times by analog control voltage maintaining a tracking accuracy of ±0.1% in an environment of −65°C to +125°C at sea level to 100,000 feet?

2. If you know which bits of a code group are in error, can you modify the hamming code to use this data to provide maximum information capacity in a noisy channel?

3. Can you design a crystal mixer to operate with latest production type crystals and having a noise figure less than 12db above KTB operating in the "S"-band?

AT WALTHAM:

4. Under what conditions can signal fluctuations improve radar performance?

5. What are the limitations on allowable smoothing time for target tracking radars?

6. Under what conditions can random noise introduce systematic errors in radar measurements?

Continuing product diversification means long-range security and advancement... and both locations offer good housing and ample leisure-time activities, as well as unusual opportunities for advanced studies.

If you believe that you can assist us in the solving of these problems, please write:

WALTHAM LABORATORIES
Erling Mostue
100 First Ave.
Waltham, Mass.

BUFFALO LABORATORY
E. F. Culverhouse
175 Great Arrow Ave.
Buffalo 7, New York

SYLVANIA
SYLVANIA ELECTRIC PRODUCTS INC.

Your inquiries will be answered within 2 weeks.

ENGINEERS

PARTS APPLICATION
(Reliability)

ME or EE degree with design experience and/or application experience. Job will be to recommend types of parts to be used and how these parts shall be used.

Qualified men will become a vital part of a Reliability Group.

GM INERTIAL GUIDANCE SYSTEM PROGRAM

• ELECTRONICS DIV.,
Milwaukee 2, Wis.

Enjoy Challenging Opportunities in the most versatile Laboratories in the country. Work with the top men in the field and with the finest test, research and development facilities. We are in the process of a Major, Permanent, Expansion Program. New Plant facilities being added in suburban Milwaukee area.

To aid you in your professional advancement AC will provide financial assistance toward your Master's degree. A Graduate Program is available evenings at the University of Wisconsin, Milwaukee.

GM's Electronics Division aggressive position in the field of manufacture and GM's long-standing policy of decentralization creates individual opportunity and recognition for each Engineer hired.

Recent EE,ME Graduate Inquiries Also Invited

Milwaukee offers ideal family living in a progressive neighborly community in cool, southern Wisconsin where swimming, boating, big league baseball and every shopping and cultural advantage is yours for the taking.

To arrange personal, confidential interview in your locality send full facts about yourself today to

Mr. John F. Heffinger
Supervisor of Salaried Personnel

AC

Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.

SENIOR ENGINEERS
write to W. L. Webb
Bendix Guided Missiles

SYSTEMS ANALYSIS

A fundamental problem in the development of guided missiles is analytical dynamics. For this work, we need Senior Engineers who have extensive backgrounds in the over-all dynamic behavior of missiles and weapons systems, as well as airframe systems of a missile. They will work with analogue computers, digital differential analyzers, breadboards, prototypes of missiles and missile equipment, and special mechanical and electronic simulators.

MISSILE GUIDANCE

Senior Engineers, here is your opportunity to design and develop sub-systems, plan packaging components and supervise tests of prototype models for an extremely complex system of missile guidance, wherein experience in microwave, electronics, mechanics, and servo systems is essential. Particular emphasis is placed in solving vital problems relative to the performance of a missile under a variety of conditions and environments.

TEST EQUIP. SR. ENG.

Test equipment is important to us in that it measures our product. If you feel that you have better than average engineering imagination, if you have 8-10 years of experience backed by a solid grounding in fundamentals, and if you can effectively put this to work in directing the design of new improved test equipment — such as automatically programmed testers to go-no-go comparators suitable for factory use—contact us.

Also— Job Opportunities for Assistant Engineers Junior Engineers Technicians

A thirty-six-page book, "Your Future in Guided Missiles", describing in detail every phase of guided missile operation, will be sent to you on request. Write for your copy today.

At Bendix Products Division—Missiles Section, qualified engineers have the advantages of a compact, hard-hitting organization backed by all the resources of the nation-wide Bendix Aviation Corporation. If you can accept a challenge, want an opportunity to grow with a rapidly expanding technical business, and can accept the responsibilities that go with opportunity, I would like to hear from you personally—W. L. Webb, General Manager, BENDIX PRODUCTS DIVISION—MISSILES, **403A, Bendix Drive, South Bend, Indiana.**

Are You an Engineer Whose Success-Express is on a Freight-Track?

Has a few years made it clear that your present job won't let you keep schedule with your success timetable? We're offering challenging careers—not just jobs—that can be as exciting and rewarding as your initiative makes them . . . Career opportunities in circuitry, applications, development, equipment design, electron tube and transistor development and production.

Submit resume or address request for personal interview to D. Bellat, Personnel Director, Tung-Sol Electric Inc., 200 Bloomfield Avenue, Bloomfield, N. J.

TUNG-SOL®

EAST ORANGE • BLOOMFIELD, N. J.

the electronics engineer who can WRITE is one of our favorite people

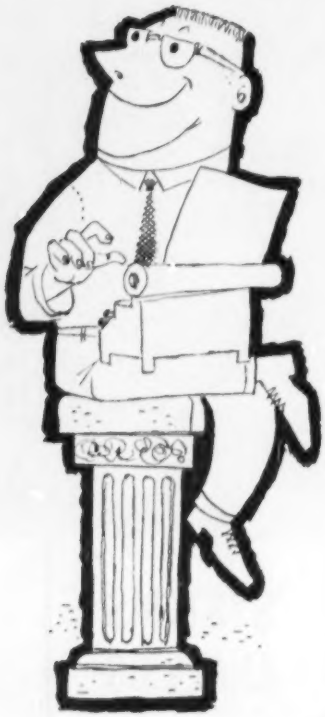

. . . if you're one of them, let us tell you about the opportunities for publications engineers at Collins . . .

in the fields of . . .

Microwave Relay	Flight Control
Navigation Systems	Radar Systems
Communication Systems	Guided Missiles
SSB Systems	Computers
Radio Astronomy	Amateur Equipment

Collins offers you top salary, rapid advancement, company benefits, liberal moving expense allowance. Electrical Engineers or Physicists are desired. Actual writing experience is not necessary . . . U.S.A. citizenship is.

Send resume to: Industrial Relations Director

Collins Radio Company

Cedar Rapids, Iowa
1930 Hi-Line Drive, Dallas 2, Texas
2700 W. Olive Ave., Burbank, Calif.

He makes a daily trip to tomorrow

This man is a creative engineer. Like other young men, he is interested in baseball, talks about taxes, is proud of his kids. But there's something different about this *particular* young man. He's a Goodyear Aircraft engineer. And, each day when he passes through this door, he leaves behind the world known to his friends and neighbors and crosses the threshold of tomorrow.

Of course "tomorrow" is not new to aviation engineers. For the whole industry is on the threshold of spectacular things to come. But, here again, there's something different about this *particular* door. Behind it lie many unique and exciting avenues of endeavor—airships, electronics, plastics, missiles, structures and many more—examples of diversification rarely found under one roof. And *this man*, like all Goodyear Aircraft engineers, guides himself along his chosen path utilizing the most modern facilities available to put his own ideas to work.

For here individual thought and expression are encouraged. Ideas are a prime commodity and every one gets a chance to mature. Here engineers, in transforming their own ideas into practical realities, find the stimulation of creative challenge and the satisfaction of realistic accomplishment.

If you are a creative engineer with faith in your ideas and confidence in your ability to make them work, there's a challenging career waiting for *you* at Goodyear Aircraft. Our growth and diversification demand expansion of our engineering staffs at both Akron, Ohio, and Litchfield Park, Arizona. Opportunities are unlimited for creative engineers in all specialties.

Salaries and benefits are, of course, liberal. And if you wish to continue your academic studies, company-paid tuition courses leading to advanced degrees are available at nearby colleges.

For further information on *your* career opportunities at Goodyear Aircraft, write: Mr. C. G. Jones, Personnel Dept., Goodyear Aircraft Corporation, Akron 15, Ohio.

They're doing big things at

GOODYEAR AIRCRAFT

THE TEAM TO TEAM WITH in AERONAUTICS

JOIN amf IN BOSTON

If you are vacationing in New England, plan to pay us a visit. Interviews at your convenience.

Boston, and New England, is in the middle of a gigantic electronic boom . . . in fact, this is the NEW electronic center of America.

A leader in this movement is the Electronics Division of American Machine & Foundry Company in Boston . . . surrounded by the nation's leading universities, outstanding historical sites, and gateway to all New England's 4-season resorts and sports . . . easily accessible on new super highways. And our smart, modestly priced suburban home communities are models for today and tomorrow.

Work with outstanding colleagues in creative engineering where assignments are diversified and the programs long-range.

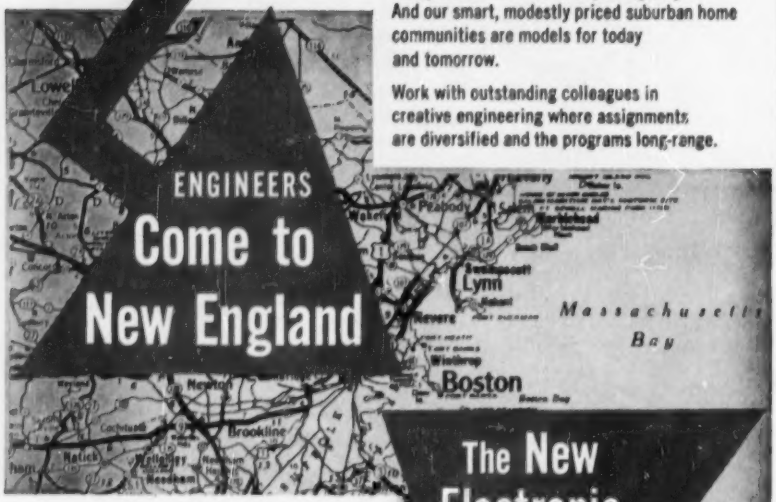

ENGINEERS
Come to New England

The New Electronic Center of America

We have important openings in development, study and manufacturing for:

Electronic Counter Measures — Electronic Reconnaissance
Special Electronic Displays
Radar Instrumentation
Servo Mechanisms — Electrical & Hydraulic
Field Services Representatives
Digital Data Processing Equipment
Magnetics
Circuit Design Engineers
Microwave Components
Navigation Systems
Radio Communications UHF & VHF

Relocation Expenses & housing assistance. Comprehensive benefits program including tuition reimbursement plan for advanced studies.

Please send complete resume to **Mr. John Lowe**

ELECTRONICS DIVISION
American Machine & Foundry Company
1085 Commonwealth Avenue Boston, Massachusetts

Openings in Florida . . . Instrumentation Engineers . . . up to $11,000

Electrical Engineers with experience in Radar, Telemetry, Timing or Communications.

•

Challenging problems associated with the precision instrumentation for tracking of high velocity missiles being tested over a course that extends thousands of miles.

•

Pleasant family living on Florida's Central East Coast. Unprecedented opportunities with world leader in electronics.

•

To arrange confidential interview, send resume to Mr. H. C. Laur, Dept. N-10H Missile Test Project P. O. Box 1226 Melbourne, Florida

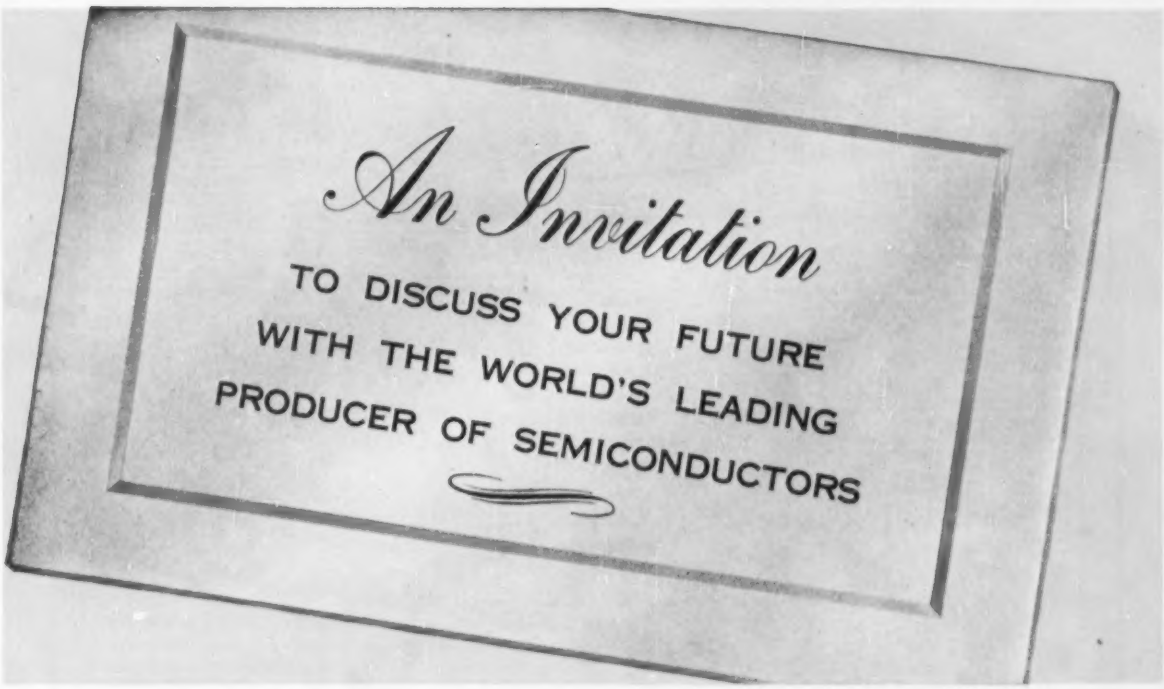

LOOK AT THIS RECORD OF GROWTH

A few short years ago, a handful of people pioneered advanced semi-conductor development at Transitron.

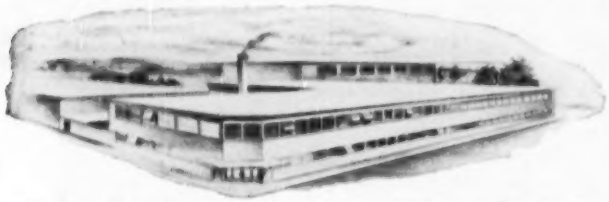

Today Transitron employs over 750 people in a modern plant of 65,000 square feet at Melrose, Massachusetts.

AND NOW... FURTHER EXPANSION

A newly modernized second plant of 250,000 square feet is being equipped at Wakefield, Massachusetts.

If you're in search of real opportunity, you'll find your professional horizons unlimited at Transitron. In a few short years this young company has carved out a leading position in the field of semiconductors. It is now undergoing further expansion into a second plant of 250,000 square feet.

Here is your chance to work with stimulating, congenial associates in an atmosphere of progress — informal and *free of red tape*. You'll be located in pleasant, suburban Boston, in the heart of one of America's technical centers — where cultural and educational advantages are found for you and your family. And you're only an hour's drive from New England's vacationland!

So, if your experience is any of these fields:

SEMICONDUCTOR RESEARCH
COMPONENTS ENGINEERING
APPLICATIONS ENGINEERING
PRODUCTION ENGINEERING
SALES ENGINEERING

. . . there is an unparalleled opportunity for you *right now* with Transitron. Salaries are attractive; vacation, insurance and retirement benefits are liberal and your opportunities for professional growth are unlimited.

A letter to Transitron with your resume will receive our prompt attention, and will be held in strictest confidence. Transitron Electronic Corporation, Telephone: MElrose 4-9600.

Transitron electronic corporation melrose 76, massachusetts

Leadership in Semiconductors

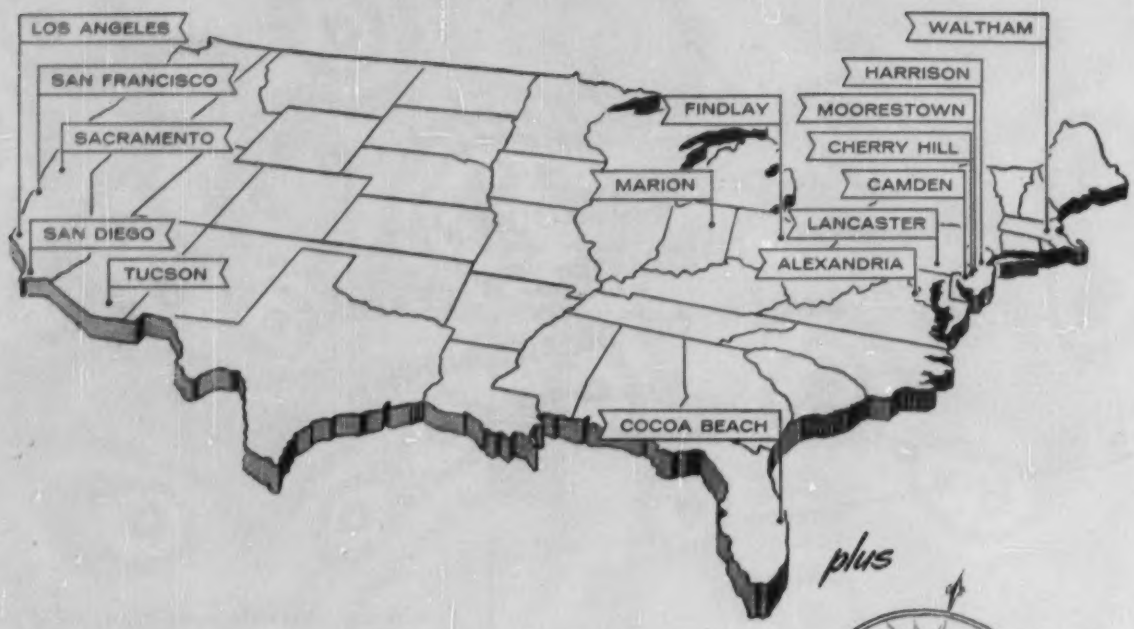

You can SELECT at RCA!

...New Opportunities...17 + Locations...One Best For You And Your Family

Can anyone but RCA offer you a choice of locations like this?
At Camden, Moorestown or Cherry Hill, you enjoy cultural advantages of Greater Philadelphia, live at moderate cost in pleasant suburban communities. Waltham offers at-home opportunities for New England engineers. Four ideal West Coast locations. Harrison borders on Greater New York. Lancaster, Marion and Findlay have small-town advantages. There's pleasant year-round outdoor living in Cocoa Beach, on Florida's central east coast. RCA Service Company and International Division assignments include ideal locations in the United States, and wherever RCA electronic equipments are installed and serviced throughout the world.

Individual Recognition—
RCA organizes engineering activities into groups small enough to allow broadest scope for your individual accomplishment. The average group has just 11 engineers. Yet, in all activities, you are supported by the entire facilities and engineering resources of RCA.

Salaries—
RCA engineering salaries average measurably higher than other companies' in the field. Intermediate engineers, $5000-$8500; senior engineers, $8500-$15,000; staff and supervisory salaries open.

Advancement—
Scheduled, objective appraisal of your work speeds promotion. Professional and financial progress is just as sure as your achievements make it.

Professional Status—
RCA bases world leadership in electronics on the abilities of exceptional men at every organizational level. Many have notable engineering and scientific reputations. You work in day-by-day association with men of this caliber.

Benefits—
There's a complete program at RCA. A very liberal Tuition Refund Plan. Company-paid life, sickness and accident, hospital-surgical insurance for you and your family. Modern retirement plan. Relocation expenses paid. Suggestion and patent awards.

Now, Pinpoint Your Future

...Here are the Opportunities!
...Here are the Locations!

FIELDS OF ENGINEERING ACTIVITY		MANAGERS	TYPE OF DEGREE AND YEARS OF EXPERIENCE PREFERRED											
			Electrical Engineers			Mechanical Engineers			Physical Science			Chemistry Ceramics Glass Technology Metallurgy		
			0-2	2-3	4-15	0-2	2-3	4-15	1-2	2-3	4-15	1-2	2-3	4-15
• ***SYSTEMS*** *(Integration of theory, equipments and environment to create and optimize major electronic concepts.)*	AVIATION ELECTRONICS • CONTROLS			W	W M			M		W	W M			
	DIGITAL DATA HANDLING DEVICES	M C		M C	M C		C	C		C	C			
	MISSILE ELECTRONICS • RADAR	M W		M W X	M W X		M W	M W		M W	M W			
	INERTIAL NAVIGATION	W			W			W			W			
	COMMUNICATIONS				C						C			
• ***DESIGN • DEVELOPMENT***														
KINESCOPES (B & W and COLOR), OSCILLOSCOPES—Electron Optics—Instrumental Analysis—Solid States (Phosphors, High Temperature Phenomena, Photosensitive Materials and Glass to Metal Sealing)			L	L Y	L Y	L	L Y	L Y	L	L	L	L	L Y	L Y
RECEIVING TUBES—Tube Design—Test and Application Engineering—Chemical and Physical Development—Methods and Process Engineering—Advanced Development			H	H	H		H	H		H	H		H	H
SEMI-CONDUCTORS—Transistors—Semi Conductor Devices—Materials			H	H	H	H	H	H	H	H	H	H	H	H
MICROWAVE TUBES—Tube Development and Manufacture (Traveling Wave—Backward Wave—Magnetron)		H		H	H		H	H		H	H		H	H
GAS, POWER AND PHOTO TUBES—Photosensitive Devices—Glass to Metal Sealing—UHF and VHF—Power			L	L	L	L	L	L	L	L	L	L	L	
AVIATION ELECTRONICS—Radar—Computers—Servo Mechanisms—Shock and Vibration—Circuitry—Remote Control—Heat Transfer—Sub-Miniaturization—Automatic Flight—Automation—Transistorization		W C	W C X	W C X	W C X	W C	W C X	W C X	W C X	W C X	W C X			
COMPUTERS—Systems—Advanced Development—Circuitry—Assembly Design—Mechanisms—Programming			C	C X	M C X	C	C X	M C X	C	C	M C			
RADAR—Circuitry—Antenna Design—Servo Systems—Gear Trains—Intricate Mechanisms—Fire Control—Information Handling—Displays		M C	M C X	M C X	M C X	M C X	M C X	M C X	M C X	M C X	M C X			
COMMUNICATIONS—Specialized Military Systems—Microwave—Aviation—Audio—Propagation Studies			C	C	C		C	C	C	C	C			
MISSILE ELECTRONICS—Systems Planning and Design—Radar—Fire Control—Shock Problems—Servo Mechanisms		M	M X	M X	M X	M	M	M X	M	M X	M X			
COMPONENTS—Transformers—Coils—TV Deflection Yokes (Color or Monochrome)—Resistors—Ferrites (Material and Parts)			C	Z C	Z C	C	Z C	Z C	C	C	C		Z C	Z C
• ***SYSTEMS APPLICATION***	*(Evaluation and Planning—Design and —, Development—Modification—Specification)*													
MISSILE TEST INSTRUMENTATION (Data Acquisition and Processing)—Radar—Telemetry—Timing—Communications—Optics—Computers		F	F S	F S	F S	F S	F S	F S	F S	F S	F S			
RADAR—Airborne—Surface—Shipboard—Sonar—Fire Control		F	F S	F S	F S	F S	F S	F S	F S	F S	F S			
COMMUNICATIONS—Radio—HF—VHF—UHF—Microwave—Telephone—Teletype—Telegraph Terminal Equipment—Wave Propagation		F	F S I	F S I	F S I	F S	F S	F S	F S	F S	F S			
• ***MACHINE DESIGN***														
Mechanical and Electrical—Automatic or Semi-Automatic Machines			L	L		L	L H Y	C H Y		L	L			

Locations: **C**—Camden, N.J. **F**—Cocoa Beach, Fla. **H**—Harrison, N.J. **I**—International Div. **L**—Lancaster, Pa. **M**—Moorestown, N.J. **S**—RCA Service Co. (Cherry Hill, N.J.; Alexandria, Va.; Tucson, Ariz.; San Diego, Sacramento, San Francisco, Calif.; Foreign Assignments). **W**—Waltham, Mass. **X**—Los Angeles, Calif. **Y**—Marion, Ind. **Z**—Findlay, Ohio

Please send resume of education and experience, with location preferred, to:

Mr. John R. Weld, Employment Manager
Dept. A-13H, Radio Corporation of America
30 Rockefeller Plaza, New York 20, N.Y.

RADIO CORPORATION of AMERICA

Copyright 1956 Radio Corporation of America

MEMO from the desk of W. FREDERICK GOODYEAR
Chief Engineer, Instrument Division

Tracerlab KELEKET

Dear Ken:

It was good to hear from you and learn that you might be interested in changing jobs.

You mentioned that you had a few offers and were "sort of shopping around". If that's what you're doing Ken, very frankly, we're not interested.

Let's not kid ourselves. Although there are plenty of jobs around, good ones are still hard to find. The really important factors that make for job satisfaction, can't be found everywhere. Sure, the "ads" all talk about opportunity, challenge, frontiers to conquer, special benefits, etc., etc., but...

If you're sincere about a career opportunity, we want you to consider the possibility of joining Tracerlab. Ours is one company (I'm sure there are others) where the atmosphere is right. We're a first-name, shirt-sleeve company. We're not chained by tradition or by static thinkers. If you have an idea, and it's a good one, you'll see it as a finished product.

Tracerlab is young, only ten years old. We were the first firm to enter this field (nucleonics, basically electronic devices), and we're still leading the pack. We're used to moving fast. We have to, to stay ahead. We continue to expand (our new Waltham plant opens soon), but we're small enough to recognize, encourage and reward individual effort. Here you not only get a slap on the back for a good job, but also an increased pay check and a desk load of additional responsibilities.

Just a word about openings, Ken. We have only a few (not hundreds), and they're important ones. Most critical is our need for a Senior Electronic Engineer to supervise a small development group, working on some pretty complex electronic systems. To back him up, we'd like to find a couple of top-flight Engineers with some background in pulse techniques. A Mechanical Engineer to work as a consultant on all mechanical problems will round out the team.

That's it! Let me know what you think, and pass the word along to any good men you might know.

Best Regards,

Fred

P.S. Naturally we'll take care of any interview expenses and help on relocation.

Write:

Tracerlab inc.
130 HIGH STREET
BOSTON 10, MASS.

ELECTRONIC ENGINEERS

RESEARCH DEVELOPMENT

Expansion of our engineering department requires electronic engineers with radar, servo, sonar or transistor circuit experience. Excellent opportunity for advancement with top-calibre associates. New modern plant in the suburbs with ideal laboratory facilities and well-trained technical assistants.

Other Opportunities in the following areas:

- **TECHNICAL WRITERS**
- **DRAFTING** Electrical Layout
- **DETAILING** Electrical - Mechanical

DESIGN ENGINEERS

Must have EE degree or equivalent, with 3-5 years experience in one of the following:

— Flight Simulators
— Analog Computers
— Radar & Sonar Trainers
— Radar Guidance & Fire Systems
— Redesign, Modification & Testing of Radar & Electronic Systems
— Electronic installation & Maintenance
— Coil & Transformer Design
— Packaged Power Supplies

Other Openings For:

COMMUNICATIONS EQUIPMENT DESIGNERS

COMPUTER DESIGNERS

FIELD ENGINEERS

(*)Must have E.E. degree or equivalent with 5-10 yrs. experience.
**Positions located throughout USA*

LOCATION:
On U. S. Highway 22, thirty miles (45 minutes) from New York City.

ENVIRONMENT:
One of the finest plants of its kind . . . spacious, modern, air-conditioned. Conducive to bringing out the best of your abilities!

ABOUT THE COMPANY:
Organized in 1945. Engaged in research, design and development for the Armed Services.

ITS BENEFITS:

- Pension Plan
- Group Life Insurance
- Paid Holidays
- Paid Sick Leave
- Paid Vacations
- Education & Tuition Assistance
- Other Group Insurances

Los Angeles interviews during N.T.C. & Wescon.
Call ZACK GEANES, Stavid West Coast representative at Granite 7-1352 after 6 P.M. for interview appointment.

Interviews in Your Community by Appointment

Send complete resume, write or call personnel director.

Stavid

STAVID ENGINEERING
Incorporated
U. S. Highway 22
Watchung, P. O.
Plainfield, N. J.
Plainfield 7-1600

TREMENDOUS, NEW FIELD OF OPPORTUNITY

NUCLEAR AIRCRAFT DESIGN AND DEVELOPMENT

Convair in San Diego offers challenging and very rewarding positions to engineers and scientists in the long-range program of development of *nuclear powered aircraft* for the U.S. Navy.

Graduate Mechanical, Civil, Marine, Chemical Engineers, Physicists and Naval Architects *without* aircraft experience are invited to join the important program of construction and operation of NUCLEAR DEVELOPMENT FACILITIES and operational and handling concepts.

Aerodynamic, Dynamic, Hydrodynamic, Nuclear, Propulsion Engineers and Aircraft Designers will enjoy tremendous growth potential at all experience levels through participation in the design and development of NUCLEAR POWERED AIRCRAFT.

To join this *new team* within our engineer's engineering department, write at once. Address resume to H. T. Brooks, Engineering Personnel, Dept. 920

CONVAIR

C-V GD

A DIVISION OF GENERAL DYNAMICS CORPORATION

3302 PACIFIC HIGHWAY · SAN DIEGO, CALIFORNIA

calculate the advantages of your future with Bendix in Southern California

The diversity of Bendix long range projects — for both industry and defense — offers you unusual advantages.

Bendix, in Southern California, has excellent positions open for electronic, hydraulic & mechanical engineers of all levels. You are cordially invited to write for complete information. Use the handy coupon.

W. C. Walker, Engineering Employment Mgr.
Pacific Division, Bendix Aviation Corp.
11600 Sherman Way, North Hollywood, Calif.

I am interested in this engineering field_____
I am a graduate engineer with _____ degree.
I am not a graduate engineer but have _____ years experience.

Name_____

Address_____

City_____ Zone____ State_____

ENGINEERS

RADIO RECEIVER DEPARTMENT

Expanision of this well-known company's Radio Receiver Department has created career positions for

Production Liaison Engineers

Two men to act as liaison between engineering and manufacturing. Will be responsible for on-the-spot substitution of materials and design modification where necessary to keep the lines running smoothly.

Cost Reduction and Value Analysis Engineer

Prefer man with ME degree, interested in probing into the why and wherefore of our designs in order to determine where cost reductions can be effected. This man would also spark our value analysis team.

Lots of room for initiative and technical exploration in depth in these openings. Up-to-date facilities to back you up.

And you'll like this city in Upstate New York, with its ideal combination of suburban comforts and urban coveniences.

Notable benefits program. High starting salary. Relocation expenses paid.

Please send resume in confidence to:

P-2246, ELECTRONICS
Class. Adv. Div., PO Box 12
N. Y. 36, N. Y.

HRB graduate work?

HRB offers the young engineer and physicist a sound beginning in the electronic field. The company offices are located just a few minutes walk from the campus of the Pennsylvania State University where you may join many others of the HRB staff in doing graduate work in your specialized field. The University, ranking in the top ten of engineering training, boasts a swimming-pool-type Nuclear Reactor, one of the few in the country. Along with the proximity of the University, HRB offers excellent salaries and generous benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

advanced systems studies at ARMA

Continuing expansion of systems engineering requirements at Arma is creating several challenging openings at SUPERVISORY, STAFF and SENIOR ENGINEERING levels for airborne systems work in:

- Operational Requirements
- General Control and Instrument Studies
- Digital Computation
- Inertial Navigation
- Radar, I.R. and E.C.M.

Applicants with extensive technical background, sound administrative ability and skill in customer relations can qualify for these responsible positions.

Send resume in confidence to:
Manager of Technical Personnel Dept. 674

ARMA
Division of
American Bosch Arma Corporation
Roosevelt Field, Garden City
Long Island, N. Y.

COMMUNICATIONS ENGINEERS and TECHNICIANS

EXCELLENT SALARIES
MINIMUM PREREQUISITES

ENGINEER — EE Graduates with 3 years experience
TECHNICIAN — 2 years technical school in communications and 3 years experience.

Require installation adjustment and maintenance experience with communication receivers and associated terminal equipment. Also, men with similar experience with high-powered transmitters, antennas, transmission lines.

Must be willing to travel in United States and Overseas

Page Communication Engineers, Inc.
710 Fourteenth St., N.W., Washington 5, D.C.

Electronic Engineers

To those interested in extending the "State of the Art" at VHF and UHF —I. F. I. offers challenging opportunities on long range programs. Wide band experience particularly useful, but not necessary. Expanding electronics firm. Exceptional fringe benefits.

Send resume or phone

Instruments for Industry, Inc.
150 Glen Cove Rd., Mineola, N. Y.
Mr. T. C. Villa Pioneer 2-5300



ERMA

electronic recording machine accounting



Brilliant career opportunities for . . .

- EXPERIENCED COMPUTER ENGINEERS
- LOGICAL DESIGNERS
- TRANSISTER APPLICATIONS ENGINEERS
- COMPUTER CIRCUIT ENGINEERS
- DESIGNERS ELECTRO MECHANICAL DEVICES
- ELECTRONIC PACKAGING ENGINEERS

YOU are URGENTLY NEEDED at once to work on the General Electric Team for the ERMA Program.

Technical Assignments available in Palo Alto, California and Syracuse, New York.

FIRST *industrial data processing system designed to solve entire checking account bookkeeping.*

FIRST *such system ordered into quantity production. (The Bank of America to convert to ERMA.)*

FIRST *production computer designed with modern, solid state components.*

FIRST *of a line of tailored data processing for business, industry and Government.*

ERMA IS REVOLUTIONARY IN CONCEPT AND EXECUTION

. . . solves entire bookkeeping problem from time check is entered until monthly statement is issued.

. . . originally conceived by Bank of America and developed to the bank's specifications by Stanford Research Institute.

. . . refinement to continue through joint effort of General Electric and Stanford Research Institute.

Please send your resume to

Engineering Administration
Industrial Computer Section

GENERAL ELECTRIC

3001 James Street • Syracuse, New York

ENGINEERS,
Electronic & Mechanical
PHYSICISTS:

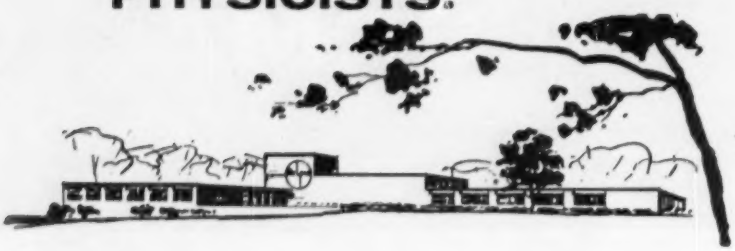

Choose your location when you join Melpar

Melpar's R & D operations are centered near and in two of the country's more desirable communities: Washington, D. C., Watertown and Boston, Massachusetts, each of which affords engineers the opportunity to enjoy research, cultural and recreational resources well above the average.

Regardless of which locale he selects, the engineer will find that our advancement policies and organizational structure provide opportunities uncommon to the industry as a whole.

Individual performance heads the list of factors which determine progress. Regardless of age, experience or tenure, an engineer is given more complex responsibilities *as soon as he is ready*. There is always room to move ahead at Melpar, because we have doubled in size every 18 months for the past 10 years, with a proportionate increase in top and middle level openings.

Our engineers gain comprehensive experience in all phases of engineering problems. Each is assigned to a project team which is charged with responsibility for *whole* problems, from design concept to completion of prototype.

The engineer will find each of Melpar's laboratories splendidly equipped with an eye to both present and future needs. Fully air-conditioned, each laboratory has recently acquired additional facilities.

We extend financial support to those who intend to pursue advanced study. Fully accredited courses are available at our main laboratories.

Write for *complete* information, indicating geographical preference. Qualified candidates will be invited to visit Melpar laboratories at Company expense.

Top Level Openings Exist in These Fields:

Network Theory • Systems Evaluation • Microwave Technique • UHF, VHF, or SHF Receivers • Analog Computers • Magnetic Tape Handling • Digital Computers • Radar and Countermeasures • Packaging Electronic Equipment • Pulse Circuitry • Microwave Filters • Flight Simulators • Servomechanisms • Subminiaturization • Electro-Mechanical Design • Small Mechanisms • Quality Control and Test Engineering

Write: Technical Personnel Representative

MELPAR *Incorporated*

A Subsidiary of Westinghouse Air Brake Company

3161 Arlington Boulevard, Falls Church, Virginia

Positions also available at our laboratories in Boston and Watertown, Mass.

opportunities in

OPERATIONS RESEARCH

The Operations Research Office of The Johns Hopkins University offers exceptional opportunities for scientists who prefer the challenge of operational problems of unusual scope and diversity to routine design and development work.

Our current research program has openings for men qualified in electronics and physics who are particularly interested in:

- Mathematical Analysis
- Determining applications of known photographic, accoustic, infrared and radar techniques to military problems
- Military communications systems planning, analysis and evaluation
- Electronic Countermeasures Analysis

Please send your resume to Research Personnel Officer

THE OPERATIONS RESEARCH OFFICE

THE JOHNS HOPKINS UNIVERSITY

7100 Connecticut Avenue
Chevy Chase, Md.

THE UNIVERSITY of MICHIGAN

ENGINEERS and SCIENTISTS

Unusual opportunities for outstanding and experienced men are available at The University of Michigan's Willow Run Laboratories. Research Engineers and Physicists with advanced degrees and/or experience in the fields of:

DIGITAL COMPUTER • LOGICAL DESIGN • INFRARED • ACOUSTICS • DIGITAL COMPUTER PROGRAMMING ELECTROMAGNETIC THEORY • COMMUNICATIONS CIRCUIT DESIGN • COMPONENT DEVELOPMENT • RADAR • OPTICS ENGINEERING • SYSTEMS DESIGN

Salary commensurate with training and experience. Excellent working conditions. Liberal vacation policy along with other fringe benefits. Unusual opportunity to carry on University graduate studies while working full time. Moving expenses paid. U. S. Citizenship required.

Write, giving details of education and experience, to

A. J. Procassini
The University of Michigan
Willow Run Laboratories
Ypsilanti, Michigan

ENGINEERS · PHYSICISTS



Do YOU Want?...

Freedom in thinking and the practice of development engineering, with a minimun of supervision?

Complete, *modern*, development laboratory facilities?

Association with a company whose background in electronic tubes dates to the earliest days of vacuum tubes?

To work in a company whose position in industry can weather economic stresses?

To live in a fine community of lovely residential areas, within minutes' drive of the laboratory, where all summer and winter sports are nearby?

To have an opportunity for you *and your family* to grow and prosper in a fine small city with excellent schools and churches?

Then...

You will want to further explore the challenging electronic tube engineering opportunities at Westinghouse Electronic Tube Division in Elmira, N. Y. Telephone collect or send resumé to R. M. Jarrett (Phone Elmira 9-3611).

There are challenges in such fields as:

TUBE DESIGN & DEVELOPMENT

MICROWAVE TUBES: Magnetrons, traveling wave tubes, klystrons, reference cavities, and other devices.
PICKUP DEVICES: Image orthicon, vidicon, infra-red, X-ray image intensifier.
POWER TUBES: High power, neutron counter, or gas tubes.
CATHODE RAY TUBES: Color and black-and-white.
OTHER TUBES: Including receiving and power tubes.

THERMIONIC EMISSION ENGINEERING

In each aforementioned field.

APPLICATION ENGINEERING

In each aforementioned field.

GLASS ENGINEERING

For power tube manufacturing.

Perhaps you are planning an August or early September vacation, and can visit us in Elmira. Please phone prior to visit for appointment for personal interview, and bring resumé and pertinent details. Telephone now, collect, to R. M. Jarrett (Elmira 9-3611) for a definite date for your visit.

ONLY YOU!
CAN MAKE THIS IMPORTANT DECISION Write Now!

Send resumé, or telephone collect, to R. M. Jarrett, Dept. Q-20

Westinghouse
ELECTRONIC TUBE DIVISION • ELMIRA, NEW YORK

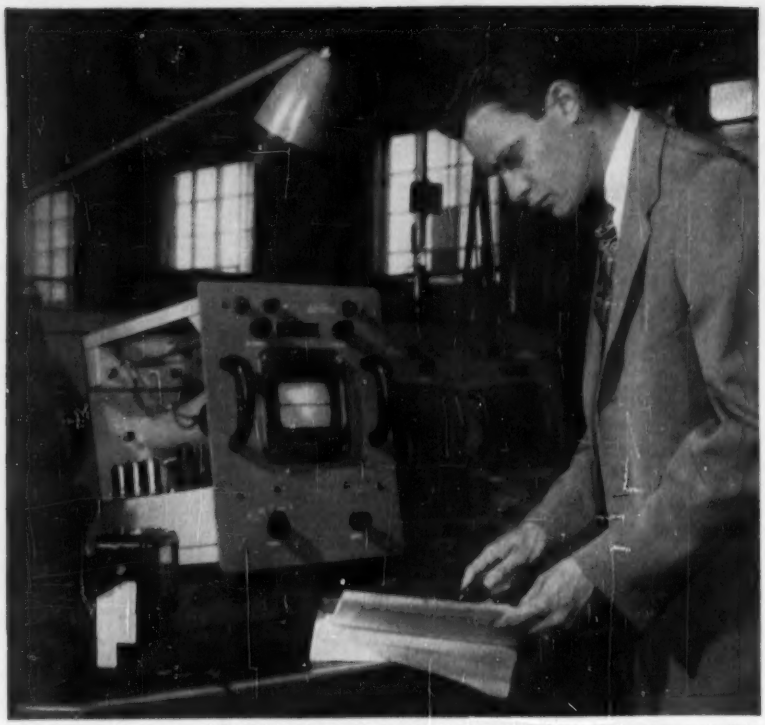

Console of Raytheon AN/CPS-9 Storm Detector Radar. Unit locates storms up to 300 miles away; measures their distance, direction, height; indicates presence of rain or snow.

FIELD ENGINEERING
WITH A FUTURE—at Raytheon

PLAN YOUR CAREER HERE — Raytheon needs men like you who are qualified for field engineering and have the ability to build a future in electronics. Experience in the field has enabled many of our engineers to become executives at Raytheon. Unlimited opportunity is open to you now in the following programs:

MISSILES . . . . . **Air-to-Air—Ground-to-Air**

RADAR . . . . . **Search—Fire Control Bombing—Countermeasures**

Other Equipment . . . **Ship and Airborne Sonar—Microwave Relay Links—UHF & Microwave Communications**

Raytheon has designed and built complicated electronic equipment for the past 30 years. One of its present equipment projects is the world's most publicized radar—the Arctic DEW LINE radar.

If you have a college degree, you'll rate preference. However, if you have an extensive electronic background, send in your application. Special training will be provided by our Training Facility to prepare you for your assignments.

Attractive salaries, benefits, allowances. Interesting domestic and overseas assignments. Please address your inquiry to E. K. Doherr.

RAYTHEON

RAYTHEON MANUFACTURING COMPANY
GOVERNMENT SERVICE DEPARTMENT
100 River St., Waltham 54, Mass.

ENGINEERS

product development

The expanding Radio Receiver Department of this well-known company offers qualified engineers an assured future for professional recognition in the following areas:

Product Development Engineer, EE or ME

Highly creative; familiar with mass product techniques of consumer goods. This cost-conscious man will be responsible for the forward-looking programs and new product areas.

Mechanical and Electrical Development Engineers

Should be creative and have some experience similar to that for the product development engineer; to devise new ingenious circuits and new manufacturing techniques.

You will be working in upstate New York, close to the Adirondack Forest Preserve, where the advantages of big-city conveniences and small-town comfort blend into a wholesome family life.

All our notable company benefits plus high starting salary. Relocation expenses paid.

Please send resume in confidence to:

P-2244, Electronics
Class. Adv. Div., P.O. Box 12, N. Y. 36, N. Y.

PROJECT ENGINEERS
Electrical or Mechanical
$8400 to $12,000 Yr.

Progressive company seeks experienced research, design or development men, Juniors or Seniors—with or without degrees.

Experience in timers, relays, solenoids, systems, controls, synchros, transformers, power equipment, magnetic amplifiers, or electronics equipment. Should have initiative and desire to progress. Capable of directing groups of engineers.

Send complete resumes to:

J. J. COOPER
64 E. Jackson Blvd., Chicago, Ill.
Suite 940 — Phone: Wabash 2-1918
Prompt and confidential service.

PLANT SUPERINTENDENT
SALARY $12,000

A new division of large multiple manufacturing co. needs a plant superintendent experienced in the electro-mechanical field. Early promotion to management. Company assumes agency fee & moving expense.

MONARCH PERSONNEL
28 E. Jackson Blvd. Chicago 4, Ill.

ENGINEERS UNLIMITED...

This might well be the most important letter *you'll* ever write

...because it could open the door to a lifetime job in a wonderful company

If you're an Electrical Engineer, with a high degree of skill and imagination in any of the fifty-odd fields listed right, we believe we can offer you the most promising opportunity in America.

Since 1940, Stromberg-Carlson's volume has increased *sixteen times*. In 1955, we became a division of the headline-making General Dynamics Corporation. Our future is as unlimited as humans can promise themselves—and *you* could well grow with us.

We are not looking for job-hoppers—but for men now stymied either by the limitations of a little company or the complexity of a giant. In any of the job classifications listed here, you'll find satisfaction and opportunity.

And you'll like Rochester—well-known for its grand schools, handsome residential sections and wide entertainment, vacation and cultural facilities. This firm's employee relations (including a liberal bonus plan) make it one of the state's preferred industries.

The list at right shows where there's room for you and your ideas to grow. Dig in now—with a detailed letter to Mr. Arthur N. Paul, at the address below. We think you'll like what he has to say to you.

S-C

STROMBERG-CARLSON COMPANY

A DIVISION OF GENERAL DYNAMICS CORPORATION

104 CARLSON ROAD, ROCHESTER 3, N. Y.

You'll find your future in one of these specialized areas

RESEARCH

Communication and Data Systems • Information Theory • Semi-Conductor • Digital Techniques • Servo Mechanisms • Electronic Switching • Acoustic Transducers • Magnetic Amplifiers • Nucleonics • Microwave and Wireline Carrier

ELECTRONICS

Radio Communications • Mechanical Design Engineering • Infrared • Automatic Test Systems • Countermeasures • Navigational Systems • Radar • Computer Techniques • Military Transistor Applications • Missile Guidance Systems • Microwave Development • Electronic Communications

AUTOMATION

Systems Engineering • Automatic Assembly • Transistors • Amplifiers & Filters • Automatic Test Equipment • Numerical Control • Computers • Counters • Instrument and Power Servos • Production Engineers

WIRE COMMUNICATION

Dial Central Office Equipment • Telephone Instruments • Wireline Carrier • Frequency Multiplex • Toll Ticketing • Transistor Circuitry • Microwave Links • Electro-mechanical Design • Electronic Switching Systems

AUDIO-ACOUSTICAL

Transformers • Tape Recorders • Audio Amplifiers • Loudspeakers • Electronic Carillons • Intercommunication Systems • Auto Radio • Home Radio • High Fidelity Music Reproduction • Sonar

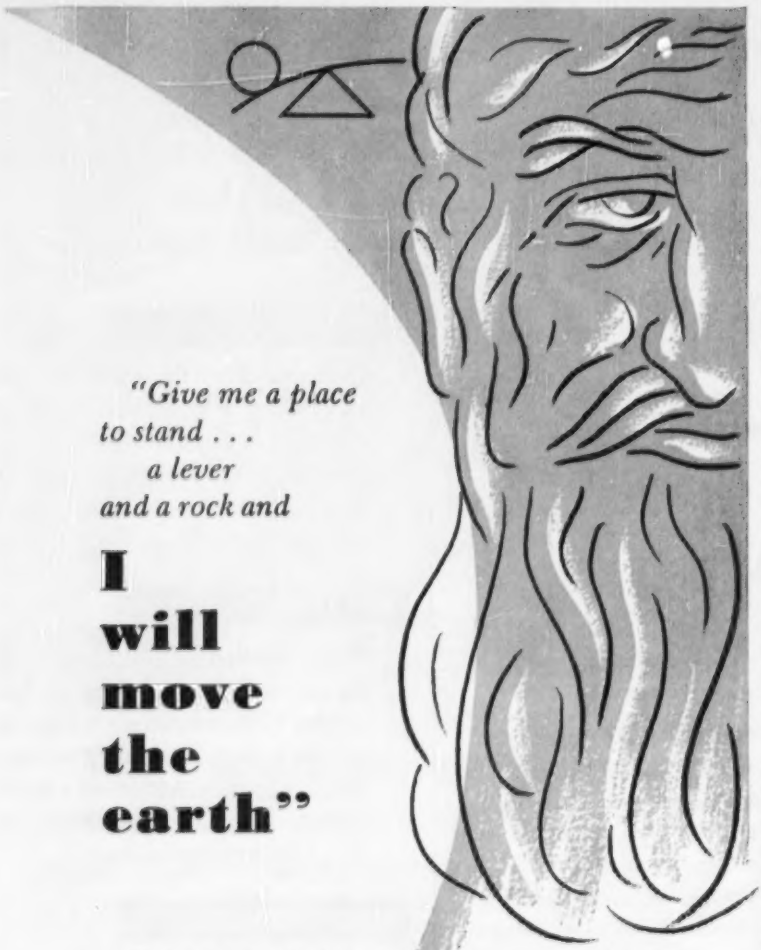

"Give me a place to stand . . . a lever and a rock and

I will move the earth"

Today, as in Archimedes time, many a scientist and engineer is stymied through lack of facilities for research, development and production of an "out of this world" idea.

To such individuals, Farnsworth *is* "the place to stand, the lever and the rock" in these exciting and challenging fields: Missile guidance, control, and test equipment systems, microwaves, radar and countermeasures, infra-red systems, industrial electronics, antennas, transistor and pulse circuitry and packaging.

Your resume will receive immediate, confidential attention.

Farnsworth

A DIVISION OF IT&T

Address Technical Employment Director
FARNSWORTH ELECTRONICS COMPANY, FORT WAYNE, INDIANA
A Division of International Telephone and Telegraph Corporation

TEST ENGINEERS
DO YOU LIKE YOUR ENVIRONMENT?

Investigate the Environment created at AC for its Advanced Development Programs on Missile Guidance and Aircraft Fire Control Systems.

OUR ENVIRONMENTAL LABORATORY

is one of the most Versatile Laboratories in the country and is in hte process of a Major, Permanent Expansion. Men hired will enjoy working with the finest of test equipment and facilities, together with top men of the field.

We are currently engaged in the following Types of Test Activities:

VIBRATION TESTING
COMPLEX WAVE ANALYSIS
LOW TEMPERATURE—ALTITUDE
HIGH TEMPERATURE
RELIABILITY EVALUATION
INSTRUMENTATION

Write MR. J. HEFFINGER,
Supervisor of Salaried Personnel

AC
The Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.

HRB e.e.'s and physicists

A rewarding future is waiting for you at HRB. You will live in State College, a few minutes walk from the Pennsylvania State University. Located among the scenic Nittany mountains of central Pennsylvania, State College offers the congenial atmosphere for young family growth. Some of the finest hunting and fishing areas in the United States are located in the area. HRB, one of the country's fastest growing research companies offers excellent salaries and generous company benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

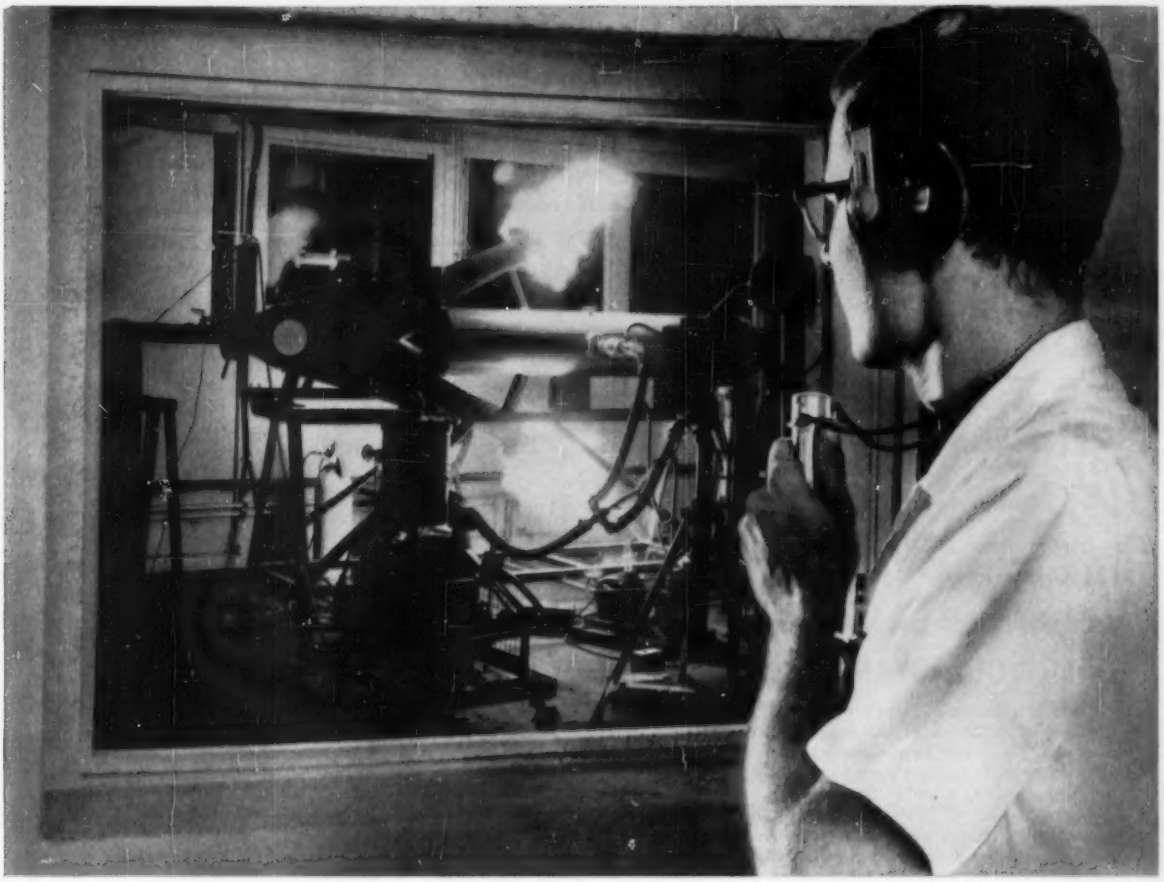

HYPERSONICS

AT CORNELL AERONAUTICAL LABORATORY

This is the "business end" of a shock tunnel. The photograph illustrates its use to obtain data on hypersonic flight . . . data which will be needed to engineer intercontinental missiles. The shock tunnel was conceived by a Cornell Aeronautical Laboratory engineer six years ago and was initially developed under a self-supported internal research program, and later by Air Force contract. Today the tunnel has become a basic tool for the study of high-speed gas dynamics.

The hypersonic program is one of the 160 technical research projects that are currently in progress at C. A. L. These projects deal with almost every area of research related to the challenging problems of modern flight. Electronics, materials, atmospheric physics, weapon systems, and applied mathematics are among the many stimulating areas of research available at C. A. L. for the professional man with an inquisitive mind.

CORNELL AERONAUTICAL LABORATORY, INC.
OF CORNELL UNIVERSITY

The story behind Cornell Aeronautical Laboratory and its contributions to aeronautical progress is vividly told in a 68-page report, "A Decade of Research." Whether you are interested in C. A. L. as a place to work or as a place to watch, you will find "A Decade of Research" both useful and pertinent. Mail in the coupon now for your free copy.

G. L. Kopp
CORNELL AERONAUTICAL LABORATORY, INC.
Buffalo 21, New York

Please send me "A Decade of Research."

Name

Street

City Zone State

☐ Please send employment information.

engineers . . . physicists

NEW opportunities at MOTOROLA in Phoenix

WORK IN A VACATIONLAND

(your family will love year-round outdoor living)

WHILE YOU ADVANCE YOUR CAREER

Here are two of the country's newest and most complete Electronic Laboratories; (1) our expanding Military Research lab. and (2) our new Semi-Conductor Division. Both offer outstanding career advantages . . . (see listing below). This is your opportunity to get in on the ground floor of a swiftly expanding company. You'll enjoy working in air conditioned comfort in the most modern and well instrumented laboratories . . . with liberal employee benefits, including an attractive profit sharing plan and association with men of the highest technical competence.

Salary levels are open and commensurate with ability. You'll like working with Motorola in Phoenix, where there's room to grow and it's fun to live.

MOTOROLA IN PHOENIX HAS OPENINGS FOR:

Electronic Engineers, Mechanical Engineers, Physicists, Metallurgists, and Chemists, in the following categories:

Research Laboratory

- Microwave Antennas
- Pulse and Video Circuitry
- Radar Systems Design
- Circuit Design
- Electro-Mechanical Devices
- Systems Test
- Transistor Applications

for above positions write to:

Mr. R. Coulter
Dept. A
3102 N. 56th St.
Phoenix, Arizona

Semi-Conductor Division

- Transistor Application
- Transistor Devices
- Solid State Physics
- Physical Chemistry
- Metallurgical Engineering
- Production Engineering

for above positions write to:

Mr. V. Sorenson
Dept. A
5005 E. McDowell Road
Phoenix, Arizona

Excellent opportunities in RIVERSIDE & CHICAGO, too

RIVERSIDE, CALIF., Exceptional openings in Military Operation Analysis, Analog Computor Flight Simulation, Digital Computor Analysis, Microwave Systems, Servo Mechanisms, Missile Systems, Aerophysics.

Write to:

Mr. C. Koziol
Dept. A
8330 Indiana Ave.
Riverside, California

CHICAGO, ILL., Challenging positions in Two-Way Communications, Microwave, Radar and Military equipment, Television (Color), Radio Engineering and Field Engineering.

Write to:

Mr. L. B. Wrenn
Dept. A
4501 Augusta Blvd.
Chicago 51, Ill.

MOTOROLA

CLASSICAL PHYSICIST

Ph.D.—some years experience—to do research and development on instrument and sensor principles.

Basic & Applied Research. Laboratory Operation.

Suburban location near large city.

Five figure salary plus attractive large company benefit plans.

Reply in confidence to:

P-2203, ELECTRONICS
Class. Adv. Div.
P.O. Box 12, N.Y. 36, N.Y.

ELECTRICAL ELECTRONIC and MECHANICAL ENGINEERS

Excellent opportunities in the field of

AUDIO AMPLIFIER DESIGN
SERVO AMPLIFIER DESIGN
COMPONENT DEVELOPMENT
EQUIPMENT DESIGN

Senior and Junior Engineers

Write, giving full details to:
Personnel Director, Dept. B

GIBBS MANUFACTURING AND RESEARCH CORPORATION
Janesville, Wisconsin

Bendix Aviation Corporation
YORK DIVISION

YORK, PENNSYLVANIA
TELEPHONE YORK 47-2611

Dear Engineer,

If you are a fortune-hunter, turn the page; this is not for you. But if you are one of the great majority of professional men who is primarily interested in a satisfying job and attractive working and living conditions with reasonable security and good promise for the future, read on!

Sure, this is a sales pitch - but different, since it aims to be honest! We need Engineers, just like every other leading company. You've seen the screaming ads promising Utopia, or Nirvana, to anybody with any semblance of engineering qualifications. We're different! At York, we cling to the belief that you will be more impressed with a frank statement of the pros and cons.

First, we are in the electronics business. Most of our work is military. Since we are working with five or six government agencies, our activities are diverse. We are a small, but full-fledged division of the Bendix Aviation Corporation, which conveys the security and stability of a large company. On the other hand, Bendix operates its divisions on a practically autonomous basis, so that we also have the flexibility and healthy atmosphere of a small, independent company. Nobody gets buried!

The plant is 100,000 sq. ft. big - about 3 years new and excellently equipped with machinery and test equipment. The plant is located about five miles east of York, Pa., on the Lincoln Highway, in what the real estate dealers describe as a "beautiful suburban area". (And it is.) You can live (as I do) within three minutes drive of the plant. For $10,000 you can have a 2-bedroom house (cheaper if you buy a run-down farm house).

The town (of about 75,000) has at least one of everything you could find in a bigger city, including a symphony orchestra of some note. (Sorry, the pun was unintentional.)

Here in our plant, we believe that engineers are people, individuals yet, and not hired hands. We exercise some care in hiring, because we want them to stick; and, in fact, our turn-over rate is negligible. The work and status of each individual is reviewed every six months. This doesn't mean that he gets a raise every time, but 10% a year isn't far from the average. As an engineer, it's possible to make over $10,000 a year, but you have to be good.

We operate basically by a project system, with a great deal of responsibility vested in each Project Engineer. The supporting departments - Drafting, Mechanical Engineering, Model Shop (you should see our Model Shop), technical publications and the like - furnish service to the project groups. We do about $1,000,000 a year engineering business alone, and seem to have no difficulty in acquiring more. We're growing fast!

We don't offer you the moon, but we do offer you a fair shake!

Sincerely yours,

K. F. Umpleby

K. F. Umpleby
Chief Engineer

P.S. If what I've said interests you, get in touch with me!

K.F.U.

ENGINEERS NEW OPENINGS TO $15,000

East coast summer resorts are conveniently located nearby. Exceptional professional positions. It will pay you to investigate these opportunities and benefits for you and your family.

PROJECT ENGINEER—MECHANICAL—5 to 10 years' experience in the design of precision mechanisms, high speed devices, servo controls.

PROJECT ENGINEER—PULSE TECHNIQUES—5 to 10 years' experience in the development and application of pulse circuits and techniques to military and commercial equipment.

SYSTEMS ENGINEER—UHF and Microwave Communications Application of formal mathematical and physical theory to the development of systems. Advanced degrees in engineering and mathematics preferred.

PROJECT LEADER—Analog and Digital Information Handling. Direct design and development projects involving data processing for military application.

PROJECT ENGINEER—AVIATION ELECTRONICS—5 to 10 years' experience in development and design of airborne communication and navigation equipment.

PROJECT ENGINEER—TRANSISTOR APPLICATIONS—3 to 10 years' experience in the application of transistors to military or commercial equipment. Interest in general circuitry.

PROJECT ENGINEER—MICROPHONE DESIGN—2 to 5 years' experience in the design of commercial microphones.

PLEASE PHONE OR WRITE FOR APPOINTMENT

Mr. A. Wilson—Dept. X-000—BRyant 9-5570

SUBURBAN EMPLOYMENT AGENCY, INC.

100 W. 42nd Street **New York, N. Y.**

Other offices in White Plains, N. Y. and Stamford, Conn.

ELECTRICAL ENGINEERS PHYSICISTS

Immediate openings in fast-growing field of

SEMICONDUCTORS

Permanent career positions with General Electric in Syracuse, New York . . . for development, instrumentation, design and processing of transistors and rectifiers.

Unusual opportunity for electrical engineers and physicists with B.S., M.S. or Ph.D. degrees.

Chance to work with the industry's leading engineers and scientists . . . under ideal working conditions in modern laboratories, fully equipped with all facilities.

To learn more about your G-E opportunity to live and work in the heart of New York's vacation land, write today to:

Mr. M. D. Chilcote,
Department 8-56-E

Electronics Park
Syracuse, New York

GENERAL ELECTRIC

HRB 'smaller company?

HRB is a small company. It has remained small by choice. Electronic engineers and physicists will find country quiet and metropolitan opportunity at HRB. Individual recognition for creative initiative is only one of the many advantages offered. A sincere interest in the progress of each engineer is standard policy in this internationally recognized "small" research company.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

SENIOR PROJECT ELECTRONICS ENGINEER
$650.00 to $950.00 Mo.
with overall experience in Research, Design & Development. To supervise Multi-Project Group. Need men in Audio, Transistor, Servos, Synchros, Systems,—General Electronics. Openings due to expansion.

J. J. COOPER
64 E. Jackson Blvd. Suite 940
Chicago, Ill. WAbash 2-1918
Prompt and confidential service

ENGINEERS

for immediate placement

ELECTRICAL ENGINEERS
MECHANICAL ENGINEERS
ELECTRONIC ENGINEERS
COMPUTER ENGINEERS
SOLID-STATE PHYSICISTS

Engineering at NCR:

1. Immediate, permanent positions in Mechanical Engineering, Electrical Engineering and Physics Research Divisions.

2. Engineering project work in Adding Machines, Cash Registers, Accounting Machines, Computers and related Data Processing Equipment in Dayton, Los Angeles, and Ithaca, New York.

3. Opportunities in design, development, production-engineering and packaging of mechanical, electronic, and electromechanical devices.

4. Some experience in development, design, and application of high-speed, light-weight mechanisms of the intermittent-motion type; or, experience in digital devices and components, is desirable, but not essential.

5. Ample training and indoctrination is available to all employees.

As an NCR engineer you, with your family, will enjoy:

1. UNLIMITED OPPORTUNITY in the broad, ever-expanding field of Business Machine Engineering and Research.

2. AN EXCELLENT SALARY, plus exceptional benefits of lifetime value for you and your family.

3. A RECREATIONAL PROGRAM for year-round enjoyment of the entire family, including a new NCR Country Club with 36 holes of golf, and a 166-acre employees' park for outings with swimming, boating, and supervised play for the children.

4. LIVING IN DAYTON . . . considered a clean, attractive, progressive city with outstanding school facilities.

5. YOUR WORK AT NCR with its friendly, family atmosphere, with its employee morale at a very high level, and with people who, like yourself, have decided to build their professional future with NCR.

National*

ACT AT ONCE — Send résumé of your education, experience and geographic preference to:

EMPLOYMENT DEPARTMENT, TECHNICAL PROCUREMENT SECTION 4

THE NATIONAL CASH REGISTER COMPANY
Dayton 9, Ohio

* Trade-Mark—Reg. U. S. Pat. Off.

99.07* ENGINEERS and DESIGNERS

Stay with

AC

THE ELECTRONICS DIVISION OF GENERAL MOTORS

PIONEERING OPPORTUNITIES in the following fields!

- MISSILE GUIDANCE SYSTEMS
- JET and TURBO PROP ENGINE CONTROLS
- BOMBING NAVIGATIONAL COMPUTER SYSTEMS
- AIRBORNE FIRE CONTROL
- U.H.F. COMMUNICATIONS
- MICRO-WAVE EQUIPMENT

* Our current monthly turnover figures are phenomenally good. Have been, we are proud to say, for years. It speaks well for the job opportunities, working conditions and the wages we pay our Engineers and Designers. Investigate for your future. Write us today.

Write today for Employment Application:
Mr. John F. Heflinger, Supervisor of Salaried Personnel

AC SPARK PLUG • THE ELECTRONICS DIVISION
GENERAL MOTORS CORPORATION
Milwaukee 2, Wis. Flint 2, Mich.

ELECTRONIC ENGINEERS!

ARE YOU ENGINEERS . . . OR TIME CARD NUMBERS?

If you are tied up in red tape . . . if the scope of your work is limited . . . if you can't use your creative engineering abilities . . . then MEMCO offers you a sound escape from stagnation and monotony.

AT

MEMCO:

every electronic engineer . . .

- is encouraged to use his creative talents.
- works on all phases of his projects.
- is appreciated as an engineer, not as a replaceable cog in a big machine.
- gets top pay and many benefits.
- can build a sound, worthwhile future.

For full details please write to:

MARYLAND ELECTRONIC

MANUFACTURING CORPORATION

5009 Calvert Road
College Park, Maryland

(A suburb of Washington, D. C.)

LOW SPECIALIZATION *AND* HIGH OPPORTUNITY

High specialization sometimes makes it difficult for a good all-around engineer to find a kind of work that satisfies the many facets of his aptitudes and abilities, and at the same time fulfills his financial requirements. Specialization in electronics has gone so far that often an engineer has difficulty in changing from the field of specialty assigned by his company to one more to his liking. To make this change, an engineer must frequently throw away much of his hard gained experience and start at or near the bottom of a new field. All too seldom does the opportunity for major advancement come to an engineer having a broad engineering knowledge, rather than a specialization in any particular field.

McGraw-Hill's Technical Writing Service needs several engineers who have a familiarity with all phases of electronics and who are, or can become, engineering writers and editors. These men may now be engaged in the design or manufacture of electronic components, tubes or equipment or they may be engineering writers or editors. Most important, they must have the engineering viewpoint and they must know the needs and attitudes of the electronic design engineer. Because it is very possible that they may not know that they fulfill these requirements, we invite interested engineers and writers (specialist and non-specialist alike) to investigate this unusual opportunity.

McGraw-Hill is preparing under Air Force contracts several engineering handbooks on the application techniques of electronic component parts and tubes. The contents will be on a par with that of other well known McGraw-Hill engineering handbooks. The editorial staffs, on which there are several high level openings, will be responsible for the technical contents they will do through original writing as well as work with top level engineering contributors. The work offers both challenge and opportunity to the engineering writer who, if he is a specialist at all, is a specialist in everything electronic.

Interested and qualified engineers and engineer-writers may apply in person or to send their resumes by mail.

Personnel Relations Dept.
Room 818
McGraw-Hill Book Co.
330 West 42 Street
N. Y. 36, N. Y.

REEVES

ELECTRONIC FIELD SERVICE ENGINEERS

GRADUATES OR EQUIVALENT EXPERIENCE

Now read this!

Men with experience in

- **Gun Fire Control**
- **Naval or Ground Radar**
- **Computers**

are offered factory training at an excellent beginning salary.

Full per diem subsistence while on assignment. Free Hospitalization and Surgical benefits for you and your dependents.

Reeves, one of the foremost designers of Missile Guidance and Electronic Control Systems, as well as the REAC® Computer, requires additional Field Service Engineers.

Here is an opportunity to join an expanding organization with an exceptional reputation in the Electronic Field.

PRESENT OPENINGS ALSO IN THE RESEARCH AND DEVELOPMENT SECTION OF REEVES FOR ELECTRICAL ENGINEERS ARE AVAILABLE IN:

- Industrial Automation
- Guided Missile Controls
- Gyroscopics
- Transistor Circuits
- Components
- Analog Computers
- Inertial Systems
- Radar
- Gun Fire Control
- Nucleonics

ASSIGNMENTS in the United States and Overseas Areas. A few assignments with New York City as home base are available.

Interviews can be arranged in either New York City or Mineola, L. I. Daily, until 6:30 P. M.

REEVES INSTRUMENT CORP.

215 East 91st Street, N. Y.
Near 3rd Avenue
Call Mr. Carew, TR 6-6222

East Gate Boulevard
Roosevelt Field, Mineola, L. I.
Call Mr. Waters, Pioneer 6-8100

LITCHFIELD PARK, PHOENIX, ARIZONA

NEW ELECTRONIC LABORATORY NOW BEING STAFFED

This modern laboratory is being organized as the Western Division of the Well-established Aerophysics Departments of the Goodyear Aircraft Corporation of Akron, Ohio.

KEY PERSONNEL FOR FUTURE EXPANSION NOW BEING SELECTED

Openings are available for experienced personnel and recent college graduates

COMPLETE MISSILE AND ELECTRONIC SYSTEMS MICROWAVES, SERVOMECHANISMS, AIRCRAFT INSTRUMENTATION, RADARS AND STABILIZED ANTENNAS

Long range research and development projects

University of Arizona graduate studies available under the Goodyear Fellowship Program, or company financed evening courses.

WESTERN LIVING AT ITS BEST
"IN THE VALLEY OF THE SUN"

Modern Inexpensive Housing

GOODYEAR AIRCRAFT CORPORATION

A Subsidiary of the Goodyear Tire & Rubber Co.

Send resume to:
A. E. Manning
Engineering and Scientific Personnel
Goodyear Aircraft Corporation
Litchfield Park, Arizona

Similar opportunities available in our Akron, Ohio Laboratory.

---

engineer, E.E.

MICROWAVE

If you have ability to make original contributions to field of microwave transmission and propagation, you will want to work with this progressive company.

You'll receive recognition for initiative through company salary program, besides benefits of one of the most forward-looking industrial relations plans.

Your work calls for RF design work on microwave transmission lines and reflectors for shipboard or landbased systems. Previous experience in this area is desirable. Working with designers, customers, and subcontractors, you will need 3 to 5 years experience plus additional study in theory and techniques.

Please send resume in confidence to:
P-2225, ELECTRONICS
Class. Adv. Div., P.O. Box 12, N.Y. 36, N.Y.

ENGINEERS

AC needs

SERVO ENGINEERS

...Electrical

...Mechanical

GM INERTIAL GUIDANCE SYSTEM PROGRAM

ELECTRONICS DIV.,

Milwaukee 2, Wis.

●

Seeks experienced engineers for the further development and systems testing of Inertial Guidance Systems and their Servo Loops.

Enjoy Challenging Opportunities in the most versatile Laboratories in the country. Work with the top men in the field and with the finest test, research and development facilities. We are in the process of a Major, Permanent, Expansion Program. New Plant facilities being added in suburban Milwaukee area.

To aid you in your professional advancement AC will provide financial assistance toward your Master's degree. A Graduate Program is available evenings at the University of Wisconsin, Milwaukee.

GM's Electronics Division aggressive position in the field of manufacture and GM's long-standing policy of decentralization creates individual opportunity and recognition for each Engineer hired.

Recent EE,ME Graduate Inquiries Also Invited

Milwaukee offers ideal family living in a progressive neighborly community in cool, southern Wisconsin where swimming, boating, big league baseball and every shopping and cultural advantage is yours for the taking.

To arrange personal, confidential interview in your locality send full facts about yourself today to

Mr. John F. Heffinger
Supervisor of Salaried Personnel

AC
Electronics Div.
General Motors Corp.
Milwaukee 2, Wis.

---

a word to

SEMI-CONDUCTOR ENGINEERS...

How to Keep at the FOREFRONT of DEVELOPMENTS in your field

The best method, quite simply, is to join the staff of a company where continuous, intensive, massive research activities are constantly improving transistor performance and introducing basic innovations in this burgeoning world of the semi-conductor.

Not only is Sylvania the world's largest manufacturer of crystal diodes, but it is also a notable pioneer in this area, responsible for such developments as the practical miniaturization of transistors. Only last year SYLVANIA developed the metallurgical process which so greatly increases the electrical stability and life of tiny germanium diodes.

Inevitably, engineers and scientists who work at SYLVANIA's Electronics Division march at the forefront of the procession, professionally speaking. And they enjoy the added advantages of association with a company of outstanding stability, diversity and record of growth. (In 54 years Sylvania has grown from a one-plant company to an organization with 43 plants and 16 research and engineering laboratories.)

Salaries are high and company policies contribute in every way to peace of mind and personal progress. Comprehensive benefits include life, accident, hospital-medical-surgical insurance and a unique savings and retirement program—one of the most advanced in industry. Also liberal educational aid.

POSITIONS OPEN AT THIS TIME

for men with semi-conductor experience or a degree in Electrical, Mechanical Engineering, Chemistry, Physics or Metallurgy.

Please forward complete resume to
Miles R. Weaver, *Personnel Manager*
Electronics Division

SYLVANIA

SYLVANIA ELECTRIC PRODUCTS INC.
100 Sylvan Road, Woburn, Mass.

COOK RESEARCH LABORATORIES

THE FIELD OF RESEARCH OFFERS Satisfying CAREERS

Immediate Openings In—

RADAR — COMMUNICATIONS — MICROWAVE TECHNIQUES — INFORMATION THEORY — CIRCUIT DESIGN — TELEMETERING — PULSE TECHNIQUES — SERVO — FIRE CONTROL — WEAPONS SYSTEMS — MATHEMATICAL ANALYSIS FOR NUMERICAL COMPUTATION — THERMODYNAMICS — AERODYNAMICS — AIRCRAFT INSTRUMENTATION — NUCLEAR PHYSICS — MECHANICAL DESIGN — TEST ENGINEERS, COMPONENT & EVALUATION.

Cook Research Laboratories offers outstanding opportunities in the field of Research and Development for Engineers and Physicists at both the Senior and Junior levels.

Cook Research maintains one of the nation's foremost research and development laboratories and has on its staff men who are nationally known in their respective fields.

At Cook Research, employees are encouraged in the publishing of technical papers. Undergraduate and graduate work is fully subsidized by the company.

The Research division offers highly diversified work in both research and development, excellent salaries and working conditions.

Company products are to be found on all commercial and military aircraft.

The Laboratory activities ARE WORLD WIDE IN SCOPE.

Cook Research Laboratories are located in the northwest suburbs of Chicago. This location is conveniently located to many fine universities, civic and shopping centers and many excellent resort areas.

Contact
D. M. HALLIDAY

• 8100 N. Monticello Ave.
Skokie, Illinois KEystone 9-2060

• A DIVISION OF COOK ELECTRIC COMPANY
2700 N. Southport Ave., Chicago, Illinois

ELECTRICAL AND MECHANICAL ENGINEERING AND MANUFACTURING SINCE 1897

Design and Engineering Opportunities for

Electronic Engineers — **Design Engineers**
Electrical Engineers — **Field Engineers**
Project or Systems Engineers

Kollsman's expansion in the airborne equipment field has created a need for additional engineers and electro-mechanical designers, and offers unusual scope to alert, capable and enthusiastic professional men. For engineers, a degree in Mechanical Engineering, Electronic Engineering or Physics is necessary, plus experience or a strong interest in airborne instrumentation or allied fields.

America's finest aircraft instruments are designed at Kollsman, where the congenial atmosphere and modern facilities contribute to an environment in which a man can do his best work.

Please submit resumes to T. A. DeLuca

kollsman INSTRUMENT CORPORATION

80-08 45th AVENUE, ELMHURST, NEW YORK • SUBSIDIARY OF Standard COIL PRODUCTS CO. INC.

ELECTRICAL AND MECHANICAL ENGINEERS

MOTOROLA RESEARCH LABORATORIES, located in the healthful climate of Arizona's Valley of the Sun, has several openings for engineers experienced in the following:

Electronic circuit design and development for missile guidance, radar and VHF communications.

Mechanical design of missile-borne and vehicular electronic equipment.

Microwave antenna and wave guide design.

Transistor circuit development.

Engineers desired who have B.S. degrees or above and at least two years direct experience. Free health, life and accident insurance. Free hospitalization plan. Profit sharing. Paid holidays. Sick leave, vacations. Ideal working conditions. Plenty of housing, reasonably priced. Excellent schools. Exceptionally mild and dry winter climate.

Write:
DR. ROBERT E. SAMUELSON, Chief Engineer
MOTOROLA RESEARCH LABORATORY
3102 North 56th Street
Phoenix, Arizona

Simex . . . an experiment by the Combat Operations Research Group, to test an anti-tank mine simulator, or automatic umpiring device for troop tests or maneuvers. The simulator looks like an actual mine, but emits an electrical pulse that stops the tank without damage or injury. Simex is typical of work done by CORG scientists to assist in developing new tactics and organizations for the Army.

- PHYSICISTS
- MATHEMATICIANS
- *and other* SCIENTISTS

will find in CORG a small but growing research group, where freedom to think and unlimited creative opportunities are paramount. Contact with varied scientific disciplines, excellent living conditions, all usual benefits, make CORG "a good place to work."

for information, write to:
Dr. F. C. Brooks, *Director*
COMBAT OPERATIONS RESEARCH GROUP
Fort Monroe, Virginia

TECHNICAL OPERATIONS
INCORPORATED

Engineers . . . Physicists

PLOT YOUR FUTURE at Admiral®

Continued and steady growth of established research and development projects presents a number of unusual opportunities for men at all levels of experience.

UHF—VHF Communication Systems

Advanced development and design of military apparatus at all power levels—airborne and ground equipment.

Television—Military and Civilian

Airborne and ground systems for the military, including receivers, transmitters, camera, antennas, sync generating systems and displays. Civilian TV includes monochrome and color receivers as well as printed circuit and transistor application.

I.F.F. and Other Forms of Radar

Includes circuit design, equipment modification and original research, air traffic control, beacons and delay line work.

Nuclear Radiation Damage Control

To conduct post-irradiation analysis of electronic components, evaluate reactor levels, analyze results and proprietory research into radiation resistant materials.

Radio Receiver Design

Design and development of broadcast receivers, hi-fi phonographs, transistorized and vacuum tube types.

If your talent and skill are not being used in a way for which your education and experience has equipped you, investigate these and other assignments at Admiral.

Current openings offer excellent income and employee benefits including retirement plan, paid group insurance and college tuition refund plan plus ideal working conditions.

Send a letter outlining your education and experience to Mr. W. A. Wecker, Personnel Division.

Admiral Corporation
3800 W. Cortland St. • Chicago 47, Illinois

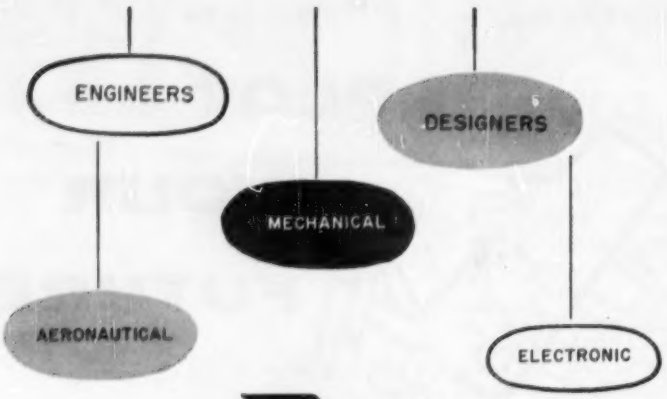

Bendix

Provides MIDWEST Opportunities for Experienced Engineers

In South Bend, hundreds of professional people have found a community adequately satisfying for a highly educated way of life. Notre Dame is an excellent center for technical, graduate study, as well as affording cultural opportunities.

Immediate openings available in research, design, test and development:

AIRCRAFT JET FUEL SYSTEMS →
Electro-Mechanical Design
Magnetic Amplifiers
Nuclear Control Applications
Rocket Circuitry
Servo-Mechanisms
Systems Evaluation
Thermo-dynamics
Transistorization
Vibration Analysis

AIRCRAFT LANDING GEAR →
Computer Applications
Heat Transfer
Stress Analysis
Structure
Systems and Component Design or Testing

AUTOMOTIVE COMPONENTS →
Conventional Brakes
Hydraulic Systems
Mechanical Design and Test
Power Brake Research
Power Steering

If you are interested in any of these engineering projects, send a summary of education and experience to:

Technical Employment,
Department S-8,
BENDIX PRODUCTS DIVISION OF
BENDIX AVIATION CORPORATION
401 Bendix Drive
South Bend, Indiana

General Manager

If you are a General Manager with experience in manufacturing electric or electronic components, this opportunity will warrant your confidential inquiry.

A planned retirement has created this opportunity for an executive to direct all phases of the operation of this multi-plant manufacturing company. We are well financed, our products and markets are diversified and our volume of business exceeds $10,000,000 annually. We are growing through constant improvement in present lines and through extensive research and development activity.

We require a man in the age range of 35 to 45 years. Earnings will be in excess of $35,000 in salary and bonus, and will be supplemented by a liberal stock option arrangement.

Interviews will be held in a convenient city, at our expense. Your reply will be handled in complete confidence and should include age, present position and home telephone number.

P-2243, Electronics
Class. Adv. Div.,
P.O. Box 12, N.Y. 36, N.Y.

LIAISON ENGINEER

$11,000

Specializing in the administrative and broad technical direction of product department relationships with laboratories engaged in the design and development of advanced systems in the fields of radar, communications, and countermeasures, requiring knowledge in a wide range of advanced techniques including infra-red, magnetics, transistorization, digital techniques and sub-miniaturization.

Please reply in confidence to:

P-2045, Electronics
Class. Adv. Div., P.O. Box 12,
N. Y. 36, N. Y.

TECHNICAL WRITERS

ELECTRONIC

SENIORS & JUNIORS

On Assignments That Provide Permanent & Challenging Opptys

This is an established department that is rapidly expanding. You must have a thorough knowledge of electronic equipment and experience in writing to government specifications.

Working conditions, salaries & employee benefits are of the best in the field. We have a quiet, uncrowded, pleasant, air-conditioned office, conveniently located on the main highway only 15 minutes from the George Washington Bridge.

If you feel qualified, contact
MR. J. SACKMAN, Personnel Adm.

FEDERAL ELECTRIC CORP.
AN I.T.&T. ASSOCIATE
ROUTE 17, LODI, N. J.

To EMPLOYERS Who Advertise for MEN:

Frequently, when there are many applicants for a position, only the most promising letters are acknowledged. The other applicants never know whether their letters reached a prospective employer or not. These men often become discouraged, will not respond to future advertisements and even question their bona fide character.

Every Advertisement Printed Is Duly Authorized. You can help keep our readers interested and get better returns to your advertising in this section if you acknowledge each reply—in plain envelopes, if you wish.

Classified Advertising Division

McGRAW-HILL PUBLISHING CO., INC.

"Put Yourself in his place."

ENGINEERS
PHYSICISTS

PLANNED RESEARCH-CENTERED
EXPANSION MAKES ALL THE DIFFERENCE
IN ELECTRONICS AT

GENERAL ELECTRIC

Every engineer interested in an *exceptional* career in electronics should consider what makes a G-E career exceptional. Basically, G-E research continually *creates* careers — as proved again by the recent establishment of an Industrial Computer Department. This new center now has openings for many engineers to research, develop, design and produce all types of computers.

This is the kind of *planned* research-centered expansion that has given the G-E engineer one of the fastest-growing professional environments in America today...

PLUS *all the personal advantages of stability, benefits and:*

"Individual-oriented" Project System of Work • Stimulating Widely-known Associates • Management-grooming Programs Individual Merit Evaluations • Rotating Assignments • Overall Project Follow-through • In-plant Technical Seminars • Reimbursed Graduate Study • Firm Policy of Promotion-from-within

Bachelor's or advanced degree in Electrical or Mechanical Engineering or Physics, and experience in electronics industry necessary.

To learn how and where you can begin your G-E career in electronics, use the coupon. You may, of course, send your resume with it, if you wish.

TO:
GENERAL ELECTRIC
Electronics Pk., Syracuse, N. Y.
ATT.: Dept. 8-6-E
Technical Personnel

I am interested in...
...Advanced Development
...Design
...Field Service
...Technical Writing
...Sales

In the field of...
...Military Radio & Radar
...Multiplex Microwave
...Mobile Communications
...Semiconductors
...Electronic Components
...Computers
...Television Tubes & Antennas
...Television Receivers

FROM:

NAME_____

ADDRESS_____

_____

DEGREE_____

ELECTRONIC ENGINEERS TECHNICIANS

FIELD ENGINEERING

5 years installation, maintenance and/or instruction experience

in AIRBORNE and/or GROUND

- **COMMUNICATIONS**
- **NAVIGATION**
- **RADAR**

ASSIGNMENTS
DOMESTIC AND OVERSEAS

DYNAMIC ELECTRONICS • NEW YORK, INC.

73-79 Woodhaven Blvd.,
Glendale, L. I., N. Y.

Mr. Leonard—Illinois 9-7000



GAMBLE?

sure...

if the odds are in YOUR favor...

DECISION/INC — nationwide specialists in recruitment of engineering personnel — have an active and enviable record in developing job opportunities for men who want bigger salaries and a chance for greater personal achievement.

DECISION/INC is retained by more top-ranking firms thruout the nation than any other organization to *find the right man* for each job.

This confidential service costs *you* nothing.

It takes TIME—MONEY—EFFORT to improve your job situation. If you are an engineer or scientist, particularly in the ELECTRONIC—AERONAUTICAL or GUIDED-MISSILE field, DECISION/INC will do this *quickly, effectively at no cost* to you.

HOW? After a study of your outlined objectives, our placement specialist develops a plan "tailor-made" for you—which includes a resume of your experience... and then a review by selected companies leading to confidential interviews at *your* convenience and *our* client's expense.

NOW is the time for DECISION!

All *you* do *Now* is... send us your name, home address, job interest or title. We take it from there.

Write or phone:

OLIVER P. BARDES, *President*—DECISION/INC
1448 FIRST NATIONAL BANK BUILDING
CINCINNATI 2, OHIO GArfield 1-1700

Publishers of the authoritative ENGINEERS' JOB DIRECTORY

AVION DIVISION
ACF Industries, Inc.

Continues it's policy of Dynamic Leadership in Electronic Development

Challenging Research & Development Positions For:

ELECTRONIC ENGINEERS

Airborne Electronic & Missile Systems Equipment

- Analog Computers
- Aircraft Navigation Aids
- Magnetic Amplifiers
- Microwave
- Magnetic Storage Devices
- Radar
- Infra-Red
- Electro-Optics

Openings At All Levels From Junior to Supervisory

Field Service Representatives

to represent AVION at permanent field locations. Work will consist of design, maintenance and liaison with the customer. QUALIFICATIONS: Experience in one of the following: Radar; Computers; Fire Control Systems; Servomechanisms; Magnetic Amplifiers.

Top Per Diem • Travel Allowances

Call or write:
Technical Employment Dept.
Every inquiry will be answered

Tuition-Paid Educational Plan

AVION encourages advanced education. Our liberal educational benefits plan enables qualified employees to further their education either by taking courses leading to a degree, or courses pertinent to their assignments.

Location ideal for working & living

Comfortable, convenient living provides optimum conditions to bring out the best of your capabilities. Suburban Paramus, N. J., offers countrified, neighborly residential communities nearby . . . yet it is only 15 minutes from G. Washington Bridge and New York City's superb cultural, educational and entertainment centers.

You are invited to join a leader

Move to the forefront of your field . . . our important position in Electronics ensures you of challenging assignments on advanced projects . . . rapid recognition of your accomplishments . . . as well as high salary supplemented with many company-paid benefits.

AVION DIVISION
ACF INDUSTRIES, INCORPORATED

Route 17, Paramus, New Jersey COlfax 1-4100

Our Virginia Plant: North Pitt Street, Alexandria, Va.

ADVERTISING MAN WANTED FOR TECHNICAL PRODUCTS

- Previous advertising experience not necessary but helpful. Must have at least two or three years of college with courses in engineering and technical subjects and like to write If you have the qualifications we have an opportunity open for you. Man selected will be trained in all phases of industrial advertising. In your letter of application state age, education, positions held, and give statement of why you want a career in advertising. Location: well-known Connecticut company.

P 1212 Electronics
330 W. 42 St, New York 36, N. Y.

ELECTRONIC DESIGNER

Development and design of industrial measurement and control equipment for the continual process industries. Unusual opportunities in a rapidly expanding firm and industry for personal growth through technical "know how" and hard work. BSEE or MSEE required. 1 to 10 years experience. Servo and feedback experience helpful. Send resume to: 1205 Chesapeake Ave., Columbus 5, Ohio.

Industrial Nucleonics Corporation

HRB

more responsibility!

HRB is offering a challenge to electronic engineers and physicists who are able to accept mature responsibility on research and development projects. The creative mind will find academic freedom, complete management encouragement and full responsibility on a task. Excellent salary and generous company benefits.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

development engineers

ELECTRO-MAGNETIC DEVICES

Challenging opportunities at all levels for engineers to contribute to the development of advanced precision electro-magnetic components for application in

INERTIAL GUIDANCE SYSTEMS
ANALOG COMPUTERS
DIGITAL COMPUTERS

Salary—up to $12,000
(Commensurate with experience)

Send resume in confidence to:
Manager of Technical Personnel Dept. 674

ARMA
Division American Bosch Arma Corp.
Roosevelt Field, Garden City, L. I., N. Y.

ELECTRONIC ELECTRICAL ENGINEERS

Permanent positions are available at all levels of experience at both the Chicago and Arizona locations of an internationally known research and development organization. We need qualified personnel to work in:

Electronic Countermeasures
Microwaves
Radar
Antennas and Propagation
Radio Interference
Communications Systems

Here is an excellent opportunity to join the staff of a progressive organization, work on challenging and diversified research programs, receive liberal educational benefits, and enjoy optimum professional associations. New air-conditioned facilities are under construction, and will be available shortly.

Write to
J. A. Metzger
ARMOUR RESEARCH FOUNDATION
of Illinois Institute of Technology
10 West 35th St. Chicago 16, Illinois

Needed Now...

Engineering Talent

in ■ Electronics

■ Physics

■ Mechanics

IRL

It's not too late...

. . . to take advantage of an opportunity to ally yourself with a rapidly expanding research and development organization . . . Industrial Research Laboratories. Here you can rekindle that spark of interest in your chosen profession by being associated with all phases of a project instead of merely one aspect of the overall. In an atmosphere which encourages high level engineering, individual work wins ready recognition. You can live in pleasant suburban surroundings, and work in buildings designed specifically for research laboratories.

Industrial Research Laboratories holds a liberal approach to all employee benefits—paid vacations, sick leave, incentive plans, and many other advantages.

Since its inception, I.R.L. has not discharged or furloughed an employee for lack of work.

Take a realistic approach to the future of your career . . . ally yourself with the firm with a future. *Write:*

INDUSTRIAL RESEARCH LABORATORIES

IRL

Div. of Aeronca Manufacturing Corp.

Dept. A-8 Hilltop & Frederick Rds.
Baltimore 28, Maryland

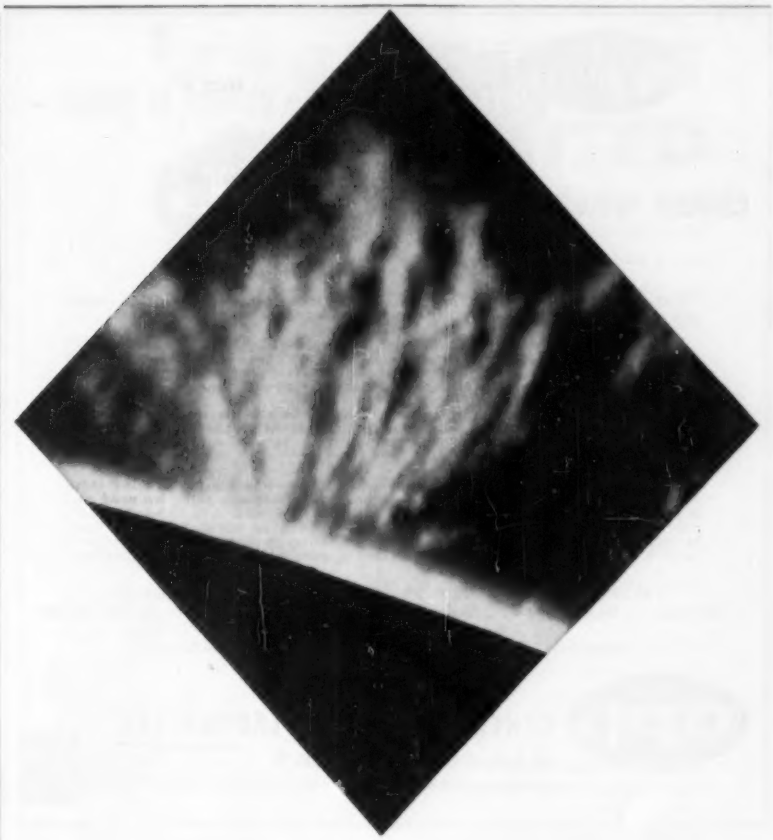

GOLDEN OPPORTUNITY

Not since the advent of electricity has so golden an opportunity as this knocked at the engineer's door!

It is the horizonless future of nucleonics, the science—and the power—of a whole new age.

Today, a top team of Martin engineers is solving the problems of developing and harnessing nuclear power. Their goal: The development of a fully integrated system of packaged and portable power for military and industrial uses.

If you are interested in this immense field of research and development, contact J. M. Hollyday, Dept. E-08, The Martin Company, Baltimore, Maryland.

MARTIN

ENGINEERS **today** the choice is yours –

choose wisely... choose GPL

GPL—with its widely diversified operations in today's most active fields—offers you a lifetime of achievement, satisfaction and advancement.

Here you'll be working with men who have repeatedly broken ground on the frontiers of science, made GPL one of the country's outstanding technological leaders. You'll be part of the nationwide General Precision Equipment organization whose many companies operate in highly advanced areas.

We offer you work on challenging new projects in various stages of research and development. We offer you stimulating professional problems, top pay levels and working conditions, and ideal family living in semi-rural Westchester—just an hour from New York City.

GPL's engineers are men of skill and imagination—and we are seeking more men of their caliber. If you have the inherent capabilities and skills we need and if you are seeking a stable and rewarding career, send resume to Richard E. Hoffman, Employment Mgr. Interviews can be arranged in advance at any time, including weekends. Security limits us to considering applications of U. S. citizens only. We will pay the expenses of qualified applicants to come for an interview.

RADAR NAVIGATION AND BOMBING SYSTEMS (DOPPLER AND INERTIAL

Research . . . Development . . . Applications . . . System Analysis . . . Project Management . . . Field Engineering . . . Technical Writing

Computers . . . Servos . . . Microwave Techniques . . . Pulse Circuitry

GPL **GENERAL PRECISION LABORATORY** INCORPORATED

63 Bedford Road, Pleasantville, N. Y.

A SUBSIDIARY OF GENERAL PRECISION EQUIPMENT CORPORATION

ENGINEERS! SCIENTISTS!

Is your advancement keeping pace with your ability?

TCC

If you are not pleased with your present position . . . if you just don't seem to be doing the type of work you like to do . . . then we suggest you contact us at once.

We represent clients who retain us to secure qualified technical personnel for their ever expanding research and engineering programs. TCC can help you find the position that will utilize your abilities to the utmost . . . as well as satisfy your salary requirements and location preference.

Our service is completely confidential with all contacts being made at your residence. There is no expense or obligation to you what so ever.

Write, phone, or wire today for information which will put you "on your way" to the position of your choice.

TECHNICAL CAREER CONSULTANTS

641 Tri-State Building

432 Walnut Street, Cincinnati 2, Ohio

Attention: Robert Adams

ENGINEERS

H HONEYWELL *Brown Instruments Division*

OFFERS EXCELLENT OPPORTUNITIES IN

RESEARCH — DESIGN and DEVELOPMENT
APPLICATION and SYSTEMS ENGINEERING

Openings for ELECTRICAL ENGINEERS, MECHANICAL ENGINEERS, PHYSICS MAJORS, in all phases of Industrial Instrumentation, including Automatic Data Processing and Nuclear Reactor Controls.

Opportunities permit designing and working with equipment from the initial ordering through development to actual operational checkout. These position offer excellent potential for men with ambition and inventiveness. Openings are with a separately functioning division which is expanding rapidly to meet present trend in Automatic Data Processing and Reactor Control areas. Positions provide prestige and benefits offered by one of the leaders in INDUSTRIAL AUTOMATION.

CONTACT OUR REPRESENTATIVE

MR. D. R. GARVEY

HONEYWELL
BROWN INSTRUMENTS

Wayne & Windrim Avenues — Philadelphia 44, Pa.

engineer

MISSILE GUIDANCE *Specialist*

$10,000

Advanced engineering design and development of missile guidance equipment employing the latest techniques in the fields of radar and communications. The essential job emphasis is directed toward the mechanical aspects of design and development of a complex nature.

Please reply in confidence to:

P-2044, ELECTRONICS
Class. Adv. Div.,
P. O. Box 12, N. Y. 36, N. Y.

Your Inquiries to Advertisers Will Have Special Value . . .

—for you—the advertiser—and the publisher, if you mention this publication. Advertisers value highly this evidence of the publication you read. Satisfied advertisers enable the publishers to secure more advertisers and—more advertisers mean more opportunities or better service—more value—to YOU.

it's **YOUR** move

as an **ELECTRONICS ENGINEER** or **PHYSICIST**

What do you look for when you think of moving to a better position?

- Full and immediate use of your training and experience
- Simple, sensible salary policies offering rapid and continued recognition of your contributions
- An organization small enough to insure individual recognition and growth and large enough to offer long range security
- A research and development organization managed by engineers and scientists
- An opportunity to develop your professional competence through fundamental engineering in a variety of fields

All of these, plus the usual benefits, are reasons given by engineers themselves for joining TECHNICAL OPERATIONS, INCORPORATED.

Positions are available for electronics engineers and physicists in such fields as Transistor Circuitry, Operations Research and Nuclear Instrumentation.

It's *your* move. Be sure it's a *good* move. Call or write us before you make it. (Ask for our *short*, preliminary application card)

Robert L. Koller

TECHNICAL OPERATIONS
INCORPORATED

6 SCHOULER COURT
ARLINGTON 74, MASSACHUSETTS
MI 3-4500

**Dr. F. C. Henriques, President and Technical Director; Dr. Marvin G. Schorr and Dr. Eric T. Clarke, Vice Presidents*

ENGINEERING UNLIMITED

...an established concept at Convair-Pomona where your opportunities in the career of your choice are virtually unlimited. Work in the finest engineering facility in the country at America's first exclusive Guided Missile plant. Ultra-modern surroundings, completely air-conditioned, in beautiful Pomona only minutes from Los Angeles, the mountains, the seashore or desert recreation. Here is country living near the city at its best:

Excellent opportunities available now in:

ELECTRONICS
DYNAMICS
AERODYNAMICS
THERMODYNAMICS
OPERATIONS RESEARCH
HYDRAULICS
MECHANICAL DESIGN
LABORATORY TEST ENGINEERING

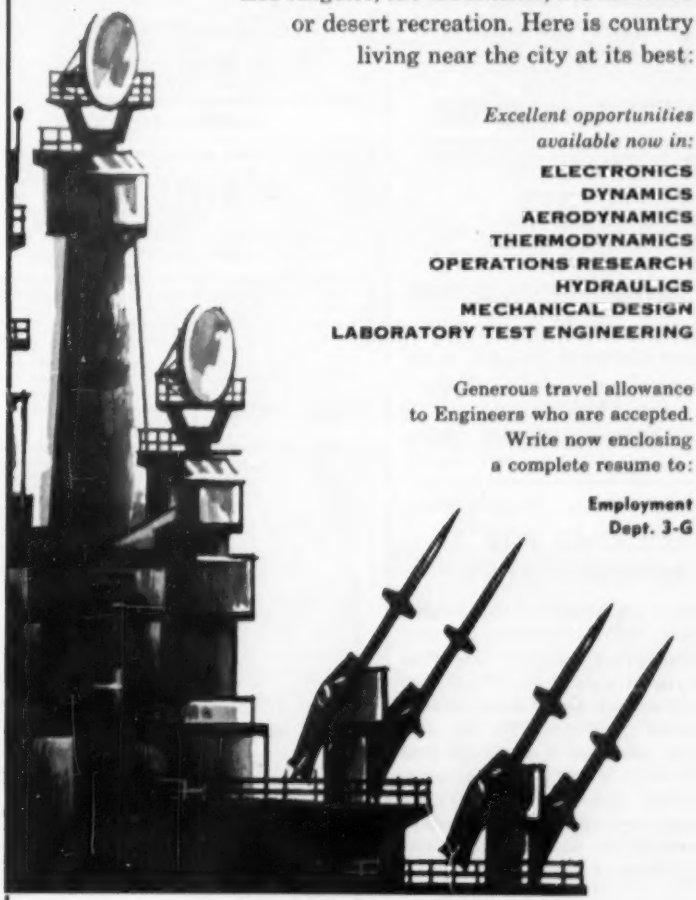

Generous travel allowance to Engineers who are accepted. Write now enclosing a complete resume to:

Employment
Dept. 3-G

CONVAIR
A DIVISION OF
GENERAL DYNAMICS
CORPORATION
POMONA
CALIFORNIA

get into a
UNIQUE field . . .

VIBRATION

Apply your engineering background in an uncrowded and interesting line of work. Become a specialist on vibration for the country's leading company in this field.

MB Manufacturing Company, an expanding division of Textron Inc., is adding DESIGN ENGINEERS, SALES ENGINEERS and FIELD SERVICE ENGINEERS to its select staff of specialists in vibration engineering. Requirements: Electronic and/or mechanical background.

You'll be a valued individual in a solid company, get plenty of rewarding responsibility and opportunity, have liberal job benefits, and enjoy New England living. Interested? Send resume to: J. M. Wirtz, Personnel Mgr.

MB MANUFACTURING COMPANY
1041 State Street, New Haven 11, Conn.

ETI . . . *Offers Unusual Challenge and Opportunity to . . .*

PHYSICISTS and ENGINEERS

. . . with high vacuum and microwave experience—for long range Research and Development on Molecular Oscillators

★ NEW and OPEN FIELD
★ EXPANDING OPERATION
★ SMALL COMPANY
★ BENEFITS and PROFIT SHARING

If Qualified Call or write
GORDON THOMPSON BUtterfield 8-2600

Interviews evenings or weekends by arrangement
All Confidential

ELECTRICAL TESTING LABS., INC.
2 East End Ave. N. Y. 21, N. Y.

LOOKING FOR A REPRESENTATIVE?

California organization of engineers established 1947, specializing in components, desires additional line. Must be a quality product for MIL applications. Company should have capacity for major production. We are particularly interested in a product from one of the following fields: transistors, capacitors, motors, relays, miniature guidance components. Time and money is available for immediate sales missionary work.

WEIGHTMAN & ASSOCIATES
4101 Burbank Boulevard
Burbank, Calif. Phone: Victoria 9-3435

WASHINGTON REPRESENTATIVE

Individual Company and Industry Association Representative. Extensive law and accounting background representing private business in contracts administration, government regulatory, administrative, legislative, financial and other activities. Fully accredited. Can handle additional account at this time.

RA 2247 Electronics
Class. Adv. Div. P.O. Box 12 N Y 36, N Y

REPLIES (Box No.): Address to office nearest you c/o This publication Classified Adv. Div.
New York: P. O. Box 12 (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)
LOS ANGELES: 1125 W. 6th St. (17)

POSITIONS VACANT

California State Polytechnic College plans additions to its staff in the Electronic Engineering Department to teach (1) courses in fields, waves and anennas, and (2) intermediate level courses in circuits. Starting salary depends upon qualifications of applicant. For information, write to Harold P. Hayes, Dean of Engineering, San Luis Obispo, California.

Wanted immediately: an electronic engineer to head the electronic workshop in the department of neurophysiology in the new Venezuelan Institute for Neurology and Brain Research in Caracas (See Nature, vol. 176, pp. 1049-1051, December 3, 1955). The nature of the work requires knowledge of high gain D.C. amplifiers, cathode ray oscilloscopes etc. and some interest in biology. Salary and working conditions excellent. Address all communications care of P-2211, Electronics.

Electronics Engineer, Physicist or Chemist with electronics experience. For instrumental work on diversified nuclear chemistry research project in a major eastern university. Opportunities for cooperative and individual research and for part-time graduate study with remission of tuition. P-2096, Electronics.

POSITION WANTED

Purchasing Agent Available Electronics 6½ years diversified solid experience in procurement of military and commercial material for manufacturer of electronic equipment. Also experienced in purchasing for leading electronics export firm. Heavy background in production scheduling, expediting, project buying, inventory systems, bid preparation and evaluation. Able to read prints, prepare bills of material and familiar with government specs. Intimate knowledge of electronic markets and vendors. Smart trader. College graduate with B.S. in business and one year of engineering. Seeks change for more responsibility and challenge. Will locate N.Y.C. New Jersey, Conn., or Long Island. Write box PW-2226, Electronics.

Don't forget the

BOX NUMBER

When answering the classified advertisements in this magazine don't forget to put the box number on your envelope. It's our only means of identifying the advertisement you are answering.

Employment Opportunities

ADVERTISERS INDEX

Admiral Corp 435
American Machine & Foundry Co. 412
Arma Div., American Bosch Arma Corp. 418, 438, 443
Armour Research Foundation of Illinois Institute of Technology 438, 443
Avion Div., of ACF Industries 438

Bendix Aviation Corp.
Pacific Division 418
Products Division 436
Research Labs 436
York Division 427

Collins Radio Co. 410
Convair, A Div. of General Dynamics Corp.
Pomona, Calif. 441
San Diego, Calif. 417
Cook Research Laboratories 434
Cooper, J. J. 422, 428
Cornell Aeronautical Lab., Inc. 425

Decision, Inc. 437
Dynamic Electronics, New York, Inc. 437

Electrical Testing Labs, Inc. 442

Farnsworth Electronics Co. 424
Federal Electric Corp. 436

General Electric Co.
Syracuse, N. Y. 419, 428, 437
General Motors Corp.
AC Electronics Div. 408, 424, 430, 433
General Precision Laboratory, Inc. 440
Gibbs Manufacturing & Research Corp. 426
Goodyear Aircraft Corp.
Akron, Ohio 411
Litchfield Park, Arizona 432

Haller, Raymond & Brown, Inc., 418, 424, 428, 438, 443
Honeywell Brown Instruments 440

Industrial Nucleonics Corp. 438
Industrial Research Labs. 439
Instruments for Industry, Inc. 418

Johns Hopkins University 420

Kollsman Instrument Corp. 434

Martin Co., Glenn L. 439
Maryland Electronic Mfg. Corp. 430
MB Manufacturing Co. 442
McGraw-Hill Book Co., Inc. 431
Melpar, Inc. 420
Michigan, University of 420
Missile Test Project 412
Monarch Personnel 422
Motorola, Inc. 426
Research Laboratory 434

National Cash Register Co. 429

Page Communications Engineers, Inc. 418

Radio Corp. of America 414, 415
Raytheon Mfg. Co.
Newton, Mass. 407
Waltham, Mass. 422, 443
Wayland, Mass. 407
Reeves Instrument Corp. 432

Stavid Engineering, Inc. 406
Stromberg-Carlson Co., Div. of General Dynamics Corp. 423
Suburban Employment 428
Sylvania Electric Products, Inc.
Buffalo, N. Y. 408
Waltham, Mass. 408
Woburn, Mass. 433

Technical Operations, Inc. 435, 441
Technical Career Consultants 440
Tracerlab, Inc. 416
Transition Electronic Corp. 413
Tung-Sol Electric, Inc. 410

Weightman & Associates 442
Westinghouse, Electronic Tube Division 421

This index is published as a service to the readers. Care is taken to make it accurate but CLASSIFIED assumes no responsibility for errors or omissions.

BORN TOO LATE — by Dahl

"HAVE YOU REACHED THE TOP IN YOUR PRESENT FIRM?"
HELP WANTED
"PERHAPS YOU WOULD LIKE TO ENLARGE YOUR HORIZONS—"
HELP WANTED
"IF YOU CARE FOR OUR SOUTHERN CALIFORNIA CLIMATE—"
HELP WANTED
"WE OFFER YOU COUNTRY-CITY LIVING IN MASSACHUSETTS"
HELP WANTED
"MONEY IS NO OBJECT WITH US SO WHY STAY IN A RUT?"
HELP WANTED
I SHOULD HAVE BEEN AN ENGINEER!
PRESIDENT 8TH NATIONAL BANK
DAHL

RAYTHEON

Excellence in Electronics

For further information write Mr. D. Hamant
(Send a resume if you wish)
Microwave & Power Tube Operations

RAYTHEON MANUFACTURING COMPANY
Foundry Avenue, Waltham 54, Mass.

COMPUTER
APPLICATIONS AND DEVELOPMENT
ENGINEERS

COMPUTING SERVICES
Engineering & Scientific Computation
Analog
Digital

COMPUTERS SYSTEMS DEVELOPMENT

DEVELOPMENT

Analog and Digital
Systems analysis and synthesis
Logical organization
Circuit design

These are full time positions offering fascinating and varied work and educational benefits for graduate study. Contact:

J. A. Metzger
ARMOUR RESEARCH FOUNDATION
of Illinois Institute of Technology
10 West 35th St. Chicago 16, Illinois

HRB

tangible benefits

To the electronic engineer and physicist with demonstrated creativity and sound technical background, HRB offers an abundance of benefits. You will share in such company policies as paid vacations, company-paid group life insurance, retirement plan and individual hospitalization and medical programs. Of course, salaries are excellent and location is ideal.

For application form, write:
Technical Personnel Officer
Haller, Raymond & Brown, Inc.
State College, Pennsylvania

ENVIRONMENTAL ENGINEERS

Challenging opportunities in environmental research and development. Interesting assignments in the field of inertial navigation including:

Shock and Vibration studies
High and Low Temperature Investigation
Component evaluation

Salary—up to $12000
(Commensurate with experience)

Please send resume in confidence to:
Manager of Technical Personnel, Dept. 674

ARMA
Division American Bosch Arma Corp.
Roosevelt Field, Garden City, L. I., N. Y.

CLASSIFIED SEARCHLIGHT SECTION ADVERTISING

BUSINESS OPPORTUNITIES ~ EQUIPMENT - USED or RESALE

UNDISPLAYED RATE

$2.10 a line, minimum 3 lines. To figure advance payment count 5 average words as a line.

PROPOSALS $2.10 a line an insertion.

BOX NUMBERS count as one line additional in undisplayed ads.

DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED RATE

The advertising rate is $18.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches—to a page.

EQUIPMENT WANTED or FOR SALE ADVERTISEMENTS acceptable only in Displayed Style.

Send NEW Ads or Inquiries to Classified Adv., Div. of Electronics, P. O. Box 12, N. Y. 36, N. Y. for Sept. issue closing Aug. 2nd

The publisher cannot accept advertising in the Searchlight Section, which lists the names of the manufacturers of resistors, capacitors, rheostats, and potentiometers or other names designed to describe such products.

ELECTRONIC TUBES — All types — one dependable source!

NEW! GUARANTEED! AND NOW IN STOCK!

WESTERN ELECTRIC TUBES

Write or call for quantity discounts. All items F.O.B. Los Angeles, subject to being unsold and change of price without notice. We also buy tubes. Top prices paid

V & H RADIO AND ELECTRONICS SUPPLY

2079-2047 W. VERDUGO BLVD. LOS ANGELES 6, CALIF. REpublic 0275

NEED METERS?

STANDARD or SPECIALS

ANY QUANTITY — NEW — SURPLUS

FOR ELECTRONIC — MILITARY AIRCRAFT — HAMS

ALL MAKES — MODELS RANGES — SIZES

METERS REPAIRED RESCALED RECALIBRATED

WRITE - PHONE - WIRE

INSTRUMENT SERVICE

76-14 Woodside Ave.
Elmhurst 73, N. Y.
CAA No. 4264 Ltd. HA 9-2925

ART-13 APR-4 BC-610-E

BC-348, BC-312, BC-342, TCS, BC-221, TS-173, ARC-1, APR-5AX, RTA-1B
FRA Teletype Converters (RCA)

ALLTRONICS,
Box 19, Boston 1, Mass. *Richmond 2-0048*

LEAK DETECTOR

CONSOLIDATED ENGINEERING

MASS SPECTROMETER TYPE, MODEL #24-101A ACCESSORY PUMPS, ELECTRONIC GAGES, ETC. ASSEMBLED INTO THREE PORT VACUUM MANIFOLD SYSTEM. $3,000.00

THE FUSITE CORP.
6000 Fernview Ave. Cincinnati, Ohio

TIME DELAY RELAYS

Hayden 115v 60 cy. adj. in 5 sec. steps to 40 sec. spdt mu sw. $6.95. With 2 arms & 2 sw.....$9.95
Hayden 5901-2, to 1 min. in .1 min. steps....$7.95

RELAYS: many types in stock—inquiries invited. We wish to buy your surplus timers, relays, etc.

EMPIRE ELECTRONICS COMPANY
400-Q Ave. L. Brooklyn 30, N. Y. Cloverdale 2-4000

All Brand RESISTORS

Phone: Yonkers 9-6000

.... Legri S Company

391 Riverside Ave.
Yonkers 5, N. Y.

COAXIAL R.F. FILTERS

F-29/SPR-2, Hi-Pass., with 1000 mc. Cut-off. Type "N" input and output. 50 Ohms Z.....$9.50
F-41/SPR-1, Hi-Pass, with 300 mc cut-off. Type "N" input and output. 50 Ohms Z.....$10.50

CIRCUIT BREAKERS

#1510 M-7: 7 A, 24 VDC SCS #3H900-7-3.....$1.65
#AM 1614-100: 100 Amps, 24 VDC.....$1.65
#AM 1614-80: 80 Amps, 24 VDC.....$1.45
#AM 1610-5: 500 MA, 1000 VDC. Curve 3. SCS #3H900-A-50.....$2.25
SCS #3H900-10-3: 40 VDC, 10 Amps.....$1.65

10 CM R.F. HEAD

Complete R.F. Head and Modulator delivers 50 KW Peak R.F. at 3000 MC. Pulser delivers 12KV pulse at 12 Amp. to magnetron of .5; 1, or 2 microsec. duration at duty cycle of .001. Unit requires 115V, 400-2400 Cycles, 1 phase @ 8.5A. Also 24-28 VDC @ 2A. External sync. Pulse of 120V Req'd. Brand New, Complete with magnetron, magnet, plumbing and all tubes.....$375.00

400 CYCLE TRANSFORMERS

(All Primaries 115V. 400 Cycles)

KS13101	6.3V/15A, 6.3V/6.9A, 6.3V/0.4A, 6.3V/0.2A	$3.85
KS13104	1450VCT/0.283A, 1050VCT/0.217A	7.50
KS9613	6.3V/4A, 3V/1A	1.57
KS9318	6.3V/4A, P/O R-5S/ARQ-9	1.35
KS9608	1233/.35MA, 1140VCT/.07A	5.75
352-7102	6.3V/2.5A	1.45
M-7472426	1450V/1.8MA, 2.5V/.75A, 6.4V/1.9A 5V/2A, 6.5V/.3A, P/O ID-39/-APG-13	4.95
352-7039	640VCT @ 380MA, 6.3V/.9A, 6.3-V6A 5V/6A	5.49
702724	5800/5600 @ 32MA	6.95
KS9584	5000V/250MA, 5V/18A	22.50
KS9687	714VCT/.177A, 1710VCT/.177A	4.79
352-7273	700VCT/350MA, 6.3V/0.9A, 6.3V/-25A, 6.3V/.06A, 5V/CA	6.95
352-7070	2x2.5V/2.5A (2KV TEST) 6.3V/-2.25A, 1200/100/750V. @ .005A	7.45
352-7196	1140/1.25MA, 2.5V/3.75A, 2.5V/-1.75A—5KV TEST	5.95
352-7176	320VCT/50MA, 4.5V/3A, 6.3V/CT 20A, 2x6.3VCT/5A	4.75
RA6408-1	2.5/1.75A, 6.3V/2A—5KV Test	2.39
901692	13V/9A	2.49
901699-501	2.77V @ 4.25A—10KV Test	1.45
901698-501	900V/75MA, 100V/.04A	4.29
Ux8855C	980VCT/.067A, 5V/3A	1.79
RA6405-1	880VCT/65MA, 5VCT/3A	1.69
T-48852	700VCT/595MA, 5V/3A, 6V/1.75A	4.25
352-7098	2580V/6MA, 300VCT/115MA	5.95
KS9336	1110V/50MA TAPPED 625V 2.5V 5A	1.95
M-7474319	6.3V/2.7A, 6.3V/.66A, 6.3VCT/2A	4.25
KS80984	27V/4.3A, 6.3V/2.9A, 1.25V/.62A	2.95
52C080	650VCT/50MA, 6.3VCT/2A, 5VCT/-2A	3.75
32332	400VCT/35MA, 6.4V/2.5A,. 6.4V/-.35A	1.85
68G631	1150-0-1150V 2MA	2.75
68G198	6VCT/.00006 KVA	1.75
382433A	6.3V/9.1A, 6.3VCT/6.5A, 2.5V/3.5A, 2.5/5A	4.85
KS9445	592VCT/118MA, 6.3V/8.1A, 5V/2A	5.39
KS9685	6.4/7.5A, 6.4V/3.5A, 6.4/2.5A	4.79
70G30GI	600VCT/36MA	2.65
M-7474318	2160V/.027A	4.95
352-7069	2-2.5V Wdgs at 2.5A, Each Lo-Cap., 22Kv Test	5.95
352-7096	2.5V/1.75A, 5V/11A, 6.5V/6A, 6.5V/1.2A, D/O BC-500	4.95
352-7099	360VCT/20MA, 1500V/1MA, 2.5V/-1.75A, 6.3V/2.5A, 6.3V/6A, P/O BC-929	6.45

X BAND — 1" x ½" WAVEGUIDE

90 degree elbows. "E" Plane 2¼" radius.....$8.50
AT-68/UP 3 Cm Horn with type N. feed for receiver measurements, etc. New.....$7.45
ROTARY JOINT (APR-6) Sperry PT #658275, 180 deg. rotation, choke-to-choke. Has "Built-in" Di-Coupler. 20 DB, with "N" Takeoff.....$22.50
PARABOLOID DISH, 18" diam. Spun Aluminum, 8" Focus. For AN/APR-6.....$4.95
3 CM. DIPOLE and Feed Assembly. (May be used with above dish.) 8 inches long.....$5.00
FLEXIBLE SECTION 3 in. long. Cover-to-Cover.....$5.50
ROTARY JOINT (APR-6) Sperry PT #658275, 180 deg. rotation, choke to choke. Has "Built-in" Di-Coupler, 20 DB., with "N" Takeoff.....$22.50
3 CM. DIPOLE FEED, 15" L. for APR-15.....$14.50
MITRED ELBOW. Cast aluminum, 1¼" x ⅝" W.G. W. E. Flanges. "E" Plane.....$3.50
3 CM. ANTENNA ASSEMBLY: Uses 17" paraboloid dish, operating from 24 vdc motor. Beam pattern: 5 deg. in both Azimuth and elevation. Sector Scan.: over 160 deg. at 35 scans per minute. Elevation Scan over 3 deg. Tilt. Over 24 deg.....$35.00
RG52/U Waveguide in 5' lengths, fitted with UG 39 flanges to UG40. Silver plated.....Per length $5.00
Rotating-Joints supplied either with or without deck mountings. With UG40 flanges.....each $17.50
Bulkhead Feed-thru Assembly.....$15.00
Pressure Gauge Section with 15 lb. gauge.....$10.00
Directional Coupler. UG-40/U Take off 20db.....$17.50
MAGNET AND STABILIZER CAVITY For 2J41 Magnetron.....$24.50

I. F. AMPLIFIER STRIPS

Model 15:20 Mc Center frequency, Bandwith 2.5 Mc. gain figure; 65 db. Uses 5 stages of 6AC7's. Has D. C. Restorer and Video Detector A.F.C. Strip included. Input impedance: 50 Ohms. Less tubes (as shown).....$17.50

60 MC. Miniature IF strip, using 6AK5's 60 Mc center Freq. Gain: 95 db at Bandwidth of 2.7 Mc. New. Complete with tubes..$15.00

UNDERWATER MICROPHONE

Model JR-1 Hydrophone is a piezo-electric device using an array of 20 barium titanate cylinders enclosed in a rubber cylinder 46 inches L and 2½ inches in diam. Sensitivity:—105 db/microbar relative to 1 v/microbar. Frequency response: 200-15,000 cps. Impedance 100-150 ohms. The response at rt. angles to axis is uniform over an azimuth of 360 deg. The Hydrophone may be operated at depths up to 1000 ft. and temperatures of —1 deg C. to 35 deg. C.....$32.50

ELECTRON TUBES

1AB5	$1.20	5HP4	3.50	708D	8.75
1PSGT	.45	5J23	19.75	763A	1.50
1P39	1.10	5J30	5.00	784A	.95
2C21	.35	C5B/5C30	1.10	795A	.75
2C27/7193	.67	7C4/1203A	.18	796A	9.75
2C28A	.25	9GP7	1.45	704D	14.75
2J21A	2.50	10Y	.10	706EY	9.75
2J22	2.50	15R	.45	706CY	9.75
2J26	2.50	39/44	.15	708A	.65
2J27	3.00	QK59	25.00	709A	1.00
2J37	10.00	QK60	25.00	713A	.65
2J29	18.50	QK61	25.00	C-722A	.90
2J31	12.50	QK62	25.00	730A	6.50
2J32	12.50	ML-100	47.50	800	.65
2J38	9.00	HY114B	.25	801	.25
2J39	8.25	227A	2.50	841	.19
2J48	22.50	288A	6.75	860	1.00
2J62	5.00	316A	.50	861	15.00
3CP1/S1	1.75	355A	12.50	864	.19
3EP1	1.75	356B	5.00	876	.75
3FP7	1.70	WL417A	1.00	884	1.10
4J34	21.50	GL471A	2.10	CK1005	.50
4J38	85.00	WL531	2.75	1625	.70
4J42	15.00	832/1B32	1.25	1619	.15
5FP7	1.10	GL559	.75	9B12	.75
5GP1	4.50	700B	6.75	9004	.65

TEST EQUIPMENT

TEST OSCILLATOR TS-47/APR, 40-2000+ Mc. Fundamental coverage 40-500Mc in two ranges. Harmonics above 2000 Mc. Provides a calibrated (dial accuracy ±0.7 per cent) R.F. source for testing receiving equipment. Output 3MW or more up to 400 Mc. less on harmonics. C.W., mod. pulse or sine wave output. Operates on 115/230 60 Cy. or batteries. Part of APR countermeasures equipment. New.....$120

TS 13/AP. Signal source 9305-9445 mc, 50 microwatts. Comes with a wavemeter, thermistor-bridge power meter, and calibrated attenuator. Oscillator is a Klystron type 723/a-b which may be internally (self-synch) or externally pulsed. Controls are provided for FM operation, variable pulse delay, pulse width and phasing. Operates from 115 v, 60-800 cps. New...$375

TS 235 DUMMY LOAD: Provides excellent impedance match for peak powers of up to 750 kw. at .001 duty ratio. Frequency range 400-4,000 mc. Complete with blower.....$150

R34/APR-2. Scan and search receiver; automatically scans the spectrum 90-1,000 mc and records signals on paper strip. Can also be used for single-frequency reception. Operates from 115 v. 400-1600 cps....$295

TS-56A/AP TEST EQUIPMENT. Slotted line test equipment designed for operation over a frequency of 500-675 MC. Has impedance of 51 ohms. Ideal test set for matching antennas, measurement of characteristics of transmission line. With instructions manual. New. Shipping wt.: 41 lbs.....$95.50

DYNAMOTORS

TYPE	INPUT VOLTS	INPUT AMPS	OUTPUT VOLTS	OUTPUT AMPS	PRICE
BDAR83	14		375	.150	$6.50
15X-650	13	1.8	485	.095	4.35
DM33A	28	7	540	.250	3.95
B-19	12	9.4	275	110	6.95
			500	.050	
DA-3A*	28	10	180	.250	3.95
			150	.010	
			14	5	
PE 73 CM	28	19	1000	.150	17.50
BD69	14	2.8	220	.08	8.95
DAG-33A	28	3.2	450	.06	2.50
BDAR93	28	3.25	375	.150	5.75

‡Less Filter. *Replacement for PE 94.
†Used, Excellent.
PE 94, Brand New.....$5.95

PULSE NETWORKS

H-616 10KV, 2.2 usec., 375 PPS, 50 ohms imp....$27.50
H-615 10KV, 0.85 usec., 750 PPS, 50 ohms imp..$27.50
H-660: 25 KV, "E" CKT. 1.5 usec. 400 PPS. 50 Ohms Impedance, 5 sections.....$62.50
7-5E3-1-200-67P, 7.5 KV "E" Circuit, 1 microsec. 200 PPS, 67 ohms impedance 3 sections.....$7.50
7-5E4-16-60, 67P, 7.5 KV "E" Circuit, 4 sections 16 microsec. 60 PPS. 67 ohms impedance.....$15.00
7-5E3-3-200-67P, 7.5 KV. "E" Circuit, 3 microsec. 200 PPS, ohms imp. 3 sections.....$12.50
H-616 10 KV, 2.2 usec., 375 PPS, 50 ohms imp..$27.50
H-615 10KV, 0.85 usec., 750 PPS, 50 ohms imp..$27.50

PULSE TRANSFORMERS

382-7130. Primary 50 ohms. Secondary 1000 ohms, 12,000v, 12.0 Amp. Pulse: 1 or 2 usec. at .001 duty ratio. Fitted with magnetron well and bifilar winding for filament supply.....$32.50
MAGNETRON PULSE TRANS. #664: Prim. Imp. 30 ohms. 1600 v. pulse. Secondary Imp. is 1250 ohms, 12 KV pulse. Turns ratio sec: pri. is 7.5:1. Duty ratio is 0.001 at 1.2 usec. Bifilar winding 1.2A.....$8.50
RAYTHEON WX 4298E: Primary 4KV., 1.0 USEC. SEC. 16KV 16 AMP DUTY RATIO: 001 400 CYCLE PIL. TRANS. "BUILT-IN".....$22.50
WECO: D-163247 For Modulator of SCR 720.....$22.50
GE #K-2449A (As Shown)
Primary: 9.33 KV, 50 ohms Imp.
Secondary: 28 KV, 450 ohms.
Pulse length: 1.05/5 usec @ 635/120 PPS. Pk Power Out: 1,740 KW.
Bifilar: 1.5 amps.....$62.50

GE #K-2748-A, 0.5 usec @ 2000Pps. Pk. Pwr. out is 32 KW impedance 40:100 ohm output. Pri volts 2.3 KV Pk. Sec. volts 11.5 KV Pk. Bifilar rated at 1.5 Amp. Fitted with magnetron well.....$24.50
K-2745 Primary: 3.1/2.8 KV, 50 ohms Z. Secondary: 14/12.6 KV 1025 ohms Z. Pulse length: 0.25/1.0 usec @ 600/600 PPS. Pk. Power 200/150 KW. Bifilar: 1.3 Amp. Has "built-in" magnetron well.....$32.50
K-2461-A. Primary: 3.1/2.6 KV—50 ohms (line). Secondary 14/11.5 KV—1000 ohms Z. Pulse Length: 1 usec @ 600 PPS. Pk. Power Out: 200/130 KW. Bifilar 1.3 Amp. Fitted with magnetron well.....$29.50
K35J45—Pulse Inversion: PRI: 5 KV PK. Pulse Negative. Sec: Pos. Pulse, 4 KV; 1 usec. and .001 DUTY RATIO.....$6.50
841318-1—5 wdgs. Ratio: 1:1:1, 1.10 uh. /wdg. 2.5 ohms DCR.....$3.80
UTAH X-1517-1: Dual Transformer, 2 Wdgs. per section 1:1 Ratio per sec 13 MH inductance 30 ohms DCR.....$5.00
UTAH X-1507-1: Two sections, 3 Wdgs. per section, 1:1:1 Ratio, 1 MH, 6 ohms DCR per Wdg.....$5.00
68G711: Ratio: 4:1 Pri: 200V, Sec. 33V, 1.0 usec Pulse @ 2000 PPS, 0.016 KVA.....$4.50
TR1049 Ratio 21 Pri. 220 MH, 50 Ohms, sec. 0.75 H. DCR 100 Ohms.....$6.75
K-904695-501: Ratio 1:1, Pri. Imp. 40 Ohm. Sec. Imp. 40 Ohms. Passes pulse 0.6 usec with 0.05 usec rise.....$8.95

MICROWAVE ANTENNAS

3 CM ANTENNA ASSEMBLY: Uses 17" paraboloid dish, operating from 24 vdc motor. Beam pattern: 5 deg. in both Azimuth and elevation. Sector Scan.: over 160 deg. at 35 scans per minute. Elevation Scan over 2 deg. Tilt. Over 24 deg.....$35.00
3 cm. Horn, 1" x ½", with twist and 180 deg. bend. With dielectric window.....$22.50
AT49/APR—Broadband Conical, 300-3500 MC. Type N.....$6.95
Discone Antenna. AS 125 APR. 1000-3200 mc. Stub supported with type "N" Connector.....$14.50
AS14A/AP. 10 CM pick up dipole assy, complete w/ length of coax and "N" connectors.....$4.50
AS46A/APG-4 Yagi Antenna. 5 element array...$22.50
30" Parabolic Reflector Spun Aluminum dish 10¾" Focus.....$4.85
AN/APA-12—Sector Scan adaptor for APS-2 radar—Complete Kit.....$37.50
LP-24 Alford loop, for use with glide-path transmitters (MRN-1), cfs. 100-108 mc.....$32.50
18" PARABOLIC DISHES, spun aluminum. Focus approx. 8 inches.....$4.95
10 CM. ANTENNA ASSY. (Airborne) 20" dish with coax. dipole feed. Focal length is 10½" Horiz. polarization. 350 deg. azimuth. Tilt: plus and minus 20 deg. 28 vdc drive motor, selsyn takeoff.....$65.00

VHF TEST SET



The signal generator is designed to serve as an aid in aligning 152-162 megacycle FM receivers. It consists primarily of a temperature controlled crystal oscillator, the plate circuit of which is tuned to the 48th harmonic of the crystal frequency. The generator provides an extremely stable output which can be varied continuously from zero to well over a hundred microvolts. Provision has been made for two-frequency output provided that a dual crystal is utilized.

NEW, LESS CRYSTAL..$32.50

THERMISTORS

D-164699 Bead Type DCR, 1525-2550 Ohms @ 75 Deg. F. Coefficient: 2% Per. Deg. Fahr. Max. Current 25 MA AC/DC.....$1.00
D-167332 Bead Type DCR is 2525-2550 Ohms. Rated 25 MA at 825-1175 VDC.....$1.00
D-167333 Disk Type DCR: 355 Ohms @ 75 Deg. F 1" M. 2.5%, 1 Watt.....$1.00

COMMUNICATIONS EQUIPMENT CO.

MAIL ORDERS PROMPTLY FILLED. ALL PRICES F.O.B. NEW YORK CITY. M.O. OR CHECK. ONLY SHIPPING SENT C.O.D. RATED CONCERNS SEND P. O. PARCELS IN EXCESS OF 20 POUNDS WILL BE SHIPPED VIA CHEAPEST TRUCK OR RAILEX.

343 Canal St., New York 13, N.Y. Dept. E-8 Chas. Rosen Phone: CAnal 6-4882

WANTED
RT-66, 67, 68, 69, 70 GRC
AN/PRC-8, 10 AN/PRC-6
R-109-110 GRC PARTS AND
COMPONENTS OF AN/GRC
EQUIPMENT ALSO BC-312,
342 AN/TRC-7 BC-610

Radalab Inc.

Phone Virginia 9-8181-2-3
TWX-NY-4-4361

87-17 124TH ST. RICHMOND HILL 18, NEW YORK, N. Y.

SCR-508

10 Channel FM Receiver and Transmitter. Frequency Range 20-27.9 mc. Receiver is manually tuned, transmitter is crystal controlled. Consists of 2 BC-603 Receivers, BC-604 Transmitter, FT-237 mount. Box 89 xtals BC-606 Control, A-82 Phantom Ant., Headsets, mike and antenna. Input 12v. D.C. SCR-608 also available.

AN/GSQ-1 NAVY TYPE PF SPEECH SCRAMBLER

This is a unit designed to be attached to either a radio or telephone circuit to scramble speech or code. This equipment utilizes coded cards in each terminal equipment. Unless the properly numbered card is inserted on the receiving end the speech can not be unscrambled. This provides an excellent privacy system. Complete equipment available. 24 VDC input. Mfg. Western Electric.

SCR—536 HANDI-TALKIE

Freq. range 3.7-5.5mc crystal controlled battery operated handitalkie. The range of this equipment is approximately 2 miles. We can supply these sets to your specified freq. Completely reconditioned and guaranteed. Large quantity available.

REMOTE P.P.I. REPEATER INDICATORS

VD-7" P.P.I. Upright Mount.
VE-7" P.P.I. Table Mount.
VF-5" B Scope 5" P.P.I. Upright.
VG-24" Plotting Table P.P.I. Repeater. This unit just installed in new air control center at Idlewild Airport, N. Y. Very Elaborate System.
VJ-12" P.P.I. Upright Mount.
VK-12" P.P.I. Upright Mount.
VL-12" P.P.I. Upright Mount.

RADIO TELETYPE TERMINALS

AN/SGC-1 Very Compact. Late Model.
AN/CV-60/URR All Miniaturized. Late Model.
FRA, FRR, FRF.
AN/FGC-1.

SCR-682-A SEARCH AND WEATHER RADAR

Technical Specifications:
1—Freq.—3000 mc.
2—Power—225kw.
3—Pulse—1 micro second.
4—Ranges—500-240,000 yds.
5—360 scan.
7—7" P.P.I.
8—Beam width 1°. Parabolic.
9—110v 60 cyc input.

RC-115B GROUND 75 MC MARKER BEACON

This is a 75 C Marker Beacon Ground Station. This equipment comes mounted in a transporting trunk. The set can emit either inner, outer, or airways signals. The transmitter is crystal controlled. 110 Volts 60 cyc.

AN/ASQ-1 AIRBORNE MAGNETOMETER

This is an airborne chart recording magnetometer. The set consists of an amplifier, oscillator, detector head, chart profile recorder, power supply. The equipment has a sensitivity of 2 gamma. The AN/ASQ-1 records on an Esterline ANgus recorder disturbance in the earth's magnetic field caused by an ore deposit or a sunken boat or submarine. An indicator is provided that gives a bearing on a magnetic disturbance. Input is 28v DC. Weight about 130 lbs.

SHORAN AN/APN-3-AN/CPN-2

The AN/APN-3 and AN-CPN-2 are airborne and ground. Precision distance measuring installations. This equipment operates on 225 mc. The range is 250 miles with an accuracy of 25 feet. This is the most accurate distance measuring equipment built to date. The AN-APN-3 used with the K-1 computer (also available) will permit taking a photograph up to 250 miles from the CPN-2 beacons completely automatically. The AN-APN-3 can be fed into the aircraft auto pilot to fly it to the drop point. This equipment is very widely used by geological survey companies for oil prospecting and mapping. Power input is 110v 400cyc and 28v DC. COMPLETE SETS AND SPARES ARE AVAIL.

AN/APR-4

38-4000 mc precision receiver consists of receiver and five tuning units to cover the full range. Each tuning unit is calibrated directly in mc. Input 115v-60 cyc.

AN/APG-3 AIRBORNE GUN LAYING AND SEARCH RADAR

This is a late X-band airborne search and gun laying automatic tracking radar. The set uses an antenna mounted to scan forward to search for aircraft and to provide gun fire presentation. The set consists of an indicator with a 5" B and C scope for radar operator, and a 3" indicator for the pilot for gun firing, a control stick firing grip, antenna, RF unit modulator, servos amplifier, radar control, etc. A modification of this set is the AN/APG-33 which is used in the F-89 and F-94 jet interceptors. Complete sets available. POR

RC-120 FACSIMILE TRANSCEIVERS



This is a page printing facsimile set using either direct or photographic recording paper. The set will send and receive a 7" x 7½" page of printed matter or a picture in 7 minutes on a radio or wire circuit. This equip. is completely portable. The set will operate from 6v DC or 110v 60 cyc. POR

SCR-399-499

Mobile and fixed station high power radio sets: the SCR-39 is mounted in a HO-17 shelter. The SCR-499 is transported in carrying cases to be set up for operation. Freq. of the sets is 2-18mc. pwr output is 350w. Phone and C.W. 2 communication receivers are provided. Input is 110v 60 cyc.

RELAYS
world's largest stock

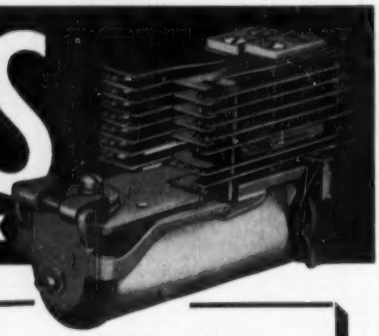

★ Immediate Delivery
★ Hundreds of Types
★ All Standard Makes
★ New-Inspected-Guaranteed

Multiple Contact
Standard Telephone Type Relay
CODE 4 TWIN CONTACTS
11-Form A 1-Form B 1-Form C 1-Form D
Heavy duty armature bearing. Available in all standard coil resistances from 12 ohms to 12,000 ohms. Single or quantity prices on request. In stock.

SEE OUR AD ON PAGE 204

24 HOUR DELIVERY OF THESE TYPES

Standard Telephone Relays
Short Telephone Relays
Midget Relays
Timers
Aircraft Contactors
Rotary Relays
Western Electric Type "E" Relays
Keying Relays
Hermetically Sealed Relays
Voltage Regulators and Cutouts
Differential and Polarized Relays
Special Relays
BK Series
Antenna and Ceramic Relays
Motor and Control Relays
Relay Assemblies
Latching and Interlocking Relays
Mechanical Action Relays
Ratchet and Stepping Relays
Time Delay Relays

Write for New Relay Sales Catalog, C-7

Relay Sales
P. O. Box 186-AA, West Chicago, Ill. Phone West Chicago 1100

RADIO RECEIVER

RDZ. 22 Tube Superhet. Range 200-400 MC. 10 Channel Autotune (Collins) with Crystal Oven. Input (S) and Output (DB) Meters, AVC, ANL, Squelch, Var. AF Band. Provisions for Remote Control. Unitized Const. Self Contained, 110 V.A.C., 1AH, 60 cy. Price $142.50. Write—Wire—Phone—
G. A. ELECTRONIC SALES
3049 W. Pico Blvd. Los Angeles 6, California
RE 39974

An Investment !

Productive advertising is an INVESTMENT rather than an EXPENDITURE.

"Searchlight" advertisers almost invariably report prompt and satisfactory results.

BE CONVINCED—send us your advertisement TODAY.

Address Classified Advertising Division

ELECTRONICS
P. O. Box 12, New York 36, N. Y.

SAVE ON TUBES BRAND NEW TUBES GUARANTEED TUBES

OA2 $0.90	2J49 40.00	5NP1 3.95	FG-271 25.00	464A 1.95	815 1.50	5654 1.40
OA2WA 3.00	2J50 35.00	5R4GY 1.25	271A 10.00	X-481D Q	829 5.00	5656 7.00
OA3/VR75 .90	2J54 30.00	5R4WGY 2.75	WE-274B 1.00	RH-507 20.00	829B 9.50	5657 125.00
OB2 .65	2J55 35.00	6AK5W 1.00	WE-282A 5.00	527 22.50	830B .50	5663 1.50
OB2WA 3.00	2J56 50.00	6AN5 2.00	WE-282B 6.00	ML-531 4.00	832A 5.00	5667 125.00
OV3/VR90 .85	2J61 15.00	6AR6 1.25	WE-285A 5.00	KU-610 3.50	834 7.00	5670 2.00
OC3/VR105 .65	2K22 14.50	6AS6W/5725 2.70	287-A 2.20	KU-627 10.00	836 1.50	5675 10.00
OD3/VR150 .65	2K23 14.50	6F4 2.50	HF-300 22.50	KU-628 10.00	838 .70	5687 3.00
ELC1B 1.50	2K25 11.00	6J4 1.95	WE-300B 5.00	WL-652 20.00	842 1.50	5691 5.00
1B22 1.30	2K26 45.00	6J4WA 3.50	GB-302 5.00	HK-654 25.00	845 4.00	5692 5.00
1B23 2.75	2K28 25.00	6K4 2.25	304TH 8.00	WE-701A 2.50	849 17.50	5693 4.50
1B24A 12.50	2K33 120.00	6J6W 1.50	304TL 8.95	702A .50	851 8.00	5702 1.50
1B26 1.25	2K33A 60.00	6SK7W 2.00	WE-305A 2.85	WE-703A 1.25	852 4.00	5703 1.10
1B27 10.00	2K33B 110.00	6SU7GTY 2.75	307A/RK75 1.00	WE-704A 1.50	861 15.00	5718 3.00
1B32 1.00	2K34 85.00	6Y4W 1.00	WE-308B 12.50	WE-705A .75	865 .90	5719 2.50
1B35 4.50	2K35 175.00	12DP7 15.00	WE-312A 2.00	706AY-GY 10.00	872A 1.35	RK-5721 150.00
1B36 4.00	2K39 100.00	12GP7 15.00	WE-315A 20.00	707B 4.00	884 1.00	5725/6AS6W 2.75
1B40 2.00	2K41 100.00	X-13 Q	WE-316A .50	WE-708A .75	GL-889 35.00	5726/6AL5W .60
1B42 4.00	2K42 110.00	FG-17 3.95	WE-336A 5.00	WE-709A 1.50	GL-889A 50.00	5744 1.90
1B45 25.00	2K43 110.00	RX-21 4.00	WE-338A 5.00	714A 10.00	905A 2.00	5750 2.50
1B47 6.50	2K44 110.00	7C24 90.00	WE-349A 6.00	714AY 35.00	905P1 2.00	5763 1.30
1B51 6.75	2K45 40.00	HK24 3.00	WE-350A 2.50	715A 1.75	905 3.00	5768 30.00
1B62 4.00	2K46 200.00	RK-28A 2.50	350B 2.50	715B 4.00	917 2.00	CK-5787 4.95
1B63A 19.50	2K47 75.00	D-42 40.00	354C 5.00	715C 12.50	919 2.00	5814 .80
1D21/SN4 5.00	2K48 75.00	V-50 Q			927 1.00	5819 35.00
1N23B 1.50	2K50 200.00	V-50XR Q			931A 2.50	5825 7.95
1N23BM 3.50	2K54 7.00	HK-54 2.00			935 4.00	5829 1.00
1N23C 2.50	2K56 50.00	QK-59 25.00			957 .35	5837 50.00
1N25 2.20	2X2A 1.00	QK-60 25.00			958A .35	5840 4.50
1N26 3.50	3AP1 2.95	RK-60/1641 1.35			959 1.25	5844 1.50
1N28 6.00	VR-3B 99.50	RK-61 2.50			991 .35	5851 4.00
1N31 2.50	3B24 1.00	QK-62 20.00			CK-1005 .35	5852 Q
1N38A .50	3B24W 5.00	HY-65 1.00			CK-1007 .45	5876 11.50
1N42 8.00	3B26 3.50	RK-65/5D22 7.50			1229 2.75	5879 1.25
1N46 .40	3B29 5.50	FG-67 12.00			1603 3.50	5896 5.00
1N52 .65	3C22 60.00	HY-69 2.50			1614 1.75	5899 5.00
1N63 1.40	3C23 5.00	RKR-72 .50			1620 3.25	5902 6.00
1N69 .40	3C31 1.50	RKR-73 .50			1622 2.00	5902A 7.50
1P22 6.50	3C33 8.00	ML-100 50.00			1623 1.75	5932 4.00
1P28 9.00	3C45 7.00	100TH 6.50			1624 1.00	5933/807W 4.00
1V5 1.40	3DP11A 6.00	FG-105 15.00			1625 .30	6005 1.75
1W5 1.00	3D21A 3.00	F-123A 2.50			1626 .25	6021 4.50
1Z2 2.00	3E29 8.50	F-128A 10.00			1631 1.25	6028/408A 2.00
2AP1 4.00	3FP7A 2.50	FG-154 10.00			1636 .75	6037/QK243 75.00
2AS15 5.00	3J30 35.00	VT158 9.75			1641 1.35	6044 30.00
2B24 .80	3K22 150.00	FG-166 8.75			1945 65.00	6046 .75
2C33 .75	3K23 150.00	FG-172 20.00			2000T 150.00	CK-6050 2.00
2C35 2.50	3K30 100.00	HF-200 10.00			2050 1.00	6096 1.50
2C39A 10.00	4B23 5.00	QK-181 25.00			2051 .65	6100/6C4WA 2.25
2C42 10.00	4B31 20.00	WL-800 75.00			4210 Q	6111 6.00
2C43 9.00	4C27 5.00	204A 25.00			R-4330 9.00	6112 7.50
2C44 .50	4C28 25.00	207 75.00			R-4340 Q	6130 7.50
2C46 6.00	4C35 17.50	211/VT4C .50			5517 1.50	6147 3.00
2C50 6.00	4E27 8.75	212E 15.00			5551/FG271 25.00	6177 49.50
2C51 3.25	4J32 45.00	WL-218 15.00			5553/	6203 2.75
2C52 3.00	4J34 50.00	QK-243 75.00			FG258A 90.00	6205 6.00
2C53 10.00	4J42 25.00	QK-249 150.00			5559/FG57 10.00	6211 1.50
2D21 .75	4J50 99.50	WE-249B 2.50			5586 125.00	VA-6310/
2D21W 1.25	4J52 50.00	250-R 3.75			5591/403B 2.75	V260 Q
2E24 3.00	4X150A 20.00	250-TL 12.50			5611 65.00	8002R 15.00
2E25 1.75	5ABP1 20.00	WE-251A 49.50			5634 6.50	8012 1.00
2E26 3.25	5ADP1 20.00	WE-252A 7.95			5636 4.00	8025A 2.00
2E27 .60	5BP2A 5.00	WE-254A 3.75			5639 7.00	9001 .85
2E32 1.00	5CP1A 7.50	FG-258A 90.00			5639A 7.50	9002 .55
2H21 85.00	5CP7A 8.00	V-260/			5647 5.00	9003 1.00
2J31 15.00	5CP11A 9.50	VA-6310 Q			5651 1.40	9005 1.50
2J32 12.50	5C22 27.50	V-262 Q				
2J33 14.50	5JP2 6.00	FP-265 20.00				
2J34 14.50	5JP4 6.00					
2J36 12.50	5JP5 6.50					
2J42 50.00	5JP11A 9.50					
2J48 35.00						

SPECIAL!

5" DUAL GUN TUBE

Long persistency face, P7 screen. Value at $200.00. This tube has been rejected for military use.

Fully Guaranteed **$17.95**

VACUUM CAPACITORS

6 mmfd. 32 KV 8.00
50 mmfd. 32 KV 8.00
75 mmfd. 20 KV 10.00

Also Other Values!

WE-355A 12.00	717A .50		
WE-356B 4.00	720AY-EY 35.00		
WE-359A 2.00	721A .75		
368AS 2.00	721B 7.00		
WE-388A 1.20	722A .75		
WE-393A 4.50	723A/B 8.50		
WE-396A 3.00	725A 3.50		
403/5591 2.75	726A 7.00		
WE-403A 1.50	726B 20.00		
WE-404A 12.00	726C 20.00		
GL-414 99.50	730A 7.50		
WE-416B 40.00	801A .35		
417A 1.75	802 2.00		
WE-417A 12.00	803 2.00		
WE-418A 18.00	804 9.00		
WE-421A 7.00	807 1.20		
WE-422A 10.00	807W 2.00		
WE-423A 8.50	808 1.25		
WE-425A 40.00	809 2.25		
GL-434A 5.00	811 2.90		
WE-438A 40.00	812A 3.50		
446B 1.00	813 10.00		
WL-456 59.50	814 1.35		

THIS IS ONLY A PARTIAL INVENTORY

Thousands of other types in stock. Send us your requirements. RECEIVING TUBES! We Carry a complete line in stock. Standard brands only.

CHECK WITH US FOR YOUR REQUIREMENTS

All prices F.O.B. Los Angeles, subject to change without notice. Minimum order $5.00. Check with us for items not listed.

jsh SALES CO.

ELECTRONICS
Dept. 15
1108 Venice Blvd
Los Angeles 15
California

TUBES • ALL FAMOUS ADVERTISED BRANDS ONLY • TUBES

RMA GUARANTEE — From 10% to 95% Below Manufacturers Price — Look and Compare

Special Prices to Quantity Buyers. Most of Our Tubes are Jan.—95% are Original boxed — Brands such as R.C.A., G.E., Ken-Rad., Sylvania, Tung-Sol and Raytheon.

Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price	Type	Price
AB/1852	$1.99	1B22	1.49	5K33A	59.95	6C22	25.00	12GP7	12.95	27GA	7.25	705DV	35.00	829B	8.99	1630	.79
CK5	4.25	1B24	5.99	2K45	72.50	6CP1	1.99	16P	1.25	27GA	6.40	707A	3.25	830B	2.99	1642	.79
CK6	4.25	1B26	9.95	2K45	32.50	6CP1A	2.75	16W	1.25	28Z	7.25	707B	3.95	832A	7.50	1643	1.65
CK7	7.99	1B27	9.95			6CP1	9.95	26A/6Y	2.95	28GA	7.50	708A	2.99	833A	21.50	1644	.89
CRP RK-72	.49	1B35	1.98	2K54	8.95	6CP11A	14.99	26C6	1.19	30AT/H	15.00	709A	1.98	836	1.98	1654	.89
RC1	1.69	2AF/G	1.19	2K55	9.50	6DP7	6.50	30AT	15.00	30AT/H	15.00	712A	2.98	837	1.98	1806P1	4.99
RF-56	.89	2AF1	1.98			6FP5	1.98	7BP7	6.25	307A	1.85	714AY	24.95	838	1.98	2050	.79
RK-34	2.65	2AP1A	6.44	2V1/G	1.39	6HP4	2.49	9LP7	5.50	310A	3.99	715A	2.45	839	1.98	2051W	2.75
RK-35	.89	2B22	1.98	2X2	.14	6JP1	14.99	10Y	1.89	328A	2.45	715B	2.45	841	.49	2051	.74
RK-39	2.65	2BP13	1.98	2X2A	.89	6JP2	14.99	12K8	1.89	329A	4.00	715C	3.50	842	.49	5641	1.19
RK-40A	39.50	2C21	.49	3A4	1.25	6JS2	65.00	12R7	1.89	342A	3.00	717A	.49	843	.49	5642	1.19
F123A	5.99	2C22	1.98	3AP1	5.95	6KP1	1.98	14W7	4.99	347A	3.00	718AY/CY/		845	10.50	6654	3.95
FG17	4.50	2C26A	.49			6LP1	11.95	15TG	7.25	348A	2.99	EY/DY	29.75	848	3.49	6670	2.50
FG-105	12.99	2C34	1.98	3B22	1.98	6NP1	6.99	19T8	1.89	348A	1.49	720A	14.95	849	10.50	6672	1.49
FG-154	14.99	2C39	4.99	3B24W	4.99	6SHWGY	5.25	QK-62	24.50	354A	2.99	720C(Y/DY)		864	.49	6687	2.65
HF-100	7.49	2C39A	11.50			6SN7	1.25	5Y3	.45	WL-417A	2.74	EY	29.75	865	1.49	5702	1.49
HK-24	2.65	2C40	10.99	3B25	1.98	6AC7	.64	100TH	4.95			721A	1.49	866A	1.49	5703WA	1.19
HK-54	1.65	2C42	9.75	3B26	4.69							721B	2.45	866B	30.00	5703	1.19
HY-114B	.49	2C43	10.99	3B27	2.98							723A/B	8.99	GL-872A	2.49	5726	1.98
KU-616	2.49	2C44	1.49	3BP1	2.98							724A	1.25	872A	1.25	5727	1.98
RY-615	1.98	2C46	1.49	3BP1A	5.49							724B	1.25	873	1.98	5726	.61
REL-71	1.00	2C50	1.98	3C21	1.29							725A	3.99	884	1.00	5814	1.19
RK-34	.97	2C51	9.50	3C22	64.95							726A	9.50	885	1.10	5851	3.25
RK-60	1.84	2D21	.89	3C23	8.99												

CRYSTAL DIODES					
1N21	.10	1N23B	1.10	1N38	.45
1N21A	.85	1N26	2.25	1N38A	.64
1N21B	1.10	1N27	.45		
1N22	.49	1N34	.45		
1N23A	.49	1N34A	.64		

LARGEST SURPLUS DEALER IN USA

RK-60	1.99	2E24	2.49	3C24	1.98	6AC7W	1.98	381A	5.99	GL-434A	6.66	725B	25.00	5-3	.69	6879	1.10
RK-41	3.50	2D21W	1.39	3C25	7.49	6AG7	1.79	385B	1.95	446A	1.79	725C	24.50	902P1	2.99	6923	2.95
RK-61	2.79	2J27	2.98	3C33	8.99	6AJ5	1.19	705B	3.95	446B	1.79	725AY/BY/		915	1.99	6963	1.19
GK-61, 5D23	14.99	2J31	2.98			6AK5	.54	807	49.50	WL-460	8.99	CY/DY	35.00	918	1.99	6973	.89
RK-73	.49	2J31A	4.95	3CP1	6.25	6AL5W	1.50			WL-464A	4.25	730A	7.95	931A	2.98	6977	1.49
RK-233A	.49	2J32	4.95	3DP1	6.25	6AN5	2.12	813A	7.25	471A	1.10	800	1.29	954	.19	6986	2.50
VT-25/7B	.49	2J35	2.98	3E29	4.99	6AN8	1.49	832A	2.99	CK-608AX	1.10	802	2.45	955	.19	6986W	1.98
VT-25A/38Y	.39	2J36	14.98	3E50	10.25	6AS5	1.49	866A	1.49	CK-621AX	1.10	803	2.65	956	.19	6986R	18.50
VT-67/10 Spec.	.79	2J37	14.98	3EP1	1.98	6AS7/G	2.49	872A	1.49	1227	1.40	805	2.95	957	.19	6985	4.50
VT-108	17.50	2J38	14.98	3FP1	2.98	6BM8	39.50	931A	2.98	WL-530	19.50	807	1.38	958A	.19	6991	4.50
VU-111	.19	2J39	14.98	3GP1	2.98	6B4	2.99	1616	2.98	WL-531	6.25	808	4.50	991	.19	6812	2.49
1631/932A	.99	2J42	9.60	3HP7	2.98	6F4	2.49	2050	2.98	532A	.99	809	1.38	CK1005	.29	6813	1.98
QK-59	29.50	2J43	14.98	3J21	49.50	6J4	1.98	2050W	2.98	700A/B/C/D/		810W	1.79	CK1006	1.97	6813A	2.49
QK-61	32.00	2J48	14.98	4A-11	.49	6J4W	2.75	2051	2.98	E	10.99	1600T	94.50	1614	.29	6828	1.98
QK-285	99.00	2J49	10.98	4B32	4.65	6J6W	1.99	2051W	2.98	701A	4.99	1608	2.98	1616	.29	6829	1.98
VR-75	.79	2J61	16.44	4C28	35.50	6K4	3.99	2052	2.98	702A	4.99	1611	1.98	1619	.29	9001	.79
VR-90	.89	2J62	9.60	4E27	9.95	6K4W	3.99	2053	2.98	703A	4.99	1612	1.40	1625	.29	9002	.79
VR-105	.79	2K21	14.98	4E29	14.98	7BP7	6.95	2054	2.98	704A	4.99	1613	11.49	1626	.29	9003	.79
VR-150	.79	2K27	14.98	4HP1	2.49	7AC7	.74	2055	2.98	705A	6.75	1614	1.40	1629	.29	9004	.79
GA2	.79	2K28	39.50	4EP1A	8.99	12AT7	.74	2056	2.98	705B	14.50	1615	1.98				
GB2	.89	2K29	39.50	4EP4	2.99	12AU7	.74	2748	1.79	705C	17.50	1616	.29				

FAY-BILL DISTRIBUTING CO. DEPT. E1
418 Broome St., N. Y. 13, N. Y.
Telephone CAnal 6-8404

All boxed and fully guaranteed. Special quantity discount—10% on 100 or more of same type. Minimum order $10.00. Thousands of other types in stock . . . Send us your requirements. F.O.B. New York 25% deposit with order or if paid in advance save C.O.D. charges. Rated firms net 10 days. Prices subject to change without notice. For fast service ask for Sy.

COAX CONNECTORS

SO239 24¢ 831R

M359A 15¢ 831AD

INVERTERS & GENERATORS

GENERATOR—115 V. 400 Cycle, 1400 Watt, Single Phase, 28.5 VDC 400 Watt.....USED: $89.50

GENERATOR: Motor 3 HP. 115/230 60 cycle single phase Generator 115 Volt, 400 cycle single Phase 1400 Watt & 28.5 VDC 400 Watt, Belt Drive, Reconditioned $195.00

TELEPHONE EQUIPMENT

EE-8 Field Telephone—Ideal for private telephone system for two or more phones, up to 17 miles, hand ringer generator with handset, carrying case, uses two flashlight batteries.....Used. Checked: $14.95
New Equipment, Used Cases: $18.95

RM-13 Remote Control Unit for telephone & radio equipment. Telephone unit same as EE-8; Radio remote, pre-amplifier, 115 V 60 cycle with input & output jacks, DB Meter, one tube amplifier with TS-9 handset.....Used: $19.95 — NEW: $24.95

SOUND POWERED HEAD & CHEST SETS
Used, Checked: $3.95

TS-9 HANDSETS.....NEW: $5.95 — USED: $3.95
TS-13 HANDSETS w/PL-55 & PL-68..USED: $5.95

RECEIVER—TRANSMITTER

FM 20 — 28 MC

BC-603 RECEIVER: 20-28 MC variable tuning, 10 Pre-Set push button channels, squelch circuit, 4" speaker; 10 Tubes: 2/12SG7, 2/6SL7, 1/6V6, 1/6J5, 3/ACT, & 1/6H6. Price.....USED: $29.95
PLUG for rear of Receiver.....$1.00

DYNAMOTOR: 12 V input; Output 230 V 80 MA. #DM-34 .....NEW: $4.95 .....ReISSUE: $2.95

BC-604 TRANSMITTER: 20-28 MC, 30 Watt, companion to BC-603 Receiver. Crystal control. 10 Pre-Set channels, interphone communication; 8 Tubes: 7/1619 & 1/1624.....USED: $18.95
PLUG for rear of Transmitter.....$1.00

DYNAMOTOR: 12 V input; Output 625 VDC 225 MA. #DM-35 .....NEW: $12.95.....ReISSUE: $8.95
FT-237 BASE for mounting Receiver & Transmitter (No plugs required).....USED: $9.95

BC-500 RECEIVER—TRANSMITTER: FM Crystal Control on 5 channels. 100 KC separation 20-28 MC. Transmitter: 25 Watt output, 7 Tubes: 1/6J5, 1/12A6, 3/12SJ7, & 2/12SA7. Receiver: 11 Tubes: 1/12SJ7, 2/12A6, 3/12SA7, 3/12H6, 2/12K8, & 1/12SJ7. Dynamotor Supply: Receiver 28 VDC 1.2 A input; output 250 VDC 60 MA. Transmitter 28 VDC 4.1 A input; output 550 V 120 M.A. Control Panel: For Local Control & outlets for Remote also. Heavy duty 5" speaker. Size: 12" x 25" x 9½". With Schematic and Conversion. Weight: 65 lbs. Price.....New: **$59.50**

115 V. 60 CYCLE BLOWERS:

At left: 115 VAC 60 Cycle SINGLE TYPE — 100 CFM — 2-¼" intake; 2" outlet. Complete size: 5" x 6" — No. 1C939 ..... **$8.95**

115 VAC 60 Cycle DUAL TYPE —100 CFM—1" intake; 2" Dia. Each Side. Complete size: 8" x 6"— No. 1C880 ..... **$13.95**

115 VAC 60 cycle COMPACT TYPE—108 CFM; Motor built inside squirrel cage; 4-⅛" intake; 3-⅝" x 3" Dia. Complete size 4-½" W x 8-⅜" H x 8-⅛" D—No. 2C067..... **$14.95**

115 VAC 60 cycle FLANGE TYPE—140 CFM; 3-½" intake; 2-½" Dia. Complete size: 7-½" W x 7-¼" H x 6-⅝" D—No. 1C807..... **$13.95**

115 VAC 60 cycle FLANGE TWIN—275 CFM; 4-½" intake; 3-½" x 3" Dia. Complete size: 11-¾" W x 2-⅝" H x 8-1/16" D— No. 3C069 ..... **$21.95**

115 VAC 60 Cycle BLOWER—200 CFM; 4" intake; 3" x 5" outlet. Overall size: 8" x 7" x 6". Bodine Motor NSI-33. Removed from New Equipment #BOD-200 ..... **$14.95**

115—VAC 60 Cycle BLOWER—100 CFM; 3-⅝" intake; 2" outlet; Rd. Flange with Flap Director. Overall size with bracket: 8" L x 6-½" W x 7" H. Removed from New Equipment. Diehl Motor FB-2106-6 No. FDBL-2106..... **$6.95**
Same as above, but with 12-Curved Director. No. CDBL-2106..... **$7.95**

OTHER BLOWERS:

12/24 VDC—AC CAST ALUMINUM BLOWER—100 CFM—3" intake; 2" outlet. Shunt Motor 4" x 2" 3000 RPM @ 24 VDC..... **$5.95**
6 VDC SINGLE—100 CFM—No. 6100—USED: **$4.95**
24 VDC DUAL—30 CFM—Min—No. 2430..... **$7.95**
10 CFM BLOWER—27.5 VDC:1/100 HP; 7000 RPM; Oster Motor C2BP-1A; L-R Mfg. Co. Bakelite Blower #5—Overall Size: 3½" x 4⅛". Price **$5.95**
Same as Above, 12 VDC operation — Price **$5.95**

115 V. 400 CYCLE—10 CFM—Eastern Air Devices Motor J31A—7200 RPM. 1/100 HP. L-R #2 Blower Assy. Overal Size: 4-½" x 3-½". No. 3110..... **$5.95**

10 CFM BLOWER—28 VDC. 6 A; 5000 RPM. Pioneer Motor 88-2345. Aluminum Blower Housing—overall Size: 4-⅝" x 2-¼". Price **$5.95**

NEW LIST: Write today for FREE New Listing of many, many items!

FAIR RADIO SALES • 132 SOUTH MAIN ST LIMA, OHIO

These "Searchlight" advertisements

are live opportunities in the Electronic field.

Each announcement represents a current Want or Offering of an organization or individual in the field. Some have money-saving possibilities, others are opportunities for more business; many offer equipment—used or surplus new.

"Searchlight" advertisements are constantly changing. New opportunities are constantly finding their way into this great Want medium, each issue. Regular reading of the "Searchlight" pages can be as important to you as reading the editorial sections; Editorial matter is news of the industry; Advertising is NEWS OF OPPORTUNITIES offered in the Industry.

for EVERY business WANT "Think SEARCHLIGHT first"

ELECTRONIC

WAR TERMINATION INVENTORIES

WRITE OR WIRE FOR INFORMATION ON OUR COMPLETE LINE OF SURPLUS ELECTRONIC COMPONENTS. ALL PRICES NET F.O.B. PASADENA, CALIFORNIA

C&H SALES CO.

2176-E East Colorado St.
Pasadena 8, California
RYan 1-7393

INVERTERS



10042-1-A Bendix
DC input 14 volts; output: 115 volts; 400 cycles. 1-phase; 50 watt **$35.00**

12116-2-A Bendix
Output: 115 VAC; 400 cyc; single phase; 45 amp. Input: 24 VDC, 5 amps. **$35.00**

12117 Bendix
Output: 26 volts; 400 cycles, 6 volt amperes, 1 phase. Input: 24 VDC; 1 amp. **$15.00**

12121 Bendix
Input: 24 volt D.C. 18 amp. 12000 r.p.m. Output: 115 volts, 400 cycle, 3-phase, 250 volt amp, 7 pf. **$49.50**

12123 Bendix
Output: 115 V; 3-phase; 400 cycle; amps .5 Input: 24 VDC; 12 amp. **$49.50**

12126-2-A Bendix
Output: 26 volts; 3 phase; 400 cycle; 10 VA; 6 PF. Input: 27.5 volts DC; 1.25 amps. **$24.50**

12130-3-B Bendix
Output: 125.5 VAC; 1.5 amps. 400 cycles single phase, 141 Va. Input: 20-30 VDC. 18-12 amps. Voltage and frequency regulated **$49.50**

12133 Bendix
Input: 26/29 volt D.C., 28 amps. Output: 115 volt, 3 phase, 400 cycle, 250 volt amp., .8 pf. **$59.00**

12147-1 Pioneer
Output: 115 VAC 400 cycles; single phase. Input: 24-30 VDC; 8 amps. **Price $39.50 each**

778 Bendix
Output: 115 volt 400 cycle; 190 VA; single phase and 26 volt, 400 cycle, 60 VA, single phase. Input: 24 VDC. **$37.50**

10285 Leland
Output: 115 volts AC; 750 VA, 3 phase, 400 cycle, .90 pf and 26 volts. 50 VA single phase, 400 cycle, .40 pf. Input: 27.5 VDC 60 amps. cont. duty, 6000 rpm. Voltage and frequency regulated. **$59.50**

10339 Leland
Output: 115 volts; 190 VA; single phase; 400 cycle, .90 pf. and 26 volts; 60 VA; 400 cycle, .40 pf. Input: 27.5 volts DC, 18 amps cont. duty, voltage and freq. regulated. **$49.50**

10486 Leland
Output: 115 VAC; 400 cycles; 3-phase; 175 VA; .80 pf. Input: 27.5 DC; 12.5 amps; cont. duty. **$70.00**

10563 Leland
Output: 115 VAC; 400 cycle; 3-phase; 115 VA; 75 pf. Input: 28.5 VDC; 12 amps. **$35.00**

PE109 Leland
Output: 115 VAC, 400 cyc; single phase; 1.53 amp; 8000 rpm. Input: 13.5 VDC; 29 amp. **$50.00**

PE218 Leland
Output: 115 VAC; single phase pf 90; 380/500 cycle; 1500 VA. Input: 25-28 VDC; 92 amps; 8000 rpms; Exc. Volts 27.5 BRAND NEW **$30.00**

MG149F Holtzer-Cabot
Output: 26 VAC @ 250 VA; 115 V. @ 500 VA; single phase; 400 cycle; Input: 24 VDC @ 36 amps. **$40.00**

MG153 Holtzer-Cabot
Input: 24 VDC; 52 amps. Output: 115 volts —400 cycles, 3-phase, 750 VA. Voltage and frequency regulated. **$95.00**

DMF2506M Continental Electric
24-30 volts input; 5.5-45 amps; cont. duty. Output: 115 volts; .44 amps; 400 cyc; 1 phase; pf 1.0; 50 watts. **$39.50**

940702-1 Eicor, Class "A"
Input: 27.5 volts at 9.2 amps AC Output: 115 volts 400 cycles; 3 phase 100 voltamp; continuous duty **Price $39.50 each**

POWER UNIT PU-104/U



5 KW 120/208 volt AC single or 3 phase permanent magnet type 400 cycle Alternator. Alternator is driven by Hercules model ZXB 4-cylinder 4-cycle "L" head liquid cooled gasoline engine. This unit is complete with a control panel.

Price is $495.00

SELSYNS-SYNCHROS

1CT Cont. Trans. 90/55V 60 cy.	$37.50
1DG Diff. Gen. 90/90V 60 cy.	37.50
1F Syn. Mtr. 115/90V 60 cy.	37.50
1G Gen. 115V 60 cy.	37.50
1SF Syn. Mtr. 115/90V 400 cy.	12.50
2J1F1 Gen. 115/57.5V 400 cy.	7.50
2J1F3 Gen. 115/57.5V 400 cy.	10.00
2J1FA1 Gen. 115/57.5V 400 cy. 57.5/57.5V 400 cy.	7.50 5.00
2J1H1 Diff. Gen. 57 5V 400 cy.	7.50
2J5D1 Cont. Trans. 105/55V 60 cy.	17.50
2J5F1 Cont. Trans. 105/55V 60 cy.	17.50
2J5H1 Gen. 115/105V 60 cy.	17.50
2J15M1 Gen. 115/57.5V 400 cy.	17.50
5CT Cont. Trans. 90/55V 60 cy.	34.50
5D Diff. Mtr. 90/90V 60 cy.	34.50
5DG Diff. Gen. 90/90V 60 cy.	34.50
5F Syn. Mtr. 115/90VAC 60 cy.	34.50
5G Syn. Gen. 115/90VAC 60 cy.	34.50
5HCT Cont. Trans. 90/55V 60 cy.	42.50
5SDG Diff. Gen. 90/90V 400 cy.	12.50
6DG Diff. Gen. 90/90V 60 cy.	25.00
6G Syn. Gen. 115/90VAC 60 cy.	34.50
7G Syn. Gen. 115/90VAC 60 cy.	42.50
R11O.2A Kearfott Cont. Mtr. 115V 400 cy.	17.50
R200-1-A Kearfott Cont. Trans. 26/11.8V 400 cy.	15.00
R210-1-A Kearfott Trans. 26/11 8V 400 cy.	15.00
R220-1 Kearfott Receiver 26/11.8V 400 cy.	20.00
R235-1A Kearfott Resolver 26/11 8V 400 cy.	22.50
C56701 Type 11-4 Rep. 115V 60 cy.	20.00
C69405-2 Type 1-1 Transm. 115V 60 cy.	20.00
C69406 Syn. Transm. 115V 60 cy.	20.00
C69406-1 Type 11-2 Rep. 115V 60 cy.	20.00
C76166 Volt. Rec. 115V 60 cy.	10.00
C78248 Syn. Transm. 115V 60 cy.	12.50
C78249 Syn. Diff. 115V 60 cy.	5.00
C78863 Repeater 115V 60 cy.	7.50
C79331 Transm. Type 1-4 115V 60 cy.	20.00
851 Bendix Autosyn Mtr. 22V 60 cy.	7.50
403 Kollsman Autosyn Mtr. 32V 60 cy.	7.50
FPE-25-11 Diehl Servo Mtr.	
FPE-25-11 Diehl Servo Mfr. 75/115V 60 cy	22.50
FPE-43-1 Resolver 400 cy.	25.00
FJE-43-9 Resolver 115V 400 cy.	25.00
999-0411 Kollsman 26V 400 cy.	15.00
13770410 Kollsman 26V 400 cy.	10.00
15158-0410 Kollsman 26V 400 cy.	20.00
10047-2-A Bendix 26V 400 cy.	12.50
2900 Transicoil 115 V 400 cy.	15.00

SIMPLE DIFFERENTIAL

Stock No. 181

Size: 2-5/32" long x 1¼" dia.; bearing one end ½" O.D.; Shaft Size: 1" long, threads 8-32-¾" long, with bearing shaft ⅛" dia. x ¼" long. Gear on shaft end 1-7/16" dia., gear on bearing end 1¼" dia. Drive gear 25/32" dia.

$3.95 ea.

SIMPLE DIFFERENTIAL

Stock No. 106

1:1 reverse ratio, 60 teeth on large gear; ¼" shaft. Size: 3" long with 1-15/16" dia.

$3.95 ea.

SPIDER DIFFERENTIAL

Stock No. 187

Size: 6½" long x 1¾" wide with 3/16" shaft.

$2.50 ea.

Dual Simple Differential

Stock No. 110

1:1 reverse ratio on both. Size: 3¼" long x 1-7/16" dia. Shaft size: ⅛" and 5/32".

$7.50 ea.

SMALL DC MOTORS

(approx. size overall 3¾" x 1¼" dia.:)

5069600 Delco PM 27.5 VDC 250 rpm	12.50
5069230 Delco PM 27.5 VDC 145 rpm.	15.00
5068750 Delco 27.5 VDC 160 rpm w/brake	6.50
5068571 Delco PM 27.5 VDC 10,000 rpm (1x1x2")	5.00
5069625 Delco 27.5 VDC 120 rpm w/governor	15.00
MM A-11 Globe PM 24 VDC	7.50
5BA10AJ18 GE 24 VDC 110 rpm	10.00
5BA10AJ37 GE 27 VDC 250 rpm reversible	10.00
5BA10AJ52 27 VDC 145 rpm reversible	12.50
806069 Oster series reversible 1/50 h.p. 10,000 rpm 27.5 VDC 1⅝" x 3½"	5.00
C-28P-1A 27 VDC 1/100 h.p. 7,000 rpm	3.00
7100-B-PM Hansen 24 VDC 160 rpm	7.50
5SFD-6-1 Diehl PM 27.5 VDC 10,000 rpm	4.00
6-volt PM Mtr. by Hansen 5,000 rpm 1¼" in dia. 2" long overall	4.00

CONSISTENTLY . . .

HIGH QUALITY ELECTRON TUBES

AT SENSIBLE PRICES

GUARANTEED • UNUSED • BOXED • 1st QUALITY • WRITE FOR COMPLETE LIST

4PR60A Surp $50.00

750-TL Surp $50.00

450-TH Surp $47.50

We stock complete line of:
BARRY—DIRECTRON
SELENIUM RECTIFIERS
Write for free catalog.

Terms: FOB—NYC—25% Deposit with order—or send full remittance to save COD charges—D & B Rated Firms (F2% or Better) Net 10 days. CABLE: BARRYLECT, N. Y. TELEGRAPH: BARRY ELECTRONICS, FAX, N.Y.C.

BARRY ELECTRONICS CORPORATION
512 Broadway, N. Y. 12, N. Y.
"Call day or nite—24 hour phone service"
Phone: WAlker 5-7000

AND MANY OTHERS! OVER 1000 TYPES IN STOCK . . . WRITE!

TUBE CARTONS • STACKERS

Super glass red & black or plain glossy white. Both types with new partitions that meet U. S. Government specifications. Specify white or colored when ordering.

FOR PRICES AND FREE SAMPLES WRITE ON YOUR LETTERHEAD

A BARGAIN FOR YOU in a . . . .

SOLA Constant Voltage TRANSFORMER

End Fluctuating Line Voltage

OVER 60% OFF . . .

the factory price of a 1-input 2,000 VA unit! And here's another bonus! This Air Forces 2,000 VA overstock, Sola Cat. No. 30768, has 4 inputs! 90-125 V., 190-250 V., 60 cy. or 50 cy. Isolated secondary is constant 115.0 V. ± 1% from no-load to full-load of 17.4 amp. So, if you choose, use it as a 220:115 V. step-down. And slash $147.50 off the factory 1-input price!



Brand new in original wood box. 4 cu. ft. Ship. wt. 254 lbs. F.O.B. Pasco, Wash. Only $97.50

(EXPORTERS: Note choice of 50 cycles.)

THE M. R. COMPANY
P. O. Box 1220-B Beverly Hills, Calif.

WANTED

EE8 Field Telephone Parts
BC 348 Receivers—any condition
BC 348 Receivers—any condition
FT 154 Mounts
DM 41A Motors
DM 53A Motors
BD 77 Motors

CONNECTORS 164—Series
CD 427 Cable
CD 500 Cable
CD 512 Cable
CD 513 Cable
CD 514 Cable
CD 515 Cable

WIRE
WD 1 Wire
WC 345 Wire
WC 535 Wire
W143 Wire

RECEIVER DC 348—ANY CONDITION

TALLEN CO., INC.
159 Carlton Ave. Brooklyn 5, N. Y.

THIS IS NO DAISY CHAIN

WANTED

P.E.103 Power Units

Any quantity.
State quantity available.
Unit price desired and condition.
Reply:

W-1971, Electronics
330 W. 42 St., New York 36, N. Y.

MUST HAVE FOR CURRENT ORDERS
PHONE COLLECT

BC-312	BC-314	BC-610
BC-342	BC-344	T-47/ART-13
R-9/ARN-7	ARC-3	ATC/ART-13

SEMLER INDUSTRIES INC.
STanley 7-1554
6853 Lankershim Blvd., North Hollywood, Calif.

ART-13/T47A Transmitters	$175.00	BC-348 Rec'r Modified	$ 25.00
ART-13/T47 Transmitters	$125.00	BC-348 Rec'r Unmodified	$ 50.00
BC-788 C Altimeters	$175.00	ARC-1 Transceiver	$300.00
ARC-3 Transceiver Complete	$325.00	BC-342 Rec'r.	$ 50.00
R5/ARN-7 Radio Compass	$175.00	BC-312 Rec'r	$ 40.00
		I-152-C Indicator	$ 50.00

Ship via Express C.O.D. Subject to Inspection to H. FINNEGAN, 48 Washington Ave. Little Ferry, N. J.

WANTED! TOP $$$$$ PAID!
AIRCRAFT ELECTRONICS NEEDED: BC-788, I-152, ARN-7, ARC-3, ARC-1—or any type airborne electronics.
ELECTRONIC TUBES NEEDED: Broadcast (water and air cooled), transmitting, receiving (in quantity only), Magnetrons, Klystrons, etc.
TOP PRICES PAID: Write or phone description for immediate action. R. E. Sanett, W6REX. 1524 S. Edris Dr., Los Angeles 35, Cal. Phone: CRestview 1-3856

TUBES

Special Purpose Tubes

Receiving Tubes

SPECIAL PURPOSE
RECEIVING TUBES
SCOPE TUBES
SEMI-CONDUCTORS

- *Fully Guaranteed!*
- *Ready for shipment!*
- *Save up to 90%!*

WRITE-WIRE or PHONE for:

★ POWER SUPPLIES ★ RADAR
★ PARTS — METERS — TUBES
★ TEST SETS ★ TELETYPE
★ AIRBORNE ELECTRONICS
★ NAVIGATION AIDS

TN-1/APR-1 TUNING UNIT

Receives and converts 38-80 MC RF to 30 MC IF. Requires only 250 V, B+ and 6.3 VAC for heaters. Hand calibrated tuning chart. Originally used for radar countermeasures, receiver, but also ideal for noise and spectrum analyses. Brand new in storage case, with carton of spare tubes and other parts. A terrific value at only..... **$24.50**

FREQUENCY METER AND TEST OSCILLATOR!

115 V., 50-800 cy. power supply. In freq. meter section, crystal oscillator beats VFO. Osc. section puts out sine or pulse modulated RF. With tubes, headset, cords, adapters, radiators, etc. and INSTRUCTION BOOK.
LU-3, 465-498.5 MC. Brand new. **$19.95**
LU-1, 470-493.5 MC. Brand new..... **17.95**

VARIABLE VOLTAGE

AMERTRAN TRANSTAT. 11.5 KVA. Input 115 V., 60 cycles. Output continuously variable 0 to 115 V, up to 100 amperes. Easily re-connected for input of 230 V, with output of 0-230 V, 50 amperes. Brand new. **$99.50**
Special .....

X-BAND DO-ALL

TS-146/UP. Radar Test Set, 9285-9465 mc. F-M 723A/B osc., attenuators, freq. meter, thermistor bridge, sawtooth generator, etc. in one convenient package. Power supply so well regulated that line may be 100-121 volts, 50-1200 cy. Measures transmitter spectrum width, freq., power, recovery time of T-R and R-T cavities, checks magnetron pulling, tunes radar receivers, tunes T-R and R-T cavities, measures receiver sensitivity and band width, checks AFC circuits. In excellent condition. Only..... **$99.50**

ARROW SALES, Inc.

OFFICE AND MAIN WAREHOUSE:
7460 VARNA AVE., NORTH HOLLYWOOD, CAL.
Mail to: BOX 3007-E, NORTH HOLLYWOOD, CAL.
Phones: STanley 7-0406 POplar 5-1810
Telegraph: WUX, NO. HOLLYWOOD
Cable: ARROWSALES, NO. HOLLYWOOD

CENTRAL WAREHOUSE & SALES SHOWROOM
2441 S. MICHIGAN AVE., CHICAGO 16, ILL.

OTHER WAREHOUSES IN:
Atlanta, Ga., San Antonio, Tex., Pasco, Wash., Sacramento, Cal., Burbank, Cal., Los Angeles, Cal.

SCOPE TUBES

2AP1	5.75	5CP1	6.00	7BP7	6.50
3AP1	5.00	5CP7	7.50	9CP7	8.50
3CP1	5.00	5FP7	7.50	9LP7	12.00
3FP7	5.00	5HP1A	15.00	10BP1	8.50
3BP1	4.00	5LP1	12.50	10GP1	8.50
5BP1	4.00	5NP1	12.00		

SEMI-CONDUCTORS

1N21	.50	1N27	5.00	1N69	.65
1N21B	.75	1N33	11.00	1N70	.75
1N22	1.15	1N53	11.00	1N91	1.15
1N23	.50	1N58	.75	CK706	.50

SPECIAL

6SH7 metal **39¢**
ea.....

Write for tubes not listed. Get our quotes on quantity orders. We deliver anywhere. Min. order $5.00. All items subject to prior sale and change of price without notice.

Now! One RELIABLE source for tubes:

C1A	6.75	2G21	1.50	5J26	175.00	261A	10.00	807W/5933	3.00	5764	45.00	6032	150.00
1B35	3.50	2J30	45.00	6AJ5	1.25	268A	6.00	813	9.00	5777	220.00	6035	30.00
1B36	3.50	2J36A	90.00	6BL6	40.00	GB30S	5.00	828	10.00	5787	4.50	6038	10.00
1B37	7.00	2J42	65.00	6SJ7WGT	1.75	BL315/6588	50.00	8298	8.00	5794	6.95	6111	5.00
1B60	22.00	2J50	45.00	6SK7W	1.25	329A	7.00	832A	6.00	5819	35.00	6112	6.00
1CP1	12.50	2J51	155.00	6XSWGT	1.25	352A	20.00	CK1026	3.00	5825	7.00	6115A	90.00
1P22	6.50	2J55	45.00	BL17	7.50	412A	1.75	R1111	3.50	5827	70.00	6161	55.00
1P24	1.00	2J56	55.00	FG17/5557	4.00	451	1.00	R1131C	12.00	5828	6.00	6177	90.00
1P28	8.00	2K25	15.00	BL26	15.00	KX641	7.50	1620	3.00	5851	4.00	6199	30.00
1P41	1.50	2K39	95.00	FG32/5558	10.00	681/5550	20.00	CG1984	10.00	5892	15.00	6386	315.00
1P42	7.50	3B26	9.00	FG33/5720	15.00	706AY	10.00	R4340	25.00	5896	5.00	6383	75.00
2AS15	6.50	4C28	20.00	FP54/5740	40.00	714AY	25.00	5563	30.00	5899	5.00	6524	15.00
2C33	2.50	4C33	90.00	RK71/6021	160.00	715B	5.00	5636	3.00	5901	6.00	8010AR	30.00
2C46	6.50	4J31	70.00	QK103	90.00	725A	25.00	5641	5.00	5902	4.75		
2E24	3.50	4J33	65.00	QK181	25.00	726C	23.50	5657	95.00	5906	12.00		
2E25	2.00	4J52	70.00	QK185	75.00	730A	5.00	5675	10.00	5937	65.00		
2E26	3.25	4J61	190.00	250R	5.00	804	8.00	5781	45.00	6021	4.00		
2E41	2.00	4X500A	50.00	250TL	15.00	807	1.25	5750	2.50				

PLUS other types, ALL fully guaranteed and sold on that basis. 24-hour, round-the-clock telephones take your orders anytime, any day of the week, regardless of time-zone differential, for PROMPT servicing. Our watchword is RELIABILITY——make it yours too.

PAGE ELECTRONICS

136 Liberty Street — COrtlandt 7-4245 — New York 6, N. Y.

AN/APR-4 LABORATORY RECEIVERS

Complete with all five Tuning Units, covering the range 38 to 4,000 Mc; wideband discone and other antennas, wavetraps, mobile accessories, 100 page technical manual, etc. Versatile, accurate, compact—the aristocrat of lab receivers in this range. Write for data sheet and quotations.

We have a large variety of other hard-to-get equipment, including microwave, aircraft, communications, radar; and laboratory electronics of all kinds. Quality standards maintained. New Reduced Prices On:

NEW TS-13/AP X-BAND SIGNAL GENERATORS with manual; T-47A/ART-13 Transmitters; H-P, Boonton, G-R, Measurements, many others in stock.

ENGINEERING ASSOCIATES

434 PATTERSON ROAD — DAYTON 9, OHIO

KOILED KORDS 3 wires $1.26
22 inches long stretches to 9 ft.

Cheap Relays for Computers and Experiments ..... 6 for $2.00

G.E. Switchettes All types—75¢ ea 10 for $6.00 100 for $50

115 V. AC RELAY $2.90

TELECHRON Motors

4 RPM on 50 cy or 4½ RPM on 60 cy	$2.85	3.6 RPM	$3.15
2 RPM	2.90	1 RPM	3.90
5 RPM	3.90	3 R.P. Hr.	2.85
4 RPM	2.90	1 R.P. 2Hr	2.80
		1 R.P.12Hr	3.25
		60 RPM	4.85

Laboratory Special 1 of Each Motor $25

General Radio **VARIACS** in stock. Special Sale on a few 200-B (1 amp.) removed from equip't $8.95

HAND WOUND 10 Sec. to 24 Min. TIMER SWITCH ..$1.35

6 Watt Most POWERFUL TELECHRON MOTOR 110V 60 CY

1 RPM $6.50
6 RPM (Revers.) $10.00

HAYDON TIMING MOTORS

110v 60 cycle 30 RPM .. $2.60
110v 60 cycle 1 RPM ... 2.60
230v 60 cy 1/2 RPM 1.00
1 RPM 1.00

HANSEN Synchron 4 RPM $4.24

BLAN EST. 1923 — 64E Day Street New York 7, N. Y. — Please include postage

"SEARCHLIGHT" Can Help You!

Hundreds of miscellaneous business problems that confront you from time to time, can be quickly solved through the use of the SEARCHLIGHT SECTION of ELECTRONICS.

When you want to buy or sell used or surplus new equipment, want additional capital or have other business wants—advertise them in the SEARCHLIGHT SECTION for quick, profitable results!

INDEX SEARCHLIGHT SECTION ADVERTISERS

Alltronics 444
Arrow Sales Inc. 451

Barry Electronics Corp. 450
Blan 452

C&H Sales Co. 449
Communications Equipment Co. 445

Empire Electronics Co. 444
Engineering Associates 452

Fair Radio Sales 448
Fay-Bill Distributing Co. 448
Finnegan, H. 450
Fusite Corp., The 444

G. A. Electronics Sales 446
Garfield Industries 453

Harjo Sales Co. 453

Instrument Service Co. 444

JSH Sales Co. 447

Legri & Co. 444

M. R. Co., The 450

Page Electronics 452

Radalab Inc. 446
Relay Sales Inc. 446

Sanett, R. E. 450
Semler-Industries Inc. 450, 453

"TAB" 454
Tallen Co., Inc. 450

Universal General Corp. 453

V&H Radio Electronics Supply 444

Western Engineers 453

This Index is published as a service to the reader. Care is taken to make it accurate but Classified assumes no responsibility for errors or omissions.

SQUARE D ALLEN BRADLEY
KURM UTLER
STEVE AMMER
ARNO ALLIED
WESTO ENERAL
PHILLI LECTRIC
CONTRO CLARE
DORME SIGMA
WESTER OMATIC
ELECTRI ECTRIC
AMPERIT LEACH
POTTE RUTHERS
BRUMFIE DUNN
LEDEX NORTH ELECTRIC
GUARD ELECTRIC
WARD LEONARD ADVANCE
STEPPIN TICALLY
SWITC LED
CONT NTACT
ROTA CURY
RACH ITROLS
TELEPHO LENOIDS
TYPE
KEYING MINIATURE AIRCRAFT

LARGEST STOCK OF RELAYS IN THE WORLD

Send for our latest bulletins

Universal general corp.
324 CANAL ST., N.Y.C. 13, N.Y. Walker 5-9642

RCA TV CAMERA



NEW Surplus
for Labs! Export!
Industrials!
Medicine!
Closed Circuit
TV!

Ideal for labs, industry, prisons, TV technicians, swim pools, medics—"mechanical eye" for closed circuit TV. 1846 Iconoscope, 6-stage video amplifier and clipper. THE REAL THING! Send for new, free, complete technical data. SOLD AT FRACTION OF REAL VALUE!

Harjo Sales Co.
Office-Warehouse: Dept. E-7, 503 N. Victory Blvd., BURBANK, CALIFORNIA

U. S. GOV'T SURPLUS
ELECTRONICS
FOR EXPORT
Semler Industries Inc.
6853 Lankershim Boulevard
North Hollywood, California, U.S.A.

Transformer Kit (500 V.A.)

Build your own. All necessary parts including wound, insulated 115 volt primary. Complete easy instructions to wind your own secondary in a few minutes. Ideal for isolation, rectifier, filament, etc. Weight 20 Lbs. $5.95.

GARFIELD INDUSTRIES
10615 So. Highland Ave., Garfield Hts. 25, O.

SPECIAL PURPOSE TUBES

OA2	$ .75	3KP1	7.50	VX-33A	5.00	WE-421A	7.00	959	1.25
OA4G	1.00	4-65A	15.00	35T	3.00	GL-434A	10.00	SN-974B	6.00
OA5	3.75	4B22	6.50	35TG	2.00	446A	.40	SN-976D	8.50
OB2	.60	4B23	5.00	VX-41	5.00	446B	.85	991/NE-16	.30
OB3/VR-90	.75	4B24	5.00	RK-49	2.85	464A	1.50	CK-1005	.25
OC3/VR-105	.60	4B25	7.00	FP-54	35.00	CK-510AX	.59	CK-1006	2.50
OD3/VR-150	.60	4B27	2.25	HK-54	2.00	527	20.00	SN-1006	6.50
EL-C1B/3C31	1.00	4B31	20.00	T-55	3.00	GL-546	2.00	CK-1007	.45
1AD4	1.15	4C27	5.00	VX-55	6.00	559	.45	SN-1007A	6.50
1AF4	2.50	4C35	17.50	RK-60/1641	1.25	575A	6.00	SN-1007B	8.50
1AG5	2.00	4E27/8001	7.50	RK-61	2.50	631-P1	5.00	CK-1009/BA	3.00
1B22	1.25	4J34	25.00	HY-65	.75	WL-638A	17.50	SC-1016C	6.50
1B24	5.00	4J38	100.00	RK-65/5D23	6.50	WL-652/57	40.00	SC-1017C	6.50
1B35	4.50	4J39	100.00	FG-67	9.00	WL-655/58	80.00	CK-1026	2.90
1B38	25.00	4J52	50.00	HY-69	2.25	WL-681/86	25.00	SN-1039A	6.50
1B46	1.75	4J61	175.00	RK-72	.50	WE-701A	2.50	SC-1156A	6.50
1B47	5.00	4X100A	12.50	RK-73	.50	703A	1.25	1500T	100.00
1P22	5.50	EL-C5B/5C30	1.00	RK-75/307A	.75	WE-705A	.70	1614	1.50
1P28	7.50	5AP1	5.00	75TL	7.50	706AY-GY	7.50	1619	.30
1P29 & 30	1.50	5B21	1.00	FG-81A	3.50	707B	2.50	1624	1.00
1P36 & 37	2.00	5BP1	2.00	FG-95	17.50	WE-714A	7.50	1625	.30
2-01C	10.00	5BP1A	4.00	100R	3.50	715B	3.00	1846	50.00
2AP1	4.00	5BP2A	4.00	100TH	5.00	715C	10.00	2050	1.00
2AP1A	6.00	5BP4	2.00	WE-122A	1.50	717A	.35	ZB-3200	100.00
2BP1	7.50	5C22	25.00	F-123A	5.00	WE-719A	7.50	R-4330	7.50
2C38	6.50	5CP1	2.00	WE-123A	2.50	720AY-EY	35.00	5528	7.50
2C39	3.75	5CP1A	7.50	F-128A	10.00	721A	.75	5550	25.00
2C39A	10.00	5CP7	6.00	VXR-130	1.65	721B	7.00	5551	40.00
2C40	12.00	5CP7A	8.00	HK-154	4.00	723A/B	7.50	5553	80.00
2C42	8.50	5CP12	10.00	VT-158	10.00	WE-725A	3.00	5556 PJ-8	6.75
2C43	9.00	5D21	7.50	FG-166	7.50	WE-726A	5.00	5557	3.50
2C44	.45	5FP7	1.50	FG-172	20.00	WE-726B	15.00	5558	5.00
2C46	5.00	5FP14	7.50	QK-181	12.50	WE-726C	15.00	5560	17.50
2D21	.75	5GP1	4.00	FG-190	7.50	WE-730A	6.50	5610	1.00
2D21W	1.00	5HP1	2.00	HF-200	8.50	750TL	40.00	5632	8.50
2D29	1.00	5J29	10.00	CE-203	3.50	SA-752B	2.00	5634	6.50
2E22	3.00	5J30	10.00	203A	3.50	801A	.50	5637	3.75
2E24	2.00	5J32	7.50	207	25.00	802	2.00	5638	6.50
2E26	2.85	5JP1	10.00	WE-211C	10.00	GL-803	2.00	5640	8.50
2E29	.75	5JP2	5.00	WE-211D	8.00	804	8.50	5642	1.00
2E36	1.25	5JP4	5.00	WL-218	15.00	805 (RCA)	7.50	5644	6.50
2J21A	2.50	5JP5A	5.00	222CH	150.00	807	1.10	5645	6.00
2J26 & 27	2.50	5JP11	7.50	CE-235A	5.00	807W	2.00	5650	85.00
2J29	10.00	5LP1	7.50	WE-242C	7.00	808	1.00	5651	1.35
2J30	35.00	5NP1	2.00	WE-244A	7.50	809	2.25	5654	1.00
2J31-40	10.00	5R4GY	1.25	WE-245A	7.50	810 (RCA)	10.00	5656	5.50
2J51	100.00	5R4WGY	3.50	WE-249B	3.00	811	2.75	5670	1.45
2J52	50.00	5X3	2.75	WE-249C	2.50	811A	3.50	5672	1.15
2J54	25.00	5X3P1	75.00	250R	3.50	812	2.75	5676	1.25
2J55	35.00	5Z3P7	50.00	250TH	20.00	813 (RCA)	12.00	5678	1.00
2J56	50.00	5Z4P11	100.00	250TL	12.50	814	1.25	5687	2.75
2J61	15.00	EL-C6J	10.00	WE-251A	75.00	815 (RCA)	1.00	5691	4.50
2J62	5.00	EL-C6L	5.00	WE-252A	7.50	816	1.00	5692	5.00
2K22	15.00	EL-6C/4B25	8.00	WE-253A	2.50	826	.50	5693	4.50
2K25	10.00	6AC7W	1.00	WE-254A	3.50	SD-828A	6.50	5696	1.00
2K30	100.00	6AD4	2.50	WE-257A	2.00	SD-828E	6.50	5703	1.00
2K33A	50.00	6AK5W	1.00	FG-258A	80.00	828	8.50	5720	15.00
2K34	85.00	6AL5W	.75	WE-262B	5.00	829	4.00	5725	1.75
2K39	100.00	6AN5	2.50	267B	5.00	829B	8.50	5726	.75
2K41	85.00	6AR6	1.25	WE-268A	5.00	830B	.50	5727	1.25
2K45	30.00	6AR6WA	3.75	FG-271	40.00	832	2.50	5728	9.00
2K47	85.00	6AS6	1.25	WE-271A	7.50	832A	4.50	5734	12.50
2K54	5.00	6AS6W	1.75	WE-274B	.90	833A	30.00	5740	35.00
2K55	5.00	6AS7G	3.00	WE-276A	7.50	SD-834	3.75	5750	2.50
2P21 (I.O.)	25.00	6BA5	2.50	WE-282A	5.00	834	7.50	5763	1.25
2V3G	1.25	6C21	15.00	WE-283A	3.50	836	1.25	5800	7.50
2X2	.25	6J4	1.75	WE-285A	5.00	837	1.00	5801	5.00
2X2A	.90	6J4WA	2.50	WE-286A	6.00	838 (RCA)	2.00	5803	6.00
3A4	.50	6J6W	1.25	287A	2.50	842	1.50	5819	30.00
3A5	.60	6L4	3.50	WE-300B	5.00	845	3.50	5827	5.00
3AP1	1.50	6SK7W	1.00	304TH	7.50	845W	7.50	CK-5829	1.00
3AP11A	5.00	6SN7W	1.50	304TL	10.00	849	17.50	5842	12.50
3B21	3.50	6SK7WA	2.00	307A	.75	850	15.00	5847	12.50
WE-3B24	1.00	6SU7GTY	2.00	WE-310A	4.00	851	7.50	5915	.75
3B24W	4.85	6X4WA	2.00	WE-313C	3.00	860	2.50	5932	3.75
3B25	3.00	6X5W	1.25	316A	.50	866A	1.15	5933	2.00
3B26	3.00	7BP7A	7.50	WE-323A	10.00	866 JR	1.00	5948/1754	200.00
3B27	3.00	7CP1	10.00	323B	6.00	869B	50.00	5949/1907	50.00
3B28	4.00	7EP4	10.00	WE-328A	3.50	872A (RCA)	2.50	5962/BS-101	5.00
3BP1	1.50	7HP7	10.00	WE-337A	6.00	884	.95	5963	1.40
EL-3C	5.00	10KP7	25.00	WE-339A	7.50	885	.95	5979/BS-1	10.00
EL-3CJ	8.50	12AP7	50.00	WE-347A	3.00	905A/P1	2.00	5980/BS-2	8.50
3C23	4.50	12DP7	17.50	WE-350A	2.50	913	17.50	5981/5650	85.00
3C24	2.50	12GP7	17.50	WE-350B	2.00	SD-917A	3.75	5998	7.00
3C33	7.50	LM-15 (I.O.)	50.00	WE-352A	15.00	917	1.75	6098	3.75
3C45	6.50	FG-17	3.50	WE-355A	12.00	918	1.50	6328	12.50
3D22	9.75	RK-20A	7.50	WE-356B	3.50	922	2.00	8002R	15.00
3DP1	3.00	TZ-20	1.50	WE-368A/AS	1.25	923	1.40	8005	4.75
3DP1A	7.50	RK-23	2.50	371B	1.50	927	.75	8012A	3.50
3E29	8.50	HK-24	3.00	WE-388A	1.50	931A	2.35	8013	2.50
3EP1	2.00	HK-24G	2.50	WE-393A	4.50	SN-947C	6.50	8013A	3.00
3FP7	1.50	RK-25	2.25	394A	3.00	SN-947D	8.50	8020	1.50
3FP7A	2.50	25E6WG	3.00	WE-396A	3.00	SN-948B	6.50	8025	1.25
3GP1	2.50	25T	3.00	WE-403A	1.25	SN-948D	6.50	8025A	2.00
3HP7	3.00	25TG	2.50	WE-404A	12.50	954	.25	9001	.85
3HP14	2.50	FG-27A	12.00	WE-409A	1.10	955	.35	9002	.50
3J21	50.00	28D7W	1.25	GL-415	25.00	SN-956B	1.00	9003	1.25
3J31	45.00	FG-32	5.00	WE-417A	12.50	956	.35	9004	.35
3JP12	10.00	VX-32B	7.50	WL-417A	2.50	957	.35	9005	1.40
3K27	150.00	FG-33	15.00	WE-418A	17.50	958A	.35	9006	.25

ALL TUBES ARE NEW, INDIVIDUALLY CARTONED, FULLY GUARANTEED

Prices are F O B shipping point

western engineers
ELK GROVE, CALIFORNIA
GEORGE WHITING, OWNER

Orders for less than ten dollars cannot be processed

"TAB"
THAT'S A BUY

New Variable Voltage X-fmrs
SUPERIOR-GR-STACO-UTC
0-135V-1.25A $7.25
0-135V/1A 10.25
Cased 0-135V/1.5A 12.50
Uncased 0-135V/1.5A 10.50
Cased/0-270V/1A 12.50
Uncased/0-270V/1A 10.50
Cased/0-135V/15A 20.50
Cased/0-270V/7.5A 102.50
Uncased 0-270V/7.5A 87.50
Cased 0-270V/5A 81.50
Cased 0-270V/12A 102.50
Cased 0-270V/15A 122.50
Cased 0-270V/20A 154.75
CR168/0-270V/15A/LN $155.00
BUY AS YOU NEED AT FACTORY DISCOUNTS

WRITE FOR NEW RECTIFIER AND POWER SUPPLY CATALOG PR156-B

"TABTRAN" Rectifier Xfmrs
Sec'd Volts (DUAL † 6-0-15-18 & 9-0-15-18 Series Sec'ds 6-0-15-9-12-15-18-21-24-27-30-33-36 Volts
TR6007 1 Amp† $5.25
TR6008 2 Amp† 6.35
TR6001 3 Amp† 8.65
TR6002 12 Amp† 16.45
TR6003 24 Amp†* 35.45
TR6004 50 Amp†* 69.95
TR6005 100 Amp†* 109.50
16 Volt 2 Amp ..... $1.98; 2 for $3.50
† Wdgs in Series at Ratings shown; Parallel 2X Current; Voltage 0-15-18.
2 Dual Pri 115 & 230V 60cy.

NEW "TABTRON" SELENIUM RECTIFIERS
ENGINEERED FOR AUTOMATION & INDUSTRY
"Technical Apparatus Builders" mfgrs. Power Rectifiers to your specs. From one amp up to and above 1000 amps, convection or fan cooled, single or 3 phase. "NEMA" & JAN. Spec.

* FULL WAVE BRIDGE ● DATED & ONE YEAR GTD

Max Amp	18VAC* 14VDC	36VAC* 28VDC	45VAC* 42VDC	72VAC* 56VDC	138VAC* 100VDC	226VAC 217VDC	Ctr Tap AC/DC 30/12	3 Phase 120VAC 156VDC	Bridge 240VAC 300VDC
1	$1.40	$2.60	$3.70	$4.45	$7.40	$25.00	$2.40	$15.50	$32.25
2	2.40	4.40	5.30	5.45	10.25	29.00	2.70	18.50	36.00
3	2.90	4.10	5.75	7.00	12.70	37.00	3.00	20.00	48.50
4	3.40	5.70	7.10	8.75	15.00	41.00	3.60	21.50	60.75
5	3.90	6.40	12.75	17.25	29.00	56.00	7.70	31.50	68.75
10	5.65	11.35	15.40	24.75	41.25	85.00	8.40	42.40	94.25
15	7.40	16.00	18.00	32.75	53.50	102.00	9.15	53.50	112.50
20	11.40	20.50	27.40	40.00	78.00	161.00	9.35	64.50	122.50
24	13.40	24.00	34.25	57.00	90.65	193.00	13.40	101.35	245.00
30	15.90	28.50	44.75	67.50	104.00	225.00	15.40	115.00	265.00
40	19.40	34.00	54.75	86.50	131.65	256.00	17.20	136.50	288.00
60	29.40	54.40	156.00	115.00	177.00	485.00	27.50	206.25	496.50

RETURN YOUR OLD DUD RECTIFIER—DEDUCT 5% FROM PRICE

FILTER CAPACITORS
CE156M 6000MFD 15V ..... 98c; 2/$1.50; 10/$5
CE601M 3000MFD 50V ..... $1.18 for $7
CE601M 3000MFD 60V ..... $1.98; 2 for $7

230 to 115 V Autoformers
For 220-/50cy Input. To 110-120V or Step up. † With Cord, Plug & Receptacle.
TPA050/50W † $2.95
TPA075/75W † 3.45
TPA100/100W † 3.95
TPA200/200W † 5.75
TPA250/250W † 6.75
TPA500/500W † 9.75
TPA750/750W † 13.70
Model TPA1000 Watts/2.5W 14.95
TPA1500/1500W, † ..... $22.50; TPA2000/2KW $34
* Less Cord, Plug & Receptacle.

Heavy Duty Battery "Fast" Charger Rectifier
12-0-12V (CT) 100 Amp Fan Cooled or 34 Amp Air Cooled. Rec'mt 6V Booster Charger.
Model CR816 ..... $15.00
16-0-16V (CT) Fan Cooled for 12V/60A and 6V/100A Booster Chargers.
Model CR36 ..... $13.50

"TABTRAN" Rectifier Chokes
CR6001/1 Amp/0.1 HY/1.4 Ohm $2.95
CR6002/2 Amp/0.1 HY/.07 Ohm 3.95
CR6003/5 Amp/.07 HY/.3 Ohm 7.95
CR6004/10 Amp/.01 HY/.05 Ohm 9.95
CR6005/24 Amp/.001 HY/.026 Ohm 14.95
CR6006/50 Amp/.001 HY/.001 Ohm 29.95

High Current Power Supplies
ONE YEAR GUARANTEE
Variable 9-28VDC. Completely Built. Ready to go. Full Wave Selenium Rectifier, Transformer Varier, 4 Volt & Amp Meters, Switch, Terminals & Fuse. Hvy Duty Steel Cabinet Std 115V/60 cy Input or 220V † (3 phase) to order.

Stock NUMBER	Continuous Rating	With Meters
T28V5A*	0-28 WVDC at 5 Amp	$200
T28V5ACC	5 Amp (1 % Ripple)	$85
T28V5A2CC	5 Amp 0.01 % Ripple	$145
T28V12A	0-28 VDC at 12 Amp	$160
T28V12ACC	12 Amp (1 % Ripple)	$160
T28V12ACC	12 Amp 0.01 % Ripple	$220
T28V24A*	0-28 VDC at 24 Amp	$315
T28V24ACC†	24 Amp (1 % Ripple)	$275
T28V24A2CC†	24 Amp 0.01% Ripple	$350
T28V50A*	0-28 VDC at 50 Amp	$500
T28V50ACC†	50 Amp (1 % Ripple)	$410
T28V100A†	0-28 VDC at 100 Amp	$600
T28V100ACC†	100 Amp (1 % Ripple)	$700

Variable 28 to 135 VDC Completely Built. Ready to go. Includes V. W. Selenium Bridge Rectifier 4 & Ammeter. Specify for 115 or 230 VAC 1 phase, 60 cy Input.

T120V5AC	28 to 135 WVDC at 5 Amp	$190
T120V5ACC	5 Amp (1 % Ripple)	$240
T120V10AC	28 to 135 VDC at 10 Amp	$245
T120V10ACC	10 Amp (1 % Ripple)	$295

*2" Meters; All Others 4" Meters
POWER SUPPLIES TO YOUR SPECS. WRITE US YOUR REQUIREMENTS

New Variable 0 to 6 & 12 Volt 12 Amp DC Power Supply

Battery Eliminator Charger Model RN Plater Aircraft Marine or any DC Neg. Extra Hvy Duty Selenium Rectifier, 2 Meters V. & A. Dsgnd for Cont. Service and up to 20 Amps Intermittent overload. New Model T612V12AC SPECIAL $33.00

IN23B Crystal Diode
"TAB" SPECIAL 75¢ ea; 10 FOR $7
IN21 ..... 6 For $1

DE JUR-AMSCO #310 Meter, 0-800MA, 3" Rd. New Reg. $12.80. "TAB" @ $2.95

"VECTOR" PLUG-IN STANDARD TURRET
B10M Con. Octal Plug & 7 pin top socket. Regular $1.52 ..... "TAB" Special ..... 3/$3; 100/$25

MICRO-POSITIONER. Barber-Colman AYLZ3522-8 polarized DC relay Dble coil, differential current cons. Sdw max for remote control position $3.50
2 for $6

WE BUY, SELL and SWAP AS WELL

New CD #BT-14 Condenser—.012/25,000 WVDC, 1 3/16"x1 5/16" Dia. $4; 6 for $20

HI-FI RECORDING TAPE
Sold on Money Back Guarantee

7" REEL, 1200 FOOT High-est Quality Precision Coated & std. PERMO-SHEEN processed quality controlled, sec-tional output, Noise Free, Plastic tape, Splice Free, Free, 7½ IPS 40-18KC Oside Wnd In. "TAB" SPECIAL & $1.89 EA; 3 @ $5.50 EA; 12 FOR $1.45 EA ..... $5000's SOLD

GENUINE SANDVICK STEEL WOOD SAW, dble cutting edge $15. Reg @ $2.99

LINEAR SAWTOOTH Precision Line DC POTENTIOMETER #KS15138
"TAB" 59¢ ea; 2/$1

WRITE FOR MONTHLY BONUS CATALOG

Fenwal Thermoswitch #37111 Precision adjustable Fluid or Air Control, +100 to +400° F/10A/115 VAC ..... 14 @ 1 2/$7

HANDPASS FILTER TRANSFORMERS. Sharp cutoff HiQ individually cased & shielded for 60 or 120 cycle ..... $1.50; 3/$4

MICA CONDENSERS

MFD	WVDC	Price
.01	600	45c; 100/$40
.01	1500	95c; 100/$75
.001	1500	39c; 100/$25
.002	1500	59c; 100/$50
.018	3500	95c; 100/$80
.002	3500	45c; 100/$40

TUBES
"TAB" TESTED INSPECTED GUARANTEED!!!

0A2	$ .74	3C45	7.00	394A	1.85	3Y31	.75	5819	$3.00
0A3	.74	3D21A	2.00	434A	2.75	4-65A	1.25	5823	48.00
0B2	.44	3D22	2.00	446A	.98	4D21	1.60	6829	.99
0B3/VR90	.44	3E29	125.00	450TH	65.00	4E27	.49	6841	7.95
0C3/VR105	.44	3E29/2K28	125.00	450TH	65.00	4X150A	7.50	6845	11.00
0D3/VR150	.44	4-65A	10.00	5U4AX	1.35	5636	3.60	6846	.85
1A0	1.24	4-125A	19.00	5U4GA	1.65	5637	.70	6847	3.50
1A3	1.35	4B32	5.00	5U4GB	1.65	5639	.70	6850	1.70
1AX2	1.35	4B35	2.00	5V4GA	1.65	5651	.70	6861	1.70
1B3	.65	4C35	15.00	5Y3GA	2.00	5652	.65	6910	.45
1B22	1.25	4X52	95.00	6AG5X	2.50	5653	.98	6912	3.95
1B24	4.34	4X150A	22.25	6AL3X	1.50	5654	.98	6922	1.98
1B26	4.34	5AR4	1.98	6BG6G	.97	5642	.98	6939	1.98
1B35	1.50	5AT4	1.75	6BY5X	1.35	5643	.98	6942	1.98
1B46	1.98	5U4G	.45	6CA4	1.25	5644	2.00	6952	4.50
1B46A	2.25	5U4GA	.45	7B4A	.74	5645	61.00	6998	1.65
1D21	.50	5AN8	2.61	7D8A	.74	5646	.74	6999	1.65
1LN5	.70	5AN8A	2.61	7D8A	.74	5647	2.49	6136	45.00
1N34	.70	5AQ5	1.30	7E8A	1.49	5654	4.00	7102	.25
1Q3	100.00	5BG7G	1.70	7F8A	1.65	5654A	4.00	7193	3.00
1X2A	.60	6B4G	.60	7F8A	1.65	5656	6.01	8008	2.50
2C22	.25	6J5	.45	7S7A	.20	5517	2.10	8012	1.00
2C26	.70	6SH7	.45	7Z4A	77.00	5685	1.40	8013	2.70
2C39A	7.50	6SN7	.45	7Z4A	.74	5686	1.25	8020	2.95
2C43	4.50	6T8	.79.00	12AT7	.84	5687	1.40	8025A	4.00
2C43	5.00	12AU7	.90	12AU7	.84	5691	1.04	9001	.80
2C51	2.50	12AV7	.90	12AX7	.84	5692	1.04	9002	.80
2C51	3.00	12AX7	1.70	12BA6	4.25	5693	2.24	9003	1.37
2D22	1.50	12BE6	1.30	12BA6	.42	5695	2.95	9004	1.15
2E22	1.95	12SQ7	1.30	12BE6	.42	5696	2.95	9005	1.15
2E25	3.95	24G	2.70	807W	4.95	5697	3.95	1BP1A	5.95
		25K24	2.70	807W	4.95	5698	3.95	1BP1B/L	6.50
2G21	1.95	REL26	.49	814	2.48	5698	6.00	1DP1	2.75
2J30	15.00	RK34	.45	815	1.50	5703	3.70	1DP1A	2.75
2J42	10.00	1L4	.45	826	.70	5703	3.70	1EP1	2.40
2K22	10.00	1T4M	8.75	829B	6.00	5703	3.70	1EP1A	2.40
2K25	50.00	1U4	.45	832A	6.00	5703	3.70	1FP1	1.91
2K28	20.00	6V6G	.60	866	1.49	5704	2.00	1GP1	1.91
2K29	20.00	6V6GT	.60	872A	1.49	5704	2.00	1GP1A	1.91
2K30	100.00	6K30	250.00	884	1.49	5705	2.00	1HP1	1.91
2K31	100.00	6K32	250.00	884	1.49	5715	2.00	1HP1A	1.91
2K33	100.00	2D21	3.50	6063A	1.35	5718	2.00	1HP2	1.95
2K39	100.00	2D21A	3.50	6063A	1.35	5719	2.00	1HP2A	1.95
				872A	1.35	5723	2.95	1JP1	14.95
2K41	90.00	223A	5.00	874	.50	5744	1.85	1LP2	5.00
2K42	90.00	250R	5.00	878	.50	5745	1.45	1LP3	7.00
2K43	110.00	250TH	10.00	885	1.15	5750	1.45	1LP4	50.00
2K45	80.00	304TH	15.00	927	.90	5751	1.45	7BP4A	7.50
2K48	120.00	304TH	15.00	927	.90	5763	4.25	7BP7	4.50
2P22	3.00	310A	.49	954	.24	5787	4.25		
2P28	5.00	310A	.49	955	.24	5797	2.95	WRITE FOR FULL LIST	
2P34W	5.00	240A	5.00	956	.28	5798	6.99		
2C22	7.50	240A	5.00	956	.28	5813	2.95		
2C22	1.98	280A	1.15	1005	.28	5814	.75		

"TAB" SPECIAL 2K25/723AB @ $5.95; 5/$25

NEW "TABLITE" ELECTRONIC PHOTOFLASH KITS
Portable Units—AC & Battery Inbuilt In One Camera Case



Uses new lo cost lo voltage super direct contrast bright light output; light duration 1/600 sec'd; color K 6800-; cost as low as 1¢ a flash. 1000 to 2000 flashes per set of batteries. All kits with inbuilt AC pack. (Kits do not include batteries*.)
Model 400B, 60W Sec color 75 +; B&W 225 +; Recycles 2 sec'd, less than 4 lbs $25.95
Model 500S, 120W Sec. color 200 +; B&W 300 +; Recycles 3 sec'd, less than 5 lbs $44.95
Model 1000S, 240W Sec color 150 +; B&W 450 +; Recycles 10 sec +, less than 6 lbs $84.95
Kits ASSEMBLED, additional ..... @ $10
*Two (2) 240V BATTERIES ..... @ $10
SOLD WITH "TAB" MONEY BACK GUARANTEE

PHOTOFLASH & STROBE LAMPS

"TAB" No.	Replaces	W-Sec Max	Each
TWL	FA 106/PT116	150	$0.98
TWL-A	FA 106A/PM2K	100	1.98
25BT	GE FT 210	200	5.98
TWFA	SYLV. 4320	200	5.98
4X5X	X400	200	10.98
TIX	DX & FA100	150	5.98
TFD	DX/PM2-250	250	10.00
240GTO	FY 600	2000	49.98

TRIGGER COIL LO VOLT FLASH $1.67
CON2-525MFD/450VDC/SI ..... Watt ..... ea/dz
NEW low leakage famous mica .58; 2/$1.15; 6/$2.98
Send 50c for "TAB" Photoflash Data

INFRARED SNOOPERSCOPE
SEE IN DARK TUBE
Selected, GTD & Tested for resolution, 1st class image converter viewing tube. Hi-Sensitivity simplified design 2" dia. Willemite screen. Resolution up to 250 lin/in Tube & Data "TAB" Special ..... $4.75; 2/$9

New Snooperscope Power Supply
MODEL PS2001—4000VDC/35MA. Using Dual Doubler Circuit, Housed in Metal Cabinet $21.95
KIT, Same as above, Less Cabinet $13.95



MERCURY THERMO REGULATOR
DUAL CKT, 100° F. & 32° F. Extremely sensitive & accurate for most exacting requirements—Research, Fire Prev., Freeze, Pi Control, or Max Min Temp Control. Brand New, w/data & ckt. Regularly over $20.00 ..... EA. 98c; 12 for $10.00

NEW Q-5er FILTER

Navy Mfgr. U.T.C. Chop off QRM by turning knob to pass only 1000 cycle with enough width for code or speech, rejects all else. Or turn knob to pass everything. With phone plug & jack, plugs into receiver.
Special $2.98 @ 1 4 for $10
FILTER PL-5, Range or Voice. Filters 1000 cy audio, excellent for CW ..... 89c; 2/$1

PUT HI-FI IN YOUR HOME NOW!
Speakers, Amplifiers, Tuners, Changers and Component Parts—
GET OUR PRICE B-4-U-BUY
NEW G.E. PHONO CARTRIDGES
Original Boxed—Money Back Gtd

RPX050A .001 & .003	$6.75
RPX052A Gold Treasure	10.25
RPX053A Gold Treasure	29.00
RPX040A Single (S) .003	5.66
RPX041A Single (S) .001	5.66

SEND US YOUR REQUIREMENTS

HI-MEG HI-VOLT RESISTORS

2 MEG 5W/10KV	89c; 12/ $9.00
7 MEG "MVP" 10W/10KV	1.00; 12/$10.00
12 MEG 5W/40KV	2.00; 12/$20.00
20 MEG "MVO" 15W/80KV	$2.00; 12/$20.00
50 MEG "MVE" 25W/40KV	$2.50; 12/$25.00
10 MEG "MVP" 10W/10KV	$2.00; 12/$20.00

PECISION RESISTORS
1% ACCURACY GTD
SPECIAL 15c EA
10 OF ONE VALUE 10c ea
100 of One Value $8.00
100 Asst'd Values $10.00
WRITE FOR FULL LISTING

"TAB" HEADQUARTERS
For All Your Electronic Needs . . . At Wholesale Prices

STEVENS ARNOLD DC-AC CHOPPER. 0-500 cps Type CH3S6 SPDT Coil DC 26V/800Ω Imp 60cy/830 ohm. 400 cy/1100 ohms. Electro-Mech Vibrator used as Chopper, rectifier, demodulator, sq wave generator, Ideal Servo Applications Reg $20 SPECIAL ..... @ $3; 4 for $10

CIRCUIT BREAKER

Heinmann Magn. Bkrs. Amps: 3, 5, 9, 10, 12, 25, 30 @ $1.89 EACH; 12 FOR $20 ..... 30 FOR $25
Sq. C CH Toggle Sw. Bkrs. Amps: 5, 10, 15, 25, 70 ..... 75c EA
Kilsen Therma Push Button Bkrs. Amps: 5, 10, 15, 25, 30, @ 79c ea; 6/$4 ..... 20 FOR $10

SELSYNS—SYNCHROS
AY1 & AY5, Autosyn/26V/400CY @ 2/$3.98
21H1-Syn Diff/57.5V/57.5V/400CY ..... @ $5.98
5405G-Syn Rptr/115V/60CY ..... @ $12.95
C78248-Syn Trans/115V/60CY ..... @ $8.98

THOR 2013 ½" Electric Speed Drill w/Jacobs chuck, 2400 RPM 115VAC/DC $33.95
THOR 4003 ½" Electric Speed Drill w/Jacobs chuck, 650 RPM 115VAC/DC $27.50

PLANETARY DRIVE
5:1 & 1 to 1 RATIO
Reg $6.20 ..... "TAB" @ $2
SPECIAL ..... 3 For $5

Microswitch, 3B-1, SPNC/10 Amp, Cased. ..... 29c Ea, Lots of 4: Singly @ 25c

THAT'S A BUY "TAB" THAT'S A BUY
Dept. BE6 111 Liberty St., New York 6, N. Y. U. S. A.
PH. RECTOR 2-6245
CABLE "TABPARTS"

Money Back Guarantee (Cost of Mdse. Only) $5 Min. Order FOB N. Y. C. Add shpg. charges or for COD 25% Dep. Prices Subject to Change Without Notice.

INDEX TO ADVERTISERS

Ace Electronics Associates 302
Acme Wire Co 375
Acton Laboratories, Inc 332
Adams & Westlake Co 66
Adcola Products Ltd 310
Adel Precision Products, A Div. of General Metals Corp 456
Advance Vacuum Products, Inc 25
Aeronautical Communications Equipment, Inc. 126
Aerovox Corp. 248
Ainslie Corp. 388
Aircraft-Marine Products, Inc 121
Air Express Division Railway Express Agency 124, 125
Airpax Products Co 55, 95
Allen-Bradley Co. 223
Allegheny Ludlum Steel Corp 88
Amco Engineering Company 401
Amelco, Inc. 380
American Airlines 40, 41
American Gas Furnace Co 403
American Lava Corporation 47
American Television & Radio Co 391
American Time Products, Inc 42
Amperite Co., Inc 342
Ampex Corporation 243
Amphenol Electronics Corp 202
Armco Steel Corp 311
Arnold Engineering Co 13
Assembly Products, Inc 402
Associated Commodity Corp 406
Automatic Manufacturing 109
Autonetics, A Div. of North American Aviation, Inc. 293

Babcock Relays, Inc 356
Baird Associates—Atomic Instrument Co. 361
Bakelite Co., A Div. of Union Carbide & Carbon Corp. 269
Baker & Company, Inc 362
Ballantine Laboratories, Inc 242
Barber-Colman Co. 379
Barry Controls, Inc 21
Bausch & Lomb Optical Co 335
Bead Chain Mfg. Co 376
Beckman Instruments, Process Instruments Dept. 374
Belden Manufacturing Co 64
Bell Telephone Laboratories 297
Bendix Aviation Corporation
Eclipse-Pioneer Div. 322
Red Bank Div 224
Scintilla Div. 337
Bentley, Harris Mfg. Co 32
Berkeley Division, Beckman Instruments, Inc. 280
Bird Electronics Corp 360
Boehme, Inc., H. O 358
Boesch Mfg. Co., Inc 406
Boonton Radio Corp 299
Bristol Co., The 340
Brush Electronics Company 54
Burroughs Corp., Electronics Instruments Div. 96
Bussmann Mfg. Co 44

C B S Hytron, A Division of Columbia Broadcasting System, Inc 77
Calidyne Co. 347
Cambridge Thermionic Corp 38
Cannon Electric Co 200
Carborundum Company, Globar Division. 263
Carolina Power & Light Co 406
Cascade Research Corp 314
Celco-Constantine Engineering Laboratories Co. 226, 390
Centralab, Div. of Globe-Union, Inc. 341, 343
Chase Brass & Copper Co 235
Chatham Electronics, Div. of Gera Corp. 251
Chicago Standard Transformer Corp 254
Chicago Telephone Supply Corp 39
Cinch Mfg. Corp 187
Circuit Instruments, Inc 357
Clare & Co., C. P 70
Clarostat Mfg. Co., Inc 75
Clearprint Paper Co 43
Cleveland Container Co 222
Clifton Precision Products Company, Inc. 207
Cohn Mfg. Co., Inc., Sigmund 386
Collectron Corporation 404
Color Television, Inc. 456
Communication Accessories Co 107
Communication Measurements Laboratory, Inc. 378
Consolidated Electrodynamics Corp 332
Consolidated Electrodynamics Corp., Rochester Div. 318
Constantin & Co., L. L 281
Continental-Diamond Fibre Div. of the Budd Company, Inc 72
Continental Wire Corp 286
Cornell-Dubilier Electric Corp 229
Corning Glass Works 110
Cosmic Condenser Corp 399
Cossor (Canada) Ltd 379
Coto-Coil, Inc. 370
Croname, Inc. 369
Crosby Laboratories, Inc 358
Cross Co., H 395
Crucible Steel Co. of America 221
Curtiss-Wright Corp. 264

Dale Products, Inc 359
Dano Products Co 398
Daven Company ..... 3rd Cover
Davies Laboratories, Inc 46
Daystrom Pacific Corp., A Subsidiary of Daystrom, Inc. 258
DeJur-Amsco Corporation, Electronics Sales Div. 255
DeMornay-Bonardi 401
Donner Scientific Company 304
Douglas Aircraft Co., Inc 249
Dow Corning Corp 295
Driver-Harris Co. 209
Dumont Laboratories, Inc., Allen B. 205, 291
Dunlee Corp. 361
DuPont de Nemours & Co. (Inc.), E. I. Film Dept. 315
Polychemicals Dept. 123
Durant Mfg. Co 376

7303 Atoll Ave., No. Hollywood, Calif.
Trenton, Ontario—Canada

Want more information? Use post card on last page.

THREE-AXIS FLIGHT SIMULATOR

Providing a flight table which can be continuously oriented in space with respect to three mutually-perpendicular reference axes, the CTI Dynamic Flight Simulator can be programmed directly from the output of a computer. Operating smoothly with no gearing, the instrument accepts independent voltage signals in each of the 3 axes and converts these vector analogs into a position corresponding to the defined space vector.

By thus reproducing the conditions of an actual high-performance aircraft or missile in flight, the unit expands the capabilities of any laboratory.

Write for brochure

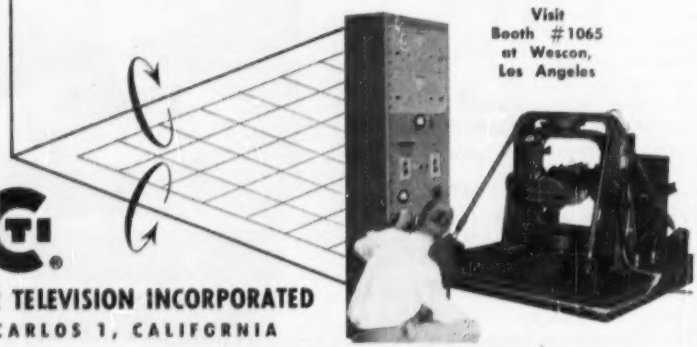

Visit Booth #1065 at Wescon, Los Angeles

CTI

COLOR TELEVISION INCORPORATED
SAN CARLOS 1, CALIFORNIA

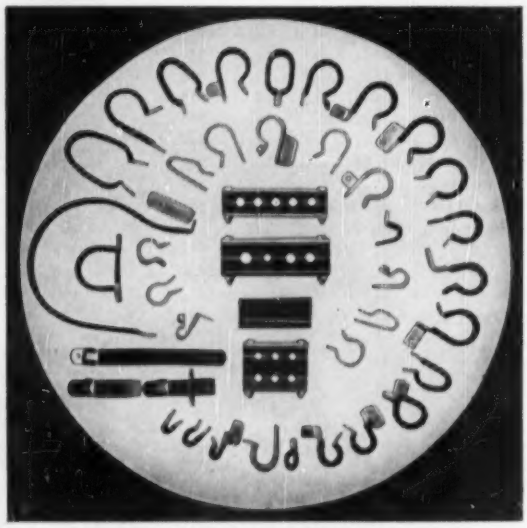

Cost Saving Ideas...

15,000 different types and sizes of LINE SUPPORT CLIPS, LINE SUPPORT BLOCKS and HARNESS STRAPS for positive, vibration-free support in aircraft, marine and industrial installations.

Consider the advantages of standardization — *completeness of line — a smaller and more flexible inventory — quick and easy training of personnel — safety — durability — interchangeability* — ECONOMY ... Specify ADEL

Complete Catalog available upon request

Direct inquiries to Huntington Division
1444 Washington Avenue
Huntington 4, West Virginia
Burbank, California
Canada: Railway & Power Engineering Corporation, Limited

ADEL
PRECISION PRODUCTS
A Division Of
General Metals Corporation

E E C O Production Company, a sub. of Electronic Engineering Company of California 274
Eastern Industries, Inc. 213
Eastman Kodak Company 219
Edo Corporation 34
Elsler Engineering Co., Inc 374
Eltel-McCullough, Inc. 61, 260
Elco Corp. 381
Electrical Industries Div. of Amperex Electronic Corp. 199
Electro Instruments, Inc 301
Electro Tec Corp 271
Electronics 86, 87, 114, 115
Electronic Instrument Co., Inc. (EICO) 385
Elgin National Watch Co. Electronics Div. 349
El-Tronics, Inc. 36, 37
Engineering Co., The 460
Erie Electronics Division, Erie Resistor Corp. 338, 339
Essex Electronics 455

F-R Machine Works, Inc. 91
Fairchild Controls Corp., Components Div. 89
Fairchild Guided Missiles Div. a Div. of Fairchild Engine & Airplane Corp 373
Federal Telephone & Radio Co 285
Ferroxcube Corp. of America 403
Filtors, Inc. 363
Firestone Guided Missile Div 367
First Six, The 17
Fisher Radio Sales Co., Inc 350
Frenchtown Porcelain Company 398

Gabriel Electronics Div. of Gabriel Co. .. 208
Gamewell Co. 336
Garrett Corp. 236, 237
Gee-Lar Manufacturing Company 378
General Ceramics Corp 211
General Electric Company
Apparatus Dept 23, 62, 63, 127
Components Dept. 99
Electronics Dept. 105
Laminated and Insulating Products Dept. 245
Metallurgical Products Dept 134
X-Ray Dept. 377
General Mills, Inc., Mechanical Div 250
General Radio Co 48, 49
General Research & Supply Co 396
Good-All Electric Mfg. Co 129
Grant Pulley & Hardware Corp 108
Gries Reproducer Corp 393
Guardian Electric Mfg. Co 275
Gudeman Co. 387
Gulton Industries, Inc 277

Hammer Electronics Co., Inc 381
Harder Co., Donald C. 398, 457
Hart Mfg. Co 300

Harvey Hubbell, Inc. 60
Haydon Manufacturing Co., Inc. 292
Heath Co. 370
Heiland, a Div. of Minneapolis-Honeywell 106
Helipot Corp., Div. of Beckman Instruments, Inc. 193
Hermaseal Co., Inc. 386
Hewlett-Packard Co. 50, 51, 201
Heyman Mfg. Co. 390
Homelite, a division of Textron, Inc. 228
Houghton Laboratories, Inc. 214
Hughes Products, a Div. of Hughes Aircraft Company 59, 215
Hughes Research & Development Laboratories 58, 217
Hunt Company, Phillip A. 272
Hycon Eastern, Inc. 283
Hycor, Division of International Resistance Co. 371

Industrial Test Equipment Co. 389
Industrial Timer Corp. 74
Intercontinental Dynamics Corp. 391
International Business Machines Corp. ... 303
International Rectifier Corp. 241
International Resistance Co. 118, 119
Irvington Division Minnesota Mining and Mfg. Co. 394

Jet Propulsion Laboratory 313
John Hopkins University, Applied Physics Laboratory 220
Johnson Company, E. F. 388
Jones Div., Howard B., Cinch Mfg. Co. ... 403

Kahle Engineering Co. 15
Kay Electric Co. 27
Kay Lab 273
Kearfott Company, Inc. 244, 351
Kepco Laboratories 191
Kester Solder Co. 231
Kinney Mfg. Div., The New York Air Brake Co. 259
Koch Fiberglas 401

Lampkin Laboratories, Inc. 234
Lapp Insulator Co., Inc. 266
Lavoie Laboratories, Inc. 392
Leach Corp. 104
Librascope, Inc. 284

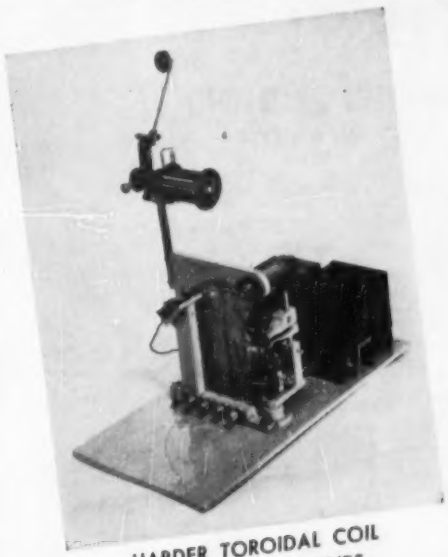

HARDER TOROIDAL COIL WINDING MACHINES
Model L-2 shown

USERS SAY:

"essential to our research program . . ."

"most versatile!"

"we wind at 2500 rpm . . ."

". . . winding coils readily that were next to impossible before receiving the L-2"

Standard ring size is 7" diameter. Special models in 10, 14 and 24".

WRITE FOR FURTHER INFORMATION

DONALD C. HARDER CO.

3710 MIDWAY DRIVE • SAN DIEGO 10, CALIFORNIA • PHONE: ACademy 2-5240

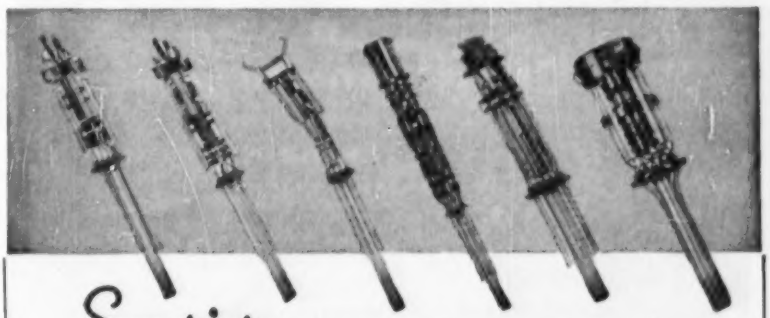

Superior manufactures superior

ELECTRONIC GUN MOUNTS!

For the CRT industry, SUPERIOR offers a full range of magnetic, electrostatic and color gun mounts . . . all precision engineered. You may order magnetic and electrostatic mounts with insulators of ceramic, pyrex cane or multiform glass. Electron guns for radar, and industrial tube types, custom built to your specifications.

Whether your order be large or small, you will enjoy all the benefits of our rigid inspection, testing and control. For complete satisfaction based on dependable service, call or write to

SUPERIOR ELECTRONICS CORPORATION

208-212 Piaget Ave. • GRegory 2-2500 • Clifton, N. J.

MARKEM MACHINES

Solve "IN-PLANT" PRINTING PROBLEMS

- FASTER - NEATER - AT LOWER COST

The Markem Model 45AF Machine prints trade name, trade mark, specifications, etc., on resistors, condensers, capacitors, diodes, triodes, transistors, etc., at production rates. Feeds, prints, and ejects automatically. Quickly insertable type provides easy change in data being printed.

Write for further information. Submit sample of item you wish to mark.

WIRE LEAD COMPONENT PRINTING

MARKEM MACHINE CO.
KEENE 5, NEW HAMPSHIRE

For manufacturers of Radio, Electrical and Electronic components and allied products!
Pre-assembled ...custom-made
PARTITIONS
for Protective Packaging
made to your exact specifications
for faster packing at lower cost!
WRITE, PHONE or WIRE for QUOTATIONS on YOUR REQUIREMENTS
PETER PARTITION CORP.
for the second time in 10 years
EXPANDS ITS FACILITIES!
NOW, in our new location—in double the space we occupied at our former address—we are operating one of America's largest plants devoted exclusively to the production of cardboard partitions ...Customers' needs can be served better than ever before in our new and enlarged plant...Production is keyed to the steadily increasing demand for our specialized service.
PETER PARTITION CORP.
Manufacturers of Cardboard Partitions
124 BOERUM PLACE BROOKLYN 1, N.Y.
Telephone: TRiangle 5-4033

Linde Air Products Company, Div. of Union Carbide & Carbon Corp. 402
Link Aviation 331
Lockheed Missile Systems Div. 238, 239
Los Alamos Scientific Laboratory of the University of California 28, 29

M. I. T. Lincoln Laboratory 306
MacLen Corp. 406
Magnatran, Inc. 404
Magnetics, Inc. 203
Malco Tool & Mfg. Co. 397
Mallory Co., Inc., P. R. 136, 189
Marconi Instruments, Ltd. 321
Marion Electrical Instrument Co. 234, 361
Markem Machine Co. 458
Martin Company, Glenn L. 102
McCoy Electronics Co. 246
Measurements Corp. 210
Metals & Controls Corp., General Plate Div. 305
Micro Switch a Div. of Minneapolis-Honeywell Regulator Co. 76
Microwave Associates, Inc. 216
Microwave Development Associates 256
Midland Mfg. Co., Inc. 98
Millen Mfg. Co., Inc., James 196
Minneapolis-Honeywell Regulator Co., Industrial Div. 323
Minnesota Mining & Manufacturing Co. 94
Moloney Electric Co. 267
Monsanto Chemical Company 83
Moseley Co., F. L. 369
Muirhead & Co., Ltd. 5
Mullard Overseas, Ltd. 122
Mutual Electronic Industries Corp. 372

N J E Corporation 135
Narda Corporation 282
National Lead Co. 90
National Moldite Co. 227
Navigation Computer Corp. 394
Neeley Enterprises 73
Nems-Clarke, Inc. 383
New Hampshire Ball Bearings, Inc. 261
New Hermes Engraving Machine Corp. 383
New York Coil Co. 389
North American Aviation, Inc. 385
Northeastern Engineering 316
Nothelfer Winding Labs, Inc. 290

Oak Mfg. Co. 93
Offner Electronics, Inc. 112, 113
Otis Elevator Company, Electronics Div. 57

Pacific Automation Products, Inc. 240
Packard-Bell Company 368
Panoramic Radio Products, Inc. 348
Penta Laboratories, Inc. 218
Perkin-Elmer Corp. 288
Peter Partition Corp. 458
Phalo Plastics Corp. 328
Phaostron Instrument & Electronic Company 266
Phelps-Dodge Copper Products Corp, Inca Mfg. Div. 52, 53, 253
Philco Corp. 85
Philamon Laboratories, Inc. 97
Phillips Process Co., Inc. 371
Photo-Crystals, Inc. 399
Photographic Products, Inc. 400
Pittsburgh Lectrodryer Company a McGraw Electric Company Division ... 80
Polarad Electronics Corporation 111
Polymer Corp. of Penna. 324
Polytechnic Research & Development Co., Inc. 56
Potter & Brumfield, Subisidiary of American Machine & Foundry Co. 128
Precision Paper Tube Co. 276
Prentice-Hall, Inc. 392

Radiation, Inc. 399
Radio Cores, Inc. 346
Radio Corporation of America 103, 329
4th Cover
Radio Engineering Laboratories, Inc. 45
Radio Engineering Products 396
Radio Industries, Inc. 400
Radio Materials Corp. 68
Radio Receptor Company, Inc. 120
Ramo Wooldridge Corp. 233
Raytheon Mfg. Co. 19, 35
Remington Rand Univac, Div. of Sperry Rand Corp. 319
Reeves Instrument Corp. 325
Relay Sales 204
Revere Copper & Brass, Inc. 30, 31
Rex Rheostat Co. 406
Rheem Manufacturing Co. 287
Richards Electrocraft, Inc. 382
Richardson Company 130

S W Electronics a Div. of Stewart-Warner Corp. 365
Sanborn Company 67
Sarkes Tarzian, Inc. 296
Shasta, Div. Beckman Instruments, Inc. 294
Shallcross Mfg. Co. 278
Shielding, Inc. 353
Sierra Electronic Corp. 355
Sigma Instruments, Inc. 326
Sola Electric Company 82
Somers Brass Co., Inc. 334
Sorensen & Co., Inc. 4
South Chester Corp. 225
Southern Electronics Corp. 101
Sprague Electric Co. 11, 195

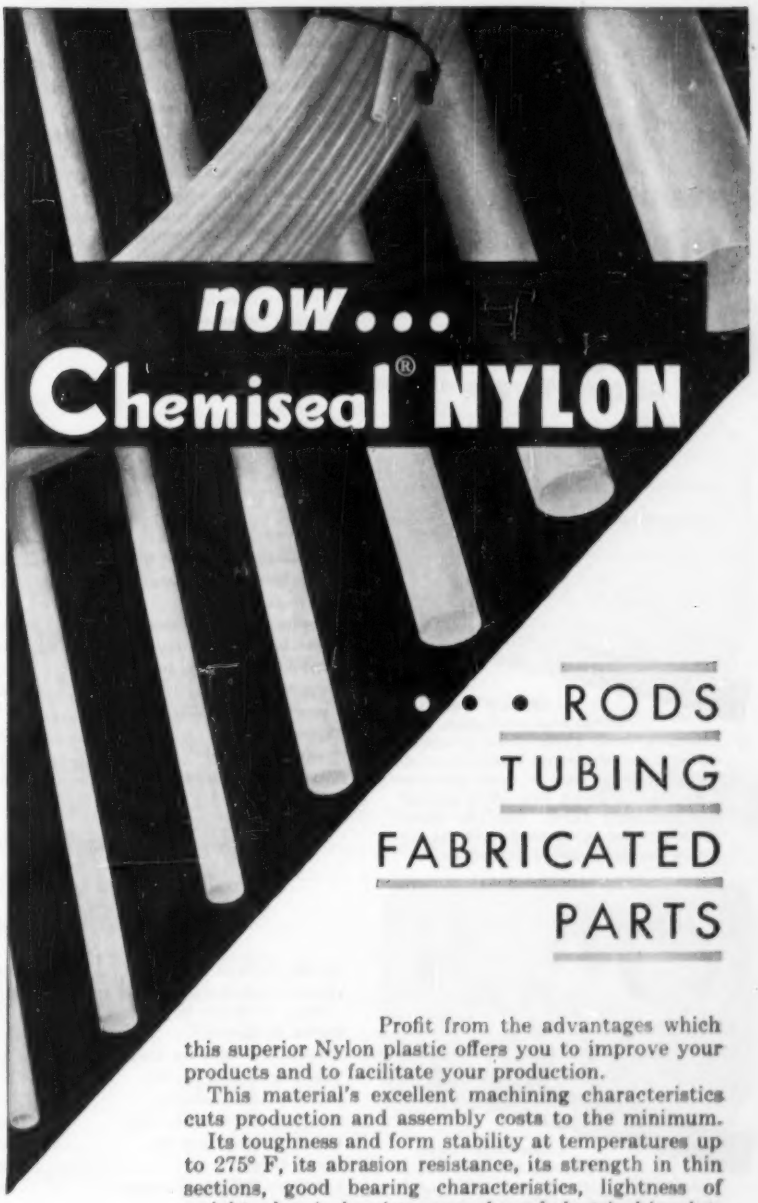

Profit from the advantages which this superior Nylon plastic offers you to improve your products and to facilitate your production.

This material's excellent machining characteristics cuts production and assembly costs to the minimum.

Its toughness and form stability at temperatures up to 275° F, its abrasion resistance, its strength in thin sections, good bearing characteristics, lightness of weight, chemical resistance and good electrical insulating properties recommend it for a wide variety of mechanical and electro-mechanical applications.

Specify Chemiseal Nylon Rod and Chemiseal Nylon Tubing (du Pont ZYTEL) now fabricated by United States Gasket Company "Quality Control" methods.

Available in all standard rod sizes from ⅛" to 2" inc. Tubing is supplied in sizes up to ½" dia. OD in various wall thicknesses. Precision machined parts to your specifications.

Write for further information.

U G S BELMONT

UNITED STATES GASKET CO.

CAMDEN 1, NEW JERSEY

Specify DKE for—
PRECISION QUALITY
components
OF TUNGSTEN,
MOLY, NICKEL CLAD WIRE,
ALLOYS, KOVAR



• DKE LEAD IN WIRES

Quality controlled throughout production with Tungsten hard glass leads produced under General Electric Timing Control. Each tungsten lead is microspecially inspected for flaws. DKE offers highest quality and LOW PRICES. Send drawings for quotations and let us prove the economy of our prices.

• DKE TUBE BASES

The Engineering Company can give you immediate delivery on following bases: 50 Watt, 3303B, 412 Industrial Base, Giant 7 Pin Bayonet, 4310 Four Pin Jumbo, Tetrode, Hydrogen Thyratron Bases in both Aluminum and Copper up to 6.50 dia. etc. All bases to JAN-1A/MIL-E-1B and subjected to weights and strength tests.

DKE HYDROGEN THYRATRON TUBE BASES

CALL OR WRITE FOR QUOTATIONS ON YOUR SPECIFIC REQUIREMENTS

THE engineering CO.

27 WRIGHT ST., NEWARK 5, N.J.

Want more information? Use post card on last page.

Spectrol Electronics Div. of Carrier Corp. 308
Sperry Gyroscope Company, Div. of Sperry Rand Corp. 132, 133
Stackpole Carbon Co. 265
Standard Electric Time Co., The 84
Stevens Arnold, Inc. 399
Stewart Corporation, F. W. 403
Stoddart Aircraft Radio Co. 262, 372
Stromberg-Carlson Company 307, 375
Stupakoff Ceramic & Manufacturing Co. Div. of the Carborundum Co. 257
Superior Electronics Corp. 457
Superior Tube Co. 78
Switchcraft, Inc. 402
Sylvania Electric Products, Inc. 6, 7
Syntronic Instruments 382

Taylor Fibre Co. 92
Technology Instrument Corp. 339
Teiner Engineering Corp. 360
Tektronix, Inc. 65
Telechrome Incorporated 279
Texas Instruments, Inc. 197
Textile Banking Co., Inc. 320
Thompson Products 333
Transitron Electronic Corp. 71
Transradio, Ltd. 362
Trop-Artic, Inc. 393
Tung-Sol Electric, Inc. 247

Ucinite Co., The 116
Union Switch & Signal, Div. of Westinghouse Air Brake Co. 344, 345
United Airlines 327
United-Carr Fastener Corp. 117
U. S. Engineering Co., Inc. 312
United States Gasket Co. 459
United States Radium Corp. 395
United Transformer Co. ..... 2nd Cover
Unitek Corp. 298
Universal Winding Company 389

Varian Associates 81, 384
Veeder-Root, Inc. 100
Vulcan Electric Co. 361

Waldes Kohinoor, Inc. 131
Ward Leonard Electric Co. 289
Waterman Products Co., Inc. 252
Waters Manufacturing, Inc. 354
Wenco Manufacturing Co. 400
Westinghouse Electric Corp. 33, 317
Westlake Plastics Co. 399
Wheelock Signals, Inc. 359
White Dental Mfg. Co., S. S. 198
Williams & Co., C. K. 384
Worcester Pressed Steel Company 212

MANUFACTURER'S REPRESENTATIVES 406

PROFESSIONAL SERVICES 405

CLASSIFIED ADVERTISING
F. J. Eberle, Business Mgr.

SEARCHLIGHT ADVERTISING 444-454
ADVERTISERS INDEX 452

EMPLOYMENT OPPORTUNITIES 407-443
ADVERTISERS INDEX 442

This index is published as a service. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

electronics

READER SERVICE SECTION

A method that provides readers with a . . .

"DIRECT-TO-THE-MANUFACTURER"

method of obtaining information on:

1. Products advertised in this issue
2. New Products and Literature covered in the editorial section of this issue

This direct method prevents loss of time in remailing your request from publication to manufacturer.

THESE POST CARDS ARE FOR YOUR USE

and

HERE IS WHAT YOU DO:

1. Fill in with ink or typewriter your name, company, address and title.

2. Then fill in the name of the specific product and the page number on which it appears.

3. Place a check mark in the box or boxes applicable to your needs.

4. Tear out the postcard on the perforated lines and address it to the manufacturer(s) whose products you are interested in. Place a stamp in the box indicated and drop into the mail.

THE MANUFACTURER WILL PROMPTLY SEE THAT YOU RECEIVE THE NECESSARY PRODUCT DATA OR THAT HIS REPRESENTATIVE CALLS UPON YOU, WHICHEVER YOU DESIRE.

If there is insufficient space on the postcard for describing your problem specifically, we suggest you write to the manufacturer, spelling out your requirements in detail. Be sure your filled in postcard accompanies your letter.

THIS SERVICE IS A CONVENIENCE FOR THE READERS OF ELECTRONICS.

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

To the Readers

of

electronics

A New Reader Service designed to provide prompt response

You, as a reader, may never have thought specifically of the viewpoint of the advertisers whose informative and up-to-date product news reaches you through the advertising pages of ELECTRONICS.

They are VITALLY interested in you and your needs. You and thousands like you constitute the market and without you they cannot continue to present their product story; indeed, they cannot remain in business.

These manufacturers whose products and services are shown in this issue welcome your inquiries and your desire for more information.

If your requirements are complicated and you require more space, we suggest that you write directly to the manufacturer, stating your problem in detail and asking for specific information or assistance. Be sure to include the postcard with your detailed request in order that your inquiry be given prompt and expeditious attention. Make certain that you specify which PRODUCT you are interested in if more than one appears in the advertisement.

On inquiries sent from foreign countries, please check mailing costs.

electronics

READER SERVICE SECTION

A method that provides readers with a . . .

"DIRECT-TO-THE-MANUFACTURER"

method of obtaining information on:

1. Products advertised in this issue
2. New Products and Literature covered in the editorial section of this issue

This direct method prevents loss of time in remailing your request from publication to manufacturer.

THESE POST CARDS ARE FOR YOUR USE

and

HERE IS WHAT YOU DO:

1. Fill in with ink or typewriter your name, company, address and title.

2. Then fill in the name of the specific product and the page number on which it appears.

3. Place a check mark in the box or boxes applicable to your needs.

4. Tear out the postcard on the perforated lines and address it to the manufacturer(s) whose products you are interested in. Place a stamp in the box indicated and drop into the mail.

THE MANUFACTURER WILL PROMPTLY SEE THAT YOU RECEIVE THE NECESSARY PRODUCT DATA OR THAT HIS REPRESENTATIVE CALLS UPON YOU, WHICHEVER YOU DESIRE.

If there is insufficient space on the postcard for describing your problem specifically, we suggest you write to the manufacturer, spelling out your requirements in detail. Be sure your filled in postcard accompanies your letter.

THIS SERVICE IS A CONVENIENCE FOR THE READERS OF ELECTRONICS.

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

Name .....

Company .....

Address .....City.....State.....

Title .....

Please send me further information on

(Product or Service).....

As described in ad on page ..... of August 1956 Issue

or, Check

New Product	
Literature	

..... on Page .....
(Name of Product or Literature)

☐ I want this information for my files

☐ I wish to see your representative

electronics

☐ Please contact me by telephone. Phone Number.....

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

ELECTRONICS
August 1956

Place 3¢ Stamp Here

TO: _____

_____

_____

For PRODUCTS and SERVICES

not specifically advertised

or described in the issue

of

Electronics

Consult your

1956-1957 ELECTRONICS BUYERS' GUIDE

or

Write to:

Reader Service Department

Electronics

330 West 42nd Street

New York 36, N. Y.

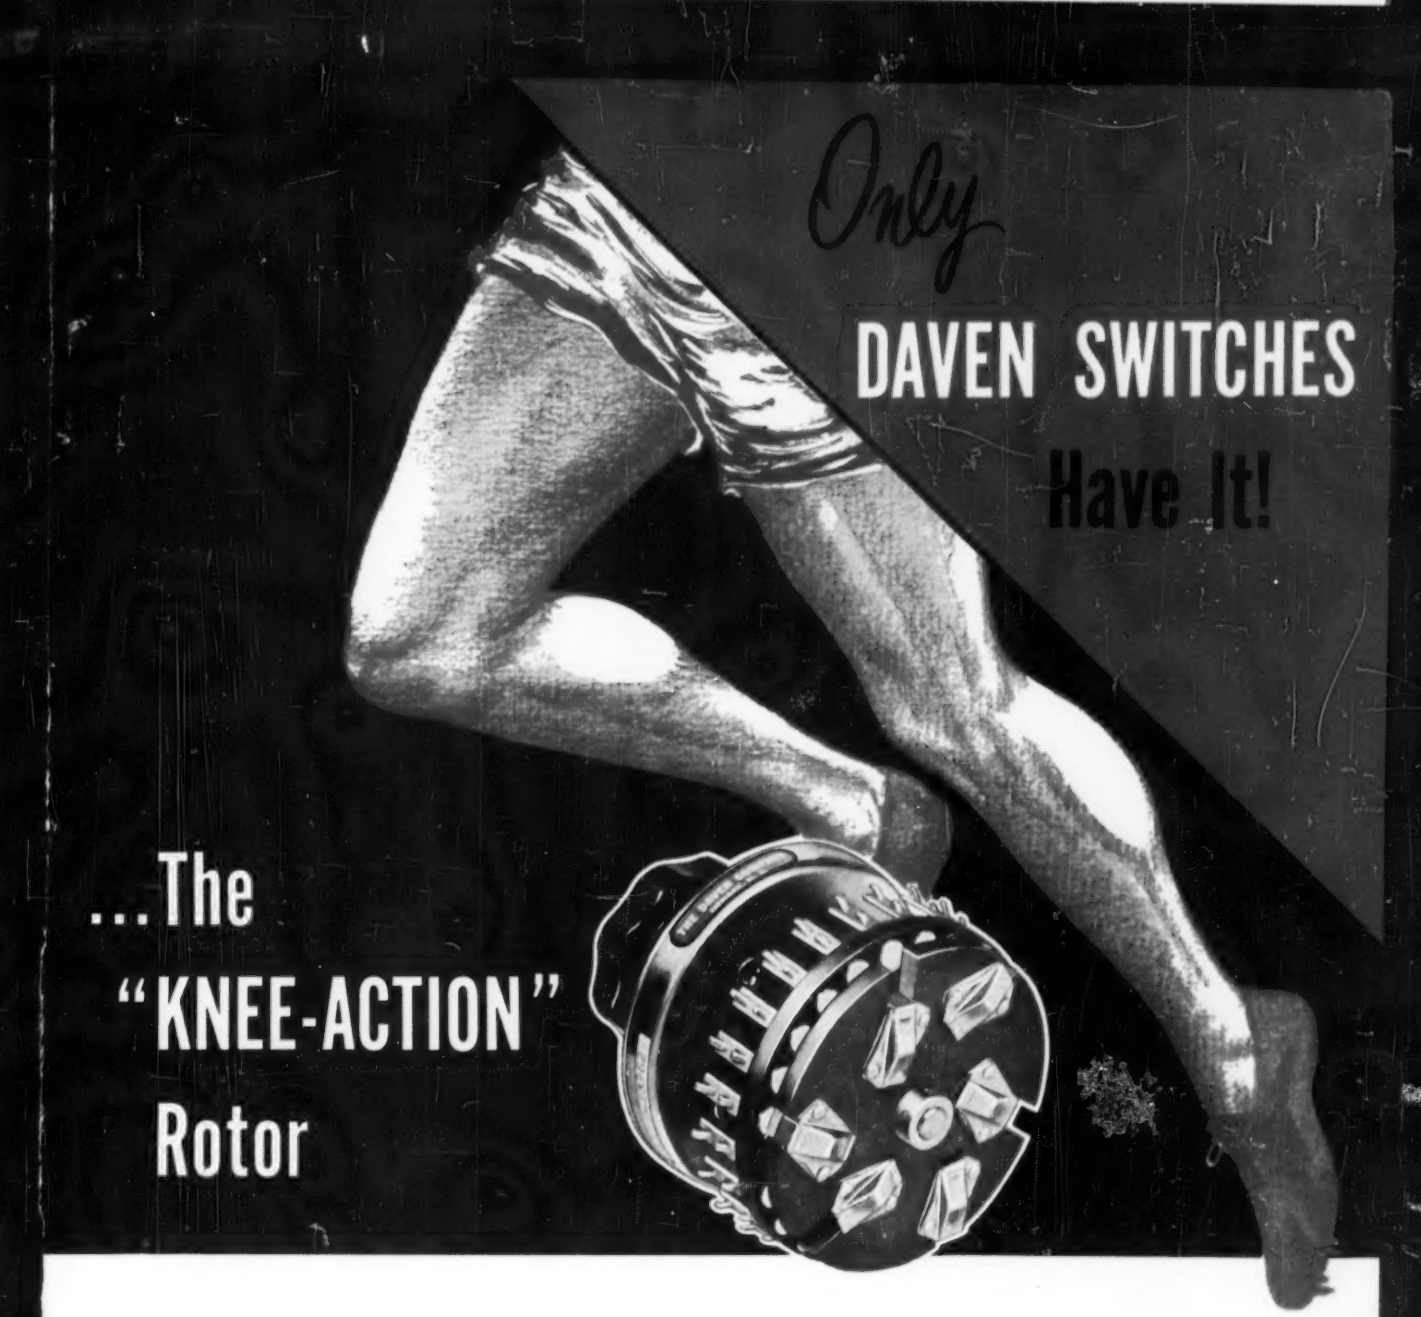

DAVEN's exclusive, patented, "KNEE-ACTION" Rotor embodies the most advanced principles in switch engineering.

Developed by DAVEN's own staff of switch specialists, it makes possible the fabrication of units with a greater number of switch positions and poles in smaller space than previously possible.

"KNEE-ACTION" insures low contact resistance and uniform contact pressure over the life of DAVEN Switches. Silver alloy contacts, slip rings, and rotor arms are used on all units.

Because a greater number of poles per deck is available, more compactness is possible . . . a feature which is in line with the present trend toward smaller size components which will render maximum performance in minimum space.

DAVEN also offers you every facility for solving your particular switch problems. It stocks a large assortment of standard parts . . . will develop special switches from these standard components . . . or will engineer special switches to meet unusual requirements. DAVEN's Development Engineering Department is at your service to help you. Call on DAVEN today!

Write for your Free copy of DAVEN's new, 28-page brochure on SWITCHES.

THE DAVEN CO. 526 WEST MT. PLEASANT AVE., LIVINGSTON, N. J.

NEW 14-STAGE MULTIPLIER PHOTOTUBE

RCA-6810

...for applications involving unusually low-level light sources!

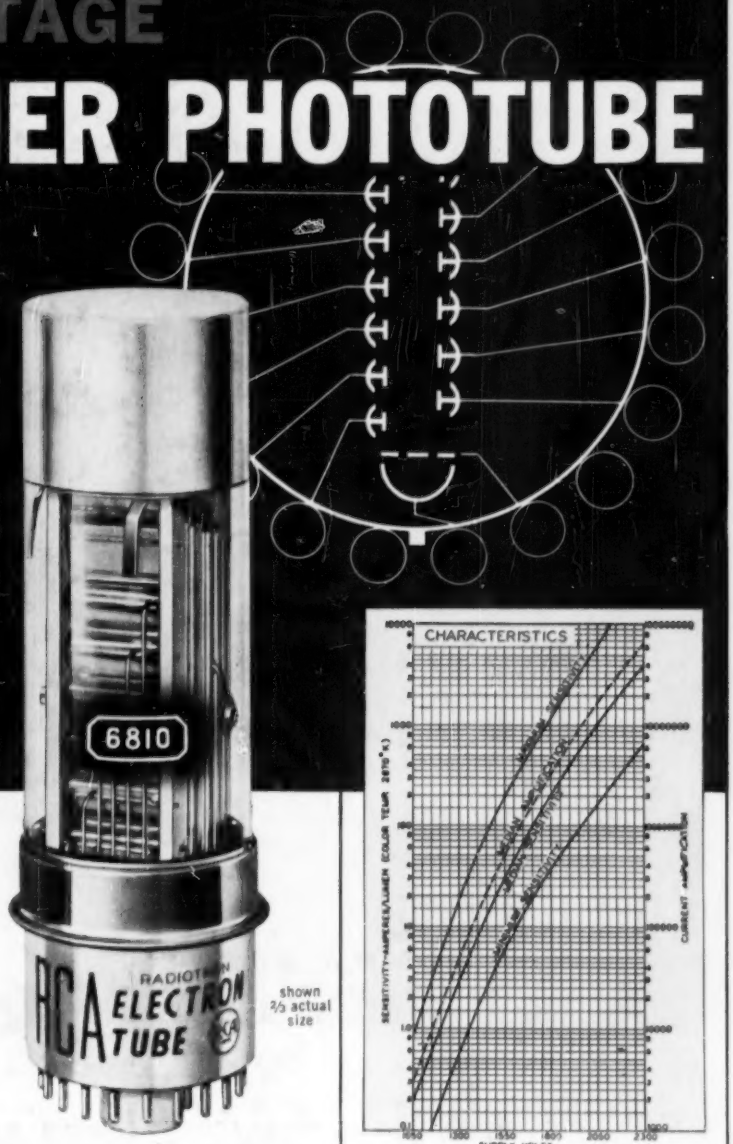

RCA-6810—the most sensitive phototube in the RCA line—is a head-on type multiplier phototube designed for scintillation counters, spectrophotometers, and other applications involving low-level light sources. Featuring fast response, high current gain, relative freedom from after-pulses, and small spread in electron-transit time, the 6810 is particularly useful for fast coincidence scintillation counting. Because the 6810 is capable of delivering pulse currents having magnitudes up to 0.5 ampere without appreciable deviation from linearity, the need for an associated wide-band amplifier is eliminated in many applications.

The spectral response of the 6810 covers the range from about 3000 to 6500 angstroms. Maximum response occurs at approximately 4400 angstroms. The 6810, therefore, has high sensitivity to blue-rich light.

Design Features of RCA-6810

• semitransparent cathode on inner surface of tube face • face has flat surface • 14 electrostatically focused multiplying (dynode) stages • focusing electrode with external connection for shaping the field which directs photoelectrons from the cathode onto the first dynode • accelerating electrode with external connection for minimizing the effect of space charge • short time-resolution capability in the order of 1 or 2 millimicroseconds • *multiplies feeble photoelectric currents approximately 66,000,000 times* when operated with 2300 volts supply potential.

For complete technical data on RCA-6810 and other RCA Phototubes, write to RCA, Commercial Engineering, Sect. H 19-Q Harrison, N. J.

RCA

RADIO CORPORATION of AMERICA

TUBE DIVISION — HARRISON, N. J.